

PS-Booster Ejection Correction Dipoles

Goal

Attempt to reproduce the results in <http://www.wpsco.cern.ch/private/gm/gmdescrip/LINC-Note.pdf>

- Take the files from the 2014 PSB configuration for **Ring 3**
- **Match the optics in MADX (32 bits)** to get the desired tunes
- Add an horizontal or a vertical kick from one of the correction dipoles
- Extract the geometrical relations between the kicks at the entry point and at the center of the ejection Septum, SMH15L1
- Repeat for different tunes and configurations

Head-to-head Comparison

- Configuration 1: **Expected from Note**
 - center of DHZ,DVT 4L1 at=1.327-0.426 m = 0.901 m
 - center DHZ,DVT 11L1 at=1.327-0.950 m = 0.377 m
 - entrance of SMH15L1 4L1 at=1.327-0.800 m = 0.527 m
- Configuration 2: **2014 Corrected using Tobias' measurements**
 - center of DHZ,DVT 4L1 at=1.3355(original)-**0.4255(correction)** m = 0.910 m
 - center DHZ,DVT 11L1 at=0.296(original) **+0.0720(correction)** m = 0.368 m
 - entrance of SMH15L1 4L1 at=1.04097(**using GEODE**)-0.508706(center→beginning blade) m = 0.532264 m

With the entrance of the septum we understood the beginning of the SMH15L1 septum blade. From the drawing (thanks to M. Houricane), the blade does not appear to be centered symmetrically w.r.t. the tank, but slightly shifted upstream, see sketch in Figure 1. We Labeled **A** the distance between the beginning of the tank and the beginning of the blade, **B** the blade length, **C** the distance between the end of the blade and the end of the tank and **X** the distance between the beginning of the blade and the center of the tank. With some simple math one can deduct that:

$$X = \frac{B + C - A}{2} \quad (1)$$

Using the values from drawing PS.CA.98411.1 of A=121.03 mm, B=1000.24 mm and C=138.21 mm, one obtains X=508.706 mm. Thus if in the configuration expected from the note one sets the SMH15L1 entrance to be at 0.527 m, this means the center of SM15L1 is at (0.507+0.508706) m = 1.015706 m.

The results of using these values and a kick of 1 mrad are summarized in Table 1.

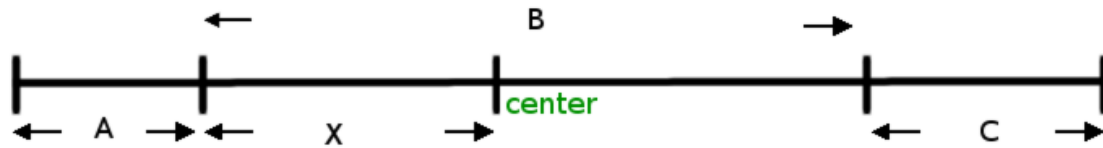


Figure 1: simplified drawing of SMH15L1. **A** is the distance between the beginning of the tank and the beginning of the blade. **B** is the blade length. **C** is the distance between the end of the blade and the end of the tank.

Table 1: Comparison for the geometrical relation between the kicks in the different PSB sections at the entrance of SMH15L1

Kicker	Note Value	Config. 1	Config. 2
	$Q_H=4.172, Q_V=5.230$ entrance of SMH15L1	$Q_H=4.172, Q_V=5.230$ Beginning Blade	$Q_H=4.172, Q_V=4.230$ Beginning Blade
BE3.DHZ4L1	$\Delta X_{ES} [\text{mm}] = 0.760 \cdot \text{DHZ4L1} [\text{mm}]$	0.786	0.764
	$\Delta X'_{ES} [\text{mm}] = 0.947 \cdot \text{DHZ4L1} [\text{mm}]$	0.938	0.938
BE3.DHZ11L1	$\Delta X_{ES} [\text{mm}] = 5.615 \cdot \text{DHZ11L1} [\text{mm}]$	5.572	5.491
	$\Delta X'_{ES} [\text{mm}] = 0.104 \cdot \text{DHZ11L1} [\text{mm}]$	0.105	0.101
BE3.DVT4L1	$\Delta Y_{ES} [\text{mm}] = -2.122 \cdot \text{DVT4L1} [\text{mm}]$	-2.143	0.593
	$\Delta Y'_{ES} [\text{mm}] = 0.021 \cdot \text{DVT4L1} [\text{mm}]$	0.023	0.709
BE3.DVT11L1	$\Delta Y_{ES} [\text{mm}] = 0.669 \cdot \text{DVT11L1} [\text{mm}]$	0.710	3.151
	$\Delta Y'_{ES} [\text{mm}] = -0.793 \cdot \text{DVT11L1} [\text{mm}]$	-0.798	0.107

The control power supplies and also for the acquisition need the deflection of each dipole magnet to be expressed in term of its current. The deflection-per-current factors for a beam energy of 1.4 GeV is measured to be:

$$\frac{\text{Deflection}}{\text{Current}} = 0.113 \frac{\text{mrad}}{\text{A}} \quad (2)$$

Using this scale factor the newly evaluated geometrical relation can be written as

$$\begin{pmatrix} \Delta X_{ES}[\text{mm}] \\ \Delta X'_{ES}[\text{mrad}] \end{pmatrix} = \begin{pmatrix} 0.0863 & 0.6205 \\ 0.1059 & 0.0114 \end{pmatrix} \times \begin{pmatrix} \text{DHZ4L1 [A]} \\ \text{DHZ11L1 [A]} \end{pmatrix} \quad (3)$$

$$\begin{pmatrix} \Delta Y_{ES}[\text{mm}] \\ \Delta Y'_{ES}[\text{mrad}] \end{pmatrix} = \begin{pmatrix} 0.0670 & 0.3560 \\ 0.0801 & 0.0120 \end{pmatrix} \times \begin{pmatrix} \text{DVT4L1 [A]} \\ \text{DVT11L1 [A]} \end{pmatrix} \quad (4)$$

Inverting the matrices:

$$\begin{pmatrix} \text{DHZ4L1 [A]} \\ \text{DHZ11L1 [A]} \end{pmatrix} = \begin{pmatrix} -0.176 & 9.586 \\ 1.636 & -1.333 \end{pmatrix} \times \begin{pmatrix} \Delta X_{ES}[\text{mm}] \\ \Delta X'_{ES}[\text{mrad}] \end{pmatrix} \quad (5)$$

$$\begin{pmatrix} \text{DVT4L1 [A]} \\ \text{DVT11L1 [A]} \end{pmatrix} = \begin{pmatrix} -0.433 & 12.85 \\ 2.89 & -2.418 \end{pmatrix} \times \begin{pmatrix} \Delta Y_{ES}[\text{mm}] \\ \Delta Y'_{ES}[\text{mrad}] \end{pmatrix} \quad (6)$$