
MicronOSC

A standalone TouchOSC editor for the Alesis Micron, controlled live over MIDI.

This guide covers installing the layout, connecting your gear, and using the sync controls on every page.



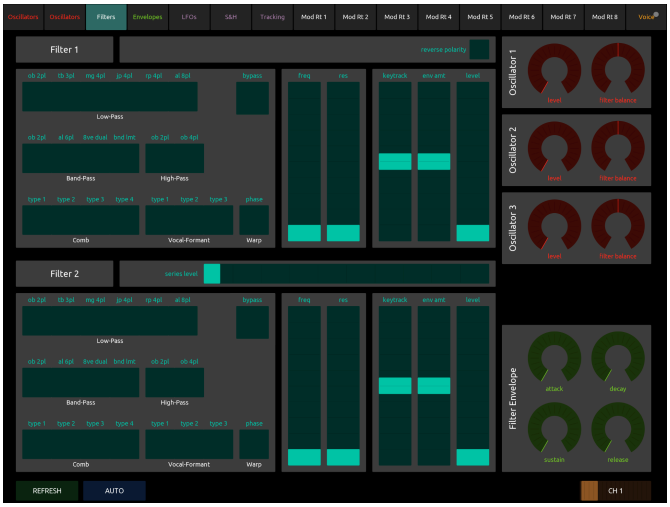

1. Credits

MicronOSC is a fork of the Miniak Patch Editor, adapted from the Akai Miniak to the Alesis Micron. None of this would exist without the original authors:

Original Miniak Patch Editor (Max/MSP): Will Crossland — *github.com/crosslandwa/miniak-patch-editor*

Original Panel Layout: Adam Neddo — *adam.neddo@gmail.com*

SysEx format documentation: Bernard “BEE” Escaillas

Adaptation for the Alesis Micron: Salva Sánchez (djStrombo)

Licensed under the GNU GPL v3.0, same as the original project.

2. What you need

- TouchOSC. This layout is sized for a tablet screen (iPad); it hasn't been tested on phones and would likely need rescaling to fit one.
- An Alesis Micron. The Micron shares most of its architecture with the Alesis Ion and the Akai Miniak, so this should also work with those, though it hasn't been tested on either.
- A MIDI interface connecting your device to the Micron — USB-MIDI recommended. Some Bluetooth MIDI adapters cannot carry a full SysEx patch dump; see §5 before going wireless.
- The MicronOSC.tosc file.

3. Installing the layout

1. Download MicronOSC.tosc.
2. Open TouchOSC on your device (or the desktop editor first, if you want to look around before loading it).
3. Import the .tosc file as a new layout.
4. In TouchOSC's connection settings, enable your MIDI interface as both input and output.
5. Open any page and press REFRESH to pull the current patch from the Micron.

4. Using MicronOSC

4.1 Pages

The layout is split across 16 pages covering oscillators, filters, envelopes, LFOs, effects and more. Use the page tabs to move between them.

4.2 Live sync

Moving any control on screen sends the matching NRPN message to the Micron immediately.

4.3 AUTO and REFRESH

- REFRESH: requests a full patch dump from the Micron and updates every control on screen to match it. Present on every page — press it any time the layout looks out of sync.
- AUTO: when enabled, MicronOSC watches for a Program Change message from the Micron — in other words, it only re-requests the dump when you actually switch to a different patch on the hardware itself. Moving controls, or editing a patch without changing it, does not trigger a SysEx request; only a program change does.

4.4 MIDI channel

Each page has a channel fader (1–16) that sets which MIDI channel NRPN messages are sent on. It's synced across all pages — moving it on one page moves it everywhere. MicronOSC also listens passively for messages coming back from the Micron and, when it recognizes a valid patch dump, nudges the fader to match the channel the Micron just used — so in most cases you shouldn't need to set it by hand at all.

5. Known limitations

- The Micron appears to save the current patch to its internal memory whenever it receives a SysEx dump request — there is no read-only way to query it. Duplicate a patch before editing it, and consider leaving AUTO off if you're not actively editing.
- Some Bluetooth MIDI adapters limit SysEx message size and can't carry a full patch dump. A wired USB-MIDI interface is the safest option; if you want to go wireless, confirm large-SysEx support first.
- If the Micron is chained through other gear (sequencers, MIDI hubs), check that their MIDI Thru actually forwards SysEx — many only forward channel and real-time messages, which is enough for NRPN control but not for patch dumps.

6. Troubleshooting

- Nothing updates when you press REFRESH: check the MIDI interface is selected as both input and output in TouchOSC, and that it actually reaches the Micron (see 5).
- Controls seem to fight each other: make sure AUTO isn't re-requesting the dump while you're mid-edit; a double-press confirmation appears if you REFRESH a patch you've just edited, to avoid silently overwriting it.
- Wrong channel: move the channel fader by hand, or trigger a patch dump from the Micron — MicronOSC will pick up the correct channel automatically.