



---

BUYLOG SECTION 1

# Load Centers and Circuit Breakers



---

# Table of contents



|      |                                                                                                   |
|------|---------------------------------------------------------------------------------------------------|
| 1-4  | Q-Line Circuit Breakers— Product Features and Benefits                                            |
| 1-5  | PowerMark Gold™ Load Centers—<br>Product Features and Benefits                                    |
| 1-6  | PowerMark Gold and Plus Load Centers—<br>Product Number Guides                                    |
| 1-7  | Q-Line Plug-in Circuit Breakers                                                                   |
| 1-8  | Special Purpose Circuit Breakers                                                                  |
| 1-11 | PowerMark Gold and Plus Single-Phase Load Centers—<br>Main Lug Convertible to Main Breaker        |
| 1-14 | Main Breaker Factory Installed                                                                    |
| 1-16 | PowerMark Plus™ Three-Phase Load Centers—<br>Main Circuit Breakers or Main Lugs Factory Installed |
| 1-19 | PowerMark Gold Load Centers—Specialty Panels                                                      |
| 1-20 | PowerMark Gold Meter Socket Load Centers                                                          |
| 1-26 | Field Installed Accessories                                                                       |
| 1-33 | Wiring Diagrams                                                                                   |
| 1-39 | Load Centers and Meter Socket Load Centers—<br>Knockouts                                          |

## Q-Line Circuit Breakers

### Reliability and Economy

### Special Purpose Circuit Breakers

- PowerMark Gold Main Circuit Breakers
- Arc Fault Circuit Interrupter
- Dual Function GFCI/AFCI Ground Fault & Combination Arc Fault Circuit Breaker
- Ground Fault with Self-Test Feature
- Ground Fault with Equipment Protection
- Switching Neutral
- HID Lighting Breaker
- High Magnetic Breaker
- Molded Case Switch
- Surge Arrester
- TQ Breaker

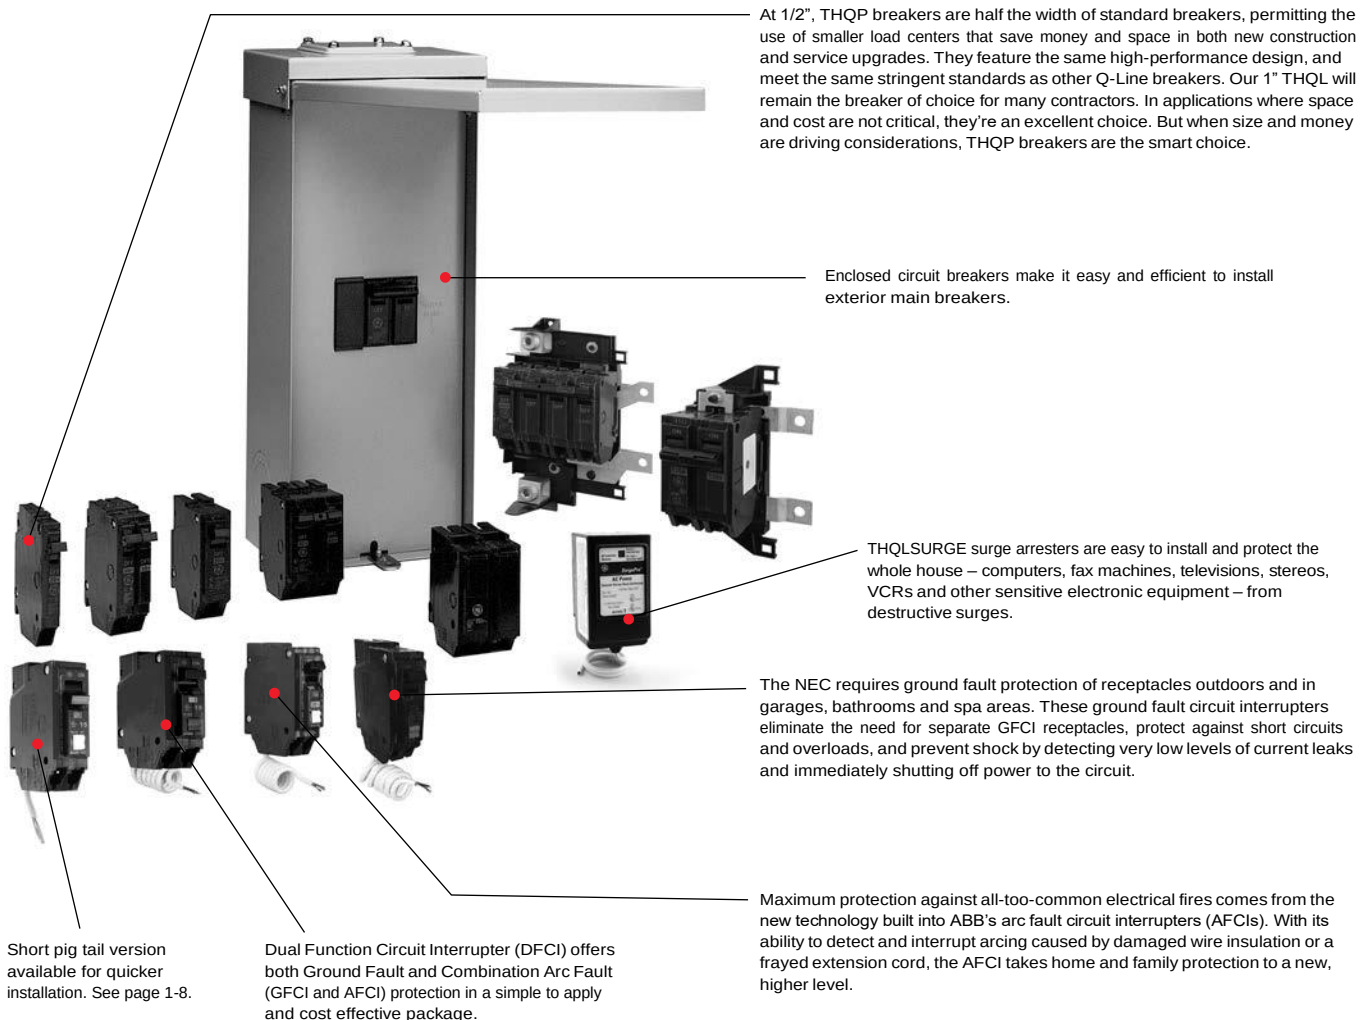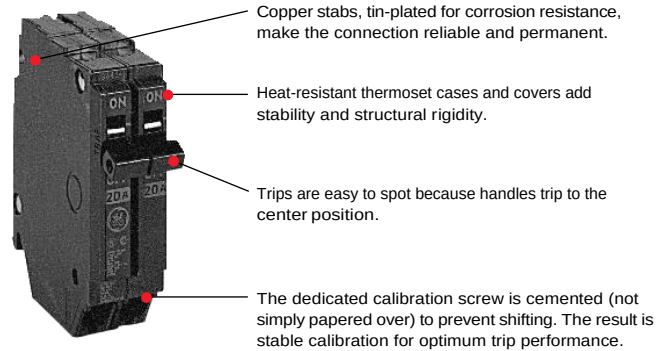



## PowerMark Gold Load Centers

### Highest Quality and Convenience

PowerMark Gold load centers lower your costs by making installation faster and easier, increasing application flexibility and reducing inventory requirements. At the same time, they deliver obvious and significant advances in design, function and quality.

- UL Listed (Panelboards No. 67)
- Service Barriers included for factory installed main circuit breaker and main circuit breaker kits (required to meet UL67 for service entrance applications)
- Suitable for Use as Service Entrance Equipment when installed in accordance with National Electrical Code
- 60°C/75°C Conductor Rating
- Single phase, 40-225A, 2-42 circuits
- Main lug models field convertible to main breaker
- Main breaker 22kAIC standard - factory installed
- All load centers top or bottom feed
- Indoor and outdoor rated enclosures
- Indoor fronts combination surface/flush
- Copper bus with tin plating standard<sup>1</sup>
- Split neutrals extend the full length of the interior for ease of wiring
- Entire main lug line converts easily to main breaker
- Combination surface/flush front with spring-reinforced pan
- Combination slotted/Robertson square-drive screws on neutral,<sup>2</sup> ground, front and breaker lugs
- Front packed in inner carton for added protection

- Field installable feed-through lugs up to 200A
- Straight-through main wiring
- Main breaker is clearly marked and circuit numbers are stamped on front
- Isolated ground bar is available
- Compact box maintains optimum wire-bending space

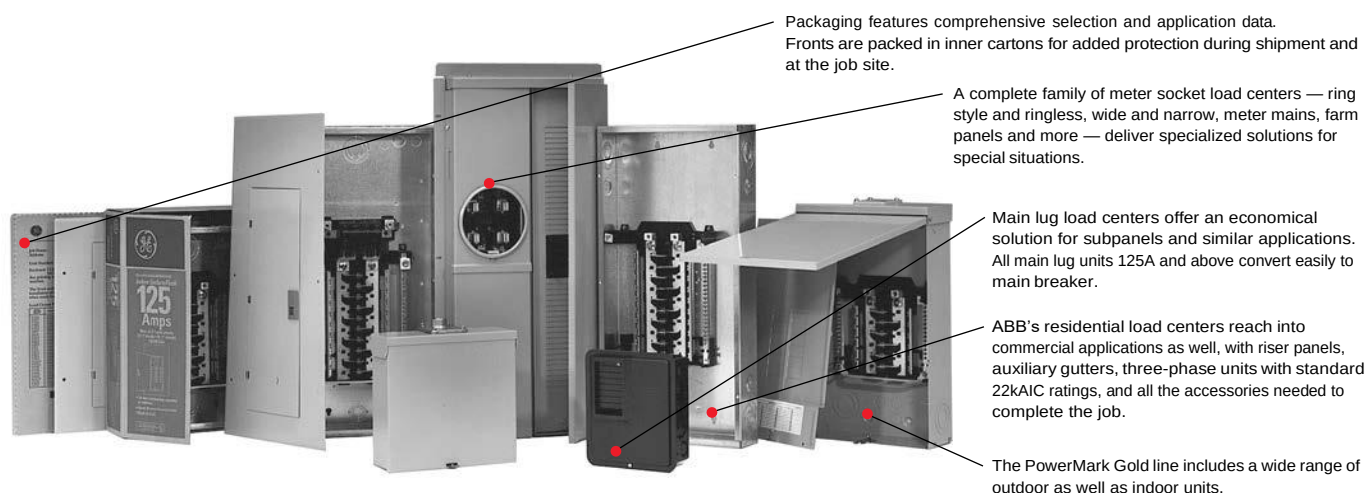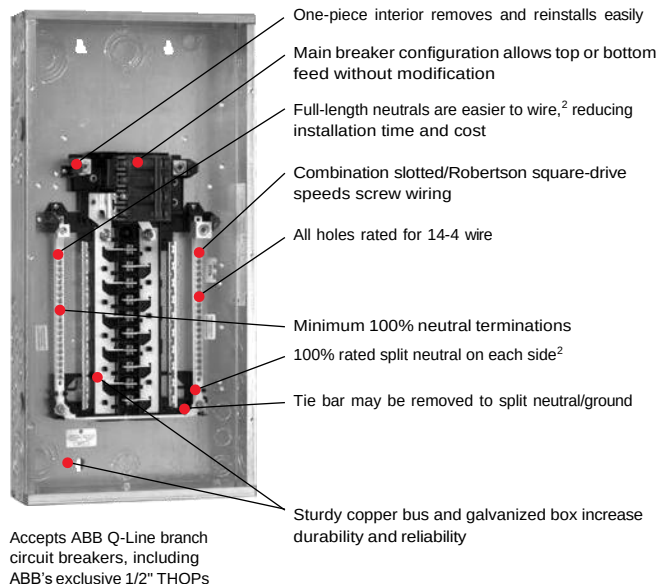

#### Accessories and Options

- Door lock and handle
- Equipment ground kits
- Sub-feed and feed-thru lugs
- Front filler plates
- Handle lock and ties
- Hardware kits
- Main breaker retainers
- Neutral kits
- Universal raintight hubs

#### Safety accessories – convenient and easy to install

- THQLSURGE whole house surge protector
- Arc fault circuit interrupter breaker, 1- or 2-pole
- Ground fault circuit interrupter breaker, 5mA and 30mA
- Generator transfer panel – 30A or 60A, indoor or outdoor
- ABB AC disconnects
- Service Barrier Kits

<sup>1</sup> Three-phase PowerMark Plus load centers have aluminum bus with copper breaker mounting stabs.

<sup>2</sup> 16 circuit and above.

PowerMark Gold and Plus Load Centers

Product Number Guides

Product Number Guide for Load Centers

(Product number for illustrative purposes only)

|                                        |   |   |    |   |    |   |    |   |                                                                                                     |
|----------------------------------------|---|---|----|---|----|---|----|---|-----------------------------------------------------------------------------------------------------|
|                                        | T | M | 42 | 4 | 20 | C | CU | B |                                                                                                     |
| ABB Identification                     |   |   |    |   |    |   |    |   | Insert for Specials                                                                                 |
|                                        |   |   |    |   |    |   |    |   | G or T = Factory installed ground bar                                                               |
|                                        |   |   |    |   |    |   |    |   | B = Bottom feed main breaker                                                                        |
|                                        |   |   |    |   |    |   |    |   | FL = Factory installed feed-through lugs                                                            |
|                                        |   |   |    |   |    |   |    |   | D = Optional door for 6-8 circuit panel.<br>(Doors standard on all units 12<br>circuits or greater) |
|                                        |   |   |    |   |    |   |    |   | W = White Front                                                                                     |
| Type                                   |   |   |    |   |    |   |    |   | Insert for PowerMark Gold                                                                           |
| M = Main breaker                       |   |   |    |   |    |   |    |   | CU = Copper Bus                                                                                     |
| L = Main lug                           |   |   |    |   |    |   |    |   | 42 = Copper Bus Full 42 circuit panel                                                               |
| LM = Convertible                       |   |   |    |   |    |   |    |   |                                                                                                     |
| PL = Main lug (Thermoplastic)          |   |   |    |   |    |   |    |   |                                                                                                     |
| Maximum Number 1" Spaces               |   |   |    |   |    |   |    |   |                                                                                                     |
| 2, 4, 6...42                           |   |   |    |   |    |   |    |   |                                                                                                     |
| Insert for 3-Phase 4-Wire Load Centers |   |   |    |   |    |   |    |   | Enclosure Type                                                                                      |
|                                        |   |   |    |   |    |   |    |   | C = Combination surface/flush                                                                       |
|                                        |   |   |    |   |    |   |    |   | F = Flush                                                                                           |
|                                        |   |   |    |   |    |   |    |   | S = Surface                                                                                         |
|                                        |   |   |    |   |    |   |    |   | R = Outdoor                                                                                         |
|                                        |   |   |    |   |    |   |    |   | Bus Ampere Rating                                                                                   |
|                                        |   |   |    |   |    |   |    |   | 40 = 40 Amps      20 = 200 Amps                                                                     |
|                                        |   |   |    |   |    |   |    |   | 70 = 70 Amps      22 = 225 Amps                                                                     |
|                                        |   |   |    |   |    |   |    |   | 10 = 100 Amps                                                                                       |
|                                        |   |   |    |   |    |   |    |   | 12 = 125 Amps                                                                                       |
|                                        |   |   |    |   |    |   |    |   | 15 = 150 Amps                                                                                       |

Product Number Guide for Q-Line Plug-in Circuit Breakers

(Product number for illustrative purposes only)

|                     |   |   |    |   |    |    |      |                                                                                                 |
|---------------------|---|---|----|---|----|----|------|-------------------------------------------------------------------------------------------------|
|                     | T | H | QL | 1 | 1* | 15 | GFTS |                                                                                                 |
| ABB Identification  |   |   |    |   |    |    |      | Ground Fault/Arc Fault Circuit Interrupter                                                      |
|                     |   |   |    |   |    |    |      | AF2 = 1- & 2-pole Combination Arc Fault<br>Circuit Interrupter                                  |
| Interrupting Rating |   |   |    |   |    |    |      | GFEP = 1- & 2-pole Ground Fault with<br>Equipment Protection Interrupter-30 mA                  |
| H = 10kAIC          |   |   |    |   |    |    |      | GFT = 1- & 2-pole Ground Fault<br>with Self-Test Feature Interrupter - 5 mA                     |
| HH = 22kAIC         |   |   |    |   |    |    |      | DF = 1-pole Dual Function GFCI/AFCI Ground Fault<br>& Combination Arc Fault Circuit Interrupter |
| X = 65kAIC          |   |   |    |   |    |    |      | S = Short pig tail                                                                              |
| Type                |   |   |    |   |    |    |      | Ampere Rating                                                                                   |
| QL = 1" plug-in     |   |   |    |   |    |    |      |                                                                                                 |
| QP = 1/2" plug-in   |   |   |    |   |    |    |      |                                                                                                 |
| QB = 1" bolt-on     |   |   |    |   |    |    |      |                                                                                                 |
| Poles (1, 2, 3)     |   |   |    |   |    |    |      | Voltage                                                                                         |
|                     |   |   |    |   |    |    |      | 1 = 120/240V                                                                                    |
|                     |   |   |    |   |    |    |      | 2 = 240V                                                                                        |

\*Omit character for THQP breakers, which are all 120/240V.

## Q-Line Plug-in Circuit Breakers

UL Listed (Molded Case Circuit Breakers No. 489)

Federal Government Specification Qualified (WC-375B)

60°C / 75°C Conductor Rating

Quick Make, Quick Break

Box Type Terminals

### Q-Line Plug-in Circuit Breakers Specifications

| Breaker Type | Ampere Rating | Wire Size AWG/kcmil <sup>1</sup> |       |
|--------------|---------------|----------------------------------|-------|
|              |               | Cu                               | Al    |
| THQP         | 15-25         | 14-8                             | 12-8  |
|              | 30-50         | 8-4                              | 8-4   |
| THQL         | 15-30         | 14-8                             | 12-8  |
|              | 35-60         | 8-3                              | 8-3   |
| THHQL        | 70-100        | 6-1/0                            | 4-1/0 |
| TXQL         | 110-125       | 2-2/0                            | 2-2/0 |

<sup>1</sup> Solid or stranded for 14-10 AWG



THQP130



THQP230



THQL1120



THQL2140



THQL32015

### Q-Line Plug-in Circuit Breakers

| 120/240 Vac<br>Ampere Rating                                         | 10,000AIC                 |                         |                           |   | 22,000AIC                |                         | 65,000AIC               |
|----------------------------------------------------------------------|---------------------------|-------------------------|---------------------------|---|--------------------------|-------------------------|-------------------------|
|                                                                      | Type THQP 1/2-inch Module | Type THQL 1-inch Module |                           |   | Type THHQL 1-inch Module |                         | Type TXQL 1-inch Module |
|                                                                      | Product Number            | Product Number          | 240 Vac<br>Product Number |   | Product Number           | Product Number          | Product Number          |
| <b>Single Pole<sup>1</sup></b>                                       |                           |                         |                           |   |                          |                         |                         |
| 15 <sup>2</sup>                                                      | THQP115                   | THQL1115                | –                         |   | THHQL1115                | –                       | TXQL1115                |
| 20 <sup>2</sup>                                                      | THQP120                   | THQL1120                | –                         |   | THHQL1120                | –                       | TXQL1120                |
| 25                                                                   | THQP125                   | THQL1125                | –                         |   | THHQL1125                | –                       | TXQL1125                |
| 30                                                                   | THQP130                   | THQL1130                | –                         |   | THHQL1130                | –                       | TXQL1130                |
| 35                                                                   | THQP135                   | THQL1135                | –                         |   | THHQL1135                | –                       | –                       |
| 40                                                                   | THQP140                   | THQL1140                | –                         |   | THHQL1140                | –                       | –                       |
| 45                                                                   | THQP145                   | THQL1145                | –                         |   | THHQL1145                | –                       | –                       |
| 50                                                                   | THQP150                   | THQL1150                | –                         |   | THHQL1150                | –                       | –                       |
| <b>Std. Pkg.</b>                                                     | <b>5 cartons of 20</b>    | <b>5 cartons of 10</b>  |                           |   | <b>5 cartons of 10</b>   |                         | <b>5 cartons of 10</b>  |
| <b>Two-Pole<sup>3</sup>: Incorporates Internal Common Trip Bar</b>   |                           |                         |                           |   |                          |                         |                         |
| 15                                                                   | THQP215                   | THQL2115                | THQL22015 <sup>4</sup>    |   | THHQL2115                | THHQL22015 <sup>4</sup> | TXQL2115                |
| 20                                                                   | THQP220                   | THQL2120                | THQL22020 <sup>4</sup>    |   | THHQL2120                | THHQL22020 <sup>4</sup> | TXQL2120                |
| 25                                                                   | THQP225                   | THQL2125                | THQL22025 <sup>4</sup>    |   | THHQL2125                | THHQL22025 <sup>4</sup> | TXQL2125                |
| 30                                                                   | THQP230                   | THQL2130                | THQL22030 <sup>4</sup>    |   | THHQL2130                | THHQL22030 <sup>4</sup> | TXQL2130                |
| 35                                                                   | THQP235                   | THQL2135                | THQL22035 <sup>4</sup>    |   | THHQL2135                | THHQL22035 <sup>4</sup> | –                       |
| 40                                                                   | THQP240                   | THQL2140                | THQL22040 <sup>4</sup>    |   | THHQL2140                | THHQL22040 <sup>4</sup> | –                       |
| 45                                                                   | THQP245                   | THQL2145                | THQL22045 <sup>4</sup>    |   | THHQL2145                | THHQL22045 <sup>4</sup> | –                       |
| 50                                                                   | THQP250                   | THQL2150                | THQL22050 <sup>4</sup>    |   | THHQL2150                | THHQL22050 <sup>4</sup> | –                       |
| 60                                                                   | –                         | THQL2160                | THQL22060 <sup>4</sup>    |   | THHQL2160                | THHQL22060 <sup>4</sup> | –                       |
| 70                                                                   | –                         | THQL2170                | THQL22070 <sup>4</sup>    |   | THHQL2170                | THHQL22070 <sup>4</sup> | –                       |
| 80                                                                   | –                         | THQL2180                | THQL22080 <sup>4</sup>    |   | THHQL2180                | THHQL22080 <sup>4</sup> | –                       |
| 90                                                                   | –                         | THQL2190                | THQL22090 <sup>4</sup>    |   | THHQL2190                | THHQL22090 <sup>4</sup> | –                       |
| 100                                                                  | –                         | THQL21100               | THQL22100 <sup>4</sup>    |   | THHQL21100               | THHQL22100 <sup>4</sup> | –                       |
| 110                                                                  | –                         | THQL21110               | –                         |   | THHQL21110               | –                       | –                       |
| 125                                                                  | –                         | THQL21125               | –                         |   | THHQL21125               | –                       | –                       |
| <b>Std. Pkg.</b>                                                     | <b>5 cartons of 5</b>     | <b>5 cartons of 5</b>   | <b>5 cartons of 5</b>     |   | <b>5 cartons of 5</b>    | <b>5 cartons of 5</b>   | <b>5 cartons of 5</b>   |
| <b>Three-Pole<sup>3</sup>: Incorporates Internal Common Trip Bar</b> |                           |                         |                           |   |                          |                         |                         |
| 15                                                                   | –                         | –                       | THQL32015                 | – | THHQL32015               | –                       | TXQL32015               |
| 20                                                                   | –                         | –                       | THQL32020                 | – | THHQL32020               | –                       | TXQL32020               |
| 25                                                                   | –                         | –                       | THQL32025                 | – | THHQL32025               | –                       | TXQL32025               |
| 30                                                                   | –                         | –                       | THQL32030                 | – | THHQL32030               | –                       | TXQL32030               |
| 35                                                                   | –                         | –                       | THQL32035                 | – | THHQL32035               | –                       | –                       |
| 40                                                                   | –                         | –                       | THQL32040                 | – | THHQL32040               | –                       | –                       |
| 45                                                                   | –                         | –                       | THQL32045                 | – | THHQL32045               | –                       | –                       |
| 50                                                                   | –                         | –                       | THQL32050                 | – | THHQL32050               | –                       | –                       |
| 60                                                                   | –                         | –                       | THQL32060                 | – | THHQL32060               | –                       | –                       |
| 70                                                                   | –                         | –                       | THQL32070                 | – | THHQL32070               | –                       | –                       |
| 80                                                                   | –                         | –                       | THQL32080                 | – | THHQL32080               | –                       | –                       |
| 90                                                                   | –                         | –                       | THQL32090                 | – | THHQL32090               | –                       | –                       |
| 100                                                                  | –                         | –                       | THQL32100                 | – | THHQL32100               | –                       | –                       |
| <b>Std. Pkg.</b>                                                     |                           |                         | <b>5 cartons of 3</b>     |   | <b>5 cartons of 3</b>    |                         | <b>5 cartons of 3</b>   |

<sup>1</sup> UL Listed as HACR (heating, air conditioning and refrigeration).

<sup>2</sup> UL Listed as SWD (switching duty). Suitable for 120 volts ac fluorescent lighting loads.

<sup>3</sup> 15-100 amp UL Listed as HACR (heating air conditioning and refrigeration).

<sup>4</sup> Required for three-phase and High Leg Delta Systems only.

### References:

|                                    |                             |
|------------------------------------|-----------------------------|
| Accessories Pages                  | 1-26 thru 1-32              |
| Auxiliary Switches and Shunt Trips | BuyLog pages 6-40 thru 6-42 |

## Special Purpose Circuit Breakers

60°C / 75°F Conductor Rating

Box Type Terminals

Quick-Make, Quick-Break

Multi-pole Breakers Incorporate Internal Common Trip

### Arc Fault<sup>2</sup>

cULus Listed

Arc-Fault Circuit Interrupters No. 1699

|                   | Ampere Rating | 1-Pole, 120/240 Volts ac <sup>1</sup><br>Product Number<br>Long Pig Tail | 1-Pole, 120/240 Volts ac<br>Product Number<br>Short Pig Tail |
|-------------------|---------------|--------------------------------------------------------------------------|--------------------------------------------------------------|
| <b>10,000 AIC</b> |               |                                                                          |                                                              |
|                   | 15            | THQL1115AF2                                                              | THQL1115AF2S                                                 |
|                   | 20            | THQL1120AF2                                                              | THQL1120AF2S                                                 |
| <b>22,000 AIC</b> |               |                                                                          |                                                              |
|                   | 15            | THHQL1115AF2                                                             | -                                                            |
|                   | 20            | THHQL1120AF2                                                             | -                                                            |
| <b>Std. Pkg.</b>  |               | <b>10 Cartons of 1</b>                                                   |                                                              |

As of Jan. 1, 2008, 2005 NEC™ requires combination AFCI.

<sup>1</sup> Combination AFCI compliant with 2008 NEC™ and later

<sup>2</sup> For 2-Pole shared neutral applications use two 1-pole circuit breakers with a handle tie. See DET-719 for more details on our Arc Fault products.

### Dual Function GFCI/AFCI Ground Fault & Combination Arc Fault Circuit Breaker

cULus Listed

|                   | Ampere Rating | 1-Pole, 120/240 Volts ac<br>Product Number<br>Long Pig Tail | 1-Pole, 120/240 Volts ac<br>Product Number<br>Short Pig Tail |
|-------------------|---------------|-------------------------------------------------------------|--------------------------------------------------------------|
| <b>10,000 AIC</b> |               |                                                             |                                                              |
|                   | 15            | THQL1115DF                                                  | THQL1115DFS                                                  |
|                   | 20            | THQL1120DF                                                  | THQL1120DFS                                                  |
| <b>22,000 AIC</b> |               |                                                             |                                                              |
|                   | 15            | THHQL1115DF                                                 | -                                                            |
|                   | 20            | THHQL1120DF                                                 | -                                                            |
| <b>Std. Pkg.</b>  |               | <b>10 Cartons of 1</b>                                      |                                                              |

### Ground Fault with Self-Test Feature

cULus

Ground Fault Circuit Interrupters UL943 ed5 (5 milliamperes)

|                   | Ampere Rating | 1-Pole, 120 Volts ac<br>Product Number<br>Long Pig Tail | 1-Pole, 120 Volts ac<br>Product Number<br>Short Pig Tail | 2-Pole, 120/240 Volts ac<br>Product Number<br>Long Pig Tail |
|-------------------|---------------|---------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------|
| <b>10,000 AIC</b> |               |                                                         |                                                          |                                                             |
|                   | 15            | THQL1115GFT                                             | THQL1115GFTS                                             | THQL2115GFT                                                 |
|                   | 20            | THQL1120GFT                                             | THQL1120GFTS                                             | THQL2120GFT                                                 |
|                   | 25            | THQL1125GFT                                             | -                                                        | THQL2125GFT                                                 |
|                   | 30            | THQL1130GFT                                             | -                                                        | THQL2130GFT                                                 |
|                   | 40            | -                                                       | -                                                        | THQL2140GFT <sup>3</sup>                                    |
|                   | 50            | -                                                       | -                                                        | THQL2150GFT <sup>3</sup>                                    |
| <b>22,000 AIC</b> |               |                                                         |                                                          |                                                             |
|                   | 15            | THHQL1115GFT                                            | -                                                        | THHQL2115GFT                                                |
|                   | 20            | THHQL1120GFT                                            | -                                                        | THHQL2120GFT                                                |
|                   | 25            | THHQL1125GFT                                            | -                                                        | THHQL2125GFT                                                |
|                   | 30            | THHQL1130GFT                                            | -                                                        | THHQL2130GFT                                                |
| <b>Std. Pkg.</b>  |               | <b>10 Cartons of 1</b>                                  |                                                          |                                                             |

<sup>3</sup> UL & CSA

### PowerMark Gold® Main Circuit Breakers Kits for use in 150A, 200A & 225A Convertible Load Centers

UL Listed

- Example - TLMXX20CCU - 200A Convertible Load Center
- Includes mounting base
- Not for use in 125A and below Convertible Load Centers (TLMXX12CCU)
- Main Breaker Conversions for 125A load centers - see footnotes for individual catalog numbers

| Description                             | Ampere Rating | Product Number | Lug Size            |
|-----------------------------------------|---------------|----------------|---------------------|
| Main Circuit Breaker Kits<br>22,000 AIC | 100           | THQMV100D      | 1-300 (cu), 2/0-300 |
|                                         | 125           | THQMV125D      |                     |
|                                         | 150           | THQMV150D      |                     |
|                                         | 175           | THQMV175D      |                     |
|                                         | 200           | THQMV200D      |                     |
|                                         | 225           | THQMV225D      |                     |

**Note:** Wire bending rules affect allowed wire sizes when THQMV breakers are installed in an enclosure. For load centers, the wire range will be on the rating label. In addition, refer to the specifications for the main breaker versions of the load center you are considering to review allowed wire ranges when a TLMXX20 load center is converted to main breaker.



Arc Fault



THQL1115AF2S



THQL1115DF



THQL1115DFS




THQL2120GFT



THQL1115GFTS



THQMV100D with  
filler plates



THQMV200D



## Special Purpose Circuit Breakers

60°C / 75°F Conductor Rating

Box Type Terminals

Quick-Make, Quick-Break

Multi-pole Breakers Incorporate Internal Common Trip

### PowerMark Gold Main Circuit Breaker Kit

For use with 125A PowerMark Gold load Centers; 22kAIC RMS symmetrical.

| Description                                                                                                                                              | Product Number       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Main Circuit Breaker Kit - Order appropriate THQL 10kAIC or THHQL 22kAIC breakers separately. Includes service barriers for use with THQL or THHQL main. | TQMH000 <sup>1</sup> |

<sup>1</sup> Please review the footnotes listed with the individual Load Center product numbers for proper parts needed to convert to a main circuit breaker. This main breaker base is only applicable for 16 circuit and larger 125 amp load centers, 12 circuit load centers with A C24 suffix, and the TLM812RCU2.



TQMH000

### Ground Fault with Equipment Protection

cULus

Ground Fault Circuit Interrupters No. 943 30 milliampere ground fault trip level

|            | Ampere Rating | 1-Pole, 120 Volts ac<br>Product Number | 2-Pole, 120/240 Volts ac<br>Product Number |
|------------|---------------|----------------------------------------|--------------------------------------------|
| 10,000 AIC | 15            | THQL1115GFEP                           | THQL2115GFEP                               |
|            | 20            | THQL1120GFEP                           | THQL2120GFEP                               |
|            | 30            | THQL1130GFEP                           | THQL2130GFEP                               |
| 22,000 AIC | 15            | -                                      | THHQL2115GFEP                              |
|            | 20            | -                                      | THHQL2120GFEP                              |
|            | 30            | -                                      | THHQL2130GFEP                              |
| Std. Pkg.  |               | 10 Cartons of 1                        | 10 Cartons of 1                            |



THQL2115GFEP

### Switching Neutral

UL Listed. 10kAIC RMS symmetrical.

Standard 1- or 2-pole automatic breaker plus one fully-rated, non-automatic pole.

|            | Ampere Rating | 1-Pole Plus Switching Neutral<br>120/240 Volts ac<br>Product Number | 2-Pole Plus Switching Neutral<br>120/240 Volts ac<br>Product Number |
|------------|---------------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| 10,000 AIC | 15            | THQL21WY15                                                          | THQL31WY15                                                          |
|            | 20            | THQL21WY20                                                          | THQL31WY20                                                          |
|            | 25            | THQL21WY25                                                          | THQL31WY25                                                          |
|            | 30            | THQL21WY30                                                          | THQL31WY30                                                          |
| Std. Pkg.  |               | 5 cartons of 5                                                      | 5 cartons of 3                                                      |



THQL21WY30

### "HID" Lighting

UL Listed as HID. HID breakers have been designed to handle the current and voltage spikes that result when gaseous discharge lamps, including fluorescent and HID lamps, are switched on and off.

|            | Ampere Rating | 1-Pole, 120/240 Volts ac<br>Product Number | 2-Pole, 120/240 Volts ac<br>Product Number |
|------------|---------------|--------------------------------------------|--------------------------------------------|
| 10,000 AIC | 15            | THQL1115HID <sup>2</sup>                   | THQL2115HID                                |
|            | 20            | THQL1120HID <sup>2</sup>                   | THQL2120HID                                |
|            | 30            | THQL1130HID                                | THQL2130HID                                |
| 22,000 AIC | 15            | THHQL1115HID <sup>2</sup>                  | THHQL2115HID                               |
|            | 20            | THHQL1120HID <sup>2</sup>                  | THHQL2120HID                               |
|            | 30            | THHQL1130HID                               | THHQL2130HID                               |
| Std. Pkg.  |               | 5 cartons of 10                            | 5 cartons of 5                             |

<sup>2</sup> UL Listed as SWD (switching duty). Suitable for 120 volts ac fluorescent lighting loads.



THQL2120HID

### High Magnetic

UL Listed. 10kAIC RMS symmetrical

High short circuit setting suitable for circuits with inherent high-inrush load currents.

|           | Ampere Rating | 1 Pole, 120 Volts ac<br>Product Number |
|-----------|---------------|----------------------------------------|
|           | 15            | THQL1115HM                             |
|           | 20            | THQL1120HM                             |
|           | 25            | THQL1125HM                             |
|           | 30            | THQL1130HM                             |
|           | 40            | THQL1140HM                             |
|           | 50            | THQL1150HM                             |
| Std. Pkg. |               | 5 cartons of 10                        |



THQL1140HM

## Special Purpose Circuit Breakers

60°C / 75°F Conductor Rating

Box Type Terminals

Quick-Make, Quick-Break

Multi-pole Breakers Incorporate Internal Common Trip

### Molded Case Switches

UL Listed

Without overload or short circuit protection.

|                         | Ampere Rating | 2-Pole Product Number | 3-Pole Product Number |
|-------------------------|---------------|-----------------------|-----------------------|
| <b>120/240 Volts ac</b> |               |                       |                       |
|                         | 60            | TQL21Y60              | —                     |
|                         | 100           | TQL21Y100             | —                     |
| <b>240 Volts ac</b>     |               |                       |                       |
|                         | 60            | TQL22Y60              | TQL32Y60              |
|                         | 100           | TQL22Y100             | TQL32Y100             |
| Std. Pkg.               |               | 5 cartons of 5        | 5 cartons of 3        |



TQL21Y100

### Interlocking Circuit Breakers for use in PowerMark Gold Generator Panels

Two breakers required for interlocking.

| Poles | Ampere Rating | Product Number |
|-------|---------------|----------------|
| 2     | 30            | THQL2130GEN    |
| 2     | 60            | THQL2160GEN    |



TQ1120

### TQ Circuit Breakers

3/4" UL Classified Circuit Breakers for use in \*Square D \*\*QO Load Centers.

10 kAIC RMS symmetrical

| Ampere Rating | 1-Pole Product Number | 2-Pole Product Number |
|---------------|-----------------------|-----------------------|
| 15            | TQ1115                | TQ2115                |
| 20            | TQ1120                | TQ2120                |
| 30            | TQ1130                | TQ2130                |
| 40            | TQ1140                | TQ2140                |
| 50            | TQ1150                | TQ2150                |
| 60            | —                     | TQ2160                |
| Std. Pkg.     | 1 carton of 10        | 1 carton of 5         |



TQ2120

### THQL 120/240 Vac, with Factory Installed Shunt<sup>1</sup>

| # of Poles | Ampere Rating | Wire Range <sup>2</sup> | 120/240 Vac Interrupting Rating | Product Number |
|------------|---------------|-------------------------|---------------------------------|----------------|
| 1          | 15            | (1) 14-8 Cu/12-8 Al     | 10kA                            | THQL1115ST1    |
| 1          | 20            | (1) 14-8 Cu/12-8 Al     | 10kA                            | THQL1120ST1    |
| 1          | 30            | (1) 14-8 Cu/12-8 Al     | 10kA                            | THQL1130ST1    |
| 1          | 35            | (1) 8-3 Cu/8-3 Al       | 10kA                            | THQL1135ST1    |

<sup>1</sup> Shunt trip requires one additional pole of space.



THQL1130ST1

### THQL 120/240 Vac, Internal Common Trip with Factory Installed Shunt<sup>1</sup>

| # of Poles | Ampere Rating | Wire Range <sup>2</sup> | 120/240 Vac Interrupting Rating | Product Number |
|------------|---------------|-------------------------|---------------------------------|----------------|
| 2          | 15            | 14-8 Cu/12-8 Al         | 10kA                            | THQL2115ST1    |
| 2          | 20            | 14-8 Cu/12-8 Al         | 10kA                            | THQL2120ST1    |
| 2          | 30            | 14-8 Cu/12-8 Al         | 10kA                            | THQL2130ST1    |
| 2          | 35            | 8-3 Cu/8-3 Al           | 10kA                            | THQL2135ST1    |
| 2          | 40            | 8-3 Cu/8-3 Al           | 10kA                            | THQL2140ST1    |
| 2          | 45            | 8-3 Cu/8-3 Al           | 10kA                            | THQL2145ST1    |
| 2          | 50            | 8-3 Cu/8-3 Al           | 10kA                            | THQL2150ST1    |
| 2          | 60            | 8-3 Cu/8-3 Al           | 10kA                            | THQL2160ST1    |
| 2          | 70            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL2170ST1    |
| 2          | 80            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL2180ST1    |
| 2          | 90            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL2190ST1    |
| 2          | 100           | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL21100ST1   |
| 3          | 20            | 14-8 Cu/12-8 Al         | 10kA                            | THQL32020ST1   |
| 3          | 30            | 14-8 Cu/12-8 Al         | 10kA                            | THQL32030ST1   |
| 3          | 40            | 8-3 Cu/8-3 Al           | 10kA                            | THQL32040ST1   |
| 3          | 50            | 8-3 Cu/8-3 Al           | 10kA                            | THQL32050ST1   |
| 3          | 60            | 8-3 Cu/8-3 Al           | 10kA                            | THQL32060ST1   |
| 3          | 70            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL32070ST1   |
| 3          | 80            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL32080ST1   |
| 3          | 90            | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL32090ST1   |
| 3          | 100           | 6-1/0 Cu/4-1/0 Al       | 10kA                            | THQL32100ST1   |

<sup>2</sup> Solid or stranded for 14-10 AWG.

\*Square D is a registered trademark of SNA Holdings, Inc. \*\*QO is a registered trademark of the Square D Company.



THQL2120ST1



THQL32020ST1

## PowerMark Gold and Plus Load Centers


### Single-Phase, Three-Wire, 120/240 Vac

### Main Lugs Convertible to Main Breaker

**Load Center**  
**1PH**  
**Main Lug**  
**Indoor NEMA 1**

## Product Features

- UL Listed (Panelboards No. 67)
- 0°/75°C Conductor Rating
- Suitable for Use as Service Entrance Equipment when Installed in Accordance with the National Electrical Code
- 22kAIC RMS symmetrical, Except Where Noted
- 6-42 circuit devices UL Listed for bottom mounted lugs by installing complete unit (box, interior and front) upside down.
- For a listing of CSA Listed load centers, visit [electrification.us.abb.com](http://electrification.us.abb.com).

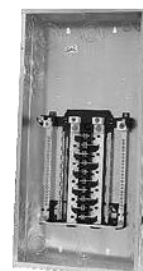

TLM2020CCU



TPL412R

**Main Lugs Factory Installed (TLM units convertible to main breaker), Indoor (NEMA 1) Enclosure**

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type                | Feed<br>Type <sup>1</sup> | Box<br>Number | Main Wire Size<br>(AWG/kcmil)<br>Cu-Al | Equipment<br>Ground Kit | Product<br>Number           |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|------------------------------|---------------------------|---------------|----------------------------------------|-------------------------|-----------------------------|
| 40                       | 2                       | 1                       | 4                         | 1                         | 4                         | Surface                      | Top<br>Bottom             | 1A            | 14-4                                   | TGK4 (order separately) | TL240SCU <sup>1,8</sup>     |
| 70                       | 2                       | 1                       | 4                         | 1                         | 4                         | Surface                      | Top<br>Bottom             | 1A            | 6-3                                    | TGK4 (order separately) | TL270SCU <sup>1,8</sup>     |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Combination<br>Flush/Surface | Top<br>Bottom             | 2A            | 1-2/0                                  | TGL1 (order separately) | TL412C <sup>1,2,8</sup>     |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Combination<br>Flush/Surface | Top<br>Bottom             | 2A            | 1-2/0                                  | TGL1 installed          | TL412CT <sup>1,2,3,8</sup>  |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Thermoplastic                | Top<br>Bottom             | 2             | 1-2/0                                  | TGL1 (order separately) | TPL412C <sup>1,2,3,8</sup>  |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Thermoplastic                | Top<br>Bottom             | 2             | 1-2/0                                  | TGL1 installed          | TPL412CT <sup>1,2,3,8</sup> |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM612FCU <sup>4,8</sup>    |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM612FCUD <sup>4,8</sup>   |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 installed          | TLM612FCUDG <sup>4,8</sup>  |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM612SCU <sup>4,8</sup>    |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM612SCUD <sup>4,8</sup>   |
| 125                      | 6                       | 3                       | 12                        | 4                         | 12                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 installed          | TLM612SCUDG <sup>4,8</sup>  |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM812FCU <sup>4,8</sup>    |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM812FCUD <sup>4,8</sup>   |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Flush                        | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM812FCUDG <sup>4,8</sup>  |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM812SCU <sup>4,8</sup>    |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 (order separately) | TLM812SCUD <sup>4,8</sup>   |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | Surface                      | Top<br>Bottom             | 3A            | 6-1                                    | TGL2 installed          | TLM812SCUDG <sup>4,8</sup>  |
| 125                      | 14                      | 6                       | 20                        | 8                         | 24                        | Combination<br>Flush/Surface | Top<br>Bottom             | 18            | 6-2/0                                  | Included <sup>10</sup>  | TLM1212CCU <sup>7,8</sup>   |
| 125                      | 14                      | 6                       | 20                        | 8                         | 24                        | White Combo<br>Flush/Surface | Top<br>Bottom             | 18            | 6-2/0                                  | Included <sup>10</sup>  | TLM1212CCU <sup>7,8,9</sup> |

<sup>1</sup> No door

<sup>2</sup> 10 kAIC

<sup>3</sup> 125 amp maximum branch capacity.

<sup>4</sup> For main breaker, order THQLRK2 retainer kit plus 2-pole circuit breaker. See page 1-30, 100 amp max.

<sup>5</sup> For main breaker, order TQMH000. See page 1-26. Also order 2-pole THQL, THHQL, or TXQL circuit breaker. See page 1-7.

<sup>6</sup> For main breaker, order THQMVXXXD circuit breaker from page 1-8.

<sup>7</sup> For main breaker applications, use reverse feed THQL breaker or THHQL circuit breaker (see page 1-7) and THQLRK3 breaker retainer (see page 1-30).

<sup>8</sup> No lock provision available. Use next size larger load center such as TLM1612CCU with a TDL106 accessory if locking provision is required.

<sup>9</sup> Minimum order QTY is 40 for below 24 circuits; QTY 24 for 24 circuits and above. (See DEE-590)

<sup>10</sup> Load center includes a factory installed ground bar and add-a-lug. See wiring diagram on page 1-33.

A separate TGL2 can be added in the unlikely event that another ground bar is required.

This table continued on next page

## PowerMark Gold and Plus Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### Main Lugs Convertible to Main Breaker

**Load Center**  
**1PH**  
**Main Lug**  
**Indoor NEMA 1**

#### Main Lugs Factory Installed (TLM units convertible to main breaker), Indoor (NEMA 1) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Front Type                | Feed Type  | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit               | Product Number             |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|---------------------------|------------|------------|----------------------------------|------------------------------------|----------------------------|
| 125                | 16                | 8                 | 16                  | 6                   | 24                  | Combination Flush/Surface | Top Bottom | 4          | 6-2/0                            | TGK12 and TGK24 (order separately) | TLM1612CCU <sup>5</sup>    |
| 125                | 16                | 8                 | 16                  | 6                   | 24                  | Combination Flush/Surface | Top Bottom | 4          | 6-2/0                            | TGK12 and TLK20 installed          | TLM1612CCUG <sup>5</sup>   |
| 125                | 24                | 12                | 0                   | 0                   | 24                  | Combination Flush/Surface | Top Bottom | 7          | 6-2/0                            | TGK24 and TGK32 (order separately) | TLM2412CCU <sup>5</sup>    |
| 125                | 24                | 12                | 0                   | 0                   | 24                  | Combination Flush/Surface | Top Bottom | 7          | 6-2/0                            | TGK24 and TGK32 (order separately) | TLM2412CCUW <sup>6,9</sup> |
| 125                | 24                | 12                | 0                   | 0                   | 24                  | Combination Flush/Surface | Top Bottom | 7          | 6-2/0                            | TGK24 and TLK20 installed          | TLM2412CCUG <sup>5</sup>   |
| 200                | 16                | 8                 | 32                  | 14                  | 32                  | Combination Flush/Surface | Top Bottom | 7          | 6-250                            | TGK32 (order separately)           | TLM1620CCU <sup>6</sup>    |
| 200                | 16                | 8                 | 32                  | 14                  | 32                  | Combination Flush/Surface | Top Bottom | 7          | 6-250                            | TGK32 (order separately)           | TLM1620CCUW <sup>6,9</sup> |
| 200                | 16                | 8                 | 32                  | 14                  | 32                  | Combination Flush/Surface | Top Bottom | 7          | 6-250                            | TGK32 installed                    | TLM1620CCUG <sup>6</sup>   |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Combination Flush/Surface | Top Bottom | 8          | 6-250                            | TGK32 (order separately)           | TLM2020CCU <sup>6</sup>    |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Combination Flush/Surface | Top Bottom | 8          | 6-250                            | TGK32 (order separately)           | TLM2020CCUW <sup>6,9</sup> |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Combination Flush/Surface | Top Bottom | 8          | 6-250                            | TGK42 installed                    | TLM2020CCUG <sup>6</sup>   |
| 200                | 24                | 12                | 36                  | 18                  | 42                  | Combination Flush/Surface | Top Bottom | 9          | 1-3/0 (Cu), 2/0-3/0 (Al)         | TGK24 or TGK32 (order separately)  | TLM2420C42 <sup>6</sup>    |
| 200                | 32                | 16                | 20                  | 8                   | 42                  | Combination Flush/Surface | Top Bottom | 11         | 1-250 (Cu), 2/0-250 (Al)         | TGK32 and TLK20 (order separately) | TLM3220C42 <sup>6</sup>    |
| 200                | 32                | 16                | 16                  | 6                   | 40                  | Combination Flush/Surface | Top Bottom | 11         | 6-250                            | TGK32 (order separately)           | TLM3220CCU <sup>6</sup>    |
| 200                | 32                | 16                | 16                  | 6                   | 40                  | Combination Flush/Surface | Top Bottom | 11         | 6-250                            | TGK32 (order separately)           | TLM3220CCUW <sup>6,9</sup> |
| 200                | 32                | 16                | 16                  | 6                   | 40                  | Combination Flush/Surface | Top Bottom | 11         | 6-250                            | TGK32 and TNLK250 installed        | TLM3220CCUG <sup>6</sup>   |
| 200                | 32                | 16                | 64                  | 30                  | 64                  | Combination Flush/Surface | Top Bottom | 19         | 6-250                            | (2) TGK24 (1) TLK250               | TLM3220C64G <sup>2</sup>   |
| 200                | 40                | 20                | 0                   | 0                   | 40                  | Combination Flush/Surface | Top Bottom | 13         | 6-250                            | TGK42 (order separately)           | TLM4020CCU <sup>6</sup>    |
| 200                | 40                | 20                | 0                   | 0                   | 40                  | Combination Flush/Surface | Top Bottom | 13         | 6-250                            | TGK42 (order separately)           | TLM4020CCUW <sup>6,9</sup> |
| 200                | 40                | 20                | 0                   | 0                   | 40                  | Combination Flush/Surface | Top Bottom | 13         | 6-250                            | TGK42 and TNLK250 installed        | TLM4020CCUG <sup>6</sup>   |
| 200                | 40                | 20                | 80                  | 38                  | 80                  | Combination Flush/Surface | Top Bottom | 20         | 6-250                            | (2) TGK32 (1) TLK250               | TLM4020C80G <sup>2</sup>   |
| 200                | 42                | 20                | 0                   | 0                   | 42                  | Combination Flush/Surface | Top Bottom | 14         | 1-300 (Cu), 2/0-300 (Al)         | TGK42 (order separately)           | TLM4220CCU <sup>6</sup>    |
| 200                | 42                | 20                | 0                   | 0                   | 42                  | Combination Flush/Surface | Top Bottom | 14         | 1-300 (Cu), 2/0-300 (Al)         | TGK42 and TNLK250 installed        | TLM4220CCUG <sup>6</sup>   |
| 225                | 42                | 20                | 0                   | 0                   | 42                  | Combination Flush/Surface | Top Bottom | 14         | 1-300 (Cu), 2/0-300 (Al)         | TGK42 (order separately)           | TLM4222CCU <sup>6</sup>    |
| 225                | 42                | 20                | 0                   | 0                   | 42                  | Combination Flush/Surface | Top Bottom | 14         | 1-300 (Cu), 2/0-300 (Al)         | TGK42 and TNLK250 installed        | TLM4222CCUG <sup>6</sup>   |

<sup>1</sup> No door

<sup>2</sup> 10 kAIC

<sup>3</sup> 125 amp maximum branch capacity.

<sup>4</sup> For main breaker, order THQLRK2 retainer kit plus 2-pole circuit breaker. See page 1-30, 100 amp max.

<sup>5</sup> For main breaker, order TQMH000. See page 1-26. Also order 2-pole THQL, THHQL, or TXQL circuit breaker. See page 1-7.

<sup>6</sup> For main breaker, order THQMVXXD circuit breaker from page 1-8.

<sup>7</sup> For main breaker applications, use reverse feed THQL breaker or THHQL circuit breaker (see page 1-7) and THQLRK3 breaker retainer (see page 1-30).

<sup>8</sup> No lock provision available. Use next size larger load center such as TLM1612CCU with a TDL106 accessory if locking provision is required.

<sup>9</sup> Minimum order QTY is 40 for below 24 circuits; QTY 24 for 24 circuits and above. (See DEE-590)

<sup>10</sup> Load center includes a factory installed ground bar and add-a-lug. See wiring diagram on page 1-33. A separate TGL2 can be added in the unlikely event that another ground bar is required.

**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.

## PowerMark Gold and Plus Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### Main Lugs Convertible to Main Breaker

**Load Center**  
**1PH**  
**Main Lug**  
**Outdoor NEMA 3R**

#### Main Lugs Factory Installed (TLM units convertible to main breaker), Outdoor (NEMA 3R) Enclosure<sup>1</sup>

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type          | Feed <sup>1</sup><br>Type <sup>1</sup> | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit                              | Product<br>Number         |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|------------------------|----------------------------------------|---------------|-------------------------------------|------------------------------------------------------|---------------------------|
| 40                       | 2                       | 1                       | 4                         | 1                         | 4                         | -                      | Top                                    | R1A           | 14-4                                | TGK4 (order separately)                              | TL240RCU                  |
| 70                       | 2                       | 1                       | 4                         | 1                         | 4                         | -                      | Top                                    | R1A           | 6-3                                 | TGK4 (order separately)                              | TL270RCU                  |
| 100                      | 5                       | 0                       | 0                         | 0                         | 5                         | Flush                  | Top                                    | R41           | 6-3                                 | TGL1 installed                                       | TL510RT <sup>2,8</sup>    |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | -                      | Top                                    | R1A           | 1-2/0                               | TGL1 (order separately)                              | TL412R1 <sup>2</sup>      |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | -                      | Top                                    | R1A           | 1-2/0                               | TGL1 installed                                       | TL412RT1 <sup>2</sup>     |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | -                      | Top                                    | R41           | 1-2/0                               | TGL1 (order separately)                              | TL412R2 <sup>2</sup>      |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Thermoplastic<br>Front | Top                                    | R1            | 1-2/0                               | TGL1 (order separately)                              | TPL412R <sup>2,3</sup>    |
| 125                      | 4                       | 2                       | 8                         | 3                         | 8                         | Thermoplastic<br>Front | Top                                    | R1            | 1-2/0                               | TGL1 installed                                       | TPL412RT <sup>2,3</sup>   |
| 125                      | 6                       | 2                       | 12                        | 4                         | 12                        | -                      | Top                                    | R2A           | 6-1                                 | TGL2 (order separately)                              | TLM612RCU <sup>4</sup>    |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | -                      | Top                                    | R2A           | 6-1                                 | TGL2 (order separately)                              | TLM812RCU <sup>4</sup>    |
| 125                      | 8                       | 4                       | 16                        | 8                         | 16                        | -                      | Top                                    | R3A           | 6-1                                 | TGL2 (order separately)                              | TLM812RCU2 <sup>5</sup>   |
| 125                      | 14                      | 6                       | 20                        | 8                         | 24                        | -                      | Top                                    | R3A           | 6-2/0                               | Included                                             | TLM1212RCU <sup>7,9</sup> |
| 125                      | 24                      | 12                      | 0                         | 0                         | 24                        | -                      | Top<br>Bottom                          | R4A           | 6-2/0                               | TGK24 (order separately)<br>TGK32 (order separately) | TLM2412RCU <sup>5</sup>   |
| 150                      | 24                      | 12                      | 12                        | 4                         | 30                        | -                      | Top<br>Bottom                          | R6A           | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK24 (order separately)<br>TGK32 (order separately) | TLM2415RCU <sup>6</sup>   |
| 200                      | 12                      | 6                       | 24                        | 10                        | 24                        | -                      | Top                                    | R5A           | 6-250                               | TGK24 (order separately)                             | TLM1220RCU <sup>6</sup>   |
| 200                      | 16                      | 8                       | 32                        | 14                        | 32                        | -                      | Top                                    | R5A           | 6-250                               | TGK32 (order separately)                             | TLM1620RCU <sup>6</sup>   |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | -                      | Top                                    | R6A           | 6-250                               | TGK24 (order separately)<br>TGK42 (order separately) | TLM2020RCU <sup>6</sup>   |
| 200                      | 24                      | 12                      | 36                        | 18                        | 42                        | -                      | Top<br>Bottom                          | R39           | 1-250 (Cu),<br>2/0-250 (Al)         | TGK24 (order separately)                             | TLM2420R4 <sup>2</sup>    |
| 200                      | 32                      | 16                      | 16                        | 6                         | 40                        | -                      | Top<br>Bottom                          | R7A           | 1-250 (Cu),<br>2/0-250 (Al)         | TGK32 (order separately)                             | TLM3220RCU <sup>6</sup>   |
| 200                      | 40                      | 20                      | 0                         | 0                         | 40                        | -                      | Top<br>Bottom                          | R8A           | 6-250                               | TGK42 (order separately)                             | TLM4020RCU <sup>6</sup>   |
| 225                      | 42                      | 20                      | 0                         | 0                         | 42                        | -                      | Top<br>Bottom                          | R8A           | 1-300 (Cu),<br>2/0-300 (Al)         | TGK42 (order separately)                             | TLM4222RCU <sup>6</sup>   |

<sup>1</sup> 40-225 amp single-phase devices have removable closing caps. Larger ampere devices require field-cut openings. Order hubs separately. See page 1-29.

<sup>2</sup> 10 kAIC.

<sup>3</sup> 125 amp maximum branch capacity.

<sup>4</sup> For main breaker, order THQLRK2 retainer kit plus 2-pole circuit breaker. See page 1-30, 100 amp maximum due to wire bending requirements.

<sup>5</sup> For main breaker, order TQMH000. See page 1-26. Also order 2-pole THQL or THHQL circuit breaker. See page 1-7.

<sup>6</sup> For main breaker, order THQMVXXXD circuit breaker from page 1-8.

<sup>7</sup> For main breaker applications, use reverse feed THQL or THHQL circuit breaker (see page 1-7) and THQLRK3 breaker retainer (see page 1-30).

<sup>8</sup> Main and branch breakers are limited to 70 amps.

<sup>9</sup> Load center includes a factory installed ground bar and add-a-lug. See wiring diagram on page 1-33. A separate TGL2 can be added in the unlikely event that another ground bar is required.

**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.

## PowerMark Gold and Plus Main Breaker Load Centers

Single-Phase, Three-Wire, 120/240 Vac  
Main Breaker Factory Installed


Load Center  
1PH  
Main Breaker  
Indoor NEMA 1

### Product Features

- UL Listed (Panelboards No. 67)
- 60°C/75°C Conductor Rating
- Suitable for Use as Service Entrance Equipment when Installed in Accordance with the National Electrical Code
- 22kAIC RMS symmetrical, Except Where Noted
- 6-42 circuit devices UL Listed for bottom mounted lugs by installing complete unit (box, interior and front) upside down.
- For a listing of CSA Listed load centers, visit [electrification.us.abb.com](http://electrification.us.abb.com).



TM2020CCU



TM820RCUFL

### Indoor (NEMA 1) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type                         | Feed<br>Type  | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit                              | Product<br>Number      |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|---------------------------------------|---------------|---------------|-------------------------------------|------------------------------------------------------|------------------------|
| 100                      | 12                      | 5                       | 20                        | 8                         | 22                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 18            | 4-1/0                               | Included <sup>1</sup>                                | TM1210CCU <sup>2</sup> |
| 100                      | 24                      | 12                      | 0                         | 0                         | 24                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 7             | 1-2/0                               | TGK24, TGK32 and<br>TLK20 (order separately)         | TM2410CCU              |
| 100                      | 20                      | 10                      | 0                         | 0                         | 20                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 6             | 4-1/0                               | TGK24 (order separately)                             | TM2010CCU              |
| 100                      | 32                      | 16                      | 0                         | 0                         | 32                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 11            | 4-1/0                               | TGK32 (order separately)                             | TM3210CCU              |
| 125                      | 12                      | 5                       | 20                        | 8                         | 22                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 18            | 1-2/0                               | Included <sup>1</sup>                                | TM1212CCU <sup>2</sup> |
| 125                      | 24                      | 12                      | 0                         | 0                         | 24                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 7             | 1-2/0                               | TGK24 (order separately)                             | TM2412CCU              |
| 125                      | 16                      | 8                       | 16                        | 6                         | 24                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 4             | 1-2/0                               | TGK12 (order separately)<br>TGK24 (order separately) | TM1612CCU              |
| 125                      | 16                      | 8                       | 16                        | 6                         | 24                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 4             | 1-2/0                               | TGK24 installed                                      | TM1612CCUG             |
| 150                      | 16                      | 8                       | 32                        | 14                        | 32                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 7             | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK24 (order separately)<br>TGK32 (order separately) | TM1615CCU              |
| 150                      | 16                      | 8                       | 32                        | 14                        | 32                        | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 7             | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK32 installed                                      | TM1615CCUG             |

This table continued on next page

## PowerMark Gold and Plus Main Breaker Load Centers

Single-Phase, Three-Wire, 120/240 Vac  
Main Breaker Factory Installed

**Load Center**  
**1PH**  
**Main Breaker**  
**Indoor NEMA 1**

### Indoor (NEMA 1) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type                | Feed<br>Type  | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit                              | Product<br>Number        |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|------------------------------|---------------|---------------|-------------------------------------|------------------------------------------------------|--------------------------|
| 150                      | 32                      | 16                      | 0                         | 0                         | 32                        | Combination<br>Flush/Surface | Top<br>Bottom | 11            | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK32 (order separately)                             | TM3215CCU                |
| 150                      | 24                      | 12                      | 36                        | 18                        | 42                        | Combination<br>Flush/Surface | Top<br>Bottom | 9             | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK24 or TGK32<br>(order separately)                 | TM2415C42                |
| 150                      | 32                      | 16                      | 20                        | 10                        | 42                        | Combination<br>Flush/Surface | Top<br>Bottom | 11            | 1-3/0 (Cu),<br>2/0-3/0 (Al)         | TGK32 and TLK20<br>(order separately)                | TM3215C42                |
| 150                      | 40                      | 20                      | 80                        | 38                        | 80                        | Combination<br>Flush/Surface | Top<br>Bottom | 20            | 1-250 (Cu)<br>2/0-250 (Al)          | Order separately<br>if required                      | TM4015C80                |
| 200                      | 16                      | 8                       | 32                        | 14                        | 32                        | Combination<br>Flush/Surface | Top<br>Bottom | 7             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 (order separately)                             | TM1620CCU                |
| 200                      | 16                      | 8                       | 32                        | 14                        | 32                        | Combination<br>Flush/Surface | Top<br>Bottom | 8             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 installed                                      | TM1620CCUG               |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | Combination<br>Flush/Surface | Top<br>Bottom | 8             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 (order separately)                             | TM2020CCU                |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | White Combo<br>Flush/Surface | Top<br>Bottom | 8             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK24 (order separately)<br>TGK42 (order separately) | TM2020CCUW <sup>3</sup>  |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | Combination<br>Flush/Surface | Top<br>Bottom | 8             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 (order separately)                             | TM2020CCUG               |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | White Combo<br>Flush/Surface | Top<br>Bottom | 8             | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 (order separately)                             | TM2020CCUGW <sup>3</sup> |
| 200                      | 32                      | 16                      | 16                        | 6                         | 40                        | Combination<br>Flush/Surface | Top<br>Bottom | 11            | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 (order separately)                             | TM3220CCU                |
| 200                      | 40                      | 20                      | 0                         | 0                         | 40                        | Combination<br>Flush/Surface | Top<br>Bottom | 13            | 1-250 (Cu)<br>2/0-250 (Al)          | TGK42 (order separately)                             | TM4020CCU                |
| 200                      | 32                      | 16                      | 20                        | 8                         | 42                        | Combination<br>Flush/Surface | Top<br>Bottom | 11            | 1-250 (Cu)<br>2/0-250 (Al)          | TGK32 and TLK20<br>(order separately)                | TM3220C42                |
| 200                      | 42                      | 20                      | 0                         | 0                         | 42                        | Combination<br>Flush/Surface | Top<br>Bottom | 14            | 1-300 (Cu),<br>2/0-300 (Al)         | TGK42 (order separately)                             | TM4220CCU                |
| 200                      | 32                      | 16                      | 64                        | 30                        | 64                        | Combination<br>Flush/Surface | Top<br>Bottom | 19            | 1-250 (Cu)<br>2/0-250 (Al)          | Order separately<br>if required                      | TM3220C64                |
| 200                      | 40                      | 20                      | 80                        | 38                        | 80                        | Combination<br>Flush/Surface | Top<br>Bottom | 20            | 1-250 (Cu)<br>2/0-250 (Al)          | Order separately<br>if required                      | TM4020C80                |
| 225                      | 42                      | 20                      | 0                         | 0                         | 42                        | Combination<br>Flush/Surface | Top<br>Bottom | 14            | 1-300 (Cu),<br>2/0-300 (Al)         | TGK42 (order separately)                             | TM4222CCU                |

<sup>1</sup> Load center includes a factory installed ground bar and add-a-lug. See wiring diagram on page 1-33. A separate TGL2 can be added in the unlikely event that another ground bar is required.

<sup>2</sup> No lock provision available. Use next size larger load center such as TLM1612CCU with a TDL106 accessory if locking provision is required.

<sup>3</sup> Minimum order QTY is 40 for below 24 circuits; QTY 24 for 24 circuits and above. (See DEE-590)

**Load Center**  
**1PH**  
**Main Breaker**  
**Outdoor NEMA 3R**

### Outdoor (NEMA 3R) Enclosure<sup>4</sup>

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Feed<br>Type  | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit                              | Product<br>Number |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|---------------|---------------|-------------------------------------|------------------------------------------------------|-------------------|
| 100                      | 12                      | 5                       | 20                        | 8                         | 22                        | Top           | R3A           | 4-1/0                               | <sup>5</sup>                                         | TM1210RCU         |
| 100                      | 20                      | 10                      | 0                         | 0                         | 30                        | Top           | R4            | 4-1/0                               | TGK24 (order separately)                             | TM2010RCU         |
| 125                      | 12                      | 5                       | 20                        | 8                         | 22                        | Top           | R3A           | 1-2/0                               | <sup>5</sup>                                         | TM1212RCU         |
| 125                      | 24                      | 12                      | 0                         | 0                         | 24                        | Top           | R4            | 1-2/0                               | TGK24 (order separately)                             | TM2412RCU         |
| 150                      | 8                       | 4                       | 16                        | 6                         | 16                        | Top           | R5            | 1-250 (Cu), 2/0-250 (Al)            | TGK24 (order separately)                             | TM815RCUFL        |
| 150                      | 16                      | 8                       | 32                        | 14                        | 32                        | Top           | R5            | 1-3/0 (Cu), 2/0-3/0 (Al)            | TGK24 (order separately)<br>TGK32 (order separately) | TM1615RCU         |
| 150                      | 24                      | 12                      | 12                        | 4                         | 30                        | Top           | R6            | 1-3/0 (Cu), 2/0-3/0 (Al)            | TGK24 (order separately)<br>TGK32 (order separately) | TM2415RCU         |
| 150                      | 24                      | 12                      | 36                        | 18                        | 42                        | Top<br>Bottom | R39           | 1-250 (Cu), 2/0-250 (Al)            | TGK24 (order separately)                             | TM2415R42         |
| 150                      | 32                      | 16                      | 0                         | 0                         | 32                        | Top           | R7            | 1-3/0 (Cu), 2/0-3/0 (Al)            | TGK32 (order separately)                             | TM3215RCU         |
| 200                      | 8                       | 4                       | 16                        | 6                         | 16                        | Top           | R5            | 1-250 (Cu), 2/0-250 (Al)            | TGK24 or TGK32<br>(order separately)                 | TM820RCUFL        |
| 200                      | 20                      | 10                      | 40                        | 18                        | 40                        | Top           | R6            | 1-250 (Cu), 2/0-250 (Al)            | TGK24 (order separately)<br>TGK42 (order separately) | TM2020RCU         |
| 200                      | 24                      | 12                      | 36                        | 18                        | 42                        | Top<br>Bottom | R39           | 1-250 (Cu), 2/0-250 (Al)            | TGK24 (order separately)                             | TM2420R42         |
| 200                      | 32                      | 16                      | 16                        | 6                         | 40                        | Top           | R7            | 1-250 (Cu), 2/0-250 (Al)            | TGK32 (order separately)                             | TM3220RCU         |
| 200                      | 40                      | 20                      | 0                         | 0                         | 40                        | Top           | R8            | 1-250 (Cu), 2/0-250 (Al)            | TGK42 (order separately)                             | TM4020RCU         |
| 225                      | 8                       | 4                       | 16                        | 6                         | 16                        | Top           | R5            | 1-250 (Cu), 2/0-250 (Al)            | TGK24 (order separately)                             | TM822RCUFL        |
| 225                      | 42                      | 20                      | 0                         | 0                         | 42                        | Top           | R8            | 1-300 (Cu), 2/0-300 (Al)            | TGK42 (order separately)                             | TM4222RCU         |

<sup>4</sup> 100-225 amp devices have removable closing caps. Larger ampere devices require field-cut openings. Order hubs separately. See page 1-29.

<sup>5</sup> Load Center includes a factory installed ground bar and add-a-lug. See wiring diagram on page 1-33. A separate TGK12 or TGK24 can be ordered as accessories.

**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.



## PowerMark Plus™ Load Centers

### Three-Phase, Four-Wire, 208Y/120 Vac<sup>2</sup>

### Main Lugs Factory Installed

**Load Center**  
**3PH**  
**Main Lugs**  
**Indoor NEMA 1**

## Product Features

- UL Listed (Panelboards No. 67)
- 60°/75°C Conductor Rating
- Suitable for Use as Service Entrance Equipment when Installed in Accordance with the National Electrical Code
- 22kAIC RMS symmetrical Short-circuit Rating Standard
- Bottom feed models available where noted with a "B" suffix.
- For a listing of CSA Listed load centers, visit [electrification.us.abb.com](http://electrification.us.abb.com).
- Copper breaker mounting stabs with aluminum bus<sup>1</sup>



TL18415C

### Indoor (NEMA 1) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 3 Pole, 1" Spaces | Total 1-pole Spaces | Front Type                      | Feed Type  | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit                                 | Product Number        |
|--------------------|-------------------|-------------------|-------------------|---------------------|---------------------------------|------------|------------|----------------------------------|------------------------------------------------------|-----------------------|
| 125                | 12                | 6                 | 4                 | 12                  | Combination Flush/Surface Front | Top Bottom | 4          | 6-2/0                            | TGK12 (order separately)<br>TGK24 (order separately) | TL12412C <sup>3</sup> |
| 150                | 18                | 8                 | 6                 | 18                  | Combination Flush/Surface Front | Top Bottom | 7          | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK24 (order separately)<br>TGK32 (order separately) | TL18415C <sup>3</sup> |
| 150                | 24                | 12                | 8                 | 24                  | Combination Flush/Surface Front | Top Bottom | 7          | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK24 (order separately)<br>TGK32 (order separately) | TL24415C <sup>3</sup> |
| 200                | 18                | 8                 | 6                 | 18                  | Combination Flush/Surface Front | Top Bottom | 8          | 1-250 (Cu),<br>2/0-250 (Al)      | TGK32 (order separately)                             | TL18420C <sup>3</sup> |
| 200                | 30                | 14                | 10                | 30                  | Combination Flush/Surface Front | Top Bottom | 11         | 1-250 (Cu),<br>2/0-250 (Al)      | TGK32 (order separately)                             | TL30420C <sup>3</sup> |
| 200                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Top Bottom | 13         | 1-250 (Cu),<br>2/0-250 (Al)      | TGK42 (order separately)                             | TL42420C              |
| 225                | 30                | 14                | 10                | 30                  | Combination Flush/Surface Front | Top Bottom | 15         | 1-300 (Cu),<br>2/0-300 (Al)      | (2) TGL2 (order separately)                          | TL30422C <sup>4</sup> |
| 225                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Top Bottom | 15         | 1-300 (Cu),<br>2/0-300 (Al)      | (2) TGL2 (order separately)                          | TL42422C <sup>4</sup> |

<sup>1</sup> Three-phase PowerMark Plus load centers have aluminum bus with copper breaker mounting stabs, providing copper-to-copper contact at breaker stabs.

<sup>2</sup> Also UL Listed for three-phase, four-wire 240/120 Volts ac delta and three-phase, three-wire 240 Volts ac branch breakers installed.

<sup>3</sup> Alternate main breaker: 100 Amp max. THQL (10kAIC), THHQL (22kAIC) three-pole, use retainer THQLRK. See page 1-30.

<sup>4</sup> Not suitable for use as service entrance equipment.


**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.



## PowerMark Plus™ Load Centers

### Three-Phase, Four-Wire, 208Y/120Vac

### Main Circuit Breaker or Main Lugs Factory Installed



**Load Center**  
**3PH**  
**Main Lugs**  
**Outdoor NEMA 3R**

TM24420CB

#### Main Lugs Factory Installed<sup>1</sup>

#### Outdoor (NEMA 3R) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 3 Pole, 1" Spaces | Total 1-pole Spaces | Feed Type | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit                                 | Product Number        |
|--------------------|-------------------|-------------------|-------------------|---------------------|-----------|------------|----------------------------------|------------------------------------------------------|-----------------------|
| 125                | 12                | 6                 | 4                 | 12                  | Top       | R3         | 6-2/0                            | TGK12 (order separately)<br>TGK24 (order separately) | TL12412R <sup>2</sup> |
| 150                | 18                | 8                 | 6                 | 18                  | Top       | R4         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK24 (order separately)<br>TGK32 (order separately) | TL18415R <sup>2</sup> |
| 150                | 24                | 12                | 8                 | 24                  | Top       | R4         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK24 (order separately)<br>TGK32 (order separately) | TL24415R <sup>2</sup> |
| 200                | 18                | 8                 | 6                 | 18                  | Top       | R4         | 1-250 (Cu),<br>2/0-250 (Al)      | TGK32 (order separately)                             | TL18420R <sup>2</sup> |
| 200                | 30                | 14                | 10                | 30                  | Top       | R6         | 1-250 (Cu),<br>2/0-250 (Al)      | TGK32 (order separately)                             | TL30420R <sup>2</sup> |
| 200                | 42                | 20                | 14                | 42                  | Top       | R8         | 1-250 (Cu),<br>2/0-250 (Al)      | TGK42 (order separately)                             | TL42420R <sup>3</sup> |
| 225                | 42                | 20                | 14                | 42                  | Top       | R8         | 1-300 (Cu),<br>2/0-300 (Al)      | TGK42 (order separately)                             | TL42422R <sup>3</sup> |

<sup>1</sup> Also UL Listed for three-phase, four-wire 240/120 Volts ac delta and three-phase, three-wire 240 Volts ac branch breakers installed.

<sup>2</sup> Alternate main breaker 100 Amp max. THQL (10kAIC), THHQL (22kAIC) three-pole, use retainer THQLRK. See page 1-30.

<sup>3</sup> Not suitable for use as service entrance equipment.

**Load Center**  
**3PH**  
**Main Breaker**  
**Indoor NEMA 1**

#### Main Breaker Factory Installed<sup>4</sup>

#### Indoor (NEMA 1) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 3 Pole, 1" Spaces | Total 1-pole Spaces | Front Type                            | Feed Type     | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit                                 | Product Number        |
|--------------------|-------------------|-------------------|-------------------|---------------------|---------------------------------------|---------------|------------|----------------------------------|------------------------------------------------------|-----------------------|
| 100                | 12                | 6                 | 4                 | 12                  | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 6          | 6-1/0 (Cu),<br>4-1/0 (Al)        | TGK12 (order separately)<br>TGK24 (order separately) | TM12410C <sup>5</sup> |
| 100                | 18                | 8                 | 6                 | 18                  | Combination<br>Flush/Surface<br>Front | Top<br>Bottom | 6          | 6-1/0 (Cu),<br>4-1/0 (Al)        | TGK24 (order separately)<br>TGK32 (order separately) | TM18410C <sup>5</sup> |
| 125                | 30                | 14                | 10                | 30                  | Combination<br>Flush/Surface<br>Front | Top           | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM30412C              |
| 125                | 30                | 14                | 10                | 30                  | Combination<br>Flush/Surface<br>Front | Bottom        | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM30412CB             |
| 150                | 24                | 12                | 8                 | 24                  | Combination<br>Flush/Surface<br>Front | Top           | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM24415C              |
| 150                | 24                | 12                | 8                 | 24                  | Combination<br>Flush/Surface<br>Front | Bottom        | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM24415CB             |
| 150                | 30                | 14                | 10                | 30                  | Combination<br>Flush/Surface<br>Front | Top           | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM30415C              |
| 150                | 30                | 14                | 10                | 30                  | Combination<br>Flush/Surface<br>Front | Bottom        | 11         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK32 (order separately)                             | TM30415CB             |
| 150                | 42                | 20                | 14                | 42                  | Combination<br>Flush/Surface<br>Front | Top           | 13         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK42 (order separately)                             | TM42415C              |
| 150                | 42                | 20                | 14                | 42                  | Combination<br>Flush/Surface<br>Front | Bottom        | 13         | 1-3/0 (Cu),<br>2/0-3/0 (Al)      | TGK42 (order separately)                             | TM42415CB             |
| 200                | 24                | 12                | 8                 | 24                  | Combination<br>Flush/Surface<br>Front | Top           | 11         | 1-300 (Cu),<br>2/0-300 (Al)      | TGK32 (order separately)                             | TM24420C              |
| 200                | 24                | 12                | 8                 | 24                  | Combination<br>Flush/Surface<br>Front | Bottom        | 11         | 1-300 (Cu),<br>2/0-300 (Al)      | TGK32 (order separately)                             | TM24420CB             |

<sup>4</sup> Also UL Listed for three-phase, four-wire 240/120 Volts Hi leg delta and three-phase, three-wire 240 Volts ac branch breakers installed.

<sup>5</sup> 100 Amp indoor devices UL listed for bottom-feed by installing complete unit upside-down.

This table continued on next page

**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.

## PowerMark Plus™ Load Centers

### Three-Phase, Four-Wire, 208Y/120 Vac<sup>1</sup>

### Main Circuit Breaker Factory Installed



TM42420C

**Load Center**  
**3PH**  
**Main Breaker**  
**Indoor NEMA 1**

#### Indoor (NEMA 1) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 3 Pole, 1" Spaces | Total 1-pole Spaces | Front Type                      | Feed Type | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit        | Product Number |
|--------------------|-------------------|-------------------|-------------------|---------------------|---------------------------------|-----------|------------|----------------------------------|-----------------------------|----------------|
| 200                | 30                | 14                | 10                | 30                  | Combination Flush/Surface Front | Top       | 12         | 1-250 (Cu), 2/0-250 (Al)         | TGK32 (order separately)    | TM30420C       |
| 200                | 30                | 14                | 10                | 30                  | Combination Flush/Surface Front | Bottom    | 12         | 1-250 (Cu), 2/0-250 (Al)         | TGK32 (order separately)    | TM30420CB      |
| 200                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Top       | 14         | 1-250 (Cu), 2/0-250 (Al)         | TGK42 (order separately)    | TM42420C       |
| 200                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Bottom    | 14         | 1-250 (Cu), 2/0-250 (Al)         | TGK42 (order separately)    | TM42420CB      |
| 225                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Top       | 15         | 1-300 (Cu), 2/0-300 (Al)         | (2) TGL2 (order separately) | TM42422C       |
| 225                | 42                | 20                | 14                | 42                  | Combination Flush/Surface Front | Bottom    | 15         | 1-300 (Cu), 2/0-300 (Al)         | (2) TGL2 (order separately) | TM42422CB      |

<sup>1</sup> Also UL Listed for three-phase, four-wire 240/120 Volts Hi leg delta and three-phase, three-wire 240 Volts ac branch breakers installed.



TM30420R

**Load Center**  
**3PH**  
**Main Breaker**  
**Outdoor NEMA 3R**

#### Outdoor (NEMA 3R) Enclosure

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 3 Pole, 1" Spaces | Total 1-pole Spaces | Feed Type | Box Number | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit                                 | Product Number |
|--------------------|-------------------|-------------------|-------------------|---------------------|-----------|------------|----------------------------------|------------------------------------------------------|----------------|
| 100                | 18                | 8                 | 6                 | 18                  | Top       | R4         | 6-1/0 (Cu), 4-1/0 (Al)           | TGK24 (order separately)<br>TGK32 (order separately) | TM18410R       |
| 125                | 30                | 14                | 10                | 30                  | Top       | R7         | 1-3/0 (Cu), 2/0-3/0 (Al)         | TGK32 (order separately)                             | TM30412R       |
| 150                | 24                | 12                | 8                 | 24                  | Top       | R6         | 1-3/0 (Cu), 2/0-3/0 (Al)         | TGK32 (order separately)                             | TM24415R       |
| 150                | 30                | 14                | 10                | 30                  | Top       | R7         | 1-3/0 (Cu), 2/0-3/0 (Al)         | TGK32 (order separately)                             | TM30415R       |
| 200                | 30                | 14                | 10                | 30                  | Top       | R7         | 1-250 (Cu), 2/0-250 (Al)         | TGK32 (order separately)                             | TM30420R       |
| 200                | 42                | 20                | 14                | 42                  | Top       | R8         | 1-250 (Cu), 2/0-250 (Al)         | TGK42 (order separately)                             | TM42420R       |
| 225                | 42                | 20                | 14                | 42                  | Top       | R8         | 1-300 (Cu), 2/0-300 (Al)         | TGK42 (order separately)                             | TM42422R       |

**Note:** See page 11-4, AL Series Lighting Panelboards as replacements for 300-600A load centers.

## PowerMark Gold Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

Load Center  
Generator Panels  
Riser Panels  
Spa Panels

### Product Features - Generator Panels

- Suitable for use in accordance with Article 702 of the National Electrical Code, ANSI/NFPA 70
- Single-phase, 2 interlock 60A or 30A main breakers, 8 circuits max.
- Safety and convenience when using a generator - 14,000 peak wattage, 11,520 continuous load, 48 amps at 240 volts.
- Maintains power to such critical circuits as those for furnace, pump, refrigerator, lights.
- Connected dual breaker mechanism ensures that only one source is active at a time.



TL412R250GF



TM830FCUGEN

#### Generator Panels, Two Interlocked Main Breakers Factory Installed Indoor (NEMA 1) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type | Feed<br>Type  | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit | Product<br>Number |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|---------------|---------------|---------------|-------------------------------------|-------------------------|-------------------|
| 30                       | 4                       | 2                       | 8                         | 4                         | 8                         | Flush Front   | Top<br>Bottom | 3A            | 6-1                                 | TGK12 included          | TM830FCUGEN       |
| 30                       | 4                       | 2                       | 8                         | 4                         | 8                         | Surface Front | Top<br>Bottom | 3A            | 6-1                                 | TGK12 included          | TM830SCUGEN       |
| 60                       | 4                       | 2                       | 8                         | 4                         | 8                         | Flush Front   | Top<br>Bottom | 3A            | 6-1                                 | TGK12 included          | TM860FCUGEN       |
| 60                       | 4                       | 2                       | 8                         | 4                         | 8                         | Surface Front | Top<br>Bottom | 3A            | 6-1                                 | TGK12 included          | TM860SCUGEN       |

#### Generator Panels, Two Interlocked Main Breakers Factory Installed Outdoor (NEMA 3R) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Feed<br>Type | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit | Product<br>Number |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|--------------|---------------|-------------------------------------|-------------------------|-------------------|
| 30                       | 4                       | 2                       | 8                         | 4                         | 8                         | Top          | R2A           | 6-1                                 | TGK12 included          | TM830RCUGEN       |
| 60                       | 4                       | 2                       | 8                         | 4                         | 8                         | Top          | R2A           | 6-1                                 | TGK12 included          | TM860RCUGEN       |

#### Riser Panels

##### Indoor (NEMA 1) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Front<br>Type                      | Feed<br>Type | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit  | Product<br>Number |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|------------------------------------|--------------|---------------|-------------------------------------|--------------------------|-------------------|
| 125                      | 20                      | 10                      | 40                        | 20                        | 40                        | Combination<br>Flush/Surface Front | Top          | 9A            | 6-2/0                               | TGK12 (order separately) | TLM2012CCURP      |
| 125                      | 12                      | 6                       | 24                        | 10                        | 24                        | Combination<br>Flush/Surface Front | Top          | 4A            | 6-2/0                               | TGK12 (order separately) | TLM1212CCURP      |

Tap kits required, order separately. See page 1-32.  
Auxiliary gutters available. See page 1-32.

#### Spa Panels

##### Outdoor (NEMA 3R) Enclosure

| Main<br>Ampere<br>Rating | 1 Pole,<br>1"<br>Spaces | 2 Pole,<br>1"<br>Spaces | 1 Pole,<br>1/2"<br>Spaces | 2 Pole,<br>1/2"<br>Spaces | Total<br>1-pole<br>Spaces | Load Center<br>Type             | Feed<br>Type  | Box<br>Number | Main Wire Size<br>(AWG/kcmil) Cu-Al | Equipment<br>Ground Kit | Product<br>Number |
|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|---------------------------|---------------------------------|---------------|---------------|-------------------------------------|-------------------------|-------------------|
| 125                      | 4                       | 2                       | 8                         | 4                         | 8                         | Factory<br>Included<br>50A GFCI | Top<br>Bottom | -             | 1-2/0                               | TGL1 installed          | TL412R250GF       |
| 125                      | 4                       | 2                       | 8                         | 4                         | 8                         | Factory<br>Included<br>60A GFCI | Top<br>Bottom | -             | 1-2/0                               | TGL1 installed          | TL412R260GF       |

#### Twist Lock Power Inlets

| Receptacles | Amps | Volts   | UL         | Product Number |
|-------------|------|---------|------------|----------------|
| L14-20      | 20   | 120/240 | Canada, US | T020N          |
| L14-30      | 30   | 120/240 | Canada, US | T030N          |
| CS637       | 50   | 120/240 | Canada, US | T050N          |

## PowerMark Gold Meter Socket Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### With Bonded Neutrals

Meter Socket LC  
1PH  
Ring Type  
Meter Main  
NEMA 3R

Designed and manufactured for quality applications, these PowerMark Gold Meter Socket Load Centers are a superior solution to specific applications. Increased durability and reliability, maximum circuit layout flexibility and ease of installation add up to lower total installed cost.

- UL Listed (Panelboards No. UL67)
- Service Barriers included for factory installed main circuit breaker and main circuit breaker kits (required to meet UL67 for service entrance applications)

The Ringless UL Style meter socket load centers (Florida Meter Group, Georgia Power, Others) are specifically designed to meet UL requirements as well as some special features required by specific utilities. If your local utility does not require specific approval and you need a ringless meter socket load center, use the Florida Meter Group style.



TSL210CFCU



TM10RMC

| Main Ampere Rating                                   | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type    | Front Type           | Bypass Type | UL Incoming | Agency Certification | Product Number                |
|------------------------------------------------------|-------------------|-------------------|---------------------|---------------------|---------------------|-------------------|----------------------|-------------|-------------|----------------------|-------------------------------|
| <b>Meter Main - Ring Type, Field Installed Mains</b> |                   |                   |                     |                     |                     |                   |                      |             |             |                      |                               |
| 100                                                  | 2                 | 1                 | 4                   | 1                   | 4                   | Outdoor (NEMA 3R) | Semi-Flush           | None        | OH/UG       | UL EUSERC            | TSL210CFCU <sup>1</sup>       |
| 100                                                  | 2                 | 1                 | 4                   | 1                   | 4                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL EUSERC            | TSL210CSCU <sup>1,2,3</sup>   |
| 125                                                  | 4                 | 2                 | 6                   | 3                   | 6                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL EUSERC            | TSL412CSCU <sup>1,2,3</sup>   |
| 200                                                  | 4                 | 2                 | 6                   | 3                   | 6                   | Outdoor (NEMA 3R) | Semi-Flush           | None        | OH/UG       | UL EUSERC            | TSL420CFCU <sup>1,4,5</sup>   |
| 200                                                  | 4                 | 2                 | 6                   | 3                   | 6                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL EUSERC            | TSL420CSCU <sup>1,2,3,4</sup> |
| <b>Meter Main - Factory Installed Mains</b>          |                   |                   |                     |                     |                     |                   |                      |             |             |                      |                               |
| 100                                                  | 0                 | 0                 | 0                   | 0                   | 0                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL                   | TM10RMC <sup>2</sup>          |
| 125                                                  | 0                 | 0                 | 0                   | 0                   | 0                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL                   | TM12RMC <sup>2</sup>          |
| 150                                                  | 0                 | 0                 | 0                   | 0                   | 0                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL                   | TM15RMC <sup>2</sup>          |
| 200                                                  | 0                 | 0                 | 0                   | 0                   | 0                   | Outdoor (NEMA 3R) | Surface <sup>2</sup> | None        | OH/UG       | UL                   | TM20RMC <sup>2</sup>          |

<sup>1</sup> Accepts field installed fifth jaw terminal in the 3 or 9 o'clock position. Product number TJAW53; order separately.

<sup>2</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

<sup>3</sup> Surface mounted units have two hub provisions on top end wall.

<sup>4</sup> THQL and THHQL only, 125 amp max. TQDL is obsolete.

<sup>5</sup> Restricted

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Field Inst. Svcs Disc        | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|------------------------------|----------------------------------|----------------------|
| TSL210CFCU     | R12        | 14                     | 23-1/2                  | 4-7/8             | -                       | THQP/THQL                    | 6-2/0                            | TGL1 installed       |
| TSL210CSCU     | R12        | 14                     | 23-1/2                  | 4-7/8             | -                       | THQP/THQL                    | 6-2/0                            | TGL1 installed       |
| TSL412CSCU     | R12        | 14                     | 23-1/2                  | 4-7/8             | -                       | THQP/THQL                    | 6-2/0                            | TGL1 installed       |
| TSL420CFCU     | R14        | 14                     | 30-3/4                  | 5-3/4             | -                       | THQP/THQL                    | 1-250                            | TGL1 installed       |
| TSL420CSCU     | R14        | 14                     | 30-3/4                  | 5-3/4             | -                       | THQP/THQL                    | 1-250                            | TGL1 installed       |
| TM10RMC        | R32        | 16                     | 17                      | <sup>5</sup>      | TQD                     | Field Installed <sup>4</sup> | 2-250                            | -                    |
| TM12RMC        | R32        | 16                     | 17                      | <sup>5</sup>      | TQD                     | Field Installed <sup>4</sup> | 2-250                            | -                    |
| TM15RMC        | R32        | 16                     | 17                      | <sup>5</sup>      | TQD                     | Field Installed <sup>4</sup> | 2-250                            | -                    |
| TM20RMC        | R32        | 16                     | 17                      | <sup>5</sup>      | TQD                     | Field Installed <sup>4</sup> | 2-250                            | -                    |

## PowerMark Gold Meter Socket Load Centers

Single-Phase, Three-Wire, 120/240 Vac  
With Bonded Neutrals

Meter Socket LC  
1PH  
Ring Type  
Farm Panel  
Main Breaker  
NEMA 3R



TSF420CSCU



TSM420CSCU

### Ring Type - Farm Panel - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type    | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number            |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|-------------------|------------|-------------|-------------|----------------------|---------------------------|
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL EUSERC            | TSF420CSCU <sup>1,2</sup> |

<sup>1</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

<sup>2</sup> Separate field mounted service disconnect can be added, THQL/THHQL. See wiring diagram on page 1-37.

### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Field Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|-----------------------|----------------------------------|--------------------------|
| TSF420CSCU     | R16        | 16-3/4                 | 33                      | 6-3/16            | THQMV                   | THQL/THHQL            | 1-300                            | TGK12 (order separately) |

### Ring Type Feed-Thru - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type    | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number          |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|-------------------|------------|-------------|-------------|----------------------|-------------------------|
| 150                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM415CSCU <sup>1</sup> |
| 150                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM815CSCU <sup>1</sup> |
| 150                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM815CSFL <sup>1</sup> |
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM420CSCU <sup>1</sup> |
| 200                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM820CSCU <sup>1</sup> |
| 200                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL                   | TSM820CSFL <sup>1</sup> |

<sup>1</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|--------------------------|
| TSM415CSCU     | R36        | 14                     | 28-1/2                  | 4-1/2             | THQMV                   | 6-350                            | TGL2 included            |
| TSM815CSCU     | R16        | 16-3/4                 | 33                      | 6-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM815CSFL     | R37B       | 14                     | 31-3/4                  | 4-1/2             | THQMV                   | 6-350                            | TGK24 included           |
| TSM420CSCU     | R36        | 14                     | 28-1/2                  | 4-1/2             | THQMV                   | 6-350                            | TGL2 included            |
| TSM820CSCU     | R16        | 16-3/4                 | 33                      | 6-3/16            | THQMV                   | 6-350                            | TGK12 (order separately) |
| TSM820CSFL     | R37B       | 14                     | 31-3/4                  | 4-1/2             | THQMV                   | 6-350                            | TGK24 included           |

## PowerMark Gold Meter Socket Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### With Bonded Neutrals



TSM1610CSCU

**Meter Socket LC**  
**1PH**  
**Ring Type**  
**Narrow, Wide,**  
**Over/Under**  
**Main Breaker**  
**NEMA 3R**

#### Ring Type - Side by Side - Main Breaker - OH/UG

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number               |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|----------------|------------|-------------|-------------|----------------------|------------------------------|
| 100                | 16                | 8                 | 32                  | 14                  | 32                  | Outdoor        | Semi-Flush | None        | OH/UG       | UL/EUSERC            | TSM1610CFCU <sup>1</sup>     |
| 125                | 12                | 6                 | 24                  | 12                  | 24                  | Outdoor        | Semi-Flush | None        | OH/UG       | UL/EUSERC            | TSM1212CFCU <sup>1</sup>     |
| 125                | 16                | 8                 | 32                  | 14                  | 32                  | Outdoor        | Semi-Flush | None        | OH/UG       | UL/EUSERC            | TSM1612CFCU <sup>1</sup>     |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor        | Semi-Flush | None        | OH/UG       | UL/EUSERC            | TSM2020CFCU <sup>1</sup>     |
| 100                | 16                | 8                 | 32                  | 14                  | 32                  | Outdoor        | Surface    | None        | OH/UG       | UL/EUSERC            | TSM1610CSCU <sup>1,2,3</sup> |
| 125                | 12                | 6                 | 24                  | 12                  | 24                  | Outdoor        | Surface    | None        | OH/UG       | UL/EUSERC            | TSM1212CSCU <sup>1,2,3</sup> |
| 125                | 16                | 8                 | 32                  | 14                  | 32                  | Outdoor        | Surface    | None        | OH/UG       | UL/EUSERC            | TSM1612CSCU <sup>1,2,3</sup> |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor        | Surface    | None        | OH/UG       | UL/EUSERC            | TSM2020CSCU <sup>1,2,3</sup> |

<sup>1</sup> Accepts field installed fifth jaw terminal in the 3 or 9 o'clock position. Product number TJAW53; order separately.

<sup>2</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

<sup>3</sup> Surface mounted units have two hub provisions on top end wall.

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|--------------------------|
| TSM1610CFCU    | R19        | 14-3/4                 | 28-1/2                  | 7-5/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM1212CFCU    | R19        | 14-3/4                 | 28-1/2                  | 7-5/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM1612CFCU    | R19        | 14-3/4                 | 28-1/2                  | 7-5/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM2020CFCU    | R17        | 16-3/4                 | 34-1/4                  | 7-5/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM1610CSCU    | R20        | 14-3/4                 | 27-5/16                 | 5-7/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM1212CSCU    | R20        | 14-3/4                 | 27-5/16                 | 5-7/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM1612CSCU    | R20        | 14-3/4                 | 27-5/16                 | 5-7/16            | THHQL                   | 12-2/0                           | TGK12 (order separately) |
| TSM2020CSCU    | R18        | 14-3/4                 | 33                      | 6-5/16            | THQMV                   | 1-300                            | TGK12 (order separately) |

#### Ring Type - Extra Wide - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number           |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|----------------|------------|-------------|-------------|----------------------|--------------------------|
| 200                | 32                | 16                | 16                  | 6                   | 40                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM3220UWCU <sup>2</sup> |
| 200                | 40                | 20                | 0                   | 0                   | 40                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM4020UWCU <sup>2</sup> |

<sup>2</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|--------------------------|
| TSM3220UWCU    | R28        | 22-1/2                 | 27-7/8                  | 6-1/4             | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM4020UWCU    | R29        | 22-1/2                 | 34-7/8                  | 6-1/4             | THQMV                   | 1-300                            | TGK12 (order separately) |

#### Ring Type - Top/Bottom - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number               |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|----------------|------------|-------------|-------------|----------------------|------------------------------|
| 200                | 24                | 12                | 36                  | 18                  | 42                  | Outdoor        | Semi-Flush | None        | UG          | UL/EUSERC            | TSM2420UF42 <sup>1</sup>     |
| 200                | 32                | 14                | 16                  | 6                   | 40                  | Outdoor        | Semi-Flush | None        | UG          | UL/EUSERC            | TSM3220UFCU                  |
| 225                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor        | Semi-Flush | None        | UG          | UL/EUSERC            | TSM2022UFCU                  |
| 225                | 32                | 14                | 16                  | 6                   | 40                  | Outdoor        | Semi-Flush | None        | UG          | UL/EUSERC            | TSM3222UFCU                  |
| 200                | 24                | 12                | 36                  | 18                  | 42                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM2420US42 <sup>1,2,3</sup> |
| 200                | 32                | 14                | 16                  | 6                   | 40                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM3220USCU <sup>1</sup>     |
| 225                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM2022USCU <sup>1</sup>     |
| 225                | 32                | 14                | 16                  | 6                   | 40                  | Outdoor        | Surface    | None        | UG          | UL/EUSERC            | TSM3222USCU <sup>1</sup>     |

<sup>1</sup> Accepts field installed fifth jaw terminal in the 3 or 9 o'clock position. Product number TJAW53; order separately.

<sup>2</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

<sup>3</sup> Surface mounted units have two hub provisions on top end wall.

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|--------------------------|
| TSM2420UF42    | R17        | 16-3/4                 | 34-1/4                  | 7-5/16            | THQMV                   | 1-4/0                            | TGK12 (order separately) |
| TSM3220UFCU    | R27        | 14-9/16                | 43-5/8                  | 7-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM2022UFCU    | R21        | 14-9/16                | 43-5/8                  | 7-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM3222UFCU    | R22        | 16-3/16                | 48-1/8                  | 7-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM2420US42    | R17        | 16-3/4                 | 34-1/4                  | 7-5/16            | THQMV                   | 1-4/0                            | TGK12 (order separately) |
| TSM3220USCU    | R27        | 14-9/16                | 48-1/8                  | 6-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM2022USCU    | R26        | 14-9/16                | 43-5/8                  | 6-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |
| TSM3222USCU    | R27        | 14-9/16                | 48-1/8                  | 6-3/16            | THQMV                   | 1-300                            | TGK12 (order separately) |

## PowerMark Gold Meter Socket Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### With Bonded Neutrals



**Meter Socket LC**  
**1PH**  
**Ringless with**  
**Bypass**  
**Xcel Energy**  
**NEMA 3R**

TSMB1212CSCU

#### Ringless with Bypass - Xcel Energy

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type   | Main Type | Front Type           | Bypass Type  | UL Incoming | Agency Certification | Product Number            |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|------------------|-----------|----------------------|--------------|-------------|----------------------|---------------------------|
| 125                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor NEMA 3R) | MLO       | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSLR412CSCU <sup>1</sup>  |
| 125                | 4                 | 2                 | 6                   | 3                   | 6                   | Outdoor NEMA 3R) | MLO       | Surface <sup>1</sup> | Lever Bypass | OH/UG       | Xcel/UL              | TSLB412CSCU <sup>1</sup>  |
| 125                | 12                | 6                 | 24                  | 10                  | 24                  | Outdoor NEMA 3R) | MB        | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSMR1212CSCU <sup>1</sup> |
| 125                | 12                | 6                 | 24                  | 12                  | 24                  | Outdoor NEMA 3R) | MB        | Surface              | Lever Bypass | OH/UG       | Xcel/UL              | TSMB1212CSCU <sup>1</sup> |
| 150                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor NEMA 3R) | MB        | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSMR415CSCU               |
| 150                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor NEMA 3R) | MB        | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSMR2015CSCU <sup>1</sup> |
| 150                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor NEMA 3R) | MB        | Surface              | Lever Bypass | OH/UG       | Xcel/UL              | TSMB2015CSCU <sup>1</sup> |
| 200                | 4                 | 2                 | 6                   | 3                   | 6                   | Outdoor NEMA 3R) | MLO       | Surface <sup>1</sup> | Lever Bypass | OH/UG       | Xcel/UL              | TSLB420CSCU <sup>1</sup>  |
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor NEMA 3R) | MLO       | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSLR420CSCU <sup>1</sup>  |
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor NEMA 3R) | MB        | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSMR420CSCU               |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor NEMA 3R) | MB        | Surface              | Horn Bypass  | OH/UG       | Xcel/UL              | TSMR2020CSCU <sup>1</sup> |
| 200                | 20                | 10                | 40                  | 18                  | 40                  | Outdoor NEMA 3R) | MB        | Surface              | Lever Bypass | OH/UG       | Xcel/UL              | TSMB2020CSCU <sup>1</sup> |

<sup>1</sup> Devices include removable closing cap. Order hub separately. See page 1-29.

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc      | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit     |
|----------------|------------|------------------------|-------------------------|-------------------|------------------------------|----------------------------------|--------------------------|
| TSLR412CSCU    | R31        | 14-9/16                | 33-9/16                 | 6-3/16            | Field Installed <sup>2</sup> | 6-350                            | TGK12 (order separately) |
| TSLB412CSCU    | R12        | 14                     | 23-1/2                  | 4-7/8             | Field Installed <sup>2</sup> | 6-350                            | TGL1 installed           |
| TSMR1212CSCU   | R30        | 14-9/16                | 40-1/2                  | 6-3/16            | THHQL                        | 6-350                            | TGK12 (order separately) |
| TSMB1212CSCU   | R20        | 14-3/4                 | 27-5/16                 | 5-7/16            | THHQL                        | 12-2/0                           | TGK12 (order separately) |
| TSMR415CSCU    | R31        | 14-9/16                | 33-9/16                 | 6-3/16            | THQMV                        | 6-350                            | TGK12 installed          |
| TSMR2015CSCU   | R30        | 14-9/16                | 40-1/2                  | 6-3/16            | THQMV                        | 6-350                            | TGK12 (order separately) |
| TSMB2015CSCU   | R18        | 14-3/4                 | 33                      | 6-5/16            | THQMV                        | 1-300                            | TGK12 (order separately) |
| TSLB420CSCU    | R14        | 14                     | 30-3/4                  | 5-3/4             | Field Installed <sup>2</sup> | 6-350                            | TGL1 installed           |
| TSLR420CSCU    | R31        | 14-9/16                | 33-9/16                 | 6-3/16            | Field Installed <sup>2</sup> | 6-350                            | TGK12 (order separately) |
| TSMR420CSCU    | R31        | 14-9/16                | 33-9/16                 | 6-3/16            | THQMV                        | 6-350                            | TGK12 installed          |
| TSMR2020CSCU   | R30        | 14-9/16                | 40-1/2                  | 6-3/16            | THQMV                        | 6-350                            | TGK12 (order separately) |
| TSMB2020CSCU   | R18        | 14-3/4                 | 33                      | 6-5/16            | THQMV                        | 1-300                            | TGK12 (order separately) |

<sup>2</sup> THQL and THHQL only. 125 amp max. TQDL is obsolete.



## PowerMark Gold Meter Socket Load Centers

### Single-Phase, Three-Wire, 120/240 Vac

### With Bonded Neutrals

Meter Socket LC  
1PH  
Ringless  
Georgia Power  
Florida Meter Group  
Main Breaker  
NEMA 3R



TSMR415CSCUGP



TSMR420CSFLFMG

#### Georgia Power Ringless - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type    | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number               |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|-------------------|------------|-------------|-------------|----------------------|------------------------------|
| 150                | —                 | —                 | —                   | —                   | —                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/GP                | TSMR015CSGP <sup>1,4</sup>   |
| 200                | —                 | —                 | —                   | —                   | —                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/GP                | TSMR020CSGP <sup>1,4</sup>   |
| 150                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/GP                | TSMR415CSCUGP <sup>1,4</sup> |
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/GP                | TSMR420CSCUGP <sup>1,4</sup> |

#### Application Data

| Product Number | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit |
|----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|----------------------|
| TSMR015CSGP    | R32A       | 18-7/8                 | 18-9/16                 | 5                 | THQD                    | 2-250                            | —                    |
| TSMR020CSGP    | R32A       | 18-7/8                 | 18-9/16                 | 5                 | THQD                    | 2-250                            | —                    |
| TSMR415CSCUGP  | R40        | 14                     | 32                      | 4-1/2             | THQMV                   | 6-350                            | TGL2 included        |
| TSMR420CSCUGP  | R40        | 14                     | 32                      | 4-1/2             | THQMV                   | 6-350                            | TGL2 included        |

#### Florida Meter Group MSLC Ringless - Main Breaker

| Main Ampere Rating | 1 Pole, 1" Spaces | 2 Pole, 1" Spaces | 1 Pole, 1/2" Spaces | 2 Pole, 1/2" Spaces | Total 1-pole Spaces | Enclosure Type    | Front Type | Bypass Type | UL Incoming | Agency Certification | Product Number               |
|--------------------|-------------------|-------------------|---------------------|---------------------|---------------------|-------------------|------------|-------------|-------------|----------------------|------------------------------|
| 150                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/FMG               | TSMR415CSFLFMG               |
| 200                | 4                 | 2                 | 8                   | 3                   | 8                   | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/FMG               | TSMR420CSFLFMG               |
| 150                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/FMG               | TSMR815CSFLFMG <sup>4</sup>  |
| 200                | 8                 | 4                 | 16                  | 6                   | 16                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/FMG               | TSMR820CSFLFMG <sup>4</sup>  |
| 200                | 20                | 4                 | 40                  | 18                  | 40                  | Outdoor (NEMA 3R) | Surface    | None        | OH/UG       | UL/FMG               | TSMR2020CSCUFMG <sup>2</sup> |

#### Application Data

| Product Number  | Box Number | Unit Width (in inches) | Unit Height (in inches) | Depth (in inches) | Factory Inst. Svcs Disc | Main Wire Size (AWG/kcmil) Cu-Al | Equipment Ground Kit |
|-----------------|------------|------------------------|-------------------------|-------------------|-------------------------|----------------------------------|----------------------|
| TSMR415CSFLFMG  | R36A       | 14                     | 28-1/2                  | 4-1/2             | THQMV                   | 6-350                            | TGL2 included        |
| TSMR420CSFLFMG  | R36A       | 14                     | 28-1/2                  | 4-1/2             | THQMV                   | 6-350                            | TGL2 included        |
| TSMR815CSFLFMG  | R37A       | 14                     | 31-3/4                  | 4-1/2             | THQMV                   | 6-350                            | TGK24 included       |
| TSMR820CSFLFMG  | R37A       | 14                     | 31-3/4                  | 4-1/2             | THQMV                   | 6-350                            | TGK24 included       |
| TSMR2020CSCUFMG | R403       | 14                     | 34-1/2                  | 4-1/2             | THQMV                   | 6-350                            | TGK24 included       |

<sup>1</sup> Use FMG unit if Ringless standard UL design is required by your local utility.

<sup>2</sup> No feed through lugs.

<sup>3</sup> Knock outs are the same as R36A.

<sup>4</sup> Feed-thru lugs provided.



## PowerMark Gold Meter Socket Load Centers

Single-Phase, Three-Wire, 120/240 Vac  
With Bonded Neutrals

Meter Socket LC  
1PH  
Class 320  
NEMA 3R



TSDA2440UC42

### Class 320

| Main<br>Ampere<br>Rating | 1 Pole,<br>1" Spaces | 2 Pole,<br>1" Spaces | 1 Pole,<br>1/2" Spaces | 2 Pole,<br>1/2" Spaces | Total<br>1-pole<br>Spaces | Enclosure<br>Type   | Front<br>Type | Bypass<br>Type | UL<br>Incoming | Agency<br>Certification | Product<br>Number              |
|--------------------------|----------------------|----------------------|------------------------|------------------------|---------------------------|---------------------|---------------|----------------|----------------|-------------------------|--------------------------------|
| 320                      | 24                   | 12                   | 32                     | 14                     | 40                        | Outdoor<br>NEMA 3R) | Surf/Semi     | None           | UG             | UL                      | TM2432RMS <sup>1,2,3</sup>     |
| 400                      | 0                    | 0                    | 0                      | 0                      | 0                         | Outdoor<br>NEMA 3R) | Surf/Semi     | Lever Bypass   | UG             | UL                      | TSDR040UFCU <sup>4</sup>       |
| 300                      | 8                    | 4                    | 16                     | 6                      | 16                        | Outdoor<br>NEMA 3R) | Surface       | Lever Bypass   | UG             | UL<br>FMG               | TSDR830USCU <sup>4</sup>       |
| 400                      | 8                    | 4                    | 16                     | 6                      | 16                        | Outdoor<br>NEMA 3R) | Surface       | Lever Bypass   | UG             | UL<br>FMG               | TSDR840UFCU <sup>4</sup>       |
| 400                      | 24                   | 12                   | 32                     | 14                     | 40                        | Outdoor<br>NEMA 3R) | Surf/Semi     | Lever Bypass   | UG             | UL                      | TM2440RMRS <sup>1,2,3</sup>    |
| 400                      | 24                   | 12                   | 32                     | 14                     | 40                        | Outdoor<br>NEMA 3R) | Surf/Semi     | None           | UG             | UL<br>EUSERC            | TM2440RMS <sup>1,2,3</sup>     |
| 400                      | 24                   | 12                   | 32                     | 14                     | 40                        | Outdoor<br>NEMA 3R) | Surf/Semi     | Lever Bypass   | UG             | UL<br>Xcel              | TMH2440RMRS <sup>1,2,3,4</sup> |
| 400                      | 24                   | 12                   | 32                     | 14                     | 40                        | Outdoor<br>NEMA 3R) | Surf/Semi     | None           | UG             | UL                      | TMH2440RMS <sup>1,2,3,4</sup>  |
| 320                      | 0                    | 0                    | 0                      | 0                      | 0                         | Outdoor<br>NEMA 3R) | Surf/Semi     | Lever Bypass   | UG             | UL                      | TSD032UFCU <sup>4</sup>        |
| 320                      | 24                   | 12                   | 32                     | 14                     | 42                        | Outdoor<br>NEMA 3R) | Surf/Semi     | Link Bypass    | UG             | UL<br>EUSERC            | TSDA2432UC42 <sup>4</sup>      |
| 400                      | 24                   | 12                   | 32                     | 14                     | 42                        | Outdoor<br>NEMA 3R) | Surf/Semi     | Link Bypass    | UG             | UL<br>EUSERC            | TSDA2440UC42 <sup>4</sup>      |

<sup>1</sup> 200A main breaker factory installed. Space provided for field mounted TQD-WL sub feed.

<sup>2</sup> For semi-flush applications, order surface enclosure load center and field installed kit, Product number SF400.

<sup>3</sup> Stud provisions only provided.

<sup>4</sup> 22 kAIC.

### Application Data

| Product<br>Number | Ringless | Box<br>Number | Unit Width<br>(in inches) | Unit Height<br>(in inches) | Depth<br>(in inches) | Factory Inst.<br>Main Breaker | Field Inst.<br>Main Breaker | Main Wire Size<br>(AWG/kcmil) Cu-Al                                                                            | Equipment<br>Ground Kit        |
|-------------------|----------|---------------|---------------------------|----------------------------|----------------------|-------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------|
| TM2432RMS         | No       | R24           | 30-1/4                    | 40                         | 6                    | TQD                           | THQL                        | (1) 800 or (2) 400 compression type;<br>(1) 1000 or (2) compression type;<br>(1) 1000 or (2) 350 pressure type | (2) TGL2<br>(order separately) |
| TM2440RMS         | No       | R24           | 30-1/4                    | 40                         | 6                    | TQD                           | TQD                         | (1) 800 or (2) 400 compression type;<br>(1) 1000 or (2) 350 pressure type                                      | (2) TGL2<br>(order separately) |
| TMH2440RMS        | No       | R24           | 30-1/4                    | 40                         | 6                    | THQD                          | THQD                        | (1) 800 or (2) 400 compression type;<br>(1) 1000 or (2) 350 pressure type                                      | (2) TGL2<br>(order separately) |
| TSDA2432UC42      | No       | R24           | 30-1/4                    | 40                         | 6                    | THQD                          | THQL/THHQL                  | (1) 800 or (2) 400 compression type                                                                            | (2) TGL2<br>(order separately) |
| TSDA2440UC42      | No       | R24           | 30-1/4                    | 40                         | 6                    | THQD                          | TQD/THQD                    | (1) 800 or (2) 400 compression type                                                                            | (2) TGL2<br>(order separately) |
| TSD032UFCU        | No       | R33           | 30-1/4                    | 33                         | 6-3/32               | THQD                          | THQL/THHQL                  | (1) 800 or (2) 400 compression type                                                                            | (2) TGL2<br>(order separately) |
| TM2440RMRS        | Yes      | R24           | 30-1/4                    | 40                         | 6                    | TQD                           | TQD                         | (1) 800 or (2) 400 compression type;<br>(1) 1000 or (2) 350 pressure type                                      | (2) TGL2<br>(order separately) |
| TMH2440RMRS       | Yes      | R24           | 30-1/4                    | 40                         | 6                    | THQD                          | THQD                        | (1) 800 or (2) 400 compression type;<br>(1) 1000 or (2) 350 pressure type                                      | (2) TGL2<br>(order separately) |
| TSDR040UFCU       | Yes      | R33           | 30-1/4                    | 33                         | 6-3/32               | THQD                          | TQD/THQD                    | (1) 800 or (2) 400 compression type                                                                            | (2) TGL2<br>(order separately) |
| TSDR840UFCU       | Yes      | R33           | 30-1/4                    | 33                         | 6-3/32               | THQD                          | TQD/THQD                    | (1) 800 or (2) 400 compression type                                                                            | (2) TGL2<br>(order separately) |

## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### PowerMark Gold Main Circuit Breaker Kit

For use with 125A PowerMark Gold load Centers; 22kAIC RMS symmetrical.

| Description                                                                                                                                                       | Product Number       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Main Circuit Breaker Kit - Order appropriate THQL TQMH0001 10kAIC or THHQL 22kAIC breakers separately. Includes service barriers for use with THQL or THHQL main. | TQMH000 <sup>1</sup> |

<sup>1</sup> Please review the footnotes listed with the individual Load Center product numbers for proper parts needed to convert to a main circuit breaker. This main breaker base is only applicable for 16 circuit and larger 125 amp load centers, 12 circuit load centers with A C24 suffix, and the TLM812RCU2.



TQMH000

#### PowerMark Plus™ Equipment Ground Kits

| Description                                                              | Standard Package Quantity | Product Number     |
|--------------------------------------------------------------------------|---------------------------|--------------------|
| (4) 14-8Cu/12-8AL,<br>(3) 14-4Cu/6-4AL                                   | 20                        | TGL1               |
| (11) 14-8Cu/12-8AL,<br>(3) 14-4Cu/6-4AL                                  | 20                        | TGL2 <sup>1</sup>  |
| (7) 14-8Cu/12-8AL, (3) 14-4Cu/6-4AL,<br>(2) 14-4Cu/12-4AL, (1) 14-2Cu/AL | 20                        | TGL8 <sup>1</sup>  |
| (1) 6-2/0Cu/Al Number of Terminals,<br>Equipment Ground Kits             | 20                        | TGL20 <sup>2</sup> |
| (3) 10-1/0 Cu/Al Number of Terminals<br>for 400 and 600 Amp              | 1                         | TNG3 <sup>3</sup>  |
| 6) 10-1/0 Cu/Al Number of Terminals<br>for 400 and 600 Amp               | 1                         | TNG6 <sup>4</sup>  |


<sup>1</sup> TGL2, TGL4 and TGL8 mount interchangeably

<sup>2</sup> Add-on Equipment Ground Lug (for use on any TGL Kit)

<sup>3</sup> Suitable for use with up to six TPLUG108 lugs or six crimp lugs per pole



TGL2



TGL20 combined with TGL1

#### PowerMark Gold Equipment Ground and Isolated Ground Bar Kits<sup>4,5</sup>

| Description    | Standard Package Quantity | Product Number |
|----------------|---------------------------|----------------|
| 4-hole Ground  | 1                         | TGK4           |
| 12-hole Ground | 1                         | TGK12          |
| 24-hole Ground | 1                         | TGK24          |
| 32-hole Ground | 1                         | TGK32          |
| 42-hole Ground | 1                         | TGK42          |

<sup>4</sup> 6-12 circuit indoor load centers use PowerMark Plus style neutrals and grounds

<sup>5</sup> Add TGKIS for isolated ground and mount to ground kit.



TGK12



TGK12 with TGKIS

## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### PowerMark Plus™ Neutral Kits

| Description                                                    | Wire Range             | Standard Package Quantity | Product Number     |
|----------------------------------------------------------------|------------------------|---------------------------|--------------------|
| 400 & 600 Amp PowerMark Plus™ Neutral Kit                      | (5) 14-1/0             | 1                         | TNLK1 <sup>1</sup> |
| 400 & 600 Amp PowerMark Plus™ Neutral Kit                      | (3) 1-300              | 1                         | TNLK2 <sup>1</sup> |
| Add-on neutral lug for 100-200 Amp PowerMark Plus load centers | 6-2/0                  | 1                         | 286A8894G1         |
| Add-on neutral lug for 100-200 Amp PowerMark Plus load centers | 1-300 Cu or 2/0-300 Al | 1                         | 192A7663G13        |

<sup>1</sup> Suitable for use with up to six TPLUG108 lugs or six crimp lugs per pole

#### PowerMark Gold Neutral Kits

| Description                                                 | Wire Range | Standard Package Quantity | Product Number |
|-------------------------------------------------------------|------------|---------------------------|----------------|
| PowerMark Gold Neutral Kit - Mounted on top of neutral only | 6-2/0      | 1                         | TNLK20         |
| PowerMark Gold Neutral Kit - Mounted on top of neutral only | 6-250      | 1                         | TNLK250        |

#### PowerMark Gold Neutral/Ground Lug Kits

Mounted on any neutral or ground position by removing the termination screw

| Description            | Wire Range | Standard Package Quantity | Product Number |
|------------------------|------------|---------------------------|----------------|
| Neutral/Ground Lug Kit | 6-2/0      | 1                         | TLK20          |
| Neutral/Ground Lug Kit | 6-250      | 1                         | TLK250         |
| Neutral/Ground Lug Kit | 6-300      | 1                         | TLK300         |

#### Isolated Ground Bus Bars Equipment Ground Kit

| Description                                                    | Standard Package Quantity | Product Number |
|----------------------------------------------------------------|---------------------------|----------------|
| Isolated Ground Bar Kit (order with TKG Equipment Ground Kits) | 1                         | TGKIS          |
| Isolated Ground Bar Feet (Order with TKG8)                     | 1                         | TGKIS2         |

#### Subfeed Lug Kits

| Description                                            | Standard Package Quantity | Product Number |
|--------------------------------------------------------|---------------------------|----------------|
| 125A 2 Pole Plug-in                                    | 1                         | THLK2125       |
| 150A 2 Pole Plug-in - For use with PowerMark Gold only | 1                         | THLK2150       |
| 200A 2 Pole Plug-in - For use with PowerMark Gold only | 1                         | THLK2200       |
| 125A 3 Pole Plug-in                                    | 1                         | THLK3125       |
| 225A 3 Pole Plug-in - For use with 3 phase only        | 1                         | THLK3225       |

#### Sub-feed and Feed-thru Lugs

UL Listed

For use in load centers to economically supply power to a subpanel.

| Poles | Ampere Rating | Product Number        |
|-------|---------------|-----------------------|
| 2     | 125           | THLK2125              |
| 3     | 125           | THLK3125              |
| 2     | 150           | THLK2150 <sup>1</sup> |
| 2     | 200           | THLK2200 <sup>1</sup> |
| 3     | 225           | THLK3225 <sup>2</sup> |

<sup>1</sup> For use with PowerMark Gold load centers only

<sup>2</sup> For use with three-phase load centers only. Includes mounting base.



192A7663G13



286A8894G1



TNLK20



TLK20



TLK250



TGK12 with TGKIS



THLK2125

## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### PowerMark Plus™ Main Lug Kits

| Description                                      | Wire Range (Cu/Al) | Product Number |
|--------------------------------------------------|--------------------|----------------|
| 150 Amp PowerMark Plus™ Replacement Main Lug kit | 2-3/0              | THLK150        |
| 200 Amp PowerMark Plus™ Replacement Main Lug kit | 1-250              | THLK200        |




THLK200

#### PowerMark Gold Main Lug Kits

| Description                                     | Wire Range (Cu/Al) | Product Number |
|-------------------------------------------------|--------------------|----------------|
| 125 Amp PowerMark Gold Replacement Main Lug kit | 6-2/0              | TMLK125        |
| 200 Amp PowerMark Gold Replacement Main Lug kit | 6-250              | TMLK200        |
| 225 Amp PowerMark Gold Replacement Main Lug kit | 6-300              | TMLK225        |

For replacement of main lugs on 125 amp load centers; TLM load centers include main lugs.



TMLK200

#### Door Lock

| Description                                                           | Standard Package Quantity | Product Number |
|-----------------------------------------------------------------------|---------------------------|----------------|
| For indoor load centers larger than 12 circuits (Does not fit TPL412) | 10                        | TDL106         |



TDL106

#### Circuit Directory

| Description                                                              | Standard Package Quantity | Product Number |
|--------------------------------------------------------------------------|---------------------------|----------------|
| Card and holder with pressure-sensitive backing. Mounts inside the door. | 1                         | TD42           |



TD42

#### Touch-up Paint

| Description                               | Standard Package Quantity | Product Number |
|-------------------------------------------|---------------------------|----------------|
| 12 3/4 oz. spray can of light gray enamel | 1                         | TSP61          |



TSP61

## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### Front Filler Plates

| Description             | Standard Package Quantity | Product Number |
|-------------------------|---------------------------|----------------|
| 1/2" Front Filler Plate | 100                       | TFH            |
| 1" Front Filler Plate   | 50                        | TQLFP1         |

Covers 1/2" rectangular breaker knockouts  
Covers 1" rectangular breaker knockouts



TFH

#### Universal Raintight Hubs

| Description     | Base Size (in.) | Standard Package Quantity | Product Number     |
|-----------------|-----------------|---------------------------|--------------------|
| 3/4" Diameter   | 3               | 10                        | TC75               |
| 1" Diameter     | 3               | 10                        | TC100              |
| 1-1/4" Diameter | 3               | 10                        | TC125              |
| 1-1/2" Diameter | 3               | 10                        | TC150              |
| 2" Diameter     | 3               | 10                        | TC200              |
| 2-1/2" Diameter | 3               | 10                        | TC250              |
| 3" Diameter     | 3               | 5                         | TC300              |
| Closing Cap     | 3               | 10                        | TCCP               |
| 2" Diameter     | 4               | -                         | TCU27 <sup>1</sup> |
| 2-1/2" Diameter | 4               | -                         | TCU28 <sup>1</sup> |
| 3" Diameter     | 4               | -                         | TCU30 <sup>1</sup> |
| 3-1/2" Diameter | 4               | -                         | TCU35 <sup>1</sup> |
| 4" Diameter     | 4               | -                         | TCU40 <sup>1</sup> |
| 4" Cover Plate  | 4               | -                         | TCUP1              |


<sup>1</sup> For 40 and 42 circuit units in R8 boxes only.



TC150

#### Door Handle

| Description                       | Standard Package Quantity | Product Number |
|-----------------------------------|---------------------------|----------------|
| Replacement Door Handle Universal | 1                         | TRL22          |



TRL22

#### PowerMark Gold Cross Arm

| Description                                           | Standard Package Quantity | Product Number |
|-------------------------------------------------------|---------------------------|----------------|
| Replacement cross arm for PowerMark Gold load centers | 1                         | LCCROSSARM     |



LCCROSSARM

## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### PowerMark Gold Main Breaker Retainers

- Includes service barriers for use with THQL main

- Main Breaker Retainer Kits are UL listed (Panelboards No. 67)

| Description                                                                                                                             | Breaker Type | Product Number |
|-----------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|
| Travel Trailer Main Breaker Retainer Kit for THQP Breakers                                                                              | THQP         | THQPSBK        |
| For use on PowerMark Plus™ load centers with THQL Breakers 225A max                                                                     | THQL         | THQLRK         |
| For use with 12 - 42 circuit PowerMark Gold load centers with THQL Breakers                                                             | THQL         | THQLRK1        |
| For use with 6 - 8 circuit PowerMark Gold load centers with THQL Breakers                                                               | THQL         | THQLRK2        |
| For use with TM/TLM1212CCU Mod 2 current model                                                                                          | THQL         | THQLRK3        |
| For use with 6 - 42 circuit PowerMark Gold load centers with THQL Breakers. Similar to THQLRK1 but it does not take up a breaker space. | THQL         | THQLRK4        |

For main lug load centers utilizing a back fed branch breaker as a main



THQLRK



THQLRK2



THQLRK1



THQLRK3



THQLRK4

#### Handle Locks - Padlocking

| Description                 | Breaker Type | Product Number |
|-----------------------------|--------------|----------------|
| THQP Padlocking Handle Lock | THQP         | TQPPL          |
| THQL Padlocking Handle Lock | THQL         | THP100         |
| TQD Padlocking Handle Lock  | TQD          | TQDPLD1        |

Snap on handle lock

Padlock not included



THL103



#### Handle Locks - Non Padlocking

| Description                     | Breaker Type | Product Number |
|---------------------------------|--------------|----------------|
| THQP Non Padlocking Handle Lock | THQP         | TQPL           |
| THQL Non Padlocking Handle Lock | THQL         | THL103         |

Snap on handle lock



THT1



#### Handle Ties

| Description                                                                   | Breaker Type      | Product Number                             |
|-------------------------------------------------------------------------------|-------------------|--------------------------------------------|
| Handle Ties for THQP Breakers - Solid Snap-on Trip Indicating                 | THQP              | THT1 <sup>1</sup>                          |
| Handle Ties for THQP Breakers - For 2 THQPs separated by 2 side-by-side THQPs | THQP              | THT2 <sup>1</sup>                          |
| Snap-on Handle Tie - Trip Indicating                                          | TQB<br>TQC<br>TQL | TQHT1 <sup>1</sup>                         |
| Snap-on Handle Tie - Solid                                                    | TQB<br>TQC<br>TQL | THT104 <sup>1</sup>                        |
| Multiwire Branch Breaker Handle Tie Kits                                      | TQB<br>TQC<br>TQL | TQ3HTK <sup>2</sup><br>TQ4HTK <sup>3</sup> |

All multi-pole breakers have internal common trip

Handle ties provide manual on-off capability only between one-pole devices

<sup>1</sup> For two single-pole breakers

<sup>2</sup> For three single-pole breakers - kit includes (10) pcs.

<sup>3</sup> For four single-pole breakers - kit includes (10) pcs.



THT104



THT2



TQHT1



## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### Service Barrier Kits for PowerMark Load Centers

- Field installed service barrier kits.
- These kits are normally supplied with service entrance load centers and main circuit breaker kits
- Service Barriers UL listed (Panelboards No. 489) and compliant to UL 67 standards

| Description                                                                                                                       | Product Number |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------|
| THQL Service Barrier                                                                                                              | THQLSB         |
| THQMV Service Barrier Flapper                                                                                                     | THQMVSBF       |
| 2 or 4 Circuits Service Barrier. For use with: TL240RCU, TL240RCUP, TL270RCU, TL270RCUP, TL240SCU, TL240SCUP, TL270SCU, TL270SCUP | TLSB           |
| TQD Service Barrier                                                                                                               | TQDSB          |
| TQD Lug Service Barrier 100-125A Reducer                                                                                          | TQDSBR         |
| TQD/SF Service Barrier Plug                                                                                                       | TQDSFSBP       |



THQLSB



THQMVSBF



TLSB



TQDSB

#### Service Barrier Kits for PowerMark Meter Socket Load Centers

- Field installed service barrier kits.
- These kits are normally supplied with service entrance load centers and main circuit breaker kits
- Service Barriers UL listed (Panelboards No. 489) and compliant to UL 67 standards

| Description                           | Product Number |
|---------------------------------------|----------------|
| MSLC Bus Service Barrier              | TSMBSB         |
| MSLC Lug Service Barrier              | TSMLSB         |
| MSLC Service Barrier 2P Module        | TSMLSB2P       |
| MSLC Lug Service Barrier Bus Filler   | TSMLSBF        |
| MSLC Lug Service Barrier Shutter      | TSMLSBS        |
| MSLC Lug Service Barrier Reverse Feed | TSMLSBR        |



TQDSBR



TQDSFSBP



TSMBSB



TSMLSB

#### Load Center Hardware Kits Hardware

| Description                                                                                                                                | Standard Package Quantity | Product Number |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------|
| PowerMark Plus™ hardware kit: TQD THQD Main or THLK main lug kit in a TLM load center, installation instructions and front mounting screws | 1                         | LCHDKIT        |
| Powermark Gold Bond Screw Kit Screw 100 - 200A                                                                                             | 1                         | TBS            |
| Powermark Gold Bond Screw Kit 225A                                                                                                         | 1                         | TBS22          |
| Powermark Gold Hardware kit containing 20 front mounting screws                                                                            | 1                         | THDWRKIT       |
| Powermark Gold Hardware kit containing 10 interior mounting screws                                                                         | 1                         | THDWRKIT2      |



TSMLSB2P



TSMLSBF



TSMLSBS



TSMLSBR




## PowerMark Gold and Plus Load Centers

### Circuit Breakers

### Field Installed Accessories

#### Generator Interlock Kit

| Description                         | Standard Package Quantity | Product Number |
|-------------------------------------|---------------------------|----------------|
| Load Center Generator Interlock Kit | 1                         | THQLLX1        |
| MSLC Generator Interlock Kit        | 1                         | THQLLX4        |
| MSLC Generator Interlock Kit        | 1                         | THQLLX8CU      |
| MSLC Generator Interlock Kit        | 1                         | THQLLX8DR      |
| MSLC Generator Interlock Kit        | 1                         | THQLLX8FL      |



THQLLX1



THQLLX4



THQLLX8FL

#### PowerMark Gold Auxiliary Gutter Enclosures

| Description                          | Product Number |
|--------------------------------------|----------------|
| 24" Auxiliary Gutter Enclosure       | TMAGB24        |
| 28" Auxiliary Gutter Enclosure       | TMAGB28        |
| 28" Auxiliary Gutter Enclosure Flush | TMAGB28F       |
| 33" Auxiliary Gutter Enclosure       | TMAGB33        |
| 39" Auxiliary Gutter Enclosure       | TMAGB39        |
| 43" Auxiliary Gutter Enclosure       | TMAGB43        |
| 43" Deep Auxiliary Gutter Enclosure  | TMAGB43D       |

#### PowerMark Gold Gutter Tap Kits

| Description                                                                                                                                   | Product Number |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 250 kcmil Lugs Gutter Tap Kit - 3 kits required per single phase, 4 kits required per three phase application                                 | TMGT250        |
| 500 kcmil Lugs Gutter Tap Kit - 3 kits required per single phase, 4 kits required per three phase application                                 | TMGT500        |
| 750 kcmil Lugs Gutter Tap Kit - 3 kits required per single phase, 4 kits required per three phase application - Not for use with riser panels | TMGT750        |

#### Meter Socket Load Center Flange Kits

| Description                             | Product Number |
|-----------------------------------------|----------------|
| Semi-Flush Kit 400A for MSLC            | SF400          |
| Semi-Flush Kit 400A for MSLC Adjustable | SF400A         |
| Semi-Flush Kit 200A for MSLC Adjustable | SF200A         |

#### Surge Protectors

| Description                                  | Product Number |
|----------------------------------------------|----------------|
| SurgePro AC 27KA Panel-Mount Surge Protector | THQLSURGE      |



THQLSURGE


## PowerMark Gold and Plus Load Centers

### Circuit Breakers


### Wiring Diagrams

| Breaker Symbol | Breaker Fill |           |
|----------------|--------------|-----------|
|                | 1" THQL      | 1/2" THQP |
|                | 1            | —         |
|                | 1            | 2         |


| Terminal Symbol | Wire Range (AWG/kcmil) |         |
|-----------------|------------------------|---------|
|                 | Cu                     | Al      |
|                 | 14-8                   | 12-8    |
|                 | 14-4                   | 12-4    |
|                 | 6-2                    | 6-2     |
|                 | 14-1/0                 | 12-1/0  |
|                 | 6-2/0                  | 6-2/0   |
|                 | 1-300                  | 2/0-300 |
|                 | 1-300                  | 1-300   |
|                 | 6-1                    | 6-1     |
|                 | 6-3                    | 6-3     |




TL240SCU, RCU  
TL270SCU, RCU




TL510RT




TPL412C, TL412C,  
TPL412R, TL412R1,  
TL412R2, TL412R250GF,  
TL412R260GF




TPL412CT, TL412CT  
TPL412RT, TL412RT1




TLM612FCU, SCU  
FCUD, SCUD, RCU




TLM812FCU, SCU,  
FCUD, SCUD, RCU




TM815RCUFL  
TM820RCUFL




TM860FCUGEN, TLM830FCUGEN,  
TM860SCUGEN, TLM830SCUGEN,  
TM860RCUGEN, TLM830RCUGEN




TM1210CCU, TM1212CCU,  
TLM1212CCU




TM1210RCU, TM1212RCU,  
TLM1212RCU

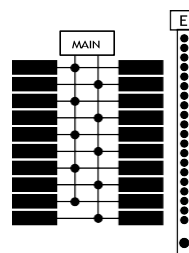


TLM2012CCURP

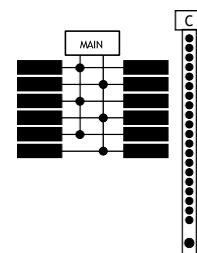


TLM1212CCURP




TLM1612CCU,  
TM1612CCU, TM1612RCU



TM1615CCU, TM1615RCU, TM1620CCU,  
TLM1620CCU, TLM1620RCU



TLM812RCU2



TM2420R42B
















PowerMark Gold and Plus Load Centers

Circuit Breakers

Wiring Diagrams

| Breaker Symbol                                                                    | Breaker Fill |           |
|-----------------------------------------------------------------------------------|--------------|-----------|
|                                                                                   | 1" THQL      | 1/2" THQP |
|  | 1            | —         |
|  | 1            | 2         |

| Terminal Symbol                                                                   | Wire Range (AWG/kcmil) |         |
|-----------------------------------------------------------------------------------|------------------------|---------|
|                                                                                   | Cu                     | Al      |
|  | 14-8                   | 12-8    |
|  | 14-4                   | 12-4    |
|  | 6-2                    | 6-2     |
|  | 14-1/0                 | 12-1/0  |
|  | 6-2/0                  | 6-2/0   |
|  | 1-300                  | 2/0-300 |
|  | 1-300                  | 1-300   |
|  | 6-1                    | 6-1     |
|  | 6-3                    | 6-3     |

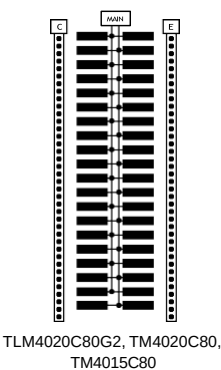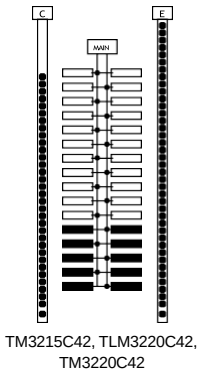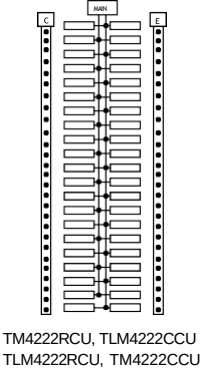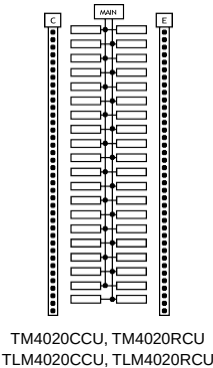









PowerMark Gold and Plus Load Centers  
Circuit Breakers  
Wiring Diagrams

| Breaker Symbol                                                                    | Breaker Fill |           |
|-----------------------------------------------------------------------------------|--------------|-----------|
|                                                                                   | 1" THQL      | 1/2" THQP |
|  | 1            | —         |
|  | 1            | 2         |

| Terminal Symbol                                                                   | Wire Range (AWG/kcmil) |         |
|-----------------------------------------------------------------------------------|------------------------|---------|
|                                                                                   | Cu                     | Al      |
|  | 14-8                   | 12-8    |
|  | 14-4                   | 12-4    |
|  | 6-2                    | 6-2     |
|  | 14-1/0                 | 12-1/0  |
|  | 6-2/0                  | 6-2/0   |
|  | 1-300                  | 2/0-300 |
|  | 1-300                  | 1-300   |
|  | 6-1                    | 6-1     |
|  | 6-3                    | 6-3     |

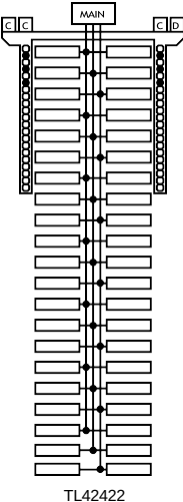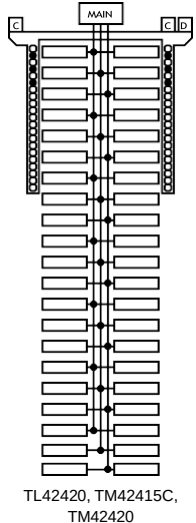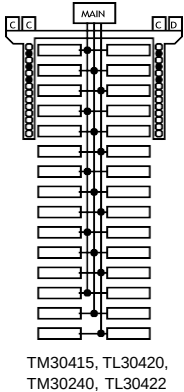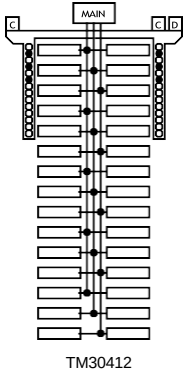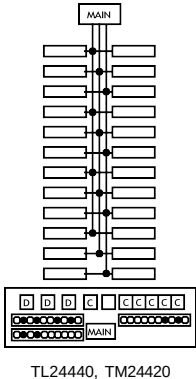









PowerMark Gold and Plus Load Centers

Circuit Breakers

Wiring Diagrams

| Breaker Symbol                                                                    | Breaker Fill |           |
|-----------------------------------------------------------------------------------|--------------|-----------|
|                                                                                   | 1" THQL      | 1/2" THQP |
|  | 1            | —         |
|  | 1            | 2         |


| Terminal Symbol                                                                   | Wire Range (AWG/kcmil) |         |
|-----------------------------------------------------------------------------------|------------------------|---------|
|                                                                                   | Cu                     | Al      |
|  | 14-8                   | 12-8    |
|  | 14-4                   | 12-4    |
|  | 6-2                    | 6-2     |
|  | 14-1/0                 | 12-1/0  |
|  | 6-2/0                  | 6-2/0   |
|  | 1-300                  | 2/0-300 |
|  | 1-300                  | 1-300   |
|  | 6-1                    | 6-1     |
|  | 6-3                    | 6-3     |

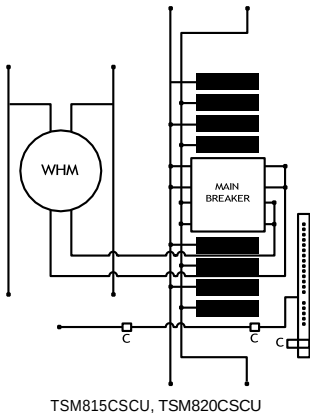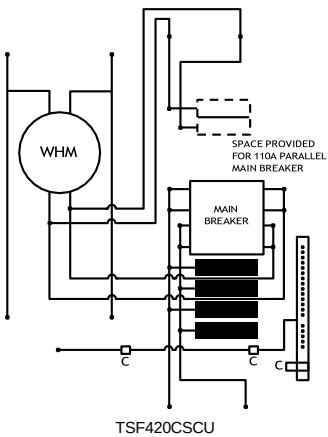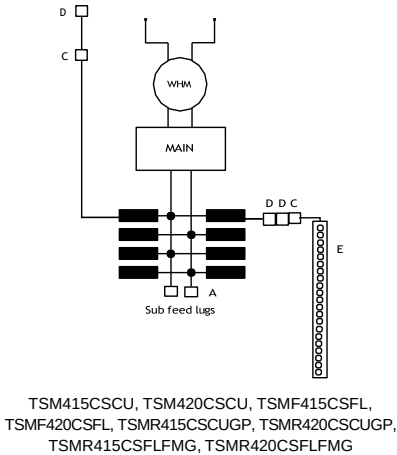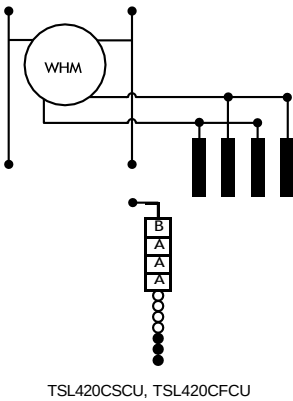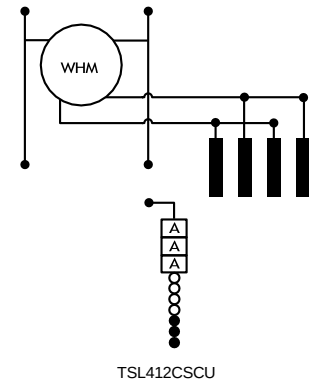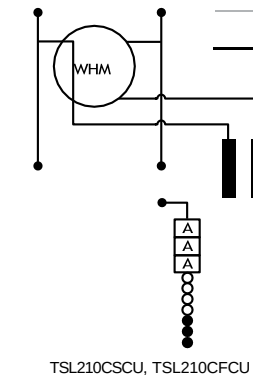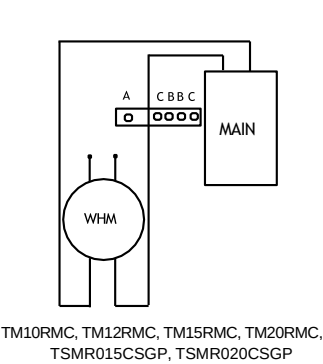


## PowerMark Gold and Plus Load Centers Circuit Breakers Wiring Diagrams

| Breaker Symbol                                                                    | Breaker Fill |           |
|-----------------------------------------------------------------------------------|--------------|-----------|
|                                                                                   | 1" THQL      | 1/2" THQP |
|  | 1            | —         |
|  | 1            | 2         |


| Terminal Symbol | Wire Range (AWG/kcmil) |         |
|-----------------|------------------------|---------|
|                 | Cu                     | Al      |
| O               | 14-8                   | 12-8    |
| ●               | 14-4                   | 12-4    |
| A               | 6-2                    | 6-2     |
| B               | 14-1/0                 | 12-1/0  |
| C               | 6-2/0                  | 6-2/0   |
| D               | 1-300                  | 2/0-300 |
| E               | 1-300                  | 1-300   |
| F               | 6-1                    | 6-1     |
| G               | 6-3                    | 6-3     |




TSM1610CSCU, TSM1610CFU,  
TSM1612CFCU, TSM1612CSCU

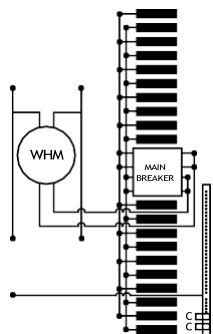


TSM2020CSCU, TSM2020CFU

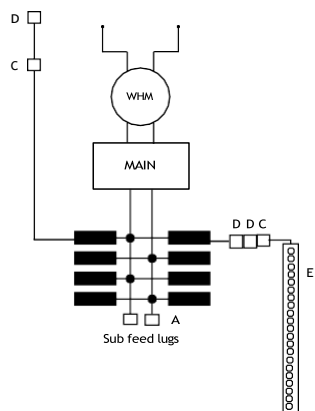


TSM815CSFL, TSM820CSFL, TSMF815CSFL,  
TSMF820CSFL, TSMR815CSFLFMG,  
TSMR820CSFLFMG




TSM3220UWCU

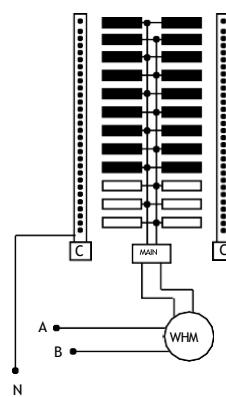


TSM2420UF42

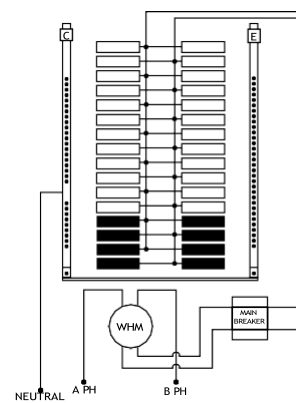


TSM3220USCU, TSM3220UFU,  
TSM3222USCU, TSM3222UFU

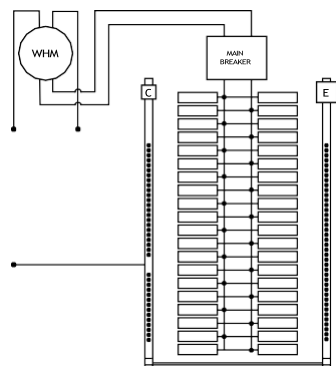


TSM4020UWCU

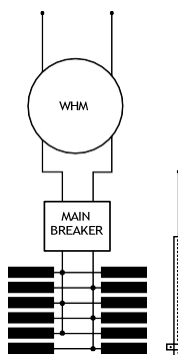

TSMR1212CSCU, TSMB1212CSCU




TSMR2020CSCU, TSMR2015CSCU,  
TSMB2020CSCU, TSMB2015CSCU











TSLR420CSCU, TSLR412CSCU,  
TSLB412CSCU, TSLB420CSCU

PowerMark Gold and Plus Load Centers  
Circuit Breakers  
Wiring Diagrams

| Breaker Symbol                                                                    | Breaker Fill |           |
|-----------------------------------------------------------------------------------|--------------|-----------|
|                                                                                   | 1" THQL      | 1/2" THQP |
|  | 1            | —         |
|  | 1            | 2         |

| Terminal Symbol                                                                   | Wire Range (AWG/kcmil) |         |
|-----------------------------------------------------------------------------------|------------------------|---------|
|                                                                                   | Cu                     | Al      |
|  | 14-8                   | 12-8    |
|  | 14-4                   | 12-4    |
|  | 6-2                    | 6-2     |
|  | 14-1/0                 | 12-1/0  |
|  | 6-2/0                  | 6-2/0   |
|  | 1-300                  | 2/0-300 |
|  | 1-300                  | 1-300   |
|  | 6-1                    | 6-1     |
|  | 6-3                    | 6-3     |

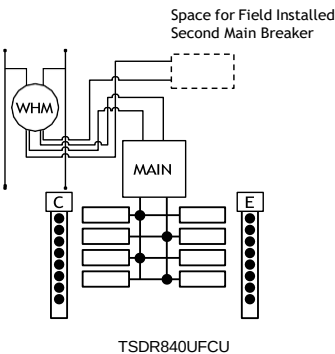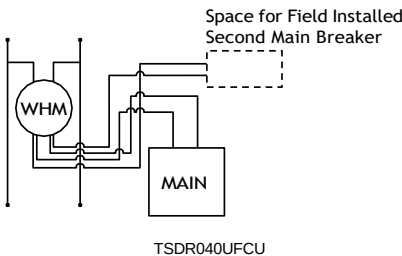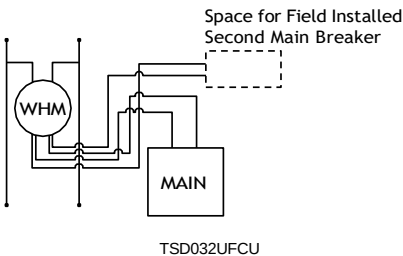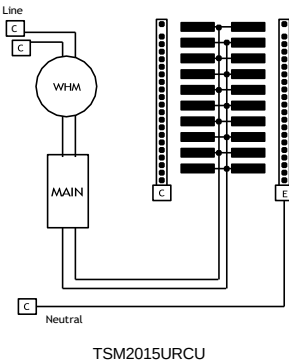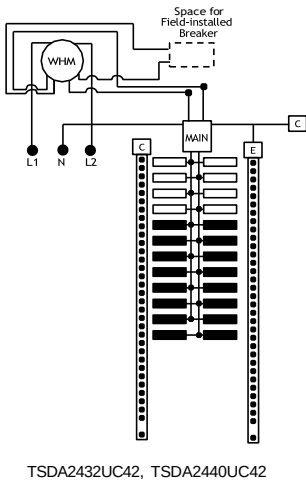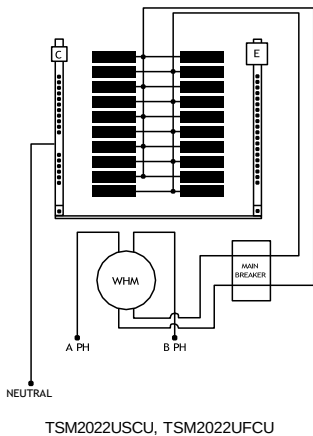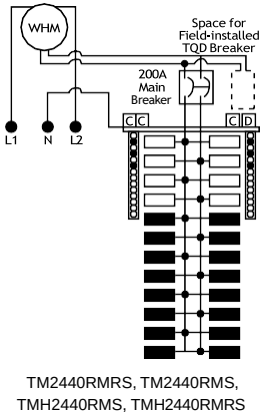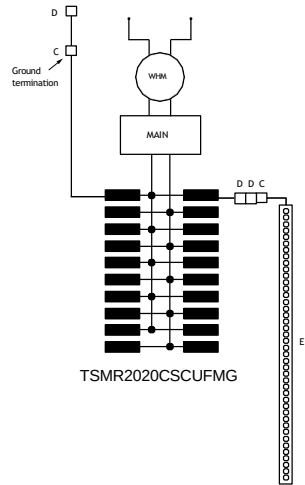

## PowerMark Gold and Plus Load Centers

### Circuit Breakers


### Indoor Enclosures

#### Knockouts


| Symbol                 | A    | •   | B   | C   | D   | E   | F     | G     | H     | I   | J     | K     | L     | M     | N     | P     | Q     | R     | S     | T     | U     | V     | W   | X     | Y     | Z     |
|------------------------|------|-----|-----|-----|-----|-----|-------|-------|-------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-------|-------|-------|
| Conduit Size in inches | 5/16 | —   | —   | —   | —   | —   | —     | —     | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —   | —     | —     | —     |
|                        | —    | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8   | —     | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —   | —     | —     | —     |
|                        | —    | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2   | 1/2   | 1/2   | 1/2 | 1/2   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —   | —     | —     | 1/2   |
|                        | —    | —   | —   | 3/4 | 3/4 | 3/4 | 3/4   | 3/4   | 3/4   | 3/4 | 3/4   | 3/4   | —     | —     | —     | 3/4   | —     | —     | —     | 3/4   | —     | —     | 3/4 | —     | 3/4   | 3/4   |
|                        | —    | —   | —   | —   | 1   | 1   | 1     | 1     | 1     | 1   | 1     | 1     | 1     | 1     | 1     | 1     | 1     | —     | —     | 1     | —     | —     | 1   | —     | 1     | 1     |
|                        | —    | —   | —   | —   | —   | —   | 1 1/4 | —     | 1 1/4 | 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | —     | —     | 1 1/4 | 1 1/4 | —     | —     | —   | 1 1/4 | 1 1/4 | —     |
|                        | —    | —   | —   | —   | —   | —   | 1 1/2 | 1 1/2 | 1 1/2 | —   | —     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | —     | 1 1/2 | 1 1/2 | 1 1/2 | —     | —     | —     | —   | 1 1/2 | 1 1/2 | 1 1/2 |
|                        | —    | —   | —   | —   | —   | —   | —     | 2     | 2     | —   | —     | —     | —     | —     | 2     | 2     | 2     | 2     | 2     | —     | 2     | 2     | —   | —     | 2     | 2     |
|                        | —    | —   | —   | —   | —   | —   | —     | 2 1/2 | 2 1/2 | —   | —     | —     | —     | —     | —     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | —     | 2 1/2 | 2 1/2 | —   | —     | 2 1/2 | 2 1/2 |
|                        | —    | —   | —   | —   | —   | —   | —     | —     | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | 3     | —     | 3     | 3     | —   | —     | —     | —     |
|                        | —    | —   | —   | —   | —   | —   | —     | —     | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | 3 1/2 | 3 1/2 | 3 1/2 | —   | —     | —     | —     |
|                        | —    | —   | —   | —   | —   | —   | —     | —     | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 4     | —   | —     | —     | —     |

#### Dimensions (in inches)


| Box No. | Width   | Height   | Depth   |
|---------|---------|----------|---------|
| 1A      | 5 11/16 | 10 1/4   | 3 3/8   |
| 2       | 7 1/2   | 9 7/32   | 3 5/16  |
| 2A      | 7 1/4   | 9        | 3       |
| 3A      | 11 9/16 | 11 3/8   | 3 3/8   |
| 4       | 14      | 19       | 3 3/4   |
| 4A      | 14      | 19       | 3 3/4   |
| 6       | 14      | 23       | 3 3/4   |
| 7       | 14      | 24 11/16 | 3 3/4   |
| 8       | 14      | 26 7/16  | 3 3/4   |
| 9       | 14      | 28 7/16  | 3 3/4   |
| 9A      | 14      | 28 7/16  | 3 3/4   |
| 11      | 14      | 33 3/16  | 3 3/4   |
| 12      | 14      | 35 7/16  | 3 3/4   |
| 13      | 14      | 39 3/16  | 3 3/4   |
| 14      | 14      | 43 7/16  | 3 3/4   |
| 15      | 14      | 43 7/16  | 4 5/8   |
| 16      | 16      | 45 1/8   | 5 13/16 |
| 17      | 20      | 59 7/8   | 6 3/32  |
| 18      | 14      | 16       | 3 3/8   |
| 19      | 15 3/8  | 36 4/5   | 3 3/4   |
| 20      | 15 3/8  | 40 5/9   | 3 3/4   |




Box 1A




Box 2




Box 2A




Box 3A




Box 4, 6, 7, 8, 9, 11, 12, 13, 14




Box 4A, 9A




Box 15




Box 16




Box 17



Box 18



Box 19



Box 20



PowerMark Gold and Plus Load Centers

Circuit Breakers


Outdoor Enclosures

Knockouts


| Symbol                 | A    | •   | B   | C   | D   | E   | F     | G   | H     | I    | J     | K     | L     | M     | N     | P     | Q     | R     | S     | T     | U     | V     | W     | X     | Y     | Z     | AA    | BB    | CC    | DD    |
|------------------------|------|-----|-----|-----|-----|-----|-------|-----|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Conduit Size in inches | –    | –   | –   | –   | –   | –   | –     | –   | –     | 9/32 | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     |
|                        | –    | 3/8 | –   | 3/8 | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     |
|                        | –    | 1/2 | 1/2 | 1/2 | 1/2 | –   | 1/2   | 1/2 | 1/2   | –    | –     | –     | –     | –     | –     | –     | –     | –     | 1/2   | –     | –     | –     | –     | –     | –     | 1/2   | –     | –     | 1/2   | 1/2   |
|                        | 9/16 | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     |
|                        | –    | –   | –   | 3/4 | 3/4 | 3/4 | 3/4   | 3/4 | 3/4   | –    | 3/4   | 3/4   | –     | –     | 3/4   | –     | 3/4   | –     | 3/4   | –     | –     | –     | 3/4   | –     | –     | 3/4   | –     | 3/4   | 3/4   | –     |
|                        | –    | –   | –   | –   | –   | –   | 1     | 1   | 1     | –    | 1     | 1     | 1     | 1     | –     | 1     | 1     | –     | 1     | –     | 1     | –     | 1     | –     | 1     | –     | –     | 1     | 1     | –     |
|                        | –    | –   | –   | –   | –   | –   | 1 1/4 | –   | 1 1/4 | –    | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | –     | 1 1/4 | 1 1/4 | –     | –     | –     | 1 1/4 | 1 1/4 | 1 1/4 | –     | 1 1/4 | 1 1/4 | –     |
|                        | –    | –   | –   | –   | –   | –   | 1 1/2 | –   | –     | –    | –     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | –     | 1 1/2 | 1 1/2 | 1 1/2 | –     | –     | –     | 1 1/2 | 1 1/2 | 1 1/2 | –     | 1 1/2 | 1 1/2 | 1 1/2 |
|                        | –    | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | 2     | 2     | 2     | 2     | 2     | 2     | –     | 2     | 2     | –     | 2     | 2     | –     | 2     | 2     | 2     |
|                        | –    | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | –     | 2 1/2 | 2 1/2 | –     | 2 1/2 | –     | 2 1/2 | –     | 2 1/2 |       |
|                        | –    | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | 3     | 3     | –     | –     | –     | 3     | –     | –     | –     |
|                        | –    | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | 3 1/2 | 3 1/2 | 3 1/2 | –     | –     | –     | 3 1/2 | –     | –     | –     |
|                        | –    | –   | –   | –   | –   | –   | –     | –   | –     | –    | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | –     | 4     | –     | –     | –     | –     | 4     | –     | –     | –     |

Dimensions (in inches)


| Box No. | Width    | Height   | Depth   |
|---------|----------|----------|---------|
| R1      | 7 1/2    | 9 7/32   | 3 5/16  |
| R1A     | 7 1/4    | 10       | 3 3/4   |
| R1B     | 7 3/8    | 13       | 3 3/4   |
| R2A     | 11 1/4   | 11 1/8   | 3 1/4   |
| R3A     | 13       | 21 1/2   | 5       |
| R3      | 12 1/2   | 21 3/16  | 4 5/8   |
| R4A     | 14 11/16 | 30 3/16  | 5 1/4   |
| R4      | 14       | 33 3/16  | 4 5/8   |
| R5A     | 13       | 29       | 5       |
| R5      | 12 1/2   | 28 11/16 | 4 5/8   |
| R6A     | 13       | 33       | 5       |
| R6      | 14       | 35 7/16  | 4 5/8   |
| R7A     | 14 11/16 | 34 3/16  | 5 1/4   |
| R7      | 14       | 39 3/16  | 4 5/8   |
| R8A     | 14 21/32 | 43 1/4   | 6 13/32 |
| R8      | 14       | 43 11/16 | 5 3/4   |
| R9      | 16       | 45 15/16 | 5 27/32 |
| R10     | 20       | 48 15/16 | 6 7/8   |
| R11     | 20       | 59 15/16 | 6 7/8   |
| R41     | 7 1/2    | 13 1/4   | 4       |




Box R1




Box R1A




Box R2A




Box R3A, R5A, R6A




Box R3, R4, R5, R6, R7




Box R8




Box R4A, R7A




Box R8A



Box R9



Box R10, R11

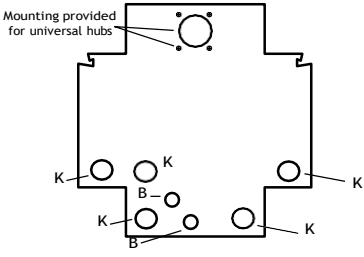

Box R41

## PowerMark Gold and Plus Load Centers

### Circuit Breakers


### Meter Socket Load Centers

#### Knockouts


| Symbol                 | A    | •   | B   | C   | D   | E   | F     | G   | H     | J     | K     | L     | M     | N     | P     | Q     | R     | S     | T     | U     | V     | W     | X     | Y     | Z     | AA    | BB    | CC    | DD    | EE    | FF    |
|------------------------|------|-----|-----|-----|-----|-----|-------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Conduit Size in inches | 5/32 | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     |
|                        | —    | 3/8 | —   | 3/8 | —   | —   | 3/8   | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     |
|                        | —    | 1/2 | 1/2 | 1/2 | 1/2 | —   | 1/2   | 1/2 | 1/2   | —     | —     | —     | —     | —     | —     | —     | —     | 1/2   | —     | —     | —     | —     | —     | —     | 1/2   | —     | 1/2   | 1/2   | 1/2   | —     | —     |
|                        | —    | —   | —   | 3/4 | 3/4 | 3/4 | 3/4   | 3/4 | 3/4   | 3/4   | 3/4   | —     | —     | 3/4   | —     | 3/4   | —     | 3/4   | —     | —     | —     | 3/4   | —     | 3/4   | 3/4   | —     | 3/4   | 3/4   | —     | 3/4   | —     |
|                        | —    | —   | —   | —   | —   | —   | 1     | 1   | 1     | 1     | 1     | 1     | 1     | —     | 1     | 1     | —     | —     | 1     | —     | —     | 1     | —     | 1     | —     | —     | 1     | 1     | —     | 1     | —     |
|                        | —    | —   | —   | —   | —   | —   | 1 1/4 | —   | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | —     | 1 1/4 | 1 1/4 | —     | —     | 1 1/4 | 1 1/4 | 1 1/4 | —     | 1 1/4 | 1 1/4 | —     | 1 1/4 | 1 1/4 |       |
|                        | —    | —   | —   | —   | —   | —   | 1 1/2 | —   | —     | —     | —     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | —     | 1 1/2 | 1 1/2 | 1 1/2 | —     | —     | —     | —     | 1 1/2 | 1 1/2 | 1 1/2 | —     | 1 1/2 | 1 1/2 | 1 1/2 |       |
|                        | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | 2     | 2     | 2     | 2     | 2     | 2     | —     | 2     | 2     | —     | —     | 2     | 2     | —     | 2     | 2     | 2     | 2     | 2     |
|                        | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | —     | 2 1/2 | 2 1/2 | —     | —     | 2 1/2 | —     | 2 1/2 | —     | —     | 2 1/2 | 2 1/2 | 2 1/2 |
|                        | —    | —   | —   | —   | —   | —   | —     | 3   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 3     | 3     | —     | —     | —     | —     | 3     | —     | —     | —     | —     | —     |
|                        | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 3 1/2 | 3 1/2 | 3 1/2 | —     | —     | —     | —     | 3 1/2 | —     | —     | —     | —     | —     |
|                        | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 4     | —     | —     | —     | —     | —     | 4     | —     | —     | —     | —     |

#### Dimensions (in inches)


| Box No. | Width   | Height  | Depth  |
|---------|---------|---------|--------|
| R12     | 14      | 23 1/2  | 4 7/8  |
| R14     | 14      | 30 3/4  | 5 3/4  |
| R15     | 16 3/4  | 33      | 6 3/16 |
| R16     | 16 3/4  | 33      | 6 3/16 |
| R17     | 16 3/4  | 34 1/4  | 7 5/16 |
| R18     | 14 3/4  | 33      | 6 5/16 |
| R19     | 16 3/4  | 28 1/2  | 7 5/16 |
| R20     | 14 3/4  | 27 5/16 | 5 7/16 |
| R21     | 14 9/16 | 43 5/8  | 7 3/16 |
| R22     | 16 3/16 | 48 1/8  | 7 3/16 |
| R23     | 30 1/4  | 40      | 6      |
| R24     | 30 1/4  | 40      | 6      |




Box R12




Box R14




Box R16




Box R17, R18




Box R19, R20



Box R21, R22



Box R23



Box R24

PowerMark Gold and Plus Load Centers

Circuit Breakers


Meter Socket Load Centers

Knockouts


| Symbol                          | A    | •   | B   | C   | D   | E   | F     | G   | H     | J     | K     | L     | M     | N     | P     | Q     | R     | S     | T     | U     | V     | W     | X     | Y     | Z     | AA    | BB    | CC    | DD    | EE    | FF    |
|---------------------------------|------|-----|-----|-----|-----|-----|-------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Conduit<br>Size<br>in<br>inches | 5/32 | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     |
|                                 | -    | 3/8 | -   | 3/8 | -   | -   | 3/8   | -   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     |
|                                 | -    | 1/2 | 1/2 | 1/2 | 1/2 | -   | 1/2   | 1/2 | 1/2   | -     | -     | -     | -     | -     | -     | -     | -     | 1/2   | -     | -     | -     | -     | -     | -     | 1/2   | -     | -     | 1/2   | 1/2   | 1/2   | -     |
|                                 | -    | -   | -   | 3/4 | 3/4 | 3/4 | 3/4   | 3/4 | 3/4   | 3/4   | 3/4   | -     | -     | 3/4   | -     | 3/4   | -     | 3/4   | -     | -     | -     | 3/4   | -     | 3/4   | 3/4   | -     | 3/4   | 3/4   | -     | 3/4   | -     |
|                                 | -    | -   | -   | -   | -   | -   | 1     | 1   | 1     | 1     | 1     | 1     | 1     | -     | 1     | 1     | -     | 1     | -     | 1     | -     | 1     | -     | 1     | -     | -     | 1     | 1     | -     | 1     | -     |
|                                 | -    | -   | -   | -   | -   | -   | 1 1/4 | -   | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | -     | 1 1/4 | 1 1/4 | -     | -     | -     | 1 1/4 | 1 1/4 | 1 1/4 | 4     | 1 1/4 | 1 1/4 | -     | 1 1/4 | 1 1/4 |
|                                 | -    | -   | -   | -   | -   | -   | 1 1/2 | -   | -     | -     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | -     | 1 1/2 | 1 1/2 | 1 1/2 | -     | -     | -     | 1 1/2 | 1 1/2 | 1 1/2 | 2     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 |
|                                 | -    | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | 2     | 2     | 2     | 2     | 2     | 2     | -     | 2     | 2     | -     | -     | 2     | 2     | -     | 2     | 2     | 2     | 2     | 2     |
|                                 | -    | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | -     | -     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | -     | 2 1/2 | 2 1/2 | -     | -     | 2 1/2 | -     | 2 1/2 | -     | -     | 2 1/2 | 2 1/2 | 2 1/2 |
|                                 | -    | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | 3     | 3     | -     | -     | -     | -     | 3     | -     | -     | -     | -     | -     |
|                                 | -    | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | 3 1/2 | 3 1/2 | 3 1/2 | -     | -     | -     | -     | 3 1/2 | -     | -     | -     | -     | -     |
|                                 | -    | -   | -   | -   | -   | -   | -     | -   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | 4     | -     | -     | -     | -     | 4     | -     | -     | -     | -     | -     |

Dimensions (in inches)


| Box No. | Width   | Height  | Depth  |
|---------|---------|---------|--------|
| R25     | 14      | 26      | 4 1/2  |
| R26     | 14 9/16 | 43 5/8  | 6 3/16 |
| R27     | 14 9/16 | 48 1/8  | 6 3/16 |
| R28     | 22 1/2  | 27 7/8  | 6 1/4  |
| R29     | 22 1/2  | 34 7/8  | 6 1/4  |
| R30     | 14 9/16 | 40 1/2  | 6 3/16 |
| R31     | 14 9/16 | 33 9/16 | 6 3/16 |
| R32     | 16      | 17      | 5      |
| R32A    | 18 7/8  | 18 9/16 | 5      |
| R40     | 14      | 32      | 4 1/2  |

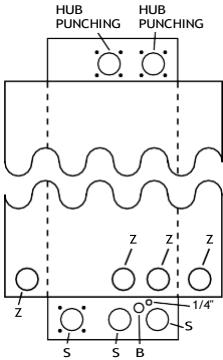


Box R25

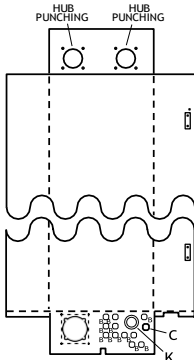


Box R26, R27




Box R28




Box R29




Box R30




Box R31



Box R32



Box R32A



Box R40

## PowerMark Gold and Plus Load Centers

### Circuit Breakers


### Meter Socket Load Centers

#### Knockouts


| Symbol                          | A    | •   | B   | C   | D   | E   | F     | G   | H     | J     | K     | L     | M     | N     | P     | Q     | R     | S     | T     | U     | V     | W     | X     | Y     | Z     | AA    | BB    | CC    | DD    | EE    | FF    | GG    |
|---------------------------------|------|-----|-----|-----|-----|-----|-------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Conduit<br>Size<br>in<br>inches | 5/32 | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     |
|                                 | —    | 3/8 | —   | 3/8 | —   | —   | 3/8   | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     |
|                                 | —    | 1/2 | 1/2 | 1/2 | 1/2 | —   | 1/2   | 1/2 | 1/2   | —     | —     | —     | —     | —     | —     | —     | —     | 1/2   | —     | —     | —     | —     | —     | —     | 1/2   | —     | 1/2   | 1/2   | 1/2   | —     | —     | —     |
|                                 | —    | —   | —   | 3/4 | 3/4 | 3/4 | 3/4   | 3/4 | 3/4   | 3/4   | 3/4   | —     | —     | 3/4   | —     | 3/4   | —     | 3/4   | —     | —     | —     | 3/4   | —     | 3/4   | 3/4   | —     | 3/4   | 3/4   | —     | 3/4   | —     | —     |
|                                 | —    | —   | —   | —   | —   | —   | 1     | 1   | 1     | 1     | 1     | 1     | 1     | —     | 1     | 1     | —     | —     | 1     | —     | —     | 1     | —     | 1     | —     | —     | 1     | 1     | —     | 1     | —     | —     |
|                                 | —    | —   | —   | —   | —   | —   | 1 1/4 | —   | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | —     | 1 1/4 | 1 1/4 | —     | —     | —     | 1 1/4 | 1 1/4 | 1 1/4 | 4—    | 1 1/4 | 1 1/4 | —     | 1 1/4 | 1 1/4 | 1 1/4 |
|                                 | —    | —   | —   | —   | —   | —   | 1 1/2 | —   | —     | —     | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | —     | 1 1/2 | 1 1/2 | 1 1/2 | —     | —     | —     | —     | 1 1/2 | 1 1/2 | 1 1/2 | 2—    | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 |
|                                 | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | 2     | 2     | 2     | 2     | 2     | 2     | —     | 2     | 2     | 2     | —     | 2     | 2     | —     | 2     | 2     | 2     | 2     | 2     | 2     |
|                                 | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | —     | 2 1/2 | 2 1/2 | —     | 2 1/2 | —     | 2 1/2 | —     | —     | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 |
|                                 | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 3     | 3     | —     | —     | —     | —     | 3     | —     | —     | —     | —     | —     | 3     |
|                                 | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 3 1/2 | 3 1/2 | 3 1/2 | —     | —     | —     | 3 1/2 | —     | —     | —     | —     | —     | —     |
|                                 | —    | —   | —   | —   | —   | —   | —     | —   | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 4     | —     | —     | —     | —     | 4     | —     | —     | —     | —     | —     | —     |

#### Dimensions (in inches)


| Box No. | Width  | Height   | Depth  |
|---------|--------|----------|--------|
| R33     | 30 1/4 | 33       | 6 3/32 |
| R34     | 30 1/4 | 40       | 6 3/32 |
| R35     | 30 1/4 | 47       | 6 3/32 |
| R36     | 14     | 28 1/2   | 4 1/2  |
| R37     | 14     | 31 3/4   | 4 1/2  |
| R38     | 14     | 49 1/2   | 10     |
| R39     | 14     | 31 11/16 | 4 5/8  |
| R40     | 14     | 32       | 4 1/2  |




Box R33




Box R34, R35




Box R36A, R37A




Box R36B, R37B



Box R38



Box R39



Box R40



Notes

Lined area for notes, consisting of multiple horizontal lines.