

AMPLIFICATION & DSP

DAP-8

8-CHANNEL DSP POWER AMPLIFIER

Eight channels of amplification and full system DSP in 2U, built to run complete D&A loudspeaker systems.

8 CHANNELS

BRIDGEABLE IN PAIRS

40,000 W

PEAK TOTAL OUTPUT

OVERVIEW

DAP-8 is D&A Innovations' custom eight-channel amplifier platform. Each channel delivers up to 5200 W into 2 Ω, with pairs bridgeable to 10,400 W for high-excursion subwoofers. Crossovers, linear-phase FIR and IIR equalisation, delay and limiters run inside the amplifier, so the approved presets for D&A loudspeakers load directly without an external processor. Analog, AES3 and redundant Dante inputs with automatic input backup keep the signal path running if a source drops.

OUTPUT STAGE


POWER PER CHANNEL @ 8 Ω	1600 W
POWER PER CHANNEL @ 4 Ω	3000 W
POWER PER CHANNEL @ 2 Ω	5200 W
BRIDGED @ 8 Ω / 4 Ω	6000 W / 10,400 W
MAX OUTPUT VOLTAGE / CURRENT	175 V peak / 130 A peak
FREQUENCY RESPONSE	5 Hz - 30 kHz (-3 dB, 1 W @ 8 Ω)

POWER & MECHANICAL

AC MAINS	100 - 240 V, 50/60 Hz, PFC > 0.9
SUPPLY	Single phase or three phase
CONSUMPTION	< 200 W idle / < 5000 W max
COOLING	Variable-speed fan, temperature controlled
OPERATING TEMPERATURE	0 - 35 °C
DIMENSIONS / WEIGHT	2U, 483 x 89 x 495 mm / 24 kg

SIGNAL PROCESSING

24-BIT / 48 KHZ CONVERSION 40-bit floating point 114.3 dB dynamic range (A)	FIR + IIR FILTERS & CROSSOVERS Linear phase, hybrid, LR, Butterworth, Bessel 6-48 dB/oct	PROTECTION LIMITERS & DELAY RMS voltage, RMS current, peak Up to 100 ms delay per output
---	---	--

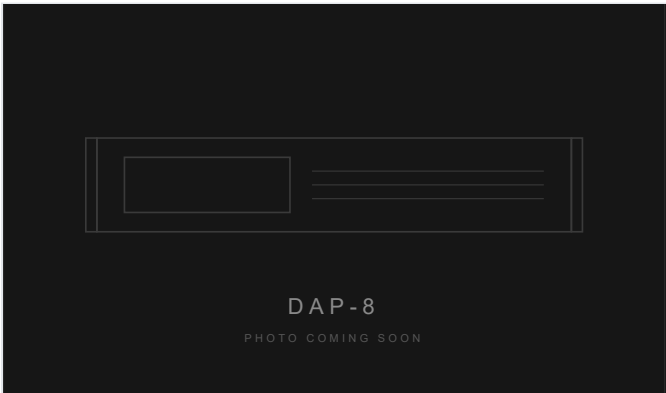

INPUTS & OUTPUTS:

- Analog: 8x XLR
AES3: 8 channels (4x XLR)
Dante: 16 channels (2x RJ45, redundant, optional)
- Outputs: TBD
Control: Ethernet, remote monitoring

OPERATIONAL REQUIREMENTS

- System presets:** Load the approved D&A preset for each connected loudspeaker before operation. Stated loudspeaker specifications are only valid with the matching preset and limiter settings.
- Mains:** Use a dedicated circuit rated for the full load. Suggested breaker: C32 single phase, C16 per phase on three-phase supply. Keep front and rear vents clear.