



STD 28N140-2408


White | 2835 | 140LED | 24V DC | 8mm | 50mm cut



Electrical & Mechanical Technical Data

Driver Types	CV (Resistor)
Voltage	24V DC
LED types	2835 SMD
LED QTY/m	140pcs
Power	5W/m 10W/m 15W/m
CCT/Color Option	White
Binning tolerance	SDCM<5
CRI	Ra80+ , Ra90+ , Ra95+
TM30	Rf=95, Rg=103
Dimming function	PWM, 0-10V, DALI
PCB dimension	8mm x 3oz (1/2oz)
Cut points	50mm (7LEDs)
Standard length/reel	5meters
Beam angle	120°
IP Rating	IP20 (IP65,IP67,IP68)
Connection	2 x 0.5mm ² / 20AWG wire / DC connector
Lifespan	30,000Hrs
Warranty	3 years
Operating temp. (Tc)	-25°C...+70°C (-13°F...158°F)
Ambient temp. (Ta)	-25°C...+45°C (-13°F...113°F)
Storage temp. (Ts)	-30°C...+80°C (-22°F...176°F)
G.W. per reel (5m)	0.15 kg
Installation	3M 300LSE adhesive tape

Dimensions

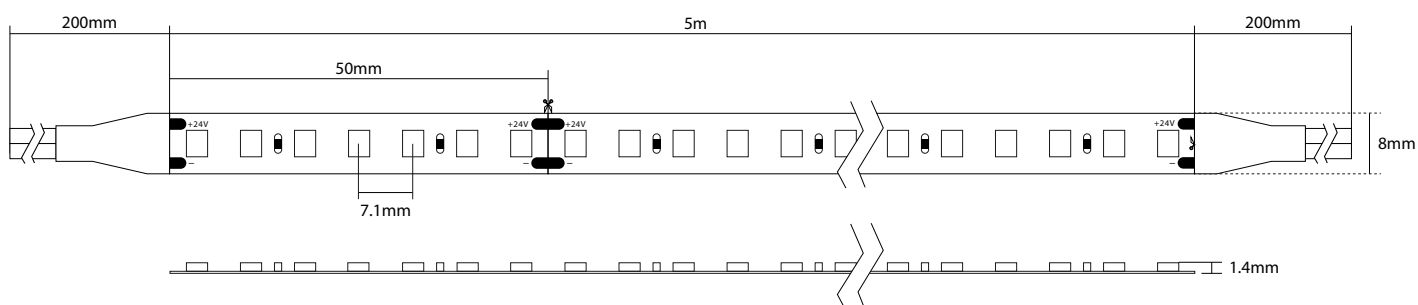


Light Technical Data



Type	Power	Product Code	CCT	CRI	PCB Width	Voltage	Cut Length	Maxrun	Efficacy	Lumen
White Ra90+	5W/m	LT-SW28N140-2790-2408-050	2700K	Ra90+	8mm	24VDC	50mm	10m	112Lm/w	560Lm/m
		LT-SW28N140-3090-2408-050	3000K	Ra90+	8mm	24VDC	50mm	10m	118Lm/w	590Lm/m
		LT-SW28N140-4090-2408-050	4000K	Ra90+	8mm	24VDC	50mm	10m	122Lm/w	610Lm/m
		LT-SW28N140-5790-2408-050	5700K	Ra90+	8mm	24VDC	50mm	10m	122Lm/w	610Lm/m
	10W/m	LT-SW28N140-2790-2408-100	2700K	Ra90+	8mm	24VDC	50mm	7m	108Lm/w	1080Lm/m
		LT-SW28N140-3090-2408-100	3000K	Ra90+	8mm	24VDC	50mm	7m	115Lm/w	1150Lm/m
		LT-SW28N140-4090-2408-100	4000K	Ra90+	8mm	24VDC	50mm	7m	120Lm/w	1200Lm/m
		LT-SW28N140-5790-2408-100	5700K	Ra90+	8mm	24VDC	50mm	7m	120Lm/w	1200Lm/m
	15W/m	LT-SW28N140-2790-2408-150	2700K	Ra90+	8mm	24VDC	50mm	6m	106Lm/w	1590Lm/m
		LT-SW28N140-3090-2408-150	3000K	Ra90+	8mm	24VDC	50mm	6m	112Lm/w	1680Lm/m
		LT-SW28N140-4090-2408-150	4000K	Ra90+	8mm	24VDC	50mm	6m	118Lm/w	1770Lm/m
		LT-SW28N140-5790-2408-150	5700K	Ra90+	8mm	24VDC	50mm	6m	118Lm/w	1770Lm/m
White Ra95+	5W/m	LT-SW28N140-2795-2408-050	2700K	Ra95+	8mm	24VDC	50mm	10m	100Lm/w	500Lm/m
		LT-SW28N140-3095-2408-050	3000K	Ra95+	8mm	24VDC	50mm	10m	105Lm/w	525Lm/m
		LT-SW28N140-4095-2408-050	4000K	Ra95+	8mm	24VDC	50mm	10m	109Lm/w	545Lm/m
		LT-SW28N140-5795-2408-050	5700K	Ra95+	8mm	24VDC	50mm	10m	109Lm/w	545Lm/m
	10W/m	LT-SW28N140-2795-2408-100	2700K	Ra95+	8mm	24VDC	50mm	7m	97Lm/w	970Lm/m
		LT-SW28N140-3095-2408-100	3000K	Ra95+	8mm	24VDC	50mm	7m	102Lm/w	1020Lm/m
		LT-SW28N140-4095-2408-100	4000K	Ra95+	8mm	24VDC	50mm	7m	107Lm/w	1070Lm/m
		LT-SW28N140-5795-2408-100	5700K	Ra95+	8mm	24VDC	50mm	7m	107Lm/w	1070Lm/m
	15W/m	LT-SW28N140-2795-2408-150	2700K	Ra95+	8mm	24VDC	50mm	6m	92Lm/w	1380Lm/m
		LT-SW28N140-3095-2408-150	3000K	Ra95+	8mm	24VDC	50mm	6m	99Lm/w	1485Lm/m
		LT-SW28N140-4095-2408-150	4000K	Ra95+	8mm	24VDC	50mm	6m	104Lm/w	1560Lm/m
		LT-SW28N140-5795-2408-150	5700K	Ra95+	8mm	24VDC	50mm	6m	104Lm/w	1560Lm/m

Mounting

Surface Mounted Series



Recessed Series



Angular Series



Wires



Wires

2PIN wire, 18/20/22AWG,
Black&Red, L=200mm, loaded current 3A,
suitable for single color LED strip

Solderless Connector



Strip to Power

2PIN connector, 8/10/12mm
Suitable for single color LED strip



Strip to Strip

2PIN connector, 8/10/12mm
Suitable for single color LED strip



Strip to Strip Extension

2PIN connector, 8/10/12mm
Suitable for single color LED strip

Power supply



LRS-150 series
Output Wattage: 150W
Output Voltage: 12V/24V/48V DC
Overcurrent and Overvoltage Protection
Dimension: 159*97*30mm (L*W*H)



LRS-350 series
Output Wattage: 350W
Output Voltage: 5V/12V/24V/48V DC
Overcurrent and Overvoltage Protection
Dimension: 215*115*30mm (L*W*H)

Controller




V1 Single Color LED Controller
Input voltage: 5-36VDC
Output voltage: 5-36VDC
Output power: 40W/96W/192W/288W
(5V/12V/24V/36V)
Operating temperature: -30°C~+ 55°C
Size: 114 x 38 x 26mm(L*W*H)




R6-1 Remote Controller
Output signal: RF(2.4GHz)
Working voltage: 3VDC(AAAx2)
Remote distance: 30m
(Barrier-free space)
Size: 140 x 60 x 26mm(L*W*H)

Connectivity

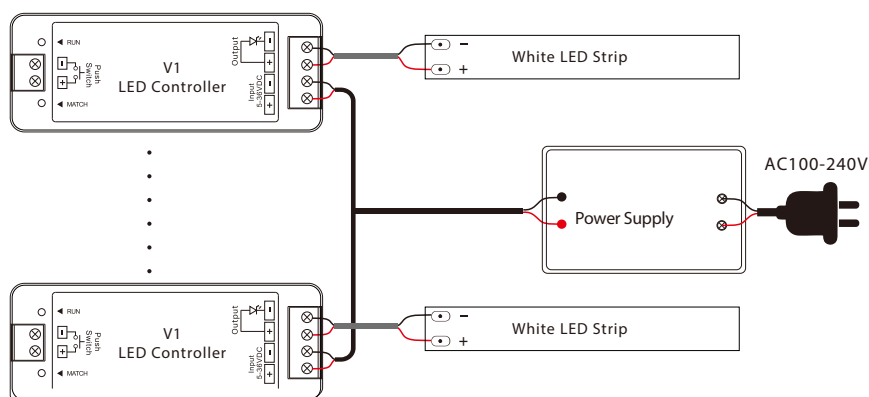

Packing

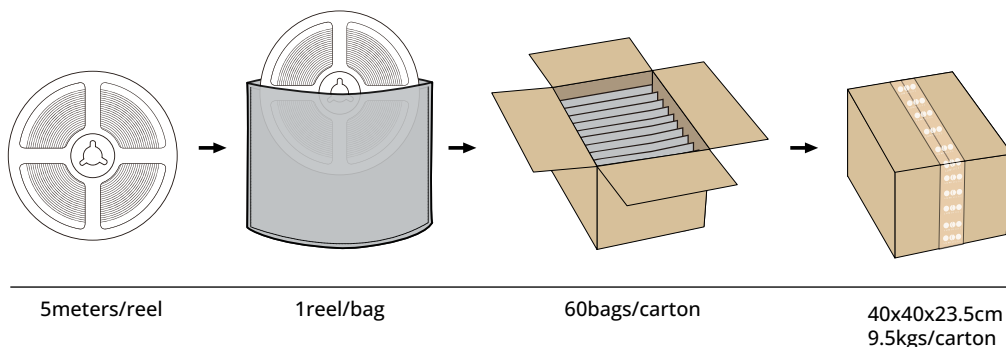

Warning



- Product installation must be carried out by a qualified professional.
- Before installing make sure, that electrical power is turned OFF.
- Before installing make sure, that the fixing area can bear the total weight of the luminaire.
- Pay attention to polarity when connecting (installing) the product.
- Do not operate if the luminaire has been damaged.
- To protect the surface from dirt and fingerprints, we recommend the use of protective gloves during installation.
- Product warranty does not cover any damage caused by faulty installation and/or misuse.
- For further information, please contact the manufacturer.