

Optical Communication in Space: Challenges and Mitigation Techniques

Hemani Kaushal and Georges Kaddoum, *Member, IEEE*

Abstract—In recent years, free space optical (FSO) communication has gained significant importance owing to its unique features: large bandwidth, license free spectrum, high data rate, easy and quick deployability, less power, and low mass requirements. FSO communication uses optical carrier in the near infrared band to establish either terrestrial links within the Earth's atmosphere or inter-satellite/deep space links or ground-to-satellite/satellite-to-ground links. It also finds its applications in remote sensing, radio astronomy, military, disaster recovery, last mile access, backhaul for wireless cellular networks, and many more. However, despite of great potential of FSO communication, its performance is limited by the adverse effects (viz., absorption, scattering, and turbulence) of the atmospheric channel. Out of these three effects, the atmospheric turbulence is a major challenge that may lead to serious degradation in the bit error rate performance of the system and make the communication link infeasible. This paper presents a comprehensive survey on various challenges faced by FSO communication system for ground-to-satellite/satellite-to-ground and inter-satellite links. It also provides details of various performance mitigation techniques in order to have high link availability and reliability. The first part of this paper will focus on various types of impairments that pose a serious challenge to the performance of optical communication system for ground-to-satellite/satellite-to-ground and inter-satellite links. The latter part of this paper will provide the reader with an exhaustive review of various techniques both at physical layer as well as at the other layers (link, network, or transport layer) to combat the adverse effects of the atmosphere. It also uniquely presents a recently developed technique using orbital angular momentum for utilizing the high capacity advantage of optical carrier in case of space-based and near-Earth optical communication links. This survey provides the reader with comprehensive details on the use of space-based optical backhaul links in order to provide high capacity and low cost backhaul solutions.

Index Terms—Free space optical communication, atmospheric turbulence, aperture averaging, diversity, adaptive optics, advanced modulation and coding techniques, hybrid RF/FSO, ARQ, routing protocols, orbital angular momentum, FSO backhaul.

LIST OF ACRONYMS

3GPP	3rd Generation Partnership Project
AFTS	Airborne Flight Test System

Manuscript received June 4, 2015; revised November 7, 2015, March 22, 2016, and July 5, 2016; accepted August 19, 2016. Date of publication August 26, 2016; date of current version February 22, 2017.

H. Kaushal is with the Department of Electrical, Electronics and Communication Engineering, NorthCap University, Gurgaon 122017, India (e-mail: hemanikaushal11@gmail.com).

G. Kaddoum is with the Département de génie électrique, École de technologie supérieure, Montreal H3C 0L7, QC, Canada.

Digital Object Identifier 10.1109/COMST.2016.2603518

ALM	Aeronomy Laboratory Model
AO	Adaptive Optics
ARQ	Automatic Repeat Request
ATP	Acquisition, Tracking and Pointing
BER	Bit Error Rate
BICM	Bit Interleaved Coded Modulation
C-ARQ	Cooperative-Diversity with Automatic Repeat Request
CALIPSO	Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observation
CAPANINA	Communications from Aerial Platform Networks delivering Broadband Communications for All
CCD	Charge Coupled Device
CEMERLL	Compensated Earth Moon-Earth Retro-Reflector Laser Link
CFARC	Cloud-Free ARC
CFLOS	Cloud-Free Line-of-Sight
CMOS	Complementary Metal Oxide Semiconductor
CSI	Channel State Information
CW	Continuous-Wave
DAPPM	Differential Amplitude Pulse Position Modulation
DHPIM	Dual Header Pulse Interval Modulation
DOLCE	Deep Space Optical Link Communications Experiment
DPPM	Differential Pulse Position Modulation
DPSK	Differential Phase Shift Keying
DTN	Delay Tolerant Networking
DWDM	Dense Wavelength Division Multiplexing
EDRS	European Data Relay Satellite System
EGC	Equal Gain Combining
ESA	European Space Agency
ETS	Engineering Test Satellite
EW	Exponentiated Weibull
FELT	Free Space Experimental Laser Terminal
FIR	Far Infra-Red
FOV	Field-of-View
FPA	Focal Pixel Array
FSM	Fast Steering Mirrors
FSO	Free Space Optics
FXLMS	Filtered-X Least Mean Square
GA-ASI	General Atomics Aeronautical Systems, Inc
GEO	Geostationary Earth Orbit
GEOS-II	Geodetic Earth Orbiting Satellite-II
GOLD	Ground/Orbiter Lasercomm Demonstration
GOPEX	Galileo Optical Experiment

H-ARQ	Hybrid Automatic Repeat Request	QAM	Quadrature Amplitude Modulation
HAP	High Altitude Platform	QAPD	Quadrant Avalanche Photo-diodes
IEC	International Electrotechnical Commission	QoS	Quality of Service
IF	Intermediate Frequency	RF	Radio Frequency
IR	Infra-Red	RIN	Relative Intensity Noise
ISR	Intelligence, Surveillance, and Reconnaissance	RME	Relay Mirror Experiment
ITU	International Telecommunication Union	ROSA	RF Optical System for Aurora
ITU	International Telecommunication Union	RPA	Remotely Piloted Aircraft
KIODO	KIrrari's Optical Downlink to Oberpfaffenhofen	RS	Reed-Solomon
LCLS	Laser Cross Link System	RZ	Return-to-Zero
LCRD	Laser Communications Relay Demonstration	SAM	Spin Angular Momentum
LEO	Low Earth Orbit	SAR	Synthetic Aperture Radar
LIDAR	Light Detection and Ranging	SC	Selection Combining
LIR	Long Infra-Red	SC-BPSK	Sub-Carrier Binary Phase Shift Keying
LLCD	Lunar Laser Communication Demonstration	SC-QPSK	Sub-Carrier Quadrature Phase Shift Keying
LMS	Least Means Squares	SILEX	Semiconductor Inter-Satellite Link Experiment
LO	Local Oscillator	SIM	Sub-carrier Intensity Modulation
LOLA	Airborne Laser Optical Link	SIMO	Single Input Multiple Output
LOS	Line-of-Sight	SIR	Short Infra-Red
LQG	Linear-Quadratic Gaussian	SLC	Submarine Laser Communication
MAC	Medium Access Control	SLM	Spatial Light Modulator
MAP	Maximum-a-Posteriori	SOLACOS	Solid State Laser Communications in Space
MC-ARQ	Modified Cooperative-Diversity with Automatic Repeat Request	SOVA	Soft Output Viterbi Algorithm
MEMS	Micro-Electro-Mechanical Systems	SR-ARQ	Selective Repeat-Automatic Repeat Request
MIMO	Multiple Input Multiple Output	SROIL	Short Range Optical Inter-satellite Link
MIR	Mid Infra-Red	STR	Self-Tuning Regulator
MISO	Multiple Input Single Output	STROPEX	Stratospheric Optical Payload Experiment
ML	Maximum Likelihood	TCM	Trellis-Coded Modulation
MLCD	Mars Laser Communications Demonstration	TES	Tropospheric Emission Spectrometer
MLSD	Maximum-Likelihood Sequence Detection	TFL	Tracking Feedback Loop
MOLA	Mars Orbiter Laser Altimeter	UAV	Unmanned Aerial Vehicle
MPE	Maximum Possible Exposure	VBLAST	Vertical Bell Laboratories Layered Space Time
MRC	Maximal Ratio Combining	VLSI	Very Large Scale Integration
MSIM	Multiple Sub-Sarrier Intensity Modulation	WDM	Wavelength Division Multiplexing.
NIR	Near Infra-Red		
OAF	Optical Amplify-and-Forward		
OAM	Orbital Angular Momentum		
OCD	Optical Communication Demonstrator		
OFDM	Orthogonal Frequency Division Multiplexing		
OFDM	Optical Frequency Division Multiplexing		
OGS	Optical Ground Station		
OICETS	Optical Inter-Orbit Communications Engineering Test Satellite		
OIL	Optical Injection Locking		
OIPLL	Optical Injection Phase-Lock Loop		
OOK	On Off Keying		
OPLL	Optical Phase-Lock Loop		
OPPM	Overlapping Pulse Position Modulation		
ORF	Optical Regenerate-and-Forward		
OWC	Optical Wireless Communication		
PAA	Point Ahead Angle		
PAM	Pulse Amplitude Modulation		
PAPR	Peak-to-Average Power Ratio		
PDF	Probability Density Function		
PIM	Pulse Interval Modulation		

I. INTRODUCTION

A. FSO Communication - An Overview

IN THE recent few years, tremendous growth and advancements have been observed in information and communication technologies. With the increasing usage of high speed Internet, video-conferencing, live streaming etc., the bandwidth and capacity requirements are increasing drastically. This ever growing demand of increase in data and multimedia services has led to congestion in conventionally used radio frequency (RF) spectrum and arises a need to shift from RF carrier to optical carrier. Unlike RF carrier where spectrum usage is restricted, optical carrier does not require any spectrum licensing and therefore, is an attractive prospect


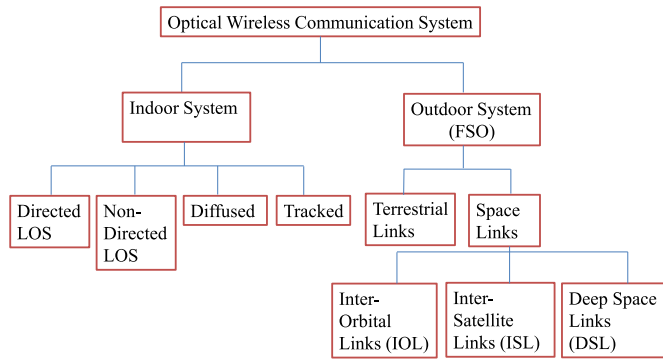


Fig. 1. Classification of the optical wireless communication system.

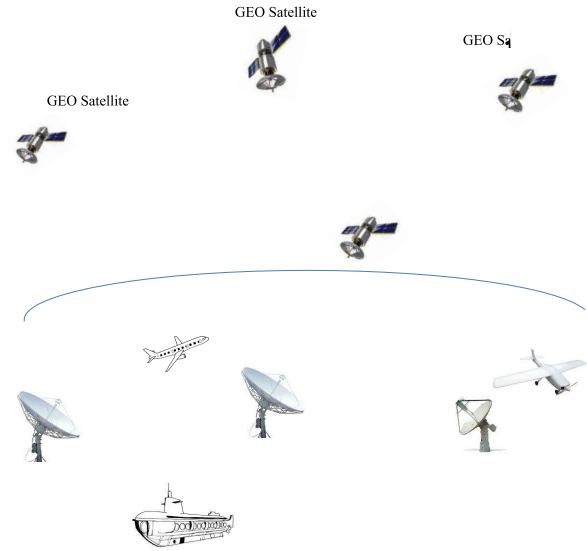

power consumption ($\sim 1/2$ of RF), reduced size ($\sim 1/10$ of the RF antenna diameter) and improved channel security [1]. It provides LOS communication owing to its narrow transmit beamwidth and works in visible and IR spectrum. The basic principle of OWC is similar to fiber optic communication except that unlike fiber transmission, in this case the modulated data is transmitted through unguided channel instead of guided optical fiber. The initial work on OWC has started almost 50 years back for defense and space applications where U.S. military used to send telegraph signal from one point to another using sunlight powered devices. In year 1876, Alexander Graham Bell demonstrated his first wireless telephone system [2], [3] by converting sound waves to electrical telephone signals and transmitted the voice signal over few feet using sunlight as carrier. The device was called “photo-phone” as it was the world’s first wireless telephone system. Thereafter, with the discovery of first working laser at Hughes Research Laboratories, Malibu, California in 1960 [4], a great advancement was observed in FSO technology.


The OWC can be classified into two broad categories, namely indoor and outdoor optical wireless communications. Indoor OWC uses IR or visible light for communicating within a building where the possibility of setting up a physical wired connection is cumbersome [5]–[12]. Indoor OWC is classified into four generic system configurations, i.e., directed line-of-sight (LOS), non-directed LOS, diffused and tracked. Outdoor OWC is also termed as free space optical (FSO) communication. The FSO communication systems are further classified into terrestrial and space optical links that include building-to-building, ground-to-satellite, satellite-to-ground, satellite-to-satellite, satellite-to-airborne platforms (unmanned aerial vehicles (UAVs) or balloons) [13]–[15], etc. Fig. 1 illustrates the classification of OWC system. This survey is focused around space optical links which include both ground-to-satellite/ satellite-to-ground links, inter-satellite links and deep space links.

Advancement in space technology and development of more sophisticated space-based instruments opened a new chapter for optical space-based communication. Due to increasing demands for high data rate and large communication capacity, researchers are actively working to build all optical communication architecture that includes ground-to-satellite optical communication links which are connected to satellite

KIRARI, the Japanese satellite (officially called Optical Inter-Orbit Communications Engineering Test Satellite -OICETS) and ESA's Artemis was demonstrated in 2005 [30]. An optical link between two LEO orbiting satellites, Terra SAR-X and NFIRE, at 5.5 Gbps on a total distance of 5500 km and at a speed of 25,000 km/hr has been established in 2008. The first successful ground-satellite optical link was conducted between the OGS and ETS-VI satellite in Konegi, Japan [31].

Several other experiments were performed in military and aerospace laboratories that demonstrated ground-to-satellite, satellite-to-satellite and satellite-to-ground optical links. It has resulted in various successful missions like (i) airborne flight test system (AFTS)- a link between aircraft and ground station at New Mexico [32], (ii) laser cross link system (LCLS)- full duplex space-to-space link for geosynchronous system [33], (iii) optical communication demonstrator (OCD)- laboratory prototype for demonstrating high speed data transfer from satellite-to-ground, (iv) stratospheric optical payload experiment STROPEX (CAPANINA Project)- high bit rate optical downlink from airborne station to transportable optical ground station [34], (v) Mars laser communications demonstration (MLCD)- provides up to 10 Mbps data transfer between Earth and Mars [35], and (vi) airborne laser optical link (LOLA)- first demonstration of a two-way optical link between high altitude aircraft and GEO satellite (ARTEMIS) [36]. Another mission by NASA is laser communication relay demonstration (LCRD) that will be launched in 2017 will demonstrate optical relay services for near earth and deep space communication missions [37].

This paper presents a comprehensive survey of FSO communication with primary focus on ground-to-satellite, satellite-to-ground and inter-satellite links. The issues involved in laser uplink are different from that of downlink or inter-satellite links. In case of laser uplink from ground-to-satellite, the beam comes immediately in contact with the atmosphere and therefore, suffer more from distortion and pointing instability due to spatial and temporal changes in the refractive index of the atmosphere. On the other hand, the downlink communication from satellite-to-ground causes the optical beam to spread geometrically (i.e., caused primarily due to beam divergence loss) and very little spread is due to atmospheric effect or variation in the beam steering. For this reason, the effect of atmospheric turbulence is generally very small on the downlink propagation as the beam goes through a non-atmospheric path until it reaches about 30 km from the Earth's surface. In case of inter-satellite links, the major challenge is laser beam pointing to or from a moving platform. For this reason, a very tight acquisition, tracking and pointing (ATP) systems are required for the optical beam to reliably reach the receiver. This survey paper provides an exhaustive coverage of various challenges and their mitigation techniques for space-based optical communication links.

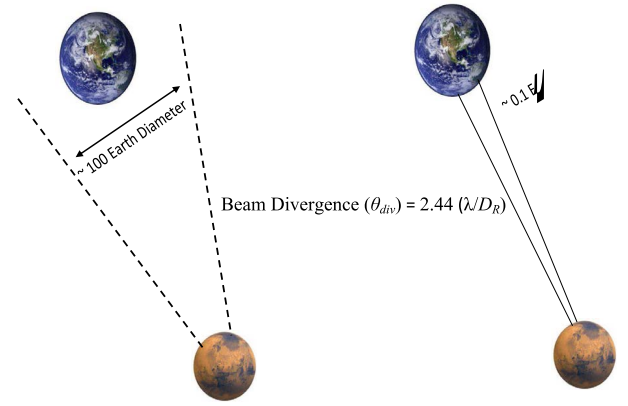

B. Advantages of FSO Communication Over RF Communication

FSO communication system offers several advantages over RF system. The major difference between FSO and RF

TABLE I

COMPARISON OF POWER AND MASS FOR GEOSTATIONARY EARTH ORBIT (GEO) AND LOW EARTH ORBIT (LEO) LINKS USING OPTICAL AND RF COMMUNICATION SYSTEMS (VALUES IN PARENTHESES ARE NORMALIZED TO THE OPTICAL PARAMETERS) [41]

Link	Optical	RF
GEO-LEO		
Antenna Diameter	10.2 cm (1.0)	2.2 m (21.6)
Mass	65.3 kg (1.0)	152.8 kg (2.3)
Power	93.8 W (1.0)	213.9 W (2.3)
GEO-GEO		
Antenna Diameter	13.5 cm (1.0)	2.1 m (15.6)
Mass	86.4 kg (1.0)	145.8 kg (1.7)
Power	124.2 W (1.0)	204.2 W (1.6)
LEO-LEO		
Antenna Diameter	3.6 cm (1.0)	0.8 m (22.2)
Mass	23.0 kg (1.0)	55.6 kg (2.4)
Power	33.1 W (1.0)	77.8 W (2.3)

RF carrier can be seen from the ratio of antenna gain as given in the equation below [42]

$$\frac{\text{Gain}_{\text{(optical)}}}{\text{Gain}_{\text{(RF)}}} \approx \frac{4\pi/\theta_{\text{div(optical)}}^2}{4\pi/\theta_{\text{div(RF)}}^2}, \quad (1)$$

where $\theta_{\text{div(optical)}}$ and $\theta_{\text{div(RF)}}$ are the optical and RF beam divergences, respectively and are proportional to λ/D_R . Since the optical wavelength is very small, a very high directivity and improved gain are obtained.

(III) (IV) *Unlicensed spectrum*: In the RF system, interference from adjacent carrier is the major problem due to spectrum congestion. This requires the need of spectrum licensing by regulatory authorities. But on the other hand, the optical system is free from spectrum licensing till now. This reduces the initial set up cost and development time [43].

(V) *High Security*: FSO communication can not be detected by spectrum analyzers or RF meters as FSO laser beam is highly directional with very narrow beam divergence. Any kind of interception is therefore very difficult. Unlike RF signal, FSO signal cannot penetrate walls, therefore can prevent eavesdropping [44].

In addition to the above advantages, FSO communication offers secondary benefits as being : (i) easily expandable and reducing the size of network segments, (ii) light weight and compact, (iii) easy and quick deployable, and (iv) able to be used where fiber optic cables cannot be used. However, despite of many advantages, FSO communication system has its own drawbacks over RF system. The main disadvantage is the requirement of tight ATP system due to the narrow beam divergence. Also, FSO communication is dependent upon unpredictable atmospheric conditions that can degrade the performance of the system. Another limiting factor, is the position of the Sun relative to the laser transmitter and receiver. In a particular alignment, solar background radiations can increase and that will lead to poor system performance [45], [46]. This undoubtedly poses a great challenge to FSO system designers.

C. Choice of Wavelength in FSO Communication

Wavelength selection in FSO communication is a very important design parameter as it affects link performance and detector sensitivity of the system. Since antenna gain is inversely proportional to operating wavelength, therefore, it is more beneficial to operate at lower wavelengths. However, higher wavelengths provide better link quality and lower pointing-induced signal fades [47]. Therefore, a careful optimization of operating wavelength in the design of FSO link helps in achieving a better performance. The choice of wavelength strongly depends on atmospheric effects, attenuation and background noise power. Further, the availability of transmitter and receiver components, eye safety regulations and cost deeply impacts the selection of wavelength in the FSO design process.

The International Commission on Illumination [48] has classified optical radiations into three categories: IR-A (700 nm to 1400 nm), IR-B (1400 nm to 3000 nm) and IR-C (3000 nm to 1 mm). It can be sub-classified into : (i) near-infrared (NIR) ranging from 750 nm to 1450 nm is a low attenuation window and mainly used for fiber optics, (ii) short-infrared (SIR) ranging from 1400 nm to 3000 nm out of which 1530 nm to 1560 nm is a dominant spectral range for long distance communication, (iii) mid-infrared (MIR) ranging from 3000 nm to 8000 nm is used in military applications for guiding missiles, (iv) long-infrared (LIR) ranging from 8000 nm to 15 μm is used in thermal imaging, and (v) far-infrared (FIR) is ranging from 15 μm to 1 mm. Almost all commercially available FSO systems are using NIR and SIR wavelength ranges since these wavelengths are also used in fiber optic communication and their components are readily available in market.

For space-based optical applications, the choice of operating wavelength depends upon the trade-off between receiver sensitivity and pointing bias due to thermal variations across the Earth's surface. Generally, longer wavelengths are preferred as they cause reduction in solar background and solar scattering from the surface of the Earth. Lasers currently being considered and developed for space communication are in the range of 500 nm to 2000 nm. Table II summarizes various wavelengths used in practical space-based optical systems.

The wavelength selection for FSO communication has to be eye and skin safe as certain wavelengths between 400 nm to 1500 nm can cause potential eye hazards or damages to the retina [49]. Under International Electrotechnical Commission (IEC), lasers are classified into four groups from Class 1 to Class 4 depending upon their power and possible hazards [50]. Most of the FSO system use Class 1 and 1M lasers. For same safety class, FSO system operating at 1500 nm can transmit more than 10 times optical power than system operating at shorter operating wavelengths like 750 nm or 850 nm. It is because cornea, the outer layer of the eye absorb the energy of the light at 1550 nm and does not allow it to focus on retina. Maximum possible exposure (MPE) [51] specifies a certain laser power level up to which person can be exposed without any hazardous effect on eye or skin.

TABLE II
WAVELENGTHS USED IN PRACTICAL FSO COMMUNICATION SYSTEMS

Mission	Laser	Wavelength	Other parameters	Application
Semiconductor Inter-satellite Link Experiment (SILEX) [52]	AlGaAs laser diode	830 nm	60 mW, 25 cm telescope size, 50 Mbps, 6 μ rad divergence, direct detection	Inter-satellite communication
Ground/Orbiter Lasercomm Demonstration (GOLD) [27]	Argon-ion laser/GaAs laser	Uplink: 514.5 nm Downlink: 830 nm	13 W, 0.6 m and 1.2m transmitter and receiver telescopes size, respectively, 1.024 Mbps, 20 μ rad divergence	Groun

various issues in FSO link according to communication theory prospective. They have presented different types of losses encountered in terrestrial FSO communication, details on FSO transceiver, channel coding, modulation and ways to mitigate fading effects of atmospheric turbulence. Similarly, Bloom *et al.* [68] have quantitatively covered various aspects that affect the performance of terrestrial FSO link - atmospheric attenuation, scintillation, alignment or building motion, solar interference and line-of-sight obstructions. Another survey by Demers *et al.* [69] solely focused on FSO communication for next generation cellular networks. An introductory paper on terrestrial FSO communication by Ghassemloooy and Popoola [13] and Henniger and Wilfert [43] provide an overview of various challenges faced in the design of FSO communication. Hemmati *et al.* [70] laid emphasis on deep space optical communication requirements and its future prospective. Similarly, Cesarone *et al.* [71] presented various trends and key initiatives used in deep space optical links. They have discussed the optical communication road-map for meeting future requirements and performance benefits in deep space optical links. Our survey is also related to space-based optical communication with focus on various challenges, current status and latest research trends in this field. In our work, we are intending to provide the reader with an exhaustive survey of various challenges faced in ground-to-satellite/satellite-to-ground and inter-satellite optical communication links. We have highlighted various performance mitigation techniques both at (i) physical layer, and (ii) other layers (link, network or transport). To the author's best knowledge most of the surveys till date have covered mitigation techniques only at physical layer. This paper uniquely presents atmospheric mitigation techniques at other layers as well. The survey also provides the reader with an exhaustive literature on the use of FSO technology for high capacity backhaul links from high altitude platforms (HAPs) or satellite-based network. A recent approach for improving the quality and data returns from deep space and near Earth optical communication using orbital angular momentum (OAM) has been highlighted.

E. Paper Organization

The rest of the paper is organized as follows: Section II describes major challenges faced by laser uplink/downlink and space-based optical links. Due to narrow beam divergence of the optical carrier, accurate acquisition and pointing becomes very challenging for the space-based optical communication links. Section III provides an exhaustive discussion on ATP for space-based optical links. Section IV presents various techniques both at physical and other layers (link, network or transport layer) to mitigate the adverse effects of the atmosphere. This section will also give the details of the hybrid RF/FSO system that provides a practical solution by backing up the FSO link with low data rate RF link. Section V highlights a recent study on a OAM-based FSO system used in combination with channel coding, MIMO or adaptive optics for enhancing data returns from deep space or near Earth communication in turbulent atmosphere. Section VI presents the

use of FSO technology in space-based optical backhaul links. Section VII discusses the future scope of FSO technology and finally, the last section will conclude the survey paper.

II. CHALLENGES IN SPACE-BASED OPTICAL COMMUNICATION

The ground-to-satellite and satellite-to-ground FSO communications are subject to atmospheric effects. FSO technology uses atmospheric channel as a propagating medium whose properties are random function of space and time. It makes FSO communication a random phenomena that is dependent on weather and geographical location. Various unpredictable environmental factors like clouds, snow, fog, rain, haze, etc., cause strong attenuation in the optical signal and limit the link distance. For inter-satellite FSO links, various limiting factors include pointing, background noise and link availability. This section will cover various challenges faced by system designers in laser uplink/downlink as well as inter-satellite FSO links.

A. FSO Uplink/Downlink

FSO signal from ground-to-satellite or satellite-to-ground requires the passage of signal through the atmosphere. The losses encountered during FSO uplink are very large compared to downlink as the beam begins to spread and accumulate distortion the very moment optical signal is emitted from ground-based terminal. In case of uplink, the source of disturbance is close to the source and therefore, it corresponds to spherical wave model. On the other hand, during downlink, the source of the disturbance is close to the receiver terminal and therefore, it corresponds to plane wave model. When a laser beam propagates through atmosphere, it experiences power loss due to various factors and a role of system design engineer is to carefully examine the system design requirements in order to combat with the random changes in the atmosphere. Changes in temperature and pressure with altitude influence the optical beam propagation in different ways. The mean temperature of atmosphere as a function of altitude is given in [72]. Also, the concentration profile of various atmospheric constituents and aerosol particles vary with altitude with largest concentration is up to 1 - 2 km immediately above the Earth's surface. Therefore, the transmittance spectrum of the atmosphere experienced during uplink at a given zenith angle and wavelength gives rise to forbidden bands where the atmospheric attenuation is very high. MODTRAN 4.0 [73], [74] simulations give the measure of atmospheric transmittance and background sky radiance for various altitude, aerosols distribution, etc. For a reliable FSO communication, the system design engineer needs to have thorough understanding of beam propagation through random atmosphere and its associated losses. Various losses encountered by the optical beam when propagating through the atmospheric optical channel are:

(I) *Absorption and scattering loss*: When the laser beam propagates through the Earth's atmosphere it may have to interact with various gas molecules and aerosols particles present in the atmosphere. The loss in the atmospheric channel is mainly due to absorption and

TABLE III
MOLECULAR ABSORPTION AT TYPICAL WAVELENGTHS [80]

S.No	Wavelength (nm)	Molecular Absorption (dB/km)
------	-----------------	------------------------------

TABLE IV
MODTRAN SIMULATED ATMOSPHERIC TRANSMITTANCE FOR
VARIOUS WAVELENGTHS AT 5 KM OF VISUAL RANGE [84]

2017

The principal atmospheric absorbers are the molecules of water, carbon-dioxide and ozone [76], [77]. The atmospheric absorption is a wavelength-dependent phenomenon. Some typical values of molecular absorption coefficients are given in Table III for clear weather conditions. The wavelength range of the FSO communication system is chosen to have minimal absorption. This is referred to as atmospheric transmission window. In this window, the attenuation due to molecular or aerosol absorption is less than 0.2 dB/km. There are several transmission windows within the range of 700 - 1600 nm. Majority of FSO systems are designed to operate in the windows of 780 - 850 nm and 1520 - 1600 nm. These wavelengths have been chosen because of the readily availability of the transmitter and detector components at these wavelengths. The wavelength dependance of attenuation under different weather conditions is commonly available in databases like MORTAN [78], LOWTRAN [79] and HITRAN. Scattering of light is also responsible for degrading the performance of the FSO system. Like absorption, scattering is also strongly wavelength dependent. If the size of atmospheric particles are small in comparison with the optical wavelength, then Rayleigh scattering is produced. This scattering is quite prominent for FSO communication around visible or ultraviolet range, i.e., wavelengths below 1 μm . However, it can be neglected at longer wavelengths near IR range. Particles like air molecules and haze cause Rayleigh scattering [81]. If the atmospheric particles size are comparable with the optical wavelength, then Mie scattering is produced. It is dominant near IR wavelength range or longer. Aerosol particles, fog and haze are major contributors of Mie scattering. If the atmospheric particles are much larger than the optical wavelength like in case of rain, snow and hail, then the scattering is better described by geometrical optic models [82], [83]. Total atmospheric attenuation is represented by the atmospheric attenuation coefficient, γ which is expressed as a combination of absorption and scattering of light. It is therefore expressed as sum of four individual parameters given as

$$\gamma = \alpha_m + \alpha_a + \beta_m + \beta_a, \quad (2)$$

where α_m and α_a are molecular and aerosol absorption coefficients, respectively and β_m and β_a are molecular and aerosol scattering coefficients, respectively. It is to

Mie scattering theory. However, it involves complex computations and requires detailed information of fog parameters. Alternate approach is based on visibility range information, in which the attenuation due to fog is predicted using common empirical models. The wavelength of 550 nm is usually taken as the visibility range reference wavelength. Eq. (4) defines the specific attenuation of fog given by common empirical model for Mie scattering.

$$\beta_{fog}(\lambda) = \frac{3.91}{V} \left(\frac{\lambda}{550} \right)^{-p}, \quad (4)$$

where $V(\text{km})$ stands for visibility range, $\lambda(\text{nm})$ is the operating wavelength and p the size distribution coefficient of scattering. The value of p can be determined using Kim or Kruse model [91], [92]. Naboulsi *et al.* [93] have provided relations to predict fog attenuation by characterizing advection and radiation fog, separately.

- **Rain:** The impact of rain is not much pronounced like that fog as rain droplets are significantly larger (100 to 10,000 μm) in size than the wavelength used in FSO communication. The attenuation loss for light rain (2.5 mm/hr) to heavy rain (25 mm/hr) ranges from 1 dB/km to 10 dB/km for wavelengths around 850 nm and 1500 nm [94], [95]. For this reason, the choice of hybrid RF/FSO systems improve the link availability especially for systems operating at 10 GHz frequency and above. This topic is discussed in more details in Section IV. The modeling of rain attenuation prediction is done using empirical methods proposed by International Telecommunication Union- Radio communication sector (ITU-R) for FSO communication [96]. The specific attenuation, α_{rain} (in dB/km) for a FSO link is given by [97]

$$\alpha_{rain} = k_1 \mathbf{R}^{k_2}, \quad (5)$$

where $\mathbf{R}$ is the rain rate in mm/hr and k_1 and k_2 are the model parameters whose values depend upon rain drop size and rain temperature. It is to be noted that rain accompanied by low clouds results in a very high attenuation. In order to combat for huge power loss during heavy rain accompanied by low clouds, high power lasers should be used and sufficient link margin greater than 30 dB should be achieved for maximum link availability of FSO system. Further, HAP interconnected optical links help in eliminating cloud blockage problem at different geographical locations [98]. Also, system designers prefer to adopt adaptive coding and modulation technique due to rapid variation in the atmospheric conditions between satellite and ground station [99].

- **Snow:** The size of snow particles are between fog and rain particles. Therefore, attenuation due to snow is more than rain but less than fog. During heavy snow, the path of the laser beam is blocked due to increasing density of snow flakes in the

propagation path or due to the formation of ice on window pane. In this case, its attenuation is comparable to fog ranging between 30-350 dB/km and this can significantly reduce the link availability of the FSO system. For snow, attenuation is classified into dry and wet snow attenuation. The specific attenuation (dB/km), α_{snow} for snow rate S in mm/hr is given as [96]

$$\alpha_{snow} = aS^b, \quad (6)$$

where the values of parameters a and b in dry and wet snow are

$$\text{Dry snow: } a = 5.42 \times 10^{-5} + 5.49, \quad b = 1.38,$$

$$\text{Wet snow: } a = 1.02 \times 10^{-4} + 3.78, \quad b = 0.72. \quad (7)$$

(II) *Atmospheric-turbulence:* Atmospheric turbulence is a random phenomenon which is caused by variation of temperature and pressure of the atmosphere along the propagation path. It will result in the formation of turbulent cells, also called eddies of different sizes and of different refractive indices. These eddies will act like a prism or lenses and will eventually cause constructive or destructive interference of the propagating beam. These perturbations in the wavefront introduced by the atmosphere can be physically described by the Kolmogorov model [100]. Depending on the size of turbulent eddies and transmitter beam size, three types of atmospheric turbulence effects can be identified:

- **Turbulence-induced beam wander:** Beam wander is a phenomenon which is experienced *when the size of turbulence eddies are larger than the beam size*. It will result in random deflection of the beam from its propagating path and leads to link failure. Beam wander is a major concern in case of uplink as the beam size is often smaller than the turbulence eddy side and it will result in the beam displacement by several hundred meters. The rms beam wander displacement is given as [101]

$$\sigma_{BW}^2 \approx 0.54(H - h_0)^2 \sec^2(\theta) \left(\frac{\lambda}{2W_0} \right)^2 \left(\frac{2W_0}{r_0} \right)^{5/3}, \quad (8)$$

where H and h_0 are the altitude of satellite and transmitter, respectively, r_0 is the atmospheric coherence length (also called Fried parameter) [18], λ is the operating wavelength, θ is the zenith angle, W_0 is the initial beam size.

- **Turbulence-induced beam spreading:** Beam spreading takes into account *when the size of the eddies are smaller than the beam size*. In this case, the incoming beam will be diffracted and scattered independently leading to distortion of the received wavefront.
- **Turbulence-induced beam scintillation:** *When the eddy's size is of the order of beam size*, then the eddies will act like lens that will focus and de-focus

the incoming beam. This will lead to redistribution of signal energy resulting in temporal and spatial irradiance fluctuations of the received signal. These intensity fluctuations of the received signal is known as scintillation and is the major cause of degradation in the performance of the FSO system. Atmospheric turbulence also leads to the loss of spatial coherence of initially coherent beam. Structure function for phase fluctuations and correlation in the phase between two position vectors (ρ_1 and ρ_2) in the plane of observation across the beam is studied in [102] and [103]. The degree of coherence for plane and spherical wave is expressed as

$$\gamma = \exp \left[- \left(\frac{|\rho_1 - \rho_2|}{\rho_0} \right)^{5/3} \right] \quad (9)$$

where ρ_0 is the phase coherence radius. For $\rho > \rho_0$, the random phase angle is larger than π , and the wavefront loses its spatial coherence. Atmospheric turbulence may also produce depolarization of the light and temporal stretching of the optical pulse. Depolarized light causes significant reduction in the average power. In [104], an average power loss of about 160 dB is observed for depolarized light as compared to incident beam. The root-mean-square change in the polarization angle of an optical beam propagating through turbulent atmosphere is of the order of 10 - 9 rad/km which further increases linearly with the path length. The temporal spreading is due to multiple path lengths as the optical beam travels through the turbulent atmosphere. It severely limits the achievable bandwidth and the data rate. During the downlink of optical signal from satellite-to-ground, the main contribution for degradation of the signal quality is due to beam spreading, scintillation and loss of spatial coherence. For the uplink, beam wander and fluctuations in the angle of arrival at the receiver plane are the principle contributor for signal degradation. Atmospheric scintillation is measured in terms of scintillation index (normalized variance of intensity fluctuations), σ_I^2 given by [100] and [105]–[107]

$$\sigma_I^2 = \frac{\langle I^2 \rangle - \langle I \rangle^2}{\langle I \rangle^2} = \frac{\langle I^2 \rangle}{\langle I \rangle^2} - 1, \quad (10)$$

where I is the irradiance (intensity) at some point in the detector plane and the angle brackets $\langle \rangle$ denotes an ensemble average. Scintillation index is expressed as variance of log-amplitude, σ_x^2 as

$$\sigma_I^2 \approx 4\sigma_x^2, \text{ for } \sigma_x^2 \ll 1. \quad (11)$$

Scintillation index is a function of the refractive index structure parameter, C_n^2 . This parameter determines the strength of turbulence in the atmosphere. Clearly, C_n^2 will vary with time of day, geographical location and height. For near ground horizontal link, value of C_n^2 is almost constant and its typical value in case of weak turbulence

is $10^{-17} \text{ m}^{-3/2}$ and for strong turbulence it can be up to $10^{-13} \text{ m}^{-3/2}$ or greater. For vertical links, the value of C_n^2 changes with altitude h unlike horizontal link where its value is assumed to be constant. With the increase in the altitude, the value of C_n^2 decreases at the rate of $h^{-4/3}$. Therefore for vertical links, the value of C_n^2 has to be integrated over the complete propagation path extending from height of the receiver above sea level to the top of the atmosphere (roughly up to 40 kms). Due to this reason, the effect of atmospheric turbulence from ground-to-satellite (uplink) is different from satellite-to-ground (downlink). Various empirical models of C_n^2 have been proposed to estimate the turbulence profiles that are based on experimental measurements carried out at variety of geographical locations, times of day, wind speeds, terrain types, etc [108]. Some of the commonly used models are presented in Table V. The most widely used model for vertical link is Hufnagel Valley Boundary (HVB) model [124] given by

$$C_n^2(h) = 0.00594 \left[\left(\frac{V}{27} \right)^2 (10^{-5}h)^{10} \exp(-h/1000) + 2.7 \times 10^{-16} \exp\left(-\frac{h}{1500}\right) + A \exp\left(-\frac{h}{100}\right) \right] m^{-2/3}, \quad (12)$$

where V^2 is the mean square value of the wind speed in m/s, h is the altitude in meters and A is a parameter whose value can be adjusted to fit various site conditions. The parameter A is given as

$$A = 1.29 \times 10^{-12} r_0^{-5/3} \lambda^2 - 1.61 \times 10^{-13} \theta_0^{-5/3} \lambda^2 + 3.89 \times 10^{-15}. \quad (13)$$

In the above equation, θ_0 is the isoplanatic angle [115] (angular distance over which the atmospheric turbulence is essentially unchanged) and r_0 is the atmospheric coherence length. The coherence length of the atmosphere is an important parameter that is dependent upon operating wavelength, C_n^2 and zenith angle θ . For plane wave (downlink) propagating from altitude h_o to $(h_o + L)$, it is given as

$$r_0 = \left[0.423k^2 \sec(\theta) \int_{h_o}^{h_o+L} C_n^2(h) dh \right]^{-3/5}. \quad (14)$$

For spherical wave (uplink), it is expressed as [121]

$$r_0 = \left[0.423k^2 \sec(\theta) \int_{h_o}^{h_o+L} C_n^2(h) \left\{ \frac{L + h_o - h}{L} \right\}^{5/3} dh \right]^{-3/5}. \quad (15)$$

It is clear from above expressions that r_0 varies as $\lambda^{6/5}$, therefore, FSO link operating at higher wavelengths will have less impact of turbulence than at lower wavelengths. For the uplink, if transmitter beam size W_0 is of

TABLE V
TURBULENCE PROFILE MODELS FOR C_n^2

Models	Range	Comments
PAMELA Model [109]	Long (few tens of kms)	- Robust model for different terrains and weather types - Sensitive to wind speed - Does not perform well over marine/overseas environment
N ⁺		

where $K_a(\cdot)$ is the modified Bessel function of second kind of order a . The parameters α and β are the effective number of small scale and large scale eddies of the scattering environment. The scintillation index for this model is defined as

$$\sigma_I^2 = \frac{E[I^2]}{(E[I])^2} - 1 = \frac{1}{\alpha} + \frac{1}{\beta} + \frac{1}{\alpha\beta}. \quad (19)$$

The M -distribution is a generic statistical model which unifies several existing distributions used for atmospheric turbulence [130], [131]. Various distribution models like log-normal, K , Gamma-Gamma, negative exponential can be generated by using the unified M -distribution model. Although Gamma-Gamma distribution is most widely used to study the performance of FSO system, however, in a recent work proposed by Chatzidiamantis *et al.* [132], Double-Weibull distribution is suggested to be more accurate model for atmospheric turbulence than the Gamma-Gamma distribution, particularly for the cases of moderate and strong turbulence. Similar to the Gamma-Gamma model, this distribution is based on the theory of doubly stochastic scintillation and considers irradiance fluctuations as the product of small scale and large scale fluctuations which are both Weibull distributed. A very latest turbulence model proposed in [133] is Double Generalized Gamma (Double GG) distribution which is suitable for all regimes of turbulence and it covers almost all the existing statistical models of irradiance fluctuations as special cases. Another distribution proposed in [134], is Exponentiated Weibull (EW) distribution for modeling irradiance fluctuations in the presence of aperture averaging. Though Gamma-Gamma model is accepted to be valid in all turbulence regimes for a point receiver, however, it does not accurately fit the irradiance statistics when aperture averaging is used [135]. In [136], the EW distribution is proved to be valid with fully and partially coherent beams under all turbulence conditions in the presence of aperture averaging. Average channel capacity for all turbulence regimes over EW distributed non-Kolmogorov turbulent channel is presented in [137].

(III) *Beam divergence loss*: As the optical beam propagates through the atmosphere, a beam divergence is caused by diffraction near the receiver aperture. Some fraction of the transmitted beam will not be collected by the receiver and that will cause beam divergence loss/geometrical loss. This loss increases with the link length unless the size of the receiver collection aperture is increased or receiver diversity is employed. In general, an optical source with narrow beam divergence is preferable. But narrow beam divergence causes the link to fail if there is a slight misalignment between the transceivers. Therefore, an appropriate choice of beam divergence has to be made in order to eliminate the need for an active tracking and pointing systems and at the same time, reduce the beam divergence loss.

The beam divergence is a very critical design parameter for ground-to-satellite FSO uplink. It has to be broad enough to reach the satellite with high degree of probability and at the same time ensure that the transmit power requirements are within range. The downlink beam divergence drives the attitude control requirements and determines the overall throughput of communication link. In [138], divergence and geometrical loss calcula-

bandwidth of a narrow bandpass filter. The sky radiance is greatly dominated by the aerosol scatter within 30° angular distance of the receiving telescope from the Sun. With the increase of angular distance, molecular scattering becomes more significant. The amount of sky radiance greatly depends upon the phase angle defined by geometrical location of Sun, Earth and the receiver. For very small Sun-Probe-Earth (SPE) and Sun-Earth-Probe (SEP) angles, a sufficient amount of stray background rejection is essential to improve the system performance. In [142], sky radiance measurements were carried out at three different locations (Thessaloniki, Izana and Innsbruck) which shows the deviation in their measured values that varies between 3 and 35% depending upon wavelength, location and instrument. An atmospheric radiance model that takes into account clear sky radiance, radiance for a blackbody at the temperature of the near-surface air and angular dependence between telescope and Sun is studied in [143].

Mis-alignment or pointing loss: The optical beam used in the FSO communication is highly directional with very narrow beam divergence. Also, receivers used in FSO links have limited FOV. Therefore, in order to have 100% availability of FSO links, it is very essential to maintain a constant LOS connection between the transmitter and receiver. A slight misalignment can lead to failure of FSO link. It is very essential to maintain pointing and acquisition throughout the duration of communication. Pointing loss could arise due to many reasons such as satellite vibration or platform jitter or any kind of stress in electronic or mechanical devices [144]. The effect of satellite vibration in the FSO system is described in [145]–[151]. Pointing error can also be caused due to the atmospheric turbulence-induced beam wander effect which can displace the beam from its transmit path [152]. In any of the cases, pointing error will increase the chances of link failure or can significantly reduce the amount of received power at the receiver resulting in a high probability of error. In order to achieve a sub micro-radian pointing accuracy, proper care has to be taken to make the assembly vibration free and maintain sufficient bandwidth control and dynamic range in order to compensate for residual jitter [153]. The pointing error is described statistically by Gaussian distribution for both azimuth and elevation uncertainties. The radial pointing error angle (without bias) is the root sum square of the elevation θ_V and azimuth θ_H angles such that $\theta = \sqrt{\theta_H^2 + \theta_V^2}$. Assuming the standard deviation of elevation and azimuth angles are equal ($\sigma_\theta = \sigma_V = \sigma$) and further assuming that azimuth and elevation processes are zero-mean, independent, and identically distributed, then the radial pointing error angle can be modeled as a Rician density distribution function given by

$$f(\theta, \phi) =$$

to several hours depending on the geographical location and season. They can lead to wandering off the down-link signal from the desired position if the space-borne system relies on uplink beacon signal for tracking and pointing. Cumulus clouds may appear alone or in clusters in the altitude range from 200 to 6500 feet above the ground and hinders the space-based optical communication [163]. Clouds offer significant attenuation as high as tens of dB and therefore require necessary actions to combat the signal loss due to cloud coverage. Implementation of spatial and temporal diversity can minimize the amount of attenuation due to clouds. International satellite cloud climatology project (ISCCP) provides database for weather conditions that can be utilized for the optical site section of various ground stations [164]. National climatic data center in Asheville, North Carolina provides information on cloud cover, visibility and other parameters over 1000 sites in United States [165]. This database is useful for the site selection to develop optical space network (OSN) and serves as a guide to build various models of real time dynamic cloud behaviors. These models are used to provide cloud-free line of sight (CFLOS) [166] or cloud-free arc (CFARC) probabilities for any site. In order to provide CFLOS probability, multiple ground stations are placed at a low cloud coverage area with a separation of at least 350 km to ensure uncorrelated CFLOS [167]. These multiple ground stations have a communication infrastructure to support relay-satellite-communication throughout the world. Temporal characteristics of optical beam propagation through the clouds using Monte Carlo simulations are studied in [168]. Mathematical modeling of the FSO communication system over cloudy channel based on adaptive optical transmitter and receiver is discussed in [169]. Infrared cloud imaging to determine day-night cloud detection, cloud optical depth and optical attenuation in cloud channel is discussed in [170].

(VII) *Atmospheric seeing*: The perturbations of the optical beam associated with coherence length of the atmosphere, r_0 is referred as atmospheric seeing effect. When r_0 is significantly smaller than the receiver aperture diameter D_R , then it leads to the blurring of the received signal which is known as astronomical seeing which is given as λ/r_0 [171]. For a perfect optical collection system, the spot size of the received signal in the focal plane of the receiver is expressed as $(2.44F\lambda/D_R)$ where F is the focal length of receiver collecting optics. When the optical beam propagates through atmosphere, then D_R is replaced by r_0 and therefore, the related signal spot size at the focal plane is increased by the ratio D_R/r_0 which effectively leads to an increase in the background noise. Also, larger FOV at the receiver can limit the electrical bandwidth of the receiver, thereby limiting the data rate. This problem can be taken care of by use of adaptive optics or array detectors.

(VIII) *Angle-of-arrival fluctuations*: Due to the presence of turbulence in the atmosphere, the laser beam wavefront arriving at the receiver will be distorted. This will

lead to spot motion or image dancing at the focal plane of the receiver. This effect is called angle-of-arrival fluctuation. However, this effect can be compensated by the use of adaptive optics or fast beam steering mirror. The variance of angle-of-arrival fluctuations, $\langle\beta^2\rangle$ is expressed as [85]

$$\langle\beta^2\rangle = 2.91 \left[\int_{h_0}^H C_n^2(h) dh \right] D_R^{-1/3} \sec(\theta), \quad (23)$$

which is further simplified to yield

$$\langle\beta^2\rangle = 0.182 \left(\frac{D_R}{r_0} \right)^{5/3} \left(\frac{\lambda}{D_R} \right)^2, \quad (24)$$


where D_R is the diameter of collecting lens and r_0 is the coherence length of the atmosphere.

Besides the above mentioned factors, there could be other reasons for link failure. Since FSO system requires LOS communication, any kind of physical obstruction can block the beam path and cause short and temporary interruptions of the received signal. This adverse effect can be taken care of by proper choice of system design parameters like beam divergence, transmitter power, operating wavelength, transmitter and receiver FOV.

B. Inter-Satellite Links

Inter-satellite FSO links are not subject to weather conditions or cloud outages as the satellite orbits are far above the atmosphere. In this case, the major challenge is caused by the acquisition and tracking as the two satellite move with different relative velocity. As inter-satellite or inter-orbital links have to cover larger distances, therefore the transmission scheme has to be power-efficient with good sensitivity at the receiver. Therefore, phase-coherent techniques like homodyne or heterodyne are preferred over direct detection methods in inter-satellite FSO links. These techniques provide very good receiver sensitivity and deliver high capacity links. A homodyne BPSK transmission between LEO-LEO with 5.6 Gbps is the highest rate published till date in [172] and [173]. The European space agency has developed European Data Relay Satellite System (EDRS) that successfully demonstrated 1.8 Gbps link between Alphasat in GEO and Sentinel-1 in LEO in late 2014 [174], [175]. A theoretical analysis of the inter-satellite FSO link is performed for 1000 km distance at 2.5 Gbps in [15]. Although, space FSO links are not subject to atmospheric and weather limitations, however, they are limited by other challenges like PAA, doppler shift, acquisition and tracking, background radiations and satellite platform stability. These challenges are discussed as follows:

(I) *Point-ahead-angle*: Due to the relative motion between the transmit and receive terminals, the return signal is required to be an offset from the apparent beacon location so that it effectively hits the receiver at a proper spatial temporal location. This pointing offset is called PAA. It depends upon the relative velocity between the two satellites and is used to compensate for the travel time over the long cross link distances. For

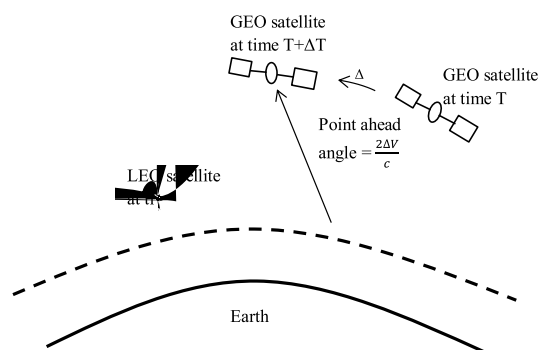

requires the tracking system to have large received spot size that will eventually reduce the sensitivity of the receiver. A decrease in sensitivity is compensated by an increase in transmit power. A feed-forward vibration compensation model is compared with feedback model for the inter-satellite FSO link in [189] and [190]. In [191], a model is proposed that adapts the bandwidth and transmitter gain to compensate for the satellite vibration. In another work presented in [192], the gain of the telescope is varied adaptively using phased array techniques to maximize the communication performance for new vibration level. More literature about compensation of satellite vibration and tracking issues can be studied in [193]–[195].

(IV) *Background noise sources*: The noise sources for inter-satellite link depends on the detection technique and if the system is optically pre-amplified or not. For direct detection receiver, major noise contribution is often from detector (bulk dark current), receiver amplifier (pre-amplifier noise and thermal noise) and shot noise due to the signal itself. For coherent detection, local oscillator shot noise dominated all the other noise sources present in the system. Other background noise sources consist of stellar and celestial radiant fluxes. It also consists of scattered light from optics structure falling on the detector. The background power collected by the receiver due to diffused, stellar and scattered noise is given by

$$P_B = \begin{cases} H_B \Omega_{FOV} L_R A_R \Delta\lambda_{filter} & \text{(Diffused source)} \\ N_B L_R A_R \Delta\lambda_{filter} & \text{(Stellar or point source)} \\ \gamma I_\lambda \Omega_{FOV} L_R A_R \Delta\lambda_{filter} & \text{(Scattered noise source)} \end{cases} \quad (25)$$

In the above equation, H_B and N_B are the background radiance and irradiance energy densities of large diffused angular sources and point sources, respectively. The term H_B is expressed in units of $\text{W/m}^2/\text{sr}/\text{\AA}$ and N_B in terms of $\text{W/m}^2/\text{\AA}$. The parameter Ω_{FOV} is the solid angle receiver FOV, L_R is the transmission loss of the receiver optics, A_R is the effective area of the receiver and $\Delta\lambda_{filter}$ is the bandwidth of optical BPF in the receiver. In case of scattered noise source, γ represents the atmospheric attenuation coefficient and I_λ is the exo-atmospheric (region of space outside the earth's atmosphere) solar constant ($0.074 \text{ W/cm}^2\mu\text{m}$). A strong background source near the receiver FOV can lead to significant scattering. Degradations caused by radiating celestial bodies other than the Sun are generally negligible except when receiving optics are directly pointing the Sun. The major source of background noise is due to scattering when an optical receiver design has its optics under direct exposure to sunlight.

III. ACQUISITION, TRACKING AND POINTING

In case of ground-to-satellite, inter-satellite and satellite-to-ground FSO communication links, pointing and focusing of optical beam become a critical issue. This is due to narrow

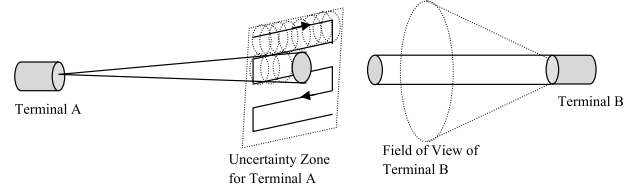



Fig. 6. Stare/Scan acquisition technique where one terminal (Terminal A) slowly scans its uncertainty region while other terminal (Terminal B) stares through over its FOV.

beam divergence of the optical beam and platform jitter disturbances [196]. The performance of the space optical link is limited due to vibration of the pointing system caused by two stochastic mechanisms: (i) tracking noise created by the electro-optic tracker and (ii) vibrations created by internal satellite mechanical mechanisms. The effect of satellite vibration and platform jitter is described in [197]–[200]. Misalignment due to any of these reasons may result in link failure or severely degrade the performance of the system. This section will cover various issues involving acquisition and tracking of narrow optical beam in order to achieve a stable LOS communication between the two terminals.

The first step to establish a space optical link is acquisition process which involves the transmitter scanning with its narrow beacon signal over an uncertainty area. The beacon signal should have a sufficient peak power and low pulse rate to help the receiver locating the beam in the presence of large background radiations [201]. The coarse detection is done during the acquisition mode with large FOV. This beacon signal is detected by the position sensitive detector at the receiver which is also searching simultaneously over its FOV for the beacon signal as shown in Fig. 6.

Once the beacon signal is detected, the receiving terminal makes use of beam steering elements to point a steady beacon signal towards the initiating terminal often offset by fixed PAA. Fig. 7 shows the basic concept of ATP for a space FSO communication system. The uplink signal from the ground station is collected with the help of telescope optics and given to the dichroic beam splitter 1. This beam splitter will reflect all the incoming signal to the beam splitter 2 that will further direct the signal to the communication detector or ATP subsystem in accordance with the wavelength of the incoming signal. In case of beacon signal, the beam splitter 3 will help in focussing the image of the ground station to a point on the focal pixel array (FPA). The location of this point on the array represents the direction from the received beacon signal relative to the telescope's axis (the center of the array). The size of the FPA determines the FOV of the telescope and is large enough to accommodate the initial pointing uncertainties. Up till this point, the first portion of the spatial acquisition process is complete wherein the position of ground station relative to the space craft is captured on the FPA. Next step is to direct the beam from an on-board mounted laser satellite to the ground-based receiver by forming a LOS link.

After the beacon signal is received, the controller logic on the satellite begins the process of narrowing its FOV until both

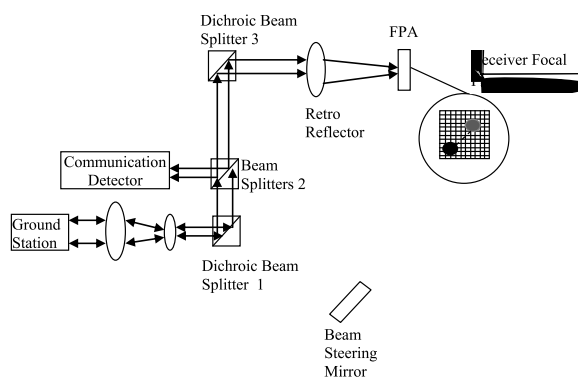

signal fluctuations from a receiver with aperture diameter D_R to that from a receiver with an infinite small aperture, i.e.,

$$A = \frac{\sigma_I^2(D_R)}{\sigma_I^2(0)}. \quad (26)$$

In case of a satellite-to-ground FSO link, aperture averaging factor for both plane and spherical waves in weak turbulence is approximated as [214]

$$A = \left[1 + 1.1 \left(\frac{D_R^2}{\lambda h_0 \cos \theta} \right)^{7/6} \right]^{-1} \quad (27)$$


where h_0 is the scale height of the turbulence and other parameters are defined earlier. Therefore, increasing the aperture diameter reduces atmospheric scintillation and improves the BER performance of the system. For the space-based optical link, the plane wave propagation model is mostly appropriate for satellite-to-ground transmissions, whereas the spherical propagation model is suitable for ground-to-satellite transmission links. Various literature on aperture averaging is found in [214]–[220]. In case of an aperture diameter larger than the coherence length of the atmosphere, the irradiance statistics appear to be log-normal. Besides widely accepted log-normal and Gamma-Gamma distributions, a new distribution family, namely Exponentiated Weibull (EW) distribution is proposed in [221], which offers an excellent fit for simulated and experimental data under weak and moderate atmospheric turbulence conditions. For space-based optical links, various experimental and theoretical studies have been carried out to analyze the effect of the detector size on atmospheric turbulence. In [222], the performance of the optical satellite communication link for different modulation schemes using aperture averaging has been investigated. It was found that an improvement in the system performance employing On Off Keying (OOK) modulation is higher as compared to subcarrier binary phase shift keying (SC-BPSK) and subcarrier quadrature phase shift keying (SC-QPSK) modulation schemes. BER performance for coherent (sub-carrier BPSK) and non-coherent (OOK) modulation schemes using aperture averaging for the ground-to-satellite FSO communication is investigated in [223]. In [214], performance improvement for the satellite-to-ground link has been observed by using aperture averaging. The synergy of the channel coding and aperture averaging is analyzed for downlink optical signal from LEO satellite [224]. It was observed that the aperture averaging shows good results for values of zenith angles. A comparison of terrestrial and satellite FSO links using various coherent modulation schemes in [225] suggested that the performance improvement due to aperture averaging is only effective in terrestrial communication and satellite downlink.

The advantage of aperture averaging for the uplink satellite communication is not available as the phase coherence radius is much larger than receiving aperture on the satellite. It should be noted that an increase in the receiver aperture area will also increase the amount of background noise collected by the receiver. Therefore, an optimum choice of aperture diameter has to be made in order to increase the power efficiency in the FSO system.

(II) *Diversity*: Diversity technique for mitigating the effect of turbulence in the atmosphere can operate on time, frequency and space. In this case, instead of a single large aperture, an array of smaller receiver aperture is used so that multiple copies of the signal that are mutually uncorrelated can be transmitted either in time or frequency or space. This will improve the link availability and BER performance of the system. It also limits the need of active tracking due to laser misalignment. GOLD demonstration in 1998 showed that the scintillation index was drastically improved with four 514.5 nm multiple beams for uplink transmission. It was reported that the value of scintillation was 0.12 with two beams, however, its value reduces to 0.045 with four beams [226]. Reduction in the intensity variance by a factor of square root of the number of transmitting antennae is observed in [227] and [228] for ground-to-satellite FSO uplink. In order to achieve the full advantage due to spatial diversity, the antennae separation at transmitter or receiver should be at least or greater than the coherence length of the atmosphere to make the multiple beams independent or at least uncorrelated. In [229], the atmospheric scintillation for the ground-to-satellite FSO link is analyzed using multiple uplink Gaussian beams. An average spatial correlation is derived as a function of beam waist, beam separation and beam wander variance. Also, the gain due to diversity is more pronounced at a high turbulence level than at lower values [230], [231]. In case of receiver diversity (SIMO- single input multiple output), diversity gain is achieved by averaging over multiple independent signal paths. The signals can be combined at the receiver using selection combining (SC) or equal gain combining (EGC) or maximal ratio combining (MRC). SC is simpler as compared to other two, but gain in this case is low. The gain achieved through MRC is slightly higher than EGC, but at the expense of complexity and cost. Therefore, implementation of EGC is preferred over MRC due to its simplicity and comparable performance [232], [233]. For optical downlink from deep space, multiple receivers are considered in [234] which are placed in an orbit above the atmosphere. However, it becomes a costly affair to launch and maintain orbiting space receiver as compare to ground-based receivers. For transmit diversity (MISO- multiple input single output), special space time codes such as optical Alamouti code is used [128], [235]. This code is designed for only two transmit antennae but can be extended to more number of antennae. FSO MIMO (multiple input

multiple output) system performs well if the beams are independent or uncorrelated. Otherwise, the performance of FSO system is going to degrade. The performance of optical MIMO and RF MIMO systems are almost equivalent. It increases the channel capacity of the system almost linearly with the number of transmitting antenna. In the case of weak atmospheric turbulence, the outage probability of Gaussian FSO channel is proportional to $[\log(\text{SNR})]^2$ term whereas for moderate to strong turbulence, it is proportional to $[\log(\text{SNR})]$ [236]. The concept of virtual MIMO (V-MIMO) is applied to the constellation of multiple HAPs for providing high capacity broadband links in the presence of cloud blockage or turbulent atmosphere. Time diversity with or without codes has also been proven to mitigate channel fading in the FSO system. This type of diversity is applicable to time selective fading channels which allows repetitive symbols to be transmitted over different coherence time period. If data frame length exceeds the channel coherence time, then diversity can be employed by either coding or interleaving. It is observed that in the presence of time diversity, convolutional codes are a good choice for weak atmospheric turbulence and Turbo-codes provide a significant coding gain for strong turbulence conditions [237]. The combination of encoding abilities of punctured digital video broadcast satellite standard (DVB-S2) and LDPC is used to mitigate the atmospheric turbulence by using time diversity in the FSO system [238].

(III) *Relay Transmission*: Relay-aided transmission is an effective technique for combating the effect of turbulence in the FSO communication [239]–[242]. It is a form of distributed spatial diversity that enables multiple terminals to share their resources by a cooperative communication so that a virtual antenna array can be built in a distributed fashion. Here, instead of using multiple apertures at the transmitter or receiver end, a single antenna is capable of achieving a huge diversity gain. Relay transmission provides good a performance advantage when operated at a high SNR such that the received signal strength is sufficiently high than the signal dependent shot noise and atmospheric fading. Otherwise, in case of a low SNR, relays will be forwarding just the noisy replicas of the information they received. The outage probability and ergodic capacity for relay transmission in the FSO system provide significant improvement over direct transmission in turbulent atmospheric channel. The performance of hybrid satellite-terrestrial FSO link is analyzed using amplify and forward relaying in [242]. The average symbol error rate and diversity order is obtained using M-ary phase shift keying. Further, the work is extended in [243], where the system performance was analyzed in the presence of co-channel interference. The optical downlink from LEO/GEO satellite-to-ground station is completed via HAP relay link. The network of interconnected HAP provide almost full availability in all weather conditions. Recently, the performance analysis of the relay-aided

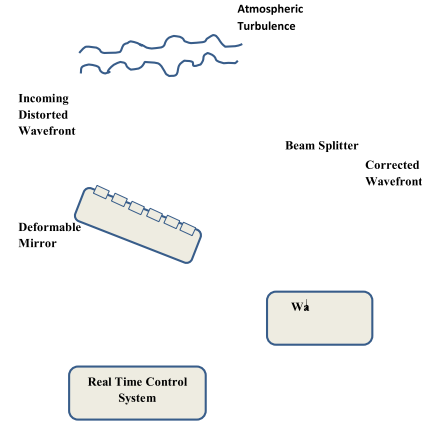

bandwidth. But later with the development of high bandwidth wavefront phase controllers, e.g., deformable mirrors based on micro-electromechanical systems (MEMS) and with the development of new efficient algorithms, this approach is gaining popularity these days. The AO using MEMS for long range FSO systems is found in [263]–[266]. The use of adaptive optics for high capacity returns from LEO or GEO satellite-to-ground receiver is investigated in [267]. The tip/tilt tracking of the incoming wavefront amounts to the tracking of the spot focused on the detector. The rms turbulence-induced wavefront tip/tilt is independent of wavelength, increases with zenith angle and is proportional to $D_R^{-1/6}$ [268]. Tip/tilt correction is achieved using natural or artificial guide stars or a down-directed laser beam near an orbiting relay mirror provides as a reference for measuring or correcting the wavefront distortion [269]. A Strehl ratio model for tip/tilt and adaptive optics correction is presented in [270]. Designing of the AO system requires that its closed loop frequency should be at least four times Greenwood frequency [271] (in Hz) given by

$$f_G = \left[0.102k^2 \sec(\theta) \int_{h_o}^{h_o+L} C_n^2 \cdot v_T(h)^{5/3} dh \right]^{3/5}, \quad (28)$$

where $v_T(h)$ is the traversal component of wind speed. This frequency tells the speed of AO system to respond to fluctuations due to atmospheric turbulence.

(V) *Modulation*: In the FSO communication, the choice of modulation schemes depends on two main criteria: optical power efficiency and bandwidth efficiency. Optical power efficiency can be measured by computing optical power gain over OOK provided both the modulation schemes have same euclidean distance, d_{min} . Power efficient modulation schemes are simpler to implement and are quite effective in mitigating the effect of the turbulence for low data rates. Bandwidth efficiency on the other hand, determines maximum data for a given link length with a particular modulation scheme. In general, the FSO communication supports a variety of binary and multilevel modulation formats. Out of these two formats, binary level format is most commonly used due to its simplicity and high power efficiency. Most well known binary modulation schemes are OOK and PPM. OOK modulation scheme requires adaptive threshold in turbulent atmospheric conditions for best results [272]. Due to its simplicity, OOK modulation scheme is very popular in FSO communication systems and most commonly is deployed with IM/DD transmission and receive mechanism. The choice of duty cycle for intensity modulated signals will impact system design parameters such as transmission bit rate and channel spacing. The ability to maintain the transmission efficiency over a wide range of duty cycles, requires efficient pulse shaping at the transmitter.

It will not only improve the sensitivity of the receiver but will also provide flexible multi-rate capabilities with simplified receiver design options [42]. In some cases, laser may require some recovery time after transmission of the pulse and this may impose a minimum delay between two pulses. Another detection technique used in OOK modulation scheme is maximum likelihood (ML) detection with perfect channel state information (CSI) [273]. However, due to its implementation's complexity, this detection technique didn't gain much popularity. Maximum-likelihood sequence detection (MLSD) can be employed when the receiver is having the knowledge of a joint temporal distribution of intensity fluctuations. Other detection techniques [274]–[276] used at the receiver are symbol-by-symbol maximum likelihood detection, blind detection, vertical Bell laboratories layered space time (V-BLAST) detection, etc. In case of M -PPM, each symbol interval is divided into M time slots and a non-zero optical pulse is placed at these time slots while other slots are kept vacant. For long distance or deep space communications, M -PPM scheme is widely used because it provides a high peak-to-average power ratio (PAPR) that improves its average-power efficiency [85], [277]. Also, unlike OOK, M -PPM does not require an adaptive threshold. However, M -PPM scheme has a poor bandwidth efficiency at higher values of M and therefore, for bandwidth limited systems, multi-level modulation schemes are preferred. Here, the transmitted data can take multiple amplitude levels and most commonly used multi-level intensity modulation schemes are pulse amplitude modulation (PAM) [278] and quadrature amplitude modulation (QAM) [279]. However, the price paid for bandwidth efficiency is the reduction in power level. Therefore, these modulation schemes are not a good choice for high turbulent atmospheric conditions or power limited systems. It is reported in many literatures that in case of high background noise, M -PPM is considered to be an optimum modulation scheme on Poisson counting channel [280]–[282]. With the increase in order of M in M -PPM, the robustness against background radiations increases even further due to its low duty cycle and lesser integration interval of photodiode. Owing to various advantages of PPM in the FSO communication, various variants of PPM have been developed aiming to enhance the spectral efficiency of the system. A natural extension of single pulse PPM is to use two or more pulses in each channel symbol to convey information and is termed as multi-pulse PPM [283]. This is accomplished by placing multitude (K) of pulses per symbol intervals in all possible ways among M slots and therefore, provides signal constellation whose size varies as M^K (for large M) rather than linearly with M , as in the case of the conventional PPM. Other variants of PPM are Differential PPM (DPPM) [284], [285], Differential Amplitude PPM (DAPPM) [286], Pulse Interval Modulation (PIM) [287], Dual Header Pulse

TABLE VI
MAPPING BETWEEN 4-PPM AND 4-DPIM CHIPS

Source Bits	4-PPM	4-PIM
00	1000	1(0)
01	0100	1(0)0
10	0010	1(0)00
11	0001	1(0)000

Interval Modulation (DHPIM) and Overlapping PPM (OPPM) [288], [289]. All these modulation schemes are obtained by simple modification to PPM to achieve improved power and bandwidth efficiency. In DPPM, the empty slots following the pulse in PPM symbol are removed, therefore, it reduces the average symbol length and improves the bandwidth efficiency. DPPM exhibits inherent symbol synchronization as every symbol ends with a pulse. However, for a long sequence of zeros there could be a problem of slot synchronization which is taken care of by making use of guard band immediately after the pulse has been removed. The performance of DPPM and PPM has been compared in terms of BER and power spectral density in [290] and [291]. It was found that DPPM results in improved bandwidth as well as power efficiency than PPM for a fixed-average bit rate and a fixed available bandwidth. On the other hand, DAPPM is a combination of DPPM and PAM. It is therefore, a multi-level modulation scheme where the symbol length varies from $1, 2, \dots, M$ and the pulse amplitude is selected from $1, 2, \dots, A$ where A and M are integers. Performance analysis of ground-to-satellite FSO system with DAPPM in a weak atmospheric turbulence is studied in [286]. PIM is an anisochronous (no fixed symbol structure) PPM technique in which each block of $\log_2 M$ data bits are mapped to one of M possible symbols. The symbol length is variable and is determined by the information content of the symbol. Every symbol begins with a pulse, followed by a series of empty slots, the number of which is dependent on the decimal value of the block of data bits being encoded. Mapping between source and transmitted bits of 4-PPM and 4-PIM is shown in Table VI. It requires only a chip synchronization and does not require symbol synchronization since each symbol is initiated with a pulse. It has higher transmission capacity as it eliminates unused time chips within each symbol. In DHPIM, a symbol can have one of the two pre-defined headers depending on the input information as shown in Fig. 10. The n^{th} symbol $S_n(h_n, d_n)$ of a DHPIM sequence is composed of a header h_n , which initiates the symbol, and information slots d_n . Depending on the most significant bit (MSB) of the input code word, two different headers are considered H_0 and H_1 . If the MSB of the binary input word is equal to 0, then H_0 is used with d representing the decimal value of the input binary word. However, if $\text{MSB} = 1$ then H_1 is used with d being equal to the decimal value of the 1's complement of the input binary word. For H_0 and H_1 ,

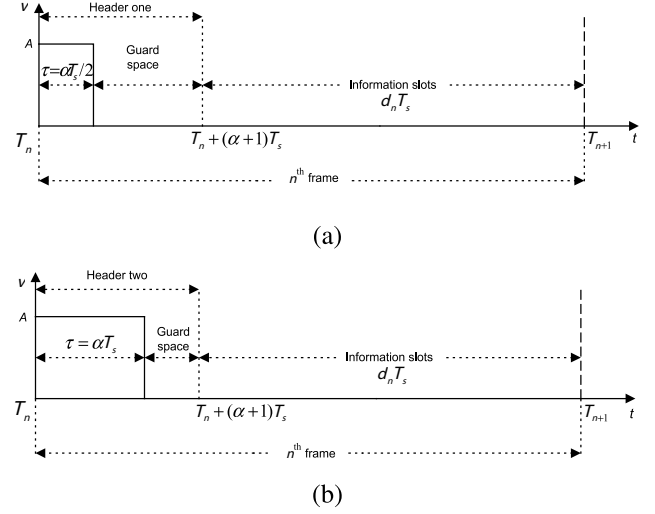


Fig. 10. Symbol structure of DHPIM with (a) H_0 and (b) H_1 headers [292].

TABLE VII
COMPARISON OF VARIANTS OF PPM MODULATION SCHEME (A: PULSE AMPLITUDE, R_b : DATA RATE AND α : INTEGER)

Modulation Schemes	M-PPM	DPPM	DAPPM	DPIM	DHPIM _a
Bandwidth (Hz)	$\frac{MR_b}{\log_2 M}$	$\frac{(M+1)R_b}{2\log_2 M}$	$\frac{(M+A)R_b}{2\log_2(MA)}$	$\frac{(M+3)R_b}{2\log_2 M}$	$\frac{(2^{\log_2 M-1} + 2\alpha + 1)R_b}{2\log_2 M}$
PAPR	M	$\frac{M+1}{2}$	$\frac{M+A}{A+1}$	$\frac{M+1}{2}$	$\frac{2(2^{\log_2 M-1} + 2\alpha + 1)}{3\alpha}$
Capacity	lo				

the rate) [296]. The performance of three different families of rateless codes (Luby Transform, Raptor and RaptorQ) is carried out in [297] for satellite-to-ground FSO links. Short length rateless raptor codes are studied in [298] for ground-to-UAV FSO link with severe jitter. Other adaptive modulation schemes like variable rate, variable power adaptation, or channel inversion can be adopted in case of weak turbulence regime [293]. For strong turbulence regime, truncated channel inversion scheme [299] is adopted where a variable data rate adaptation is performed according to the FSO channel condition. In [300], adaptive data rate is demonstrated for LEO FSO downlink and a throughput gain upto a factor of three is obtained in comparison to constant data rate throughout. When the FSO conditions are favorable, signal constellation size is increased, or when channel conditions are not favorable, signal constellation size is decreased or when intensity channel coefficients are below threshold, the signal is not transmitted at all. Optical sub-carrier intensity modulation (SIM) is another modulation format where the base-band signal modulates the electrical RF sub-carrier (can be either analog or digital) which is subsequently intensity-modulated by the optical carrier. Since the sub-carrier signal is sinusoidal signal, therefore a DC bias is added to omit negative amplitude of the transmitted optical signal. SIM does not require adaptive threshold unlike OOK scheme and is more bandwidth-efficient than the PPM scheme. Optical SIM inherits the benefits from more mature RF systems, therefore, it makes the implementation process simpler [301]. SIM in conjunction with diversity technique improves the BER performance of the FSO system in the presence of an atmospheric turbulence [302]. When this modulation scheme is used with different RF sub-carriers which are frequency-multiplexed, then this scheme is known as multiple sub-carrier intensity modulation (MSIM). In this case, each sub-carrier is a narrow band signal and experiences less distortion due to inter symbol interference at high data rates. However, the major disadvantage of SIM and MSIM is less power efficiency than OOK or PPM. Homodyne BPSK is preferred candidate for inter-satellite optical communication links due to its increased sensitivity for both communication and tracking. It also provides full immunity against solar background noise and interferences [303]. The effect of atmosphere on homodyne BPSK communication for satellite-to-ground links is investigated in [303] where it proves to be the robust modulation scheme even in the presence of strong background light. A full duplex 5.6 Gbps optical inter-satellite link using homodyne BPSK is studied in [173]. Another coherent modulation scheme, i.e., differential phase shift keying (DPSK) has received significant interest due to its power efficiency and 3 dB improvement over the OOK modulation [304]–[307]. Since it has reduced power requirement than OOK, DPSK does not have non-linear effects which in

turn improves the spectral efficiency of DPSK over OOK modulation. It is reported that sensitivity of DPSK receiver can approach the quantum limit theory. However, the cost for implementing DPSK-based FSO systems is high due to its increased complexity in system design both at transmitter and receiver level.

(VI) *Coding*: Error control coding also improves the performance of the FSO link by making use of different FEC schemes including Reed-Solomon (RS) codes, Turbo codes, convolutional codes, trellis-coded modulation (TCM) and LDPC. The study of error performance using error correction codes in fading channel has been under research for many years [308]–[311]. These codes add redundant information to the transmitted message so that any kind of error due to channel fading can be detected and corrected at the receiver. In [312], RS code is proposed for noiseless Poisson PPM-based channel. The performance of RS (262143, 157285, 65) coded 64 PPM provides a coding gain of 5.23 dB over the uncoded system [313]. RS codes provide good coding gain when implemented with PPM for a long distance FSO communication in [314]. RS coding is used along with 4096-ary PPM for laser communication experiment from Earth to Lunar reconnaissance orbiter in the presence of atmosphere turbulence and pointing jitter [315]. In case of strong atmospheric turbulence, Turbo, TCM or LDPC codes are preferred. Turbo codes can be arranged in any of the three different configurations-parallel concatenated convolutional codes, serial concatenated convolutional codes and hybrid concatenated convolutional codes [308], [316], [317]. Parallel concatenated convolutional codes are most popularly used in which two or more constituent systematic recursive convolutional encoders are linked through an interleaver. For very high data rate transmission, LDPC codes are preferred over Turbo codes due to their reduced decoding complexity and computational time. Variable rate LDPC codes can further increase the channel capacity and provide good coding gain [318]. It was observed that the LDPC coded MIMO FSO system using M -PPM provides better performance over the uncoded system in case of a strong atmospheric turbulence and large background noise set to -170 dBJ. A coding gain of 10 - 20 dB was observed over the uncoded system at $\text{BER} = 10^{-12}$ [319], [320]. A comparison of serial concatenated PPM is made with LDPC coded PPM which shows low latency and improved performance for LDPC coded PPM in space-based optical links [321]. Also, bit interleaved coded modulation (BICM) scheme proposed by Djordjevic [319] provides an excellent coding gain when used with the LDPC coded FSO system. Orthogonal frequency division multiplexing (OFDM) combined with suitable error control coding is also considered a very good modulation format for improving BER performance of FSO IM/DD systems. A comparison of different families of Rateless codes, i.e., Luby Transform, Raptor and RaptorQ is studied in [297] for satellite-to-ground FSO link and RaptorQ is considered

to be the best out of three in order to mitigate the errors in FSO link. At the receiver, various efficient decoding algorithms have been proposed to decode the generated codes. Theoretically, ML decoding at the receiver can provide better data recovery but its usage is limited due to the implementation complexity. Symbol-by-symbol maximum-a-posteriori (MAP) decoding algorithm is computationally complex and is not a preferred choice for implementation on a very large scale integration (VLSI) chip. However, logarithmic version of the MAP (log-MAP) algorithm [322] and the soft output Viterbi algorithm (SOVA) [323] are the practical decoding algorithms for implementation using Turbo codes. Out of these two, log-MAP algorithm gives the best performance but is computationally very complex. Simplified-log-MAP algorithm performs very close to the log-MAP and is less complex as well [324].

(VII) *Jitter Isolation and Rejection*: For achieving micro-radian pointing accuracy in the presence of platform jitter, a dedicated pointing control subsystem is required that ensures isolation and rejection of platform jitter or satellite vibrations. The mispointing loss of the optical beam without proper rejection of platform jitter can be of the order of more than $10\ \mu\text{rad}$ depending on the vibration power spectra density. This jitter rejection is accomplished by making use of vibration isolators or compensation control loops [325]. Two basic kinds of isolators are used: passive and active. Passive isolators are mechanical low pass filters that provide a cost-effective and reliable solution for broadband high frequency vibrations. For low frequency vibrations, active isolators are preferred that make use of vibration-control systems, force actuators, and displacement sensors. With the development of smart sensors, actuators and powerful processors, active vibration isolators have gained popularity these days. Various active control loop techniques for jitter rejection include classical feedback, modern feedback, disturbance accommodating control, disturbance observers, repetitive control, adaptive control, adaptive inverse control, adaptive feed forward control, and neural network [326]. The design of these control loops depends on the magnitude and frequency content of the vibrations. In [200], a jitter rejection using self-tuning feed-forward compensation, is developed and it shows that the feed-forward compensator provides a significant improvement over the closed loop control. Other techniques used for jitter control of optical beam are (i) using linear-quadratic Gaussian (LQG) design with feed-forward from accelerometers to fast steering mirrors (FSM) as well as feedback to the FSM using a position sensing detector at the target [327] (ii) using self-tuning regulator (STR) and a filtered-X least mean square (FXLMS) controller that adopts adaptive feed-forward vibration compensation [328] (iii) using combination of least means squares/adaptive bias filter and linear-quadratic regulator for controlling sinusoidal and random jitter [329]. Adaptive methods such as the least

means squares (LMS), broadband feed-forward active noise control, model reference, or adaptive lattice filters are also used to control jitter. LMS-derived methods require prior knowledge of the system dynamics, which may vary with time. An implementation of various vibration isolation algorithms such as the multiple LMS algorithm, the clear box algorithm, and the adaptive disturbance canceller have been carried out experimentally using hexapod platforms in [325]. It was observed that multiple LMS requires a separate measured disturbance-correlated reference signal in order to perform vibration compensation. It is an efficient computational algorithm when disturbance-correlated signals are available. The performance of the clear box algorithm implemented either in time domain or frequency domain exceeds that of multiple LMS algorithm without requiring a measured disturbance-correlated signal. The time domain clear box sine/cosine method is preferred when the disturbance frequencies are time-independent or just varying slowly, but in case of rapidly varying disturbance frequencies, the adaptive basis version should be used as it provides a better performance. Adaptive disturbance canceller works well in suppressing static disturbance frequencies however, it requires an additional frequency identification algorithm and disturbance measuring devices. In [330], a fiber based coherent receiver along with fine pointing subsystem is implemented to minimize the effect of satellite platform vibrations. They demonstrated the receiver sensitivity of $-38\ \text{dBm}$ at the transmission rate of $22.4\ \text{Gbps}$ for polarization-multiplexed QPSK signal in inter-satellite link. Another cause for jitter in the receiver detector plane is the atmospheric turbulence-induced random angle-of-arrival fluctuations. Turbulence-induced jitter effects can be greatly improved having a receiver tip-tilt correction system that includes two-axis FSM located at the image plane in order to compensate for the atmospheric turbulence-induced angle-of-arrival fluctuations. In [331], a piezoelectric FSM is implemented on a tracking test bed with bandwidth up to $1\ \text{kHz}$. The tracking feedback loop (TFL) was characterized by finding the frequency response of the gimbal tracking interface and summing the logarithmic magnitude and phase response plots with those of the FSM. A significant reduction in jitter was observed using TFL. Besides using FSM, a liquid crystal beam steering device along with non-linear adaptive controller can also reduce jitter fluctuations [332]. It increases the durability of the tilt corrector as it does not involve mechanical moving part and reduces the power requirement of the controller due to its low voltage operation.

(VIII) *Background Noise Rejection*: The major source of background noise is due to day-time solar radiations. The amount of day-time background noise is strongly dependent on operating wavelength, with lesser background noise at higher wavelength. It can be mitigated with the help of spatial filters along with a suitable modulation technique that has a high peak-to-average

power. Important design considerations in selecting the filter are the angle-of-arrival of the signal, the Doppler-shifted laser line width, and the number of temporal modes [279]. The most suitable modulation scheme is M -PPM to combat the effect of solar background noise radiations (as the noise is directly proportional to the slot width) [155]. High order PPM scheme is reported as a potential modulation scheme for inter-satellite links as it is more power efficient and drastically reduce the solar background noise [333]. Designing receiver with narrow FOV and choosing filters with spectral width less than 1 nm is another approach to reduce the background noise [334]. It has been shown that adaptive optics and deformable mirrors consisting of an array of actuators can result in a significant improvement due to the background noise by reducing the receiver FOV. The analysis presented in [335] showed that the inter-planetary FSO link between Earth and Mars has achieved 8.5 dB improvement in extreme background and turbulent conditions using adaptive optics and array of actuators with PPM modulation scheme. During moderate background conditions, the improvement was decreased to 5.6 dB. Another analysis presented in [336] gives the performance improvement of 6 dB by using array of 900 actuators and adaptive optic technique with the 16 PPM modulation scheme. A coherent detection scheme employing LO provides improved sensitivity and low susceptibility to background radiations. However, coherent detection scheme, either homodyne (i.e., optical signal is directly transferred into the baseband) or heterodyne (i.e., there is a frequency difference between LO and signal) requires perfect phase alignment of the received and LO signal which leads to increase in the complexity of the receiver. The effect of background noise and phase errors on coherent optical receiver for FSO channel was studied in [172]. Significant suppression of background radiations have been observed in case of optical homodyne receivers proving their ability to achieve quantum limit performance in a high background environment. In [337], strong background solar radiations are reduced using a heterodyne system with a very narrow intermediate frequency (IF) and therefore, permits the usage of the FSO system even when the Sun is directly in FOV without any degradation.

(IX) *Hybrid RF/FSO*: The performance of the FSO communication is drastically affected by weather conditions and atmospheric turbulence. This can lead to link failures or poor BER performance of the FSO system. Therefore, in order to improve the reliability and improve the availability of the link, it is wise to pair the FSO system with a more reliable RF system. Such systems are called hybrid RF/FSO and are capable of providing high link availability even in adverse weather conditions [338], [339]. The major cause of signal degradation in RF transmission is the rain (as the carrier wavelength is comparable to the size of the rain drop) and in the FSO communication is due to fog. So, the overall system availability can be improved by

using a low data rate RF link as a back up when the FSO link is down. In [340], the availability of an airborne hybrid RF/FSO link is evaluated. It is observed that the FSO link provides poor availability during low clouds conditions due to the attenuation by cloud particles and temporal dispersion. A significant improvement is observed when an hybrid RF/FSO link is used as RF signals are immune to cloud interference. However, the conventional approach of hybrid RF/FSO causes inefficient use of channel bandwidth. Also, a continuous hard switching between the RF and FSO systems could bring down the entire system. Therefore, a new approach as suggested in [341] gives the symbol rate an adaptive joint coding scheme wherein both the RF and FSO subsystems are active simultaneously which saves channel bandwidth. Also, rateless coding approach provides a performance advantage over fixed or adaptive rate coding scheme regardless of channel conditions [295], [296], [342]. These codes do not require channel knowledge at the transmitter and automatically adapts the rate between RF and FSO links depending on weather conditions with single bit feedback per message. The hybrid RF/FSO link provides great application for airborne vehicles [340], [343]. This technology is also used to improve the capacity and interference problem in conventional RF communication [344]–[346].

B. TCP Upper Layer Methods

There has been a lot of research on the performance mitigation of the atmospheric turbulence in physical layer. For the last few years, researchers have gained attention to work on modeling and performance evaluation of other layers including link layer, network layer or transport layer in order to improve the performance of the FSO communication [347]–[349]. In addition to the physical layer methods, various techniques like re-transmission, re-routing, cross connection between different layers, delay tolerant networking, etc., are used to improve the performance of FSO in all weather conditions [350], [351].

(I) *Re-transmission*: A re-transmission protocol such as automatic repeat request (ARQ) is widely used in data communication for reliable data transfer [352]. Here, the transmission is carried out in the form of packets of certain frame lengths. If due to some reason, the receiver does not acknowledge the transmitted packet within the speculated time frame, then the packet is re-transmitted. This process repeats until positive acknowledgment is received by the transmitter from the receiver or the preset counter value is exceeded. So, this kind of stop, wait and go-back- N ARQ scheme results in a huge delay, large energy consumption and bandwidth penalties due to re-transmission process [353]. Therefore, another variant of ARQ is selective repeat ARQ (SR-ARQ) in which data packets are continuously transmitted from the transmitter to the receiver without the need to wait for individual acknowledgment from the receiver. The receiver will continue to accept and acknowledge the received frame. If any frame is not acknowledged after certain period,

it is assumed to be lost and re-transmitted. ARQ protocol can be implemented either at data link layer or at transport layer [354]. In either case, the receiver terminal must have sufficient data storage capability to buffer the received data at least for the time period specified by the window size. In [355], the performance of inter-HAP optical link in terms of optical efficiency is studied using feedback information in ARQ data link layer protocol. Another variant of ARQ that has been studied by various researchers is hybrid-ARQ (H-ARQ) which uses a combination of FEC coding and ARQ error control [356]–[358]. The performance of FSO downlink from satellite-to-ground with ARQ and FEC schemes is studied in [359] and [360]. The outage probability of different H-ARQ scheme in the strong turbulence regimes is investigated and it is found that good performance gain is achievable using this scheme [361]. However, H-ARQ scheme has large bandwidth penalties and delay latencies. Recently, a combination of cooperative diversity with ARQ (C-ARQ) has gained interest that has shown remarkable results for combating turbulence-induced fading in the FSO channel. Another version of C-ARQ with lesser transmission delays and improved energy consumption is the modified cooperative diversity with ARQ (MC-ARQ). This modified scheme allows relay nodes to store a copy of frames for a more efficient response during transmission failure due to atmospheric turbulence [362], [363]. Another protocol, i.e., Rateless Round Robin protocol is used to provide reliable FSO communication in case of significant outages [364], [365]. It is observed that Rateless Round Robin is an effective error control design for practical FSO applications even during very strong turbulence when the channel availability is less than 45% [366].

(II) *Reconfiguration and re-routing*: Path reconfiguration and data re-routing is carried out in order to increase the availability and reliability of the FSO link during loss of LOS or adverse atmospheric conditions or device failure. Through dynamic reconfiguration of the nodes in the FSO network using physical and logical control mechanism, link availability is improved drastically. In physical layer, the reconfiguration is achieved using ATP and in logical layer, it makes use of autonomous reconfiguration algorithms and heuristics. Here, the data packets are re-routed through other existing links that could be either an optical link or low data rate RF link. Autonomous reconfiguration is used in optical satellite networks where the link is dynamically routed to alternate path if there is any link failure in the current path [367]. An automated ATP technique using dynamic path reconfiguration is present in [344] and [368]. The dynamic path reconfiguration in hybrid RF/FSO network is demonstrated experimentally in [369]. Various topology control mechanisms and re-routing algorithms have been investigated for the FSO network [370]–[374]. Topology control and beam reconfiguration are achieved through: (a) the topology

discovery and monitoring process, (b) the decision making process by which a topology change has to be made, (c) the dynamic and autonomous re-direction of beams (based on algorithms) to new receiver nodes in the network, and (d) the dynamic control of these beams for link re-direction [370]. Therefore, reconfiguration and re-routing improve the reliability of the FSO link but at the cost of a huge processing delays. A good design engineer has to ensure the restoration of the link through reconfigurability without significant impact in delay and at reduce cost. For this, the routing protocol should be designed in such a way so that during re-routing process, the path which has minimum delay or least number of hops should be given priority. Sometimes, all the routing routes are computed prior to their actual need and are stored in routing tables. Such type of routing is classified as ‘proactive routing’ protocol. However, this routing protocol is not suitable for large networks as it imposes high overhead to the network which makes it bandwidth inefficient. Another routing protocol that generates very less overhead as compare to proactive routing is called ‘reactive routing’ and computes new routes only ‘on demand’. A new route is established only during the failure of the existing route. However, this leads to prolonged latency in data delivery. Combination of both proactive and reactive routing protocols is called ‘hybrid routing’ protocol. It divides the network into clusters and apply proactive route updates within each cluster and reactive routing across different clusters.

(III) *Quality of Service Control*: The QoS in the FSO communication is measured in terms of data rate, latency, delay jitter, data loss, energy consumption, reliability and throughput efficiency. The data transfer from one node to another in the FSO communication system should meet the given requirements of special QoS class otherwise the offered services can not be used by end-users in a satisfying way. For this, the main challenge in the FSO network is to optimize the performance of the communication system measured in (a) end-to-end connection delay, (b) delay variation, (c) packet rejection rate, and (d) overhead. A quality-of-service (QoS) multicast routing protocol is studied for HAP-satellite link in [375]. A 10 Gbps QoS-based buffer is proposed in [376] in order to mitigate packet loss during strong turbulent conditions in the hybrid RF/FSO network. The buffer incorporates a custom IP packet inspection and scheduling processor which works in accordance with the link availability and QoS parameters. It was shown that the FSO link using this buffer can provide link availability under strong atmospheric conditions at fade margins as low as 8 dB. It is suggested in some literatures that modification in different layers improves the QoS of FSO system. The QoS requirements set up by International Telecommunication Union (ITU) and 3rd Generation Partnership Project (3GPP) for various FSO scenarios (satellite-to-ground, aircraft-to-aircraft, maritime mobile, etc.) is studied in [377]. A routing algorithm that improves the QoS of the network

and the medium access control (MAC) layer is proposed in [378]. The MAC layer QoS can be classified into (a) channel access policies, (b) scheduling and buffer management, and (c) error control. This routing protocol provides an energy efficient real time FSO communication.

(IV) *Others*: Re-playing is another technique to promote end-to-end connectivity of the FSO link. If re-routing or re-transmission is not possible, then the FSO network will replay up to 5 sec of data from the edge node [379]. Delay (or disruption) tolerant networking (DTN) technique is applied for the networks with intermittent connectivity and therefore, is a good candidate for the FSO communication having extreme atmospheric conditions [380], [381].

V. ORBITAL ANGULAR MOMENTUM FOR THE FSO SYSTEM

Angular momentum is one of the most fundamental physical quantity in both classical and quantum mechanics. It is classified as spin angular momentum (SAM) and orbital angular momentum (OAM). SAM is associated with the spin of the photon and thus, it is related with polarization. On the other hand, OAM is associated with the helicity photon wavefront and therefore, it is related to spatial distribution. Recently, researches have directed their attention for exploiting the capabilities of OAM beam in the FSO communication system [309], [382]. It has been seen that the FSO communication has not fully utilize the Terabit capacity of the optical carrier. In order to fully explore the potential of the FSO system, lot of research is going on in the area of OAM-multiplexed free space communication link. Information carrying OAM beams are capable of providing an increased capacity and spectral efficiency. Therefore, this approach is considered as a preferred choice for achieving high data returns from deep space or near Earth optical communication in near future [309]. At present, power efficient PPM scheme is most widely used for the long distance or deep space communication. However, the need to achieve high data rates for future space links makes the PPM a weak candidate due to its low spectral efficiency. Also, the usage of large number of slots in PPM for meeting high capacity demands increases the complexity and cost of the system. In this case, OAM modulation is considered to satisfy a high bandwidth requirements for future space missions while keeping the system cost and power consumption reasonably low. The main challenge in this approach is to preserve orthogonality between OAM states in the presence of the atmospheric turbulence. However, OAM beams when used with suitable coding, MIMO or equalization techniques are capable of operating even under strong atmospheric turbulence regime [309], [383], [384].

It was reported in [385] that a beam having helical shaped-phase front described by azimuthal phase term $\exp(il\theta)$ carries OAM of $l\hbar$ per photon where l is topological charge with any integer value, θ is the azimuth angle and $\hbar$ is the Plank's constant h divided by 2π . Therefore, unlike SAM, which can take only two possible states of $\pm\hbar$, the OAM can have an infinite


number of states corresponding to different values of l . In principle, infinite number of bits are carried by OAM of single photon. This makes OAM a potential candidate for high capacity communication systems. Also, orthogonality among beams with different OAM states allow additional degree of freedom by multiplexing of information carrying OAM beams. The possibility to generate and analyze states with different OAM by using interferometric or holographic methods [386]–[388] permits the development of energy-efficient FSO communication systems. Further, the OAM-based FSO system has provided a good performance in atmospheric turbulence when used with suitable encoding or modulation format or adaptive optics system.

An OAM beam is formed by attaching azimuthal phase term to the Gaussian beam as $U(r, \theta) = A(r) \cdot \exp(il\theta)$. Here, $A(r)$ is the amplitude at the waist of the Gaussian beam and r the radial distance from the center axis of the Gaussian beam. When data is encoded to the OAM beam, it is expressed as $U(r, \theta, t) = S(t) \cdot A(r) \cdot \exp(il\theta)$, where $S(t)$ is the data to be transmitted. With multiplexing of N information carrying OAM beams, the resultant field is expressed as $U_{\text{Mux}}(r, \theta, t) = \sum_{m=1}^N S_m(t) \cdot A_m(r) \cdot \exp(il_m\theta)$. It is to be noted that the OAM of an individual beam is not modified when propagated through free space or spherical lenses. For de-multiplexing OAM beams, an inverse of azimuthal phase term $\exp[i(-l_n)\theta]$ is used and received de-multiplexed beam is then given as

$$U_{\text{Rx}}(r, \theta, t) = \exp[i(-l_n)\theta] \cdot \sum_{m=1}^N S_m(t) \cdot A_m(r) \cdot \exp(il_m\theta). \quad (29)$$

The capacity and spectral efficiency of FSO links using OAM is increased by employing several techniques like: (i) combining multiple beams with different OAM values, (ii) using positive or negative OAM values, (iii) using wavelength division multiplexing (WDM), (iv) polarization multiplexing, or (v) using two groups of concentric rings. Recent reports in [389] have demonstrated a 2.56 Tbps data rate transmission with spectral efficiency of 95.7 bps/Hz using four light beams with 32 OAM modes employing 16 QAM. In [390], a 100.8 Tbps data transmission has been reported using 42 wavelengths with 24 modes. This shows that OAM has tremendous potential for increasing the capacity of the FSO system. However, these high capacity transmissions were limited to short transmission distances only where the effect of turbulence was not considered. Therefore, OAM-based FSO system is capable of delivering huge data returns in inter-satellite links or deep space mission where the atmospheric turbulence does not pose any problem. A multi-gigabit transmission (projected for 2020) may use coded OAM modulated beams to satisfy high bandwidth demands for future deep-space and near-Earth optical communications [331].

It has been reported in [391] that OAM beams are highly sensitive even in case of a weak atmospheric turbulence due to the redistribution of energy among various OAM states leading to time-varying crosstalk. An OAM beam has a doughnut shape with less power and large phase fluctuations in

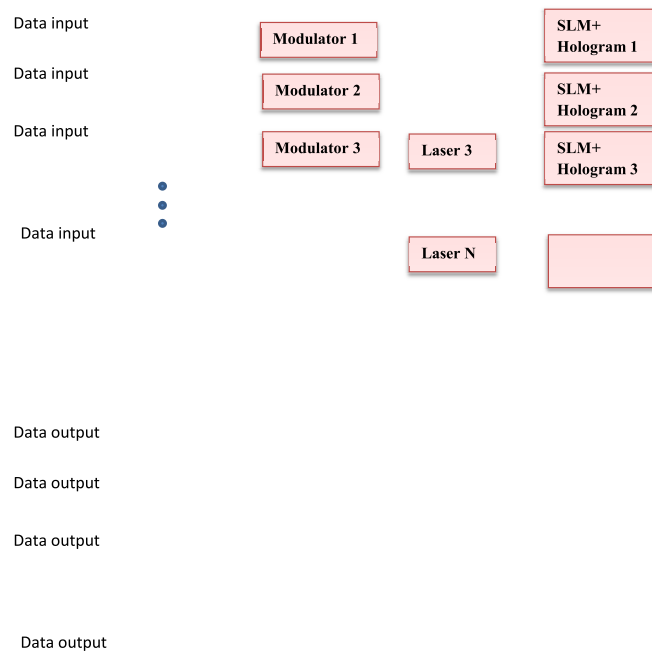

passed through detector, demodulator and decoder to recover information data.

VI. FSO BACKHAUL COMMUNICATION


The demand for high data rate is increasing in today's network and researchers these days are finding various techniques to provide gigabit capacity low cost backhaul solutions [402]–[405]. Space-based links are generally satellite or UAV links usually used to provide high speed connections where terrestrial links are not available. It has been reported in [406], that the mobile backhaul in United States will increase 9.7 times by 2016 due to rapidly growing data demands. This significant capacity growth has demanded the need for reconfigurable broadband communication networks with high data rates and reasonable cost. Further, the increase in mobile traffic has led to large number of cell sites which demands more bandwidth and large number of backhaul connections per cell site. Conventional technologies used for backhaul network include either copper lines, optical fiber, or RF backhaul. Copper lines are becoming an infeasible option for meeting future backhaul demands as they have a low data rate and their prices increases linearly with capacity. Fiber optics seems to be a good choice for high capacity links over long distances, however, they require considerable deployment time and huge initial investment. In that case, radio waves can be used but their capacity taps out around 400 Mbps due to the limited RF channel bandwidth. Although RF has played a vital role in backhaul for 2G and 3G networks for many years, however, huge data rate requirements for next generation mobile networks (5G), drive the need for high capacity backhaul links [407]. In order to cope up with increasing data rate, multiple signals using multiple RF can be transmitted but that will lead to additional electronics and an additional spectrum licensing cost. As frequencies goes up to milliwave range (60/80 GHz), high capacity links for short distance applications can potentially be employed. However, they require a very large spectrum allocation (10 GHz) to approach even 1Gbps. Further, they demand a very tight beam alignment and have reliability challenges due to rain fades.

The FSO communication has recently gained researchers attention to provide gigabit capacity backhaul links due to its low cost and rapid deployment speed in comparison with conventional backhaul technologies like RF or optical fibers [69], [408]. This survey focuses on optical backhaul links between HAPs, satellites and ground-based receivers. The optical backhaul communication between HAPs, satellite and ground are considered to serve as future broadband backhaul communication channels [409], [410]. HAPs are quasi-stationary vehicles like helium filled airships or air-crafts placed in the stratosphere, at an altitude 17-25 km where the impact of the atmosphere on optical beam is less severe than directly above the ground. Since the HAPs are located in a cloud-free atmospheric altitude, they are capable of providing reliable links between different HAPs or between HAPs and air-crafts or between HAPs and satellites. HAPs has unique characteristics compared with terrestrial and satellite systems such as large coverage area (3-7 kms), quick deployment,

flexible capacity increase through spot beam re-sizing, low maintenance cost and broadband capability. Since the HAPs are placed far from the atmospheric region, they provide a better channel conditions than satellites. Moreover, they provide better LOS condition in almost all coverage areas, thereby causing less shadowing than terrestrial systems. They can act as a relay station to forward the high capacity optical data through the atmosphere to the ground. The backhaul optical link for the HAPs is capable of connecting to the core network through terrestrial gateway stations. In case whenever HAP network is much larger than the cloud coverage correlation length, a ground station diversity can be used to improve the reliability of the system [411]. A multi-beam antenna is required for covering large subscriber ground stations by single HAPS with high frequency reuse efficiency. Furthermore, employing on-board regenerative HAP payload can split the satellite-to-ground link into two parts: (i) satellite-to-HAP link where the attenuation is equal to free space loss and (ii) HAP-to-ground link which is affected by the atmospheric attenuation. This would not only provide high capacity backhaul optical links but also relax the satellite front end requirements and reduce its on-board processing time. HAPs can work either as stand alone system or can be integrated with other satellite or terrestrial system [412] as shown in Fig. 12. The integrated ground-HAP-satellite system provides broadcasting and broadband services over a wider coverage area. It can be used to provide services to sub-urban areas with very little cost of deployment. Multiple optical payloads embarked in each HAP can serve as a large solid-state memories (almost in Terabyte size) which can store the collected data from the satellite and forward it to the ground station at any time which is not constrained by the satellite visibility time. HAPs in a stand-alone system can be deployed economically for providing high capacity and wider coverage to rural or remote areas.

A high bit rate optical backhaul downlink was demonstrated using HAP as a part of European “CAPANINA” (communications from aerial platform networks delivering broadband communications for all) project [413]–[415]. This was the first FSO link trail from the stratosphere. In this stratospheric optical payload experiment (STROPEX), a free space experimental laser terminal (FELT) was mounted at approximately 22 kms and a high capacity downlink from FELT was observed to transportable optical ground station (TOGS) as shown in Fig. 13. FELT was able to transmit at three different rates: 270 Mbps, 622 Mbps and 1.25 Gbps. Using IM/DD and standard APD detector, the sensitivity of the receiver front end was measured at 168 photons per bit. STROPEX also focused on the ATP system to ensure good tracking capability in stratospheric conditions.

A theoretical analysis for horizontal link between two stratospheric HAPs at 20 kms in [417] and [418] showed that a high capacity link is feasible upto almost 600 kms using intensity modulation at 1550 nm. The system allows for a BER of 10^{-6} at a data rate of 384 Mbps and a transmit power of 800 mW. The effect of the atmospheric turbulence on the performance of the HAP-satellite link has been studied in [419] and it was shown that an optical backhaul link between HAP and GEO

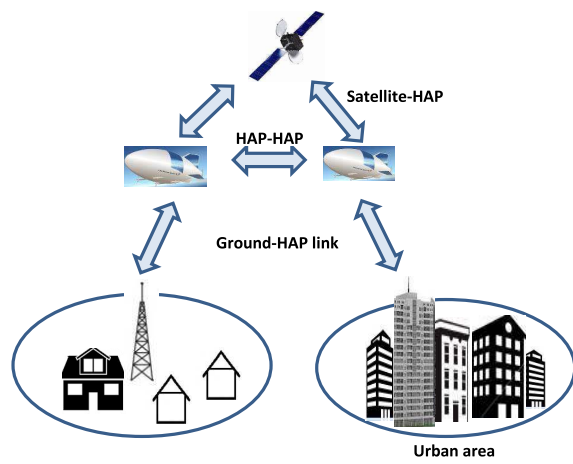

VII. FUTURE SCOPE

The FSO communication has experienced a rapid growth in the last few years despite of various crisis in the global market. This technology has demonstrated less capital expenditure with huge returns in very little time due to (i) easy availability of components, (ii) quick deployment (as it does not seek permission from municipal corporation for digging up of street), and (iii) no licensing fee required. The FSO technology provides a good solution for cellular carriers using 4G technology to cater their large bandwidth and multimedia requirements by providing a backhaul connection between cell towers. Using ultra short pulse (USP) laser, the FSO communication provides up to 10 Gbps backhaul connection without deploying fiber cables [431]. Also, with the help of advanced modulation schemes, the wireless backhaul capacity can further be increased even beyond 100 Gbps which will suffix the requirement for future 5G cellular networks [432]. The architecture of fifth generation Internet system consist of interconnecting satellites with airborne and ground-based receivers via optical links which are supported by terabit wide laser backbone, located at synchronous altitude [433]. In future, instead of hybrid fiber-coax systems, the hybrid fiber-FSO system may cater the high bandwidth and high data rate requirements of end users [434].

The FSO technology allows connectivity to remote places where physical access to 3G or 4G signals is difficult. It involve integration of terrestrial and space networks with the help of HAPs/UAVs by providing last mile connectivity to sensitive areas (e.g., disaster relief, battlefields, etc.) where high bandwidth and accessibility are necessary. An upcoming project by Facebook is an example that will allow Internet access to sub-urban or remote areas by providing aerial connectivity to users using the FSO link [435], [436]. It is proposed that for sub-urban areas in limited geographical regions, solar-powered high altitude drones will be used to deliver reliable Internet connections via FSO links. For places where deployment of drones is uneconomical or impractical (like in low population density areas), LEO and GEO satellites can be used to provide Internet access to the ground using the FSO link.

FSO technology when used over a mobile platform can be deployed in armed forces as it demands secure transmission of information on the battlefield. Intelligence, Surveillance, and Reconnaissance (ISR) platforms can deploy this technology as they require to disseminate large amount of images and videos to the fighting forces, mostly in a real time. Near Earth observing spacecrafts/drones can be used to provide high resolution images of surface contours using synthetic aperture radar (SAR) and light detection and ranging (LIDAR). In case of security monitoring system, airships or helicopters hovering over larger border area would be more economical than constructing walls or employing personnel stretched over thousands of kilometer. In this case, the data collected by the sensor would be transmitted to the command center via on-board satellite communication sub-system using FSO technology. This technology can also be used for space-based detectability and identification of submersibles which requires complete system integration of ground-based, space-based and airborne

platforms. In this, a high energy laser pulse is transmitted from a ground-based station towards a space-based mirror that scans over a specific oceanic area looking for returns from underwater vehicles. The returns in blue-green region are then picked up by LEO satellite or airplane or HAP which are then communicated to the command center [437].

Interplanetary optical communication between Moon and Earth or between Mars and Earth are another important missions for NASA. The Lunar Laser Communication Demonstration (LLCD) project by NASA has successfully carried out two way communication using a laser between Moon and Earth. It has demonstrated 20 Mbps uplink (which supported high density video) and record breaking downlink rate of 622 Mbps [438], [439]. This historic success of LLCD's mission has given new impetus to NASA's deep space optical communication. Access links for the Moon and Mars or bi-directional high data rate communication between Mars and Earth are some of the attractive upcoming developments in deep space missions. However, deep space optical communication has additional challenges from LLCD which includes kilowatt class laser beam, a photon-counting detector array on the spacecraft to observe the uplink beam, larger receiver aperture on the ground, larger point ahead angle for downlink beam and stable beam pointing system. The LCRD project by NASA will be the first long period space-based optical communication project which is to be used for both near Earth and deep space missions [37]. It is expected to transmit data at rates 10 to 100 times faster than any RF systems and will be used to deliver high resolution images or videos from various planets over solar system.

Another upcoming technology that supports fifth generation mobile network is the deployment of steered laser transceiver (SALT) on a nanosatellite (or picosatellite) whose weight is assumed to be less than 20 lb (or less than 3 lb). Due to their small size and low launch cost, it is expected to launch about 1000 small satellites into LEO orbit for the purpose of Earth exploration, data imaging, tracking, weather sensing, etc. using FSO technology [440]. The power consumption is assumed to be 0.5 to 5 W depending upon the data rates. SALT or Advanced SALT (ASALT) system would be used for optical communication between aircraft and ground station or inter-satellite communication upto several 1000 kms.

VIII. CONCLUSION

The tremendous growth in the number of multimedia users and Internet traffic in the recent years has incurred a substantial strain on the RF system operating at low data rates. Due to this huge explosion in information technology that is driving the information business to higher and higher data rates, there is a need to switch from the RF domain to optical domain. The FSO communication is capable of providing LOS wireless connection between remote sites with very high bandwidths. This technology is considered to be the promising technology in near future which can meet very high speed and huge capacity requirements of current day communication market. However, in order to fully utilize the terabit capacity of the FSO system, it has to overcome various challenges offered by the heterogeneous nature of the atmospheric channel. The FSO

system is vulnerable towards various atmospheric phenomena like absorption, scattering, atmospheric turbulence and adverse weather conditions. Various techniques implemented either at physical layer or at other layers (link, network or transport layer) help to combat the detrimental effect of the atmosphere on the quality of the laser beam. Several fading mitigation techniques that were initially proposed for the RF works well for the FSO communication as well, e.g., diversity, adaptive optics, error control codes, modulation, etc. Besides this, the complementary nature of the RF and the FSO communication has motivated the design of an hybrid RF/FSO system which ensure a carrier class availability for almost all weather conditions. Also, modifications in the other TCP layers like transport or network layers with suitable protocols and algorithms help in improving the reliability of the FSO system. The OAM-based FSO system is capable of a high capacity and an increased spectral efficiency in combination with other degree of freedom such as polarization, wavelength multiplexing or multi-amplitude/phase modulation formats. The OAM-based FSO system has recently gained attention as a potential candidate for the deep space and near-Earth communication system when used with suitable coding or modulation format or adaptive optics techniques to deal with atmospheric turbulence. Further, gigabit capacity backhaul solutions with relatively low cost is achievable using the FSO system. The FSO backhaul downlink up to 1.25 Gbps has been demonstrated experimentally and theoretical studies showed the feasibility up to 10 Gbps for HAP-HAP or HAP-satellite backhaul links.

Hence, it is clear that after so much advancement in the FSO communication, this technology seems to have very high growth prospects in the near future. Many commercial products for FSO links are already available in the market and hopefully very soon this technology will bring worldwide telecommunication revolution.

REFERENCES

- [1] V. W. S. Chan, "Free-space optical communications," *J. Lightw. Technol.*, vol. 24, no. 12, pp. 4750–4762, Dec. 2006.
- [2] D. Hochfelder, "Alexander Graham Bell," in *Encyclopedia Britannica*, 2015. [Online]. Available: <https://www.britannica.com/biography/Alexander-Graham-Bell>
- [3] D. L. Hutt, K. J. Snell, and P. A. Belanger, "Alexander Graham Bell's PHOTOPHONE," *Opt. Photon. News*, vol. 4, no. 6, pp. 20–25, 1993, doi: 10.1364/OPN.4.6.000020.
- [4] J. Hecht, "Beam: The race to make the laser," *Opt. Photon. News*, vol. 16, no. 7, pp. 24–29, 2005, doi: 10.1364/OPN.16.7.000024.
- [5] F. R. Gfeller and U. H. Bapst, "Wireless in-house data communication via diffuse infrared radiation," *Proc. IEEE*, vol. 67, no. 11, pp. 1474–1486, Nov. 1979.
- [6] A. J. C. Moreira, A. M. Tavares, R. J. M. T. Valadas, and A. M. de Oliveira Duarte, "Modulation methods for wireless infrared transmission systems: Performance under ambient light noise and interference," in *Proc. SPIE Wireless Data Trans.*, vol. 2601. Philadelphia, PA, USA, 1995, pp. 226–237.
- [7] A. M. Street, P. N. Stavrinou, D. C. O'Brien, and D. J. Edward, "Indoor optical wireless systems—A review," *Opt. Quant. Electron.*, vol. 29, no. 3, pp. 349–378, 1997, doi: 10.1023/A:1018530828084.
- [8] A. P. Tang, J. M. Kahn, and K.-P. Ho, "Wireless infrared communication links using multi-beam transmitters and imaging receivers," in *Proc. IEEE Int. Conf. Commun.*, Dallas, TX, USA, 1996, pp. 180–186.
- [9] J. B. Carruthers and J. M. Kahn, "Angle diversity for nondirected wireless infrared communication," *IEEE Trans. Commun.*, vol. 48, no. 6, pp. 960–969, Jun. 2000.
- [10] R. Ramirez-Iniguez and R. J. Green, "Indoor optical wireless communications," in *Proc. IEE Colloquium Opt. Wireless Commun.*, vol. 128. London, U.K., 1999, pp. 141–147.
- [11] D. J. T. Heatley, D. R. Wisely, I. Neild, and P. Cochrane, "Optical wireless: The story so far," *IEEE Commun. Mag.*, vol. 36, no. 12, pp. 72–74, Dec. 1998.
- [12] J. J. G. Fernandes, P. A. Watson, and J. C. Neves, "Wireless LANs: Physical properties of infra-red systems vs. MMW systems," *IEEE Commun. Mag.*, vol. 32, no. 8, pp. 68–73, Aug. 1994.
- [13] Z. Ghassemlooy and W. O. Popoola, "Mobile and wireless communications network layer and circuit level design" in *Terrestrial Free-Space Optical Communications*. InTech, 2010, ch. 17, pp. 355–392.
- [14] H. T. Yura and W. G. McKinley, "Optical scintillation statistics for IR ground-to-space laser communication systems," *Appl. Opt.*, vol. 22, no. 21, pp. 3353–3358, Nov. 1983.
- [15] V. Sharma and N. Kumar, "Improved analysis of 2.5 Gbps-inter-satellite link (ISL) in inter-satellite optical-wireless communication (ISOWC) system," *Opt. Commun.*, vol. 286, pp. 99–102, Jan. 2013.
- [16] D. L. Fried, "Scintillation of a ground-to-space laser illuminator," *J. Opt. Soc. Amer.*, vol. 57, no. 8, pp. 980–983, 1967.
- [17] P. O. Minott, "Scintillation in an earth-to-space propagation path," *J. Opt. Soc. Amer.*, vol. 62, no. 7, pp. 885–888, 1972.
- [18] P. J. Titterton, "Power reduction and fluctuations caused by narrow laser beam motion in the far field," *Appl. Opt.*, vol. 12, no. 2, pp. 423–425, 1973.
- [19] D. L. Fried, "Statistics of laser beam fade induced by pointing jitter," *Appl. Opt.*, vol. 12, no. 2, pp. 422–423, 1973.
- [20] J. L. Bufton, "Scintillation statistics measured in an earth-space-earth retroreflector link," *Appl. Opt.*, vol. 16, no. 10, pp. 2654–2660, 1977.
- [21] T. Aruga *et al.*, "Earth-to-space laser beam transmission for spacecraft attitude measurement," *Appl. Opt.*, vol. 23, no. 1, pp. 143–147, 1984.
- [22] T. Aruga *et al.*, "Earth-to-geosynchronous satellite laser beam transmission," *Appl. Opt.*, vol. 24, no. 1, pp. 53–56, 1985.
- [23] K. Araki, T. Itabe, M. Takabe, T. Aruga, and H. Inomata, "Experiments on CO₂ laser beam transmission from ground to geostationary meteorological satellite-III," in *Proc. Laser Sens. Symp.*, 1988, pp. 47–48.
- [24] P. A. Lightsey, "Scintillation in ground-to-space and retroreflected laser beams," *Opt. Eng.*, vol. 33, no. 8, pp. 2535–2543, 1994.
- [25] K. E. Wilson and J. R. Lesh, "An overview of Galileo optical experiment (GOPEX)," Commun. Syst. Res. Section, NASA, Washington, DC, USA, TDA Progr. Rep. 42-114, 1993.
- [26] M. Jeganathan, K. E. Wilson, and J. R. Lesh, "Preliminary analysis of fluctuations in the received uplink-beacon-power data obtained from the GOLD experiments," Commun. Syst. Res. Section, NASA, Washington, DC, USA, TDA Progr. Rep. 42-124, pp. 20–32, 1996.
- [27] K. E. Wilson, "An overview of the GOLD experiment between the ETS-VI satellite and the table mountain facility," Commun. Syst. Res. Section, NASA, Washington, DC, USA, TDA Progr. Rep. 42-124, pp. 9–19, 1996.
- [28] K. E. Wilson, P. R. Leatherman, R. Cleis, J. Spinhirne, and R. Q. Fugate, "Results of the compensated earth-moon-earth retroreflector laser link (CEMERLL) experiment," Jet Propulsion Lab., Pasadena, CA, USA, Tech. Rep. JPL-TDA-PR-42-131, 1997.
- [29] T. Tolker-Nielsen and G. Oppenhaus, "In-orbit test result of an operational optical intersatellite link between ARTEMIS and SPOT4, SILEX," in *Proc. SPIE Free Space Laser Commun. Technol. XIV*, vol. 4635. San Jose, CA, USA, 2002, pp. 1–15.
- [30] A. Katsuyoshi, "Overview of the optical inter-orbit communications engineering test satellite (OICETS) project," *J. Nat. Inst. Inf. Commun. Technol.*, vol. 59, nos. 1–2, pp. 5–12, 2012.
- [31] M. Toyoda *et al.*, "Ground-to-ETS-VI narrow laser beam transmission," in *Proc. SPIE Free Space Laser Commun. Technol. VIII*, vol. 2699. 1996, pp. 71–80.
- [32] F. Bellin and D. E. Tonini, "Flight testing and evaluation of airborne multisensor display systems," *J. Aircraft*, vol. 7, no. 1, pp. 27–31, 1970.
- [33] R. B. Deadrick and W. F. Deckelman, "Laser crosslink subsystem—An overview," in *Proc. SPIE Free Space Laser Commun. Technol. IV*, vol. 1635. Los Angeles, CA, USA, 1992, pp. 225–235.
- [34] J. Horwath, M. Knapke, B. Eppe, M. Brechtelsbauer, and B. Wilkerson, "Broadband backhaul communication for stratospheric platforms: The stratospheric optical payload experiment (STROPEX)," in *Proc. SPIE Free Space Laser Commun. VI*, vol. 6304. San Diego, CA, USA, Sep. 2006, pp. 63041N–1–63041N-12.
- [35] A. Biswas, D. Boroson, and B. Edwards, "Mars laser communication demonstration: What it would have been," in *Proc. SPIE Free Space Laser Commun. Technol. XVIII*, vol. 6105. San Jose, CA, USA, 2006, pp. 610502-1–610502-12.
- [36] V. Cazaubiel *et al.*, "LOLA: A 40,000 km optical link between an aircraft and a geostationary satellite," in *Proc. 6th Int. Conf. Space Opt.*, Noordwijk, The Netherlands, Jun. 2006, pp. 87.1–87.6.
- [37] "Laser communications relay demonstration: The next step in optical communications," Goddard Space Flight Center, NASA, Washington, DC, USA, Tech. Rep. [Online]. Available: http://www.nasa.gov/pdf/742122main_LCRDFactSheet3.pdf

- [38] W. D. Williams *et al.*, "RF and optical communications: A comparison of high data rate returns from deep space in the 2020 timeframe," Glenn Res. Center Cleveland, Ohio and NASA Center AeroSp. Inf., Nat. Aeronautics Space Admin., Tech. Rep. NASA/TM-2007-214459, 2007.
- [39] R. M. Sova *et al.*, "80 Gb/s free-space optical communication demonstration between an aerostat and a ground terminal," in *Proc. SPIE Free Space Laser Commun. VI*, vol. 6304. San Diego, CA, USA, 2006, Art. no. 630414.
- [40] J. H. Franz and V. K. Jain, *Optical Communications: Components and Systems: Analysis, Design, Optimization, Application*. Boca Raton, FL, USA: Narosa Publ. House, 2000.
- [41] M. Toyoshima, "Trends in satellite communications and the role of optical free-space communications," *J. Opt. Netw.*, vol. 4, no. 6, pp. 300–311, 2005.
- [42] A. K. Majumdar and J. C. Ricklin, *Free-Space Laser Communications: Principles and Advances*, vol. 2. New York, NY, USA: Springer, 2008.
- [43] H. Henniger and O. Wilfert, "An introduction to free-space optical communications," *J. Radioeng.*, vol. 19, no. 2, pp. 203–212, 2010.
- [44] M. Kaine-Krolak and M. E. Novak, "An introduction to Infrared technology: Applications in the home, classroom, workplace, and beyond," Trace R&D Center, Univ. Wisconsin, Madison, WI, USA, 1995. [Online]. Available: http://trace.wisc.edu/docs/ir_intro/ir_intro.htm
- [45] V. G. Sidorovich, "Solar background effects in wireless optical communications," in *Proc. SPIE Opt. Wireless Commun. V*, vol. 4873. 2002, pp. 133–142.
- [46] A. Biswas, F. Khatri, and D. Boroson, "Near-sun free-space optical communications from space," in *Proc. IEEE Aerosp. Conf.*, Big Sky, MT, USA, 2006, doi: 10.1109/AERO.2006.1655849.
- [47] A. Jurado-Navas, J. M. Garrido-Balsells, J. F. Paris, M. Castillo-Vázquez, and A. Puerta-Notario, "Impact of pointing errors on the performance of generalized atmospheric optical channels," *Opt. Express*, vol. 20, no. 11, pp. 12550–12562, 2012.
- [48] *International Commission on Illumination*. Accessed on Feb. 28, 2012. [Online]. Available: <http://www.cie.co.at/>
- [49] O. Bader and H. Lui, "Laser safety and the eye: Hidden hazards and practical pearls," Amer. Acad. Dermatol., Lion Laser Skin Center and Univ. British Columbia, Vancouver, BC, Canada, Tech. Rep., 1996. [Online]. Available: <http://www.dermweb.com/laser/eyesafety.html>
- [50] "Safety and laser products—Part 1: Equipment classification and requirements," Int. Electrotech. Commission, Geneva, Switzerland, Tech. Rep. IEC-60825-1, 2007. [Online]. Available: https://global.ihs.com/doc_detail.cfm?&item_s_key=00160399
- [51] M. Toyoshima, T. Jono, T. Yamawaki, K. Nakagawa, and A. Yamamoto, "Assessment of eye hazard associated with an optical downlink in free-space laser communications," in *Proc. SPIE Free Space Laser Commun. Technol. XIII*, vol. 4272. San Jose, CA, USA, 2001, pp. 219–227.
- [52] G. D. Fletcher, T. R. Hicks, and B. Laurent, "The SILEX optical interorbit link experiment," *Electron. Commun. Eng. J.*, vol. 3, no. 6, pp. 273–279, Dec. 2002.
- [53] T. Dreischer *et al.*, "Integrated RF-optical TT & C for a deep space mission," *Acta Astronaut.*, vol. 65, no. 11, pp. 1772–1782, 2009.
- [54] G. Baister, K. Kudielka, T. Dreischer, and M. Tüchler, "Results from the DOLCE (deep space optical link communications experiment) project," in *Proc. SPIE Free Space Laser Commun. Technol. XXI*, vol. 7199. 2009, Art. no. 71990B.
- [55] D. E. Smith *et al.*, "Mars orbiter laser altimeter: Experiment summary after the first year of global mapping of Mars," *J. Geophys. Res.*, vol. 106, no. E10, pp. 23689–23722, 2001.
- [56] *GA-ASI and TESAT Partner to Develop RPA-to-spacecraft Lasercom Link*, Gen. Atomics Aeronaut. Syst. Inc., Poway, CA, USA, 2012. [Online]. Available: <http://www.ga-asi.com/ga-asi-and-tesat-partner-to-develop-rpa-to-spacecraft-lasercom-link>
- [57] G. G. Ortiz, S. Lee, S. P. Monacos, M. W. Wright, and A. Biswas, "Design and development of a robust ATP subsystem for the Altair UAV-to-ground lasercomm 2.5-Gbps demonstration," in *Proc. SPIE Free Space Laser Commun. Technol. XV*, vol. 4975. 2003, pp. 103–115.
- [58] D. Isbel *et al.*, "Mars polar lander/deep space 2," NASA, Washington, DC, USA, Tech. Rep., 1999. [Online]. Available: http://www.jpl.nasa.gov/news/press_kits/mplds2hq.pdf
- [59] Y. Hu *et al.*, "Elevation information in tail (EIT) technique for lidar altimetry," *Opt. Express*, vol. 15, no. 22, pp. 14504–14515, 2007.
- [60] N. Perlot *et al.*, "Results of the optical downlink experiment KIODO from OICETS satellite to optical ground station oberpfaffenhofen (OGS-OP)," in *Proc. SPIE Free Space Laser Commun. Technol. XIX Atmospheric Propag. Electromag. Waves*, vol. 6457. 2007, pp. 645704-1–645704-8.
- [61] R. Beer, T. A. Glavich, and D. M. Rider, "Tropospheric emission spectrometer for the earth observing system's Aura satellite," *Appl. Opt.*, vol. 40, no. 15, pp. 2356–2367, 2001.
- [62] K. Nakamaru, K. Kondo, T. Katagi, H. Kitahara, and M. Tanaka, "An overview of Japan's engineering test satellite VI (ETS-VI) project," in *Proc. IEEE Commun. Int. Conf. World Prosperity Through Commun.*, vol. 3. Boston, MA, USA, 1989, pp. 1582–1586.
- [63] Y. Fujiwara *et al.*, "Optical inter-orbit communications engineering test satellite (OICETS)," *Acta Astronaut.*, vol. 61, nos. 1–6, pp. 163–175, 2007.
- [64] K. Pribil and J. Flemmig, "Solid state laser communications in space (SOLACOS) high data rate satellite communication system verification program," in *Proc. SPIE Space Opt. Space Instrum. Spacecraft Opt.*, vol. 2210. 1994, p. 39.
- [65] Z. Sodnik, H. Lutz, B. Furch, and R. Meyer, "Optical satellite communications in Europe," in *Proc. SPIE Free Space Laser Commun. Technol. XXII*, vol. 7587. 2010, pp. 758705–758714.
- [66] D. M. Boroson, A. Biswas, and B. L. Edward, "MLCD: Overview of NASA's Mars laser communications demonstration system," in *Proc. SPIE Free Space Laser Commun. Technol. XVI*, vol. 5338. San Jose, CA, USA, 2004, pp. 16–29.
- [67] M. A. Khalighi and M. Uysal, "Survey on free space optical communication: A communication theory perspective," *IEEE Commun. Surveys Tuts.*, vol. 16, no. 4, pp. 2231–2258, 4th Quart., 2014.
- [68] S. Bloom, E. Korevaar, J. Schuster, and H. Willebrand, "Understanding the performance of free-space optics," *J. Opt. Netw.*, vol. 2, no. 6, pp. 178–200, 2003.
- [69] F. Demers, H. Yanikomeroglu, and M. St-Hilaire, "A survey of opportunities for free space optics in next generation cellular networks," in *Proc. IEEE 9th Annu. Commun. Netw. Services Res. Conf.*, Ottawa, ON, Canada, 2011, pp. 210–216.
- [70] H. Hemmati, A. Biswas, and I. B. Djordjevic, "Deep-space optical communications: Future perspectives and applications," *Proc. IEEE*, vol. 99, no. 11, pp. 2020–2039, Nov. 2011.
- [71] R. J. Cesarone, D. Abraham, S. Shambayati, and J. Rush, "Deep-space optical communications: Visions, trends, and prospects," in *Proc. IEEE Int. Conf. Space Opt. Syst.*, Santa Monica, CA, USA, 2011, pp. 410–423.
- [72] "U.S. standard atmosphere supplements," U.S. Gov. Printing Office, Washington, DC, USA, Tech. Rep., 1966. [Online]. Available: <http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19670028571.pdf>
- [73] G. P. Anderson *et al.*, "MODTRAN4: Radiative transfer modeling for remote sensing," in *Proc. SPIE*, vol. 3688. Florence, Italy, 1999, pp. 2–10.
- [74] G. P. Anderson, S. A. Clough, F. X. Kneizys, J. H. Chetwynd, and E. P. Shettle, "AFGL atmospheric constituent profiles (0.120km)," Air Force Geophys. Lab., Environ. Res. Papers, Tech. Rep. AFGL-TR-86-0110, 1986.
- [75] H. Weichel, *Laser Beam Propagation in the Atmosphere*. Bellingham, WA, USA: SPIE, 1990.
- [76] R. K. Long, "Atmospheric attenuation of ruby lasers," *Proc. IEEE*, vol. 51, no. 5, pp. 859–860, May 1963.
- [77] R. M. Langer, "Effects of atmospheric water vapour on near infrared transmission at sea level," Signals Corps Contract J. R. M. Bege Company, Arlington, MA, USA, Tech. Rep. DA-36-039-SC-723351, May 1957.
- [78] F. G. Smith, J. S. Accetta, and D. L. Shumaker, *The Infrared & Electro-Optical Systems Handbook: Atmospheric Propagation of Radiation*, vol. 2. Bellingham, WA, USA: SPIE Press, 1993.
- [79] F. X. Kneizys *et al.*, "Atmospheric transmittance/radiance [microform]: Computer code LOWTRAN 6," Air Force Geophys. Lab., Bedford, MA, USA, Tech. Rep. AFGL-TR-83-0187, 1983.
- [80] M. Rouissat, A. R. Borsali, and M. E. Chiak-Bled, "Free space optical channel characterization and modeling with focus on Algeria weather conditions," *Int. J. Comput. Netw. Inf. Security*, vol. 3, pp. 17–23, Apr. 2012.
- [81] H. Willebrand and B. S. Ghuman, *Free Space Optics: Enabling Optical Connectivity in Today's Networks*. Indianapolis, IN, USA: SAMS, 2002.
- [82] R. N. Mahalati and J. M. Kahn, "Effect of fog on free-space optical links employing imaging receivers," *Opt. Express*, vol. 20, no. 2, pp. 1649–1661, 2012.
- [83] J. M. Wallace and P. V. Hobbs, *Atmospheric Science: An Introductory Survey*. New York, NY, USA: Academic Press, 1977.
- [84] Y. Lou *et al.*, "Atmospheric impact and ground station selection of satellite to ground laser communication," in *Electronics, Communication and Networks IV*. Beijing, China: Taylor & Francis, 2015, pp. 283–288.
- [85] H. Hemmati, *Deep Space Optical Communication*. New York, NY, USA: Wiley, 2006.
- [86] M. Achour, "Simulating atmospheric free-space optical propagation: Rainfall attenuation," in *Proc. SPIE Free Space Laser Commun. Technol. XIV*, vol. 4635. San Jose, CA, USA, 2002, pp. 192–202.
- [87] M. Achour, "Simulating atmospheric free-space optical propagation: II. Haze, fog, and low clouds attenuations," in *Proc. SPIE Opt. Wireless Commun. V*, vol. 4873. 2002, pp. 1–12.

- [88] B. Eppe, "Simplified channel model for simulation of free-space optical communications," *IEEE J. Opt. Commun. Netw.*, vol. 2, no. 5, pp. 293–304, May 2010.
- [89] F. Nadeem, T. Javornik, E. Leitgeb, V. Kvicera, and G. Kandus, "Continental fog attenuation empirical relationship from measured visibility data," *J. Radioeng.*, vol. 19, no. 4, pp. 596–600, 2010.
- [90] B. Flecker, M. Gebhart, E. Leitgeb, S. S. Muhammad, and C. Chlestil, "Results of attenuation measurements for optical wireless channels under dense fog conditions regarding different wavelengths," in *Proc. SPIE Atmospheric Opt. Model. Measur. Simulat. II*, vol. 6303. 2006, pp. 63030P-1–63030P-11.
- [91] I. I. Kim, B. McArthur, and E. J. Korevaar, "Comparison of laser beam propagation at 785 nm and 1550 nm in fog and haze for optical wireless communications," in *Proc. SPIE Opt. Wireless Commun. III*, vol. 4214. 2001, pp. 26–38.
- [92] P. W. Kruse, L. D. McGlauchlin, and R. B. McQuistan, *Elements of Infrared Technology: Generation, Transmission and Detection*. New York, NY, USA: Wiley, 1962.
- [93] M. A. Naboulsi, H. Sizun, and F. Fornel, "Fog attenuation prediction for optical and infrared waves," *Opt. Eng.*, vol. 43, no. 2, pp. 319–329, 2004.
- [94] A. Z. Suriza, I. M. Rafiqul, A. K. Wajdi, and A. W. Naji, "Proposed parameters of specific rain attenuation prediction for free space optics link operating in tropical region," *J. Atmospheric Solar Terrestrial Phys.*, vol. 94, pp. 93–99, Mar. 2013.
- [95] A. Vavoulas, H. G. Sandalidis, and D. Varoutas, "Weather effects on FSO network connectivity," *IEEE J. Opt. Commun. Netw.*, vol. 4, no. 10, pp. 734–740, Oct. 2012.
- [96] R. K. Crane and P. C. Robinson, "ACTS propagation experiment: Rain-rate distribution observations and prediction model comparisons," *Proc. IEEE*, vol. 85, no. 6, pp. 946–958, Jun. 1997.
- [97] A. Ghasemi, A. Abedi, and F. Ghasemi, *Propagation Engineering in Wireless Communications*. New York, NY, USA: Springer, 2012.
- [98] M. Knappek, J. Horwath, and F. Moll, and B. Eppe, "Optical high-capacity satellite downlinks via high-altitude platform relays," in *Proc. SPIE Free Space Laser Commun. VII*, vol. 6709. 2007, pp. 67090E-1–67090E-12.
- [99] D. N. Liu, M. P. Fitz, and X. Chen, "Adaptive coded modulation in low earth orbit satellite communication system," U.S. Patent US 13 800 127, 2014.
- [100] L. C. Andrews and R. L. Phillips, *Laser Beam Propagation Through Random Media*. Bellingham, WA, USA: SPIE Press, 2005.
- [101] H. Kaushal et al., "Experimental study on beam wander under varying atmospheric turbulence conditions," *IEEE Photon. Technol. Lett.*, vol. 23, no. 22, pp. 1691–1693, Nov. 15, 2011.
- [102] A. I. Kon and V. I. Tatarskii, "Parameter fluctuations in a space-limited light beam in a turbulent medium," *Izvestiya VUZ. Radiofizika*, vol. 8, no. 5, pp. 870–875, 1965.
- [103] R. A. Schmeltzer, "Means, variances, and covariances for laser beam propagation through a random medium," *Quart. Appl. Math.*, vol. 24, no. 4, pp. 339–354, 1967.
- [104] A. Saleh, "An investigation of laser wave depolarization due to atmospheric transmission," *IEEE J. Quantum Electron.*, vol. 3, no. 11, pp. 540–543, Nov. 1967.
- [105] L. C. Andrews, R. L. Phillips, and C. Y. Hopen, *Laser Beam Scintillation With Applications*. Bellingham, WA, USA: SPIE Press, 2001.
- [106] R. Rui-Zhong, "Scintillation index of optical wave propagating in turbulent atmosphere," *Chin. Phys. B*, vol. 18, no. 2, pp. 581–587, 2009.
- [107] M. A. Al-Habash, L. C. Andrews, and R. L. Phillips, "Mathematical model for the irradiance probability density function of a laser beam propagating through turbulent media," *Opt. Eng.*, vol. 40, no. 8, pp. 1554–1562, 2001.
- [108] E. S. Oh, J. C. Ricklin, G. C. Gilbreath, N. J. Vallesterio, and F. D. Eaton, "Optical turbulence model for laser propagation and imaging applications," in *Proc. SPIE Free Space Laser Commun. Active Laser Illumina III*, vol. 5160. 2004, pp. 25–32.
- [109] E. Oh et al., "Estimating optical turbulence using the PAMELA model," in *Proc. SPIE Free Space Laser Commun. IV*, vol. 5550. 2004, pp. 256–266.
- [110] S. Doss-Hammel et al., "A comparison of optical turbulence models," in *Proc. SPIE Free Space Laser Commun. IV*, vol. 5550. Denver, CO, USA, 2004, pp. 236–246.
- [111] S. Karp, R. M. Gagliardi, S. E. Moran, and L. B. Stotts, *Optical Channels: Fibers, Clouds, Water, and the Atmosphere*. New York, NY, USA: Plenum Press, 1988.
- [112] R. E. Hufnagel and N. R. Stanley, "Modulation transfer function associated with image transmission through turbulent media," *J. Opt. Soc. Amer.*, vol. 54, no. 1, pp. 52–61, 1964.
- [113] R. K. Tyson, "Adaptive optics and ground-to-space laser communication," *Appl. Opt.*, vol. 35, no. 19, pp. 3640–3646, 1996.
- [114] R. E. Hufnagel, "Variations of atmospheric turbulence," in *Proc. Opt. Propag. Through Turbulence (Opt. Soc. America)*, Washington, DC, USA, 1974, pp. WA1-1–WA1-4.
- [115] G. C. Valley, "Isoplanatic degradation of tilt correction and short-term imaging systems," *Appl. Opt.*, vol. 19, no. 4, pp. 574–577, Feb. 1980.
- [116] A. S. Gurvich, A. I. Kon, V. L. Mironov, and S. S. Khmelevtsov, *Laser Radiation in Turbulent Atmosphere*. Moscow, Russia: Nauka Press, 1976.
- [117] M. R. Chatterjee and F. H. A. Mohamed, "Modeling of power spectral density of modified von Karman atmospheric phase turbulence and acousto-optic chaos using scattered intensity profiles over discrete time intervals," in *Proc. SPIE Laser Commun. Propag. Through Atmosphere Oceans III*, vol. 9224. San Diego, CA, USA, 2014, pp. 922404-1–922404-16.
- [118] V. I. Tatarskii, *The Effects of the Turbulent Atmosphere on Wave Propagation*. Jerusalem, Israel: Israel Program Sci. Transl., 1971.
- [119] M. C. Roggermann and B. M. Welsh, *Imaging Through Turbulence*. Boca Raton, FL, USA: CRC Press, 1996.
- [120] H. Hemmati, Ed., *Near-Earth Laser Communications*. Boca Raton, FL, USA: CRC Press, 2009.
- [121] B. Beland, *The Infrared and Electro-Optical System Handbook*, vol. 2. Ann Arbor, MI, USA: SPIE Press, 1993.
- [122] T. E. Van Zandt, K. S. Gage, and J. M. Warnock, "An improve model for the calculation of profiles of wind, temperature, and humidity," in *Proc. 20th Conf. Radar Meteorol. Amer. Meteorol. Soc.*, Boston, MA, USA, 1981, pp. 129–135.
- [123] E. M. Dewan, "A model for C_n^2 (optical turbulence) profiles using radiosonde data," Phillips Lab., Hanscom, Airforce Base, MA, USA, Environ. Res., Tech. Rep. PL-TR-93-2043-1121, 1993.
- [124] V. I. Tatarskii, *Wave Propagation in a Turbulent Medium*. New York, NY, USA: McGraw-Hill, 1961.
- [125] L. C. Andrews, R. L. Phillips, and C. Y. Hopen, "Scintillation model for a satellite communication link at large zenith angles," *Opt. Eng.*, vol. 39, no. 12, pp. 3272–3280, 2000.
- [126] J. Parikh and V. K. Jain, "Study on statistical models of atmospheric channel for FSO communication link," in *Proc. Int. Conf. Eng. (NUICONE) Nirma Univ.*, Ahmedabad, India, 2011, pp. 1–7.
- [127] H. G. Sandalidis, "Performance analysis of a laser ground-station-to-satellite link with modulated Gamma-distributed irradiance fluctuations," *IEEE J. Opt. Commun. Netw.*, vol. 2, no. 11, pp. 938–943, Nov. 2010.
- [128] J. Park, E. Lee, and G. Yoon, "Average bit-error rate of the Alamouti scheme in Gamma-Gamma fading channels," *IEEE Photon. Technol. Lett.*, vol. 23, no. 4, pp. 269–271, Feb. 15, 2011.
- [129] J. Ma, K. Li, L. Tan, S. Yu, and Y. Cao, "Performance analysis of satellite-to-ground downlink coherent optical communications with spatial diversity over Gamma-Gamma atmospheric turbulence," *Appl. Opt.*, vol. 54, no. 25, pp. 7575–7585, 2015.
- [130] J. M. Jurado-Navas, J. M. Garrido-Balsells, J. F. Paris, and A. Puerta-Notario, "Numerical simulations of physical and engineering processes" in *A Unifying Statistical Model for Atmospheric Optical Scintillation*. InTech, 2011, ch. 8, pp. 181–206.
- [131] H. Samimi and M. Uysal, "Performance of coherent differential phase-shift keying free-space optical communication systems in M-distributed turbulence," *IEEE J. Opt. Commun. Netw.*, vol. 5, no. 7, pp. 704–710, Jul. 2013.
- [132] N. D. Chatzidiannidis, H. G. Sandalidis, G. K. Karagiannidis, S. A. Kotsopoulos, and M. Matthaiou, "New results on turbulence modeling for free-space optical systems," in *Proc. IEEE Int. Conf. Telecommun.*, Kochi, India, 2010, pp. 487–492.
- [133] M. A. Kashani, M. Uysal, and M. Kavehrad, "A novel statistical channel model for turbulence-induced fading in free-space optical systems," *J. Lightw. Technol.*, vol. 33, no. 11, pp. 2303–2312, Jun. 1, 2015.
- [134] R. Barrios and F. Dios, "Exponentiated Weibull model for the irradiance probability density function of a laser beam propagating through atmospheric turbulence," *Opt. Laser Technol.*, vol. 45, pp. 13–20, Feb. 2013.
- [135] F. S. Vetelino, C. Young, and L. Andrews, "Fade statistics and aperture averaging for Gaussian beam waves in moderate-to-strong turbulence," *Appl. Opt.*, vol. 46, no. 18, pp. 3780–3790, 2007.
- [136] A. B. Barrios and F. Dios, "Exponentiated Weibull fading model for free-space optical links with partially coherent beams under aperture averaging," *Opt. Eng.*, vol. 52, no. 4, 2013, Art. no. 046003.
- [137] M. Cheng, Y. Zhang, J. Gao, F. Wang, and F. Zhao, "Average capacity for optical wireless communication systems over exponentiated Weibull distribution non-Kolmogorov turbulent channels," *Appl. Opt.*, vol. 53, no. 18, pp. 4011–4017, 2014.
- [138] A. Harris, J. J. Sluss, Jr., H. H. Refai, and P. G. LoPresti, "Analysis of beam steering tolerances and divergence for various long range FSO communication links," in *Proc. SPIE Digit. Wireless Commun. VII Space Commun. Technol.*, vol. 5819. 2005, pp. 455–462.

- [139] R. Kingsbury, K. Riesing, and K. Cahoy, "Design of a free-space optical communication module for small satellites," in *Proc. Annu. AIAA/USU Conf. Small Satellites*, 2014, pp. 1–10.
- [140] J. Katz, "Planets as background noise sources in free space optical communication," *Adv. Electron. Mater. Devices Section, TDA Progr. Rep.* 42-85, 1986.
- [141] G. Thuillier *et al.*, *The Solar Spectral Irradiance From 200 to 2400 nm as Measured by the SOLSPEC Spectrometer From the ATLAS and EURECA Missions*, vol. 214. The Netherlands: Kluwer Academic, 2003, pp. 1–22.
- [142] D. Pissulla *et al.*, "Comparison of atmospheric spectral radiance measurements from five independently calibrated systems," *J. Photochem. Photobiol. Sci.*, vol. 8, no. 4, pp. 516–527, 2009.
- [143] P. W. Nugent, J. A. Shaw, and S. Piazzolla, "Infrared cloud imager development for atmospheric optical communication characterization, and measurements at the JPL table mountain facility," *Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, Tech. Rep.* 42-192, 2013.
- [144] Y. Dong, H. Liu, Z. Luo, Y. Li, and G. Jin, "Principle demonstration of fine pointing control system for inter-satellite laser communication," *Sci. China Technol. Sci.*, vol. 58, no. 3, pp. 449–453, 2015.
- [145] V. Sannibale, G. G. Ortiz, and W. H. Farr, "A sub-hertz vibration isolation platform for a deep space optical communication transceiver," in *Proc. SPIE Free Space Laser Commun. Technol. XXI*, vol. 7199. San Jose, CA, USA, 2009, pp. 719901-1–719901-9.
- [146] J. Horwath and C. Fuchs, "Aircraft to ground unidirectional laser-communications terminal for high-resolution sensors," in *Proc. SPIE Free Space Laser Commun. Technol. XXI*, vol. 7199. San Jose, CA, USA, 2009, pp. 719909-1–719909-7.
- [147] P. W. Scott and P. W. Young, "Impact of temporal fluctuations of signal-to-noise ratio (burst error) on free-space laser communications system design," in *Proc. SPIE Opt. Technol. Commun. Satellite Appl.*, vol. 616. Los Angeles, CA, USA, 1986, pp. 174–181.
- [148] S. Arnon and N. S. Kopeika, "Performance limitations of free-space optical communication satellite networks due to vibrations—Analog case," *Opt. Engg.*, vol. 36, no. 1, pp. 175–182, 1997.
- [149] C.-C. Chen and C. S. Gardner, "Impact of random pointing and tracking errors on the design of coherent and incoherent optical intersatellite communication links," *IEEE Trans. Commun.*, vol. 37, no. 3, pp. 252–260, Mar. 1989.
- [150] S. Arnon and N. S. Kopeika, "Laser satellite communication network-vibration effect and possible solutions," *Proc. IEEE*, vol. 85, no. 10, pp. 1646–1661, Oct. 1997.
- [151] J. Ma, X. Li, S. Yu, L. Tan, and Q. Han, "Influence of satellite vibration on optical communication performance for intersatellite laser links," *Opt. Rev.*, vol. 19, no. 1, pp. 25–28, 2012.
- [152] H. Guo, B. Luo, Y. Ren, S. Zhao, and A. Dang, "Influence of beam wander on uplink of ground-to-satellite laser communication and optimization for transmitter beam radius," *Opt. Lett.*, vol. 35, no. 12, pp. 1977–1979, 2010.
- [153] G. A. Tyler, "Bandwidth considerations for tracking through turbulence," *J. Opt. Soc. America A*, vol. 11, no. 1, pp. 358–367, 1994.
- [154] M. Toyoshima, T. Jono, K. Nakagawa, and A. Yamamoto, "Optimum divergence angle of a Gaussian beam wave in the presence of random jitter in free-space laser communication systems," *J. Opt. Soc. America A*, vol. 19, no. 3, pp. 567–571, 2002.
- [155] H. Hemmati, "Interplanetary laser communications," *Opt. Photon. News*, vol. 18, no. 11, pp. 22–27, 2007.
- [156] H. J. Kramer, *Observation of the Earth and Its Environment: Survey of Missions and Sensors*. Heidelberg, Germany: Springer, 2002.
- [157] J. D. Barry and G. S. Mecherle, "Beam pointing error as a significant design parameter for satellite-borne, free-space optical communication systems," *Opt. Engg.*, vol. 24, no. 6, 1985, Art. no. 241049.
- [158] S. Arnon, S. Rotman, and N. S. Kopeika, "Beam width and transmitter power adaptive to tracking system performance for free-space optical communication," *Appl. Opt.*, vol. 36, no. 24, pp. 6095–6101, 1997.
- [159] A. Viswanath, V. K. Jain, and S. Kar, "Analysis of earth-to-satellite free-space optical link performance in the presence of turbulence, beam-wander induced pointing error and weather conditions for different intensity modulation schemes," *IET Commun.*, vol. 9, no. 18, pp. 2253–2258, Dec. 2015.
- [160] A. García-Zambrana, B. Castillo-Vázquez, and C. Castillo-Vázquez, "Asymptotic error-rate analysis of FSO links using transmit laser selection over Gamma-Gamma atmospheric turbulence channels with pointing errors," *Opt. Express*, vol. 20, no. 3, pp. 2096–2109, 2012.
- [161] D. K. Borah and D. G. Voelz, "Pointing error effects on free-space optical communication links in the presence of atmospheric turbulence," *J. Lightw. Technol.*, vol. 27, no. 18, pp. 3965–3973, Sep. 15, 2009.
- [162] C. M. Pong *et al.*, "Achieving high-precision pointing on exoplanetsat: Initial feasibility analysis," in *Proc. SPIE*, vol. 7731. 2010, Art. no. 77311V.
- [163] B. Hamzeh and M. Kavehrad, "Characterization of cloud obscured free space optical channels," *Center Inf. Commun. Technol. Res. Dept. Elect. Eng., Pennsylvania State Univ., State College, PA, USA, Tech. Rep.*
- [164] R. A. Schiffer and W. B. Rossow, "The international satellite cloud climatology project ISCCP: The first project of the world climate research programme," *Bull. Amer. Meteorol. Soc.*, vol. 64, no. 7, pp. 779–784, Jul. 1983.
- [165] W. L. Hatch, "Selective guide to climatic data sources," *Dept. Commerce, Nat. Oceanic Atmospheric Admin., Environ. Data Inf. Service, Washington, DC, USA, Tech. Rep.* 4.11, 1988. [Online]. Available: http://docs.lib.noaa.gov/noaa_documents/NOAA_historic_documents/WB/Key_Meteorological_Records_Doc/KMRD_4.11.pdf
- [166] R. A. Venkat and D. W. Young, "Cloud-free line-of-sight estimation for free space optical communications," in *Proc. SPIE Atmospheric Propag. X*, vol. 8732. Baltimore, MD, USA, 2013, pp. 873205-1–873205-10.
- [167] C. I. Moore, J. Griffiths, and L. Thomas, "Ground station diversity requirements for cloud free LOS links to geostationary orbits," in *Proc. Int. Conf. Space Opt. Syst. Appl.*, 2015.
- [168] S. Arnon, D. Sadot, and N. S. Kopeika, "Analysis of optical pulse distortion through clouds for satellite to earth adaptive optical communication," *J. Modern Opt.*, vol. 41, no. 8, pp. 1591–1605, 1994.
- [169] S. Arnon and N. S. Kopeika, "Adaptive optical transmitter and receiver for space communication through thin clouds," *Appl. Opt.*, vol. 36, no. 9, pp. 1987–1993, 1997.
- [170] P. W. Nugent, J. A. Shaw, and S. Piazzolla, "Infrared cloud imaging in support of earth-space optical communication," *Opt. Express*, vol. 17, no. 10, pp. 7862–7872, 2009.
- [171] F. Roddier, "The effects of atmospheric turbulence in optical astronomy," in *Progress in Optics*, vol. 19. New York, NY, USA: North-Holland, 1981.
- [172] B. Smutny *et al.*, "In-orbit verification of optical inter-satellite communication links based on homodyne BPSK," in *Proc. SPIE Free Space Laser Commun. Technol. XX*, vol. 6877. 2008, pp. 687702-1–687702-6.
- [173] B. Smutny *et al.*, "5.6 Gbps optical intersatellite communication link," in *Proc. SPIE Free Space Laser Commun. Technol. XXI*, vol. 7199. San Jose, CA, USA, 2009, pp. 719906-1–719906-8.
- [174] "Laser link offers high-speed delivery," *ESA Press Release*, 2014. [Online]. Available: http://www.esa.int/Our_Activities/Observing_the_Earth/Copernicus/Sentinel-1/Laser_link_offers_high-speed_delivery
- [175] H. Zech *et al.*, "LCT for EDRS: LEO to GEO optical communications at 1.8 Gbps between Alphasat and Sentinel 1a," in *Proc. SPIE Unmanned/Unattended Sensors Sensor Netw. XI Adv. Free Space Opt. Commun. Tech. Appl.*, vol. 9647. Toulouse, France, 2015, pp. 96470J-1–96470J-8.
- [176] D. Zhou, H. H. Refai, P. G. LoPresti, and M. Atiquzzaman, "Control algorithm development for mobile FSO node alignment," in *Proc. IEEE/AIAA 28th Digit. Avionics Syst. Conf.*, Orlando, FL, USA, 2009, pp. 6.A.3-1–6.A.3-12.
- [177] M. Guelman *et al.*, "Acquisition and pointing control for inter-satellite laser communications," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 40, no. 4, pp. 1239–1248, Oct. 2004.
- [178] D. V. Murphy, "Atmospheric-turbulence compensation experiments using cooperative beacons," *Lincoln Lab. J.*, vol. 5, no. 1, pp. 25–44, 1992.
- [179] J. A. Louthain and J. D. Schmidt, "Anisoplanatism in airborne laser communication," *Opt. Express*, vol. 16, no. 14, pp. 10769–10785, 2008.
- [180] M. A. van Dam *et al.*, "Angular anisoplanatism in laser guide star adaptive optics," *W. M. Keck Observatory, Lincoln Lab., Massachusetts Inst. Technol., and Caltech Opt. Observatories, Waimea, HI, USA and Pasadena, CA, USA, Tech. Rep.*, 2006.
- [181] J. M. Kahn, "1 Gbit/s PSK homodyne transmission system using phase-locked semiconductor lasers," *IEEE Photon. Technol. Lett.*, vol. 1, no. 10, pp. 340–342, Oct. 1989.
- [182] O. Lidoyne, P. Gallion, C. Chabran, and G. Debarge, "Locking range, phase noise and power spectrum of an injection-locked semiconductor laser," *IEE Proc. J. Optoelectron.*, vol. 137, no. 3, pp. 147–154, Jun. 1990.
- [183] Y. Shoji, M. J. Fice, Y. Takayama, and A. J. Seeds, "A pilot-carrier coherent LEO-to-ground downlink system using an optical injection phase lock loop (OIPLL) technique," *J. Lightw. Technol.*, vol. 30, no. 16, pp. 2696–2706, Aug. 15, 2012.
- [184] F. Zhao, S. Yu, J. Ma, and L. Tan, "Effect of Doppler shift on differential phase-shift keying receivers using interferometric demodulation and balanced detection in intersatellite laser communication links," *Opt. Engg.*, vol. 49, no. 10, 2010, Art. no. 105001.
- [185] Q. Yang, L. Tan, and J. Ma, "Doppler characterization of laser inter-satellite links for optical LEO satellite constellations," *Opt. Commun.*, vol. 282, no. 17, pp. 3547–3552, 2009.

- [186] T. Ando, E. Haraguchi, K. Tajima, and S. Yamakawa, "Coherent homodyne receiver with a compensator of Doppler shifts for inter orbit optical communication," in *Proc. SPIE Free Space Laser Commun. Technol. XXIII*, vol. 7923, San Francisco, CA, USA, 2011.
- [187] E. Swanson and V. Chan, "Heterodyne spatial tracking system for optical space communication," *IEEE Trans. Commun.*, vol. 34, no. 2, pp. 118–126, Feb. 1986.
- [188] K. Tsukamoto and N. Morinaga, "Heterodyne optical detection/spatial tracking system using spatial field pattern matching between signal and local lights," *J. Electron. Commun. Japan 1*, vol. 77, no. 12, pp. 73–87, 1994.
- [189] A. Saksonov, A. Shlomi, and N. S. Kopeika, "Vibration noise control in laser satellite communication," in *Proc. SPIE Acquisition Tracking Pointing XV*, vol. 4365, Orlando, FL, USA, 2001, pp. 188–194.
- [190] X.-S. Ma *et al.*, "Quantum teleportation over 143 kilometres using active feed-forward," *J. Nat.*, vol. 489, pp. 269–273, Sep. 2012.
- [191] S. Arnon, S. R. Rotman, and N. S. Kopeika, "Bandwidth maximization for satellite laser communication," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 35, no. 2, pp. 675–682, Apr. 1999.
- [192] K. Inagaki and Y. Karasawa, "Ultrahigh-speed optical-beam steering by optical phased array antenna," in *Proc. SPIE Free Space Laser Commun. Technol. VIII*, vol. 2699, San Jose, CA, USA, 1996, pp. 210–217.
- [193] S. Arnon, "Power versus stabilization for laser satellite communication," *Appl. Opt.*, vol. 38, no. 15, pp. 3229–3233, 1999.
- [194] W. M. Neubert, W. R. Leeb, and A. L. Scholts, "Experimental results on an optical array antenna for non-mechanical beam steering," in *Proc. SPIE Free Space Laser Commun. Technol. IV*, vol. 1635, Los Angeles, CA, USA, pp. 82–89.
- [195] S. Arnon and N. S. Kopeika, "Adaptive bandwidth for satellite optical communication," *IEE Proc. Optoelectron.*, vol. 145, no. 2, pp. 109–115, Apr. 1998.
- [196] T. Ho, "Pointing, acquisition, and tracking systems for free-space optical communication links," Ph.D. dissertation, Dept. Elect. Comput. Eng., Univ. Maryland, College Park, MD, USA, 2007.
- [197] G. A. Koepf, R. Peters, and R. G. Marshalek, "Analysis of burst error occurrence on optical intersatellite link (ISL) design," in *Proc. SPIE Opt. Technol. Commun. Satellite Appl.*, vol. 616, Los Angeles, CA, USA, 1986, pp. 129–136.
- [198] S. Arnon and N. S. Kopeika, "Performance limitations of free space optical communication satellite networks due to vibrations—Analog case," *Opt. Eng.*, vol. 36, no. 1, pp. 175–182, 1997.
- [199] S. Arnon, S. R. Rotman, and N. S. Kopeika, "Performance limitations of free-space optical communication satellite networks due to vibrations: Direct detection digital mode," *Opt. Eng.*, vol. 36, no. 11, pp. 3148–3157, 1997.
- [200] V. K. Skormin, M. A. Tascillo, and T. E. Busch, "Demonstration of a jitter rejection technique for free-space laser communication," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 33, no. 2, pp. 568–576, Apr. 1997.
- [201] T. N. T. Nguyen, "Laser beacon tracking for free-space optical communication on small-satellite platforms in low-Earth orbit," M.S. thesis, Dept. Aeronaut. Astronaut., Massachusetts Inst. Technol., Cambridge, MA, USA, 2015.
- [202] Y. Takayama *et al.*, "Tracking and pointing characteristics of OICETS optical terminal in communication demonstrations with ground stations," in *Proc. SPIE Int. Soc. Opt. Eng.*, San Jose, CA, USA, 2007, pp. 645707-1–645707-9.
- [203] E. Perez, M. Bailly, and J. M. Pairot, "Pointing acquisition and tracking system for silex inter satellite optical link," in *Proc. SPIE Acquisition Tracking Pointing III*, vol. 1111, Orlando, FL, USA, 1989, pp. 277–288.
- [204] M. Pfennigbauer, "Design of optical space-to-ground links for the international space station," Ph.D. dissertation, Institut für Nachrichtentechnik und Hochfrequenztechnik, TU Wien, Vienna, Austria, 2004.
- [205] J. M. Wang, J. M. Kahn, and K. Y. Lau, "Minimization of acquisition time in short-range free-space optical communication," *Appl. Opt.*, vol. 41, no. 36, pp. 7592–7602, 2002.
- [206] X. Li, S. Yu, J. Ma, and L. Tan, "Analytical expression and optimization of spatial acquisition for intersatellite optical communications," *Opt. Express*, vol. 19, no. 3, pp. 2381–2390, 2011.
- [207] M. Scheinfeld, N. S. Kopeika, and A. Shlomi, "Acquisition time calculation and influence of vibrations for microsatellite laser communication in space," in *Proc. SPIE Acquisition Tracking Pointing XV*, vol. 4365, Orlando, FL, USA, 2001, pp. 195–206.
- [208] L. Xin, S. Quanyou, M. Jing, Y. Siyuan, and T. Liying, "Spatial acquisition optimization based on average acquisition time for intersatellite optical communications," in *Proc. 10th Russian–Chinese Symp. Laser Phys. Laser Technol. (RCSLPLT) Acad. Symp. Optoelectron. Technol. (ASOT)*, Harbin, China, 2010, pp. 244–248.
- [209] I. M. Teplyakov, "Acquisition and tracking of laser beams in space communications," *Acta Astronaut.*, vol. 7, no. 3, pp. 341–355, 1980.
- [210] H. Kaushal, V. K. Jain, and S. Kar, "Acquisition time for laser uplink communication to space-borne satellite using transmit diversity in atmospheric turbulence," in *Proc. 2nd Int. Conf. Future Comput. Commun. (ICFCC)*, vol. 1, Wuhan, China, 2010, pp. 840–845.
- [211] A. Harris and T. A. Giurma, "Minimization of acquisition time in a wavelength diversified FSO link between mobile platforms," in *Proc. SPIE Atmospheric Propag. IV*, vol. 6551, 2007, pp. 655108-1–655108-10.
- [212] B. G. Boone *et al.*, "Optical communications development for space-craft applications," *Johns Hopkins Apl. Tech. Dig.*, vol. 25, no. 4, pp. 306–315, 2004.
- [213] C. Hindman and L. Toberton, "Beaconless satellite laser acquisition-modeling and feasibility," in *Proc. IEEE Mil. Commun. Conf. (MILCOM)*, Monterey, CA, USA, 2004, pp. 41–47.
- [214] H. T. Yura and W. G. McKinley, "Aperture averaging of scintillation for space-to-ground optical communication applications," *Appl. Opt.*, vol. 22, no. 11, pp. 1608–1609, Jun. 1983.
- [215] L. C. Andrews, "Aperture-averaging factor for optical scintillations of plane and spherical waves in the atmosphere," *J. Opt. Soc. America A*, vol. 9, no. 4, pp. 597–600, 1992.
- [216] N. Perlot and D. Fritzsch, "Aperture averaging, theory and measurements," in *Proc. SPIE Free Space Laser Commun. Technol. XVI*, vol. 5338, San Jose, CA, USA, 2004, pp. 233–242.
- [217] R. F. Lutomirski and H. T. Yura, "Aperture-averaging factor of a fluctuating light signal," *J. Opt. Soc. America*, vol. 59, no. 9, pp. 1247–1248, Sep. 1969.
- [218] L. M. Wasiczko and C. C. Davis, "Aperture averaging of optical scintillations in the atmosphere: Experimental results," in *Proc. SPIE Atmospheric Propag. II*, vol. 5793, Orlando, FL, USA, 2005, pp. 197–208.
- [219] S. D. Lyke, D. G. Voelz, and M. C. Roggemann, "Probability density of aperture-averaged irradiance fluctuations for long range free space optical communication links," *Appl. Opt.*, vol. 48, no. 33, pp. 6511–6527, 2009.
- [220] J. A. Mendenhall *et al.*, "Design of an optical photon counting array receiver system for deep-space communications," *Proc. IEEE*, vol. 95, no. 10, pp. 2059–2069, Oct. 2007.
- [221] R. Barrios and F. Dios, "Exponentiated Weibull distribution family under aperture averaging for Gaussian beam waves," *Opt. Express*, vol. 20, no. 12, pp. 13055–13064, 2012.
- [222] A. Kumar and V. K. Jain, "Antenna aperture averaging with different modulation schemes for optical satellite communication links," *J. Opt. Netw.*, vol. 6, no. 12, pp. 1323–1328, 2007.
- [223] A. Malpani and A. Malpani, "Performance analysis of FSO communication with aperture averaging under varying atmospheric turbulence regimes," in *Proc. Int. Conf. Wireless Opt. Commun. Netw.*, Indore, India, 2012.
- [224] H. Liao, Q. Zhang, J. Ma, and L.-Y. Tan, "Performance evaluation of channel coding and aperture averaging for the satellite-to-ground optical communications with APD receivers," in *Proc. Int. Conf. Commun. Netw. China*, Harbin, China, 2011, pp. 899–902.
- [225] A. Viswanath, P. Gopal, V. K. Jain, and S. Kar, "Performance enhancement by aperture averaging in terrestrial and satellite free space optical links," *IET Optoelectron.*, vol. 10, no. 3, pp. 111–117, Jun. 2016.
- [226] M. Jeganathan *et al.*, "Data analysis results from the GOLD experiments," in *Proc. SPIE Free Space Laser Commun. Technol. IX*, vol. 2990, San Jose, CA, USA, 1998, pp. 70–81.
- [227] M. R. Garcia-Talavera *et al.*, "Ground-to-satellite bidirectional laser links for validation of atmospheric turbulence model," in *Proc. SPIE Free Space Laser Commun. Active Laser Illumination III*, vol. 5160, San Diego, CA, USA, 2004, pp. 44–55.
- [228] C. Higgs, H. Barclay, D. Murphy, and C. A. Primmerman, "Multibeam illumination," *Lincoln Lab. J.*, vol. 11, no. 1, pp. 8–22, 1998.
- [229] W.-M. Wu, Y. Ning, P.-F. Zhang, X.-X. Feng, and C.-H. Qiao, "Scintillation analysis for multiple uplink Gaussian beams in the presence of beam wander," in *Proc. SPIE*, vol. 9142, Suzhou, China, 2013, pp. 914223-1–914223-6.
- [230] Z. Chen *et al.*, "Channel correlation in aperture receiver diversity systems for free-space optical communication," *J. Opt.*, vol. 14, no. 12, 2012, Art. no. 125710.
- [231] H. Kaushal, V. K. Jain, and S. Kar, "Ground-to-satellite optical communication link performance with spatial diversity in weak atmospheric turbulence," *J. Fiber Integr. Opt.*, vol. 29, no. 4, pp. 315–340, 2010.
- [232] M. Niu, "Coherent optical wireless communications over atmospheric turbulence channels," Ph.D. dissertation, Dept. Elect. Comput. Eng., Univ. Brit. Columbia, Vancouver, BC, Canada, 2012.
- [233] K. Li, J. Ma, A. Belmonte, L. Tan, and S. Yu, "Performance analysis of satellite-to-ground downlink optical communications with spatial diversity over Gamma–Gamma atmospheric turbulence," *Opt. Eng.*, vol. 54, no. 12, pp. 1–9, 2015.
- [234] W. J. Hurd *et al.*, "Exo-atmospheric telescopes for deep space optical communications," in *Proc. IEEE Aerosp. Conf.*, 2006, pp. 1–13.

- [235] M. K. Simon and V. A. Vlnrotter, "Alamouti-type space time coding for free space optical communication with direct detection," *IEEE Trans. Wireless Commun.*, vol. 4, no. 1, pp. 35–39, Jan. 2002.
- [236] N. Letzepis and A. G. I. Fabregas, "Outage probability of the Gaussian MIMO free-space optical channel with PPM," *IEEE Trans. Commun.*, vol. 57, no. 12, pp. 3682–3690, Dec. 2009.
- [237] F. Xu, M.-A. Khalighi, P. Causse, and S. Bourennane, "Performance of coded time-diversity free-space optical links," in *Proc. IEEE 24th Biennial Symp. Commun.*, Kingston, ON, Canada, 2008, pp. 146–149.
- [238] M. Czaputa, T. Javornik, E. Leitgeb, G. Kandus, and Z. Ghassemloo, "Investigation of punctured LDPC codes and time-diversity on free-space optical links," in *Proc. Int. Conf. Telecommun.*, 2011, pp. 359–362.
- [239] J. N. Laneman, D. N. C. Tse, and G. W. Wornell, "Cooperative diversity in wireless networks: Efficient protocols and outage behavior," *IEEE Trans. Inf. Theory*, vol. 50, no. 12, pp. 3062–3080, Dec. 2004.
- [240] M. Safari and M. Uysal, "Relay-assisted free-space optical communication," *IEEE Trans. Wireless Commun.*, vol. 7, no. 12, pp. 5441–5449, Dec. 2008.
- [241] X. Wang *et al.*, "Performance analysis of high altitude platform multi-hop optical communication with non-regenerative system," in *Proc. SPIE Laser Commun. Technol. Syst.*, vol. 8906. Beijing, China, 2013.
- [242] M. R. Bhatnagar and M. K. Arti, "Performance analysis of hybrid satellite-terrestrial FSO cooperative system," *IEEE Photon. Technol. Lett.*, vol. 25, no. 22, pp. 2197–2200, Nov. 2013.
- [243] L. Yang and M. O. Hasna, "Performance analysis of amplify-and-forward hybrid satellite-terrestrial networks with cochannel interference," *IEEE Trans. Commun.*, vol. 63, no. 12, pp. 5052–5061, Dec. 2015.
- [244] P. Wang *et al.*, "Performance analysis for relay-aided multihop BPPM FSO communication system over exponentiated Weibull fading channels with pointing error impairments," *IEEE Photon. J.*, vol. 7, no. 4, pp. 1–20, Aug. 2015.
- [245] M. A. Kashani, M. Safari, and M. Uysal, "Optimal relay placement and diversity analysis of relay-assisted free-space optical communication systems," *IEEE/OSA J. Opt. Commun. Netw.*, vol. 5, no. 1, pp. 37–47, Jan. 2013.
- [246] B. Zhu, J. Cheng, and L. Wu, "Optimal FSO relay nodes placement with link obstacles and infeasible regions," in *Proc. IEEE GLOBECOM*, Austin, TX, USA, 2014, pp. 2137–2142.
- [247] M. A. Kashani, M. Safari, and M. Uysal, "Optimal relay placement in cooperative free-space optical communication systems," in *Proc. IEEE Wireless Commun. Netw. Conf.*, 2012, pp. 995–999.
- [248] R. Boluda-Ruiz, A. García-Zambrana, B. Castillo-Vázquez, and C. Castillo-Vázquez, "Impact of relay placement on diversity order in adaptive selective DF relay-assisted FSO communications," *Opt. Express*, vol. 23, no. 3, pp. 2600–2617, 2015.
- [249] S. Kazemlou, S. Hranilovic, and S. Kumar, "All-optical multihop free-space optical communication systems," *J. Lightw. Technol.*, vol. 28, no. 18, pp. 2663–2669, Sep. 15, 2011.
- [250] E. Bayaki, D. S. Michalopoulos, and R. Schober, "EDFA-based all-optical relaying in free-space optical systems," *IEEE Trans. Commun.*, vol. 60, no. 12, pp. 3797–3807, Dec. 2012.
- [251] M. A. Kashani, M. M. Rad, M. Safari, and M. Uysal, "All-optical amplify-and-forward relaying system for atmospheric channels," *IEEE Commun. Lett.*, vol. 16, no. 10, pp. 1684–1687, Oct. 2012.
- [252] P. V. Trinh, A. T. Pham, H. T. T. Pham, and N. T. Dang, "BER analysis of all-optical AF dual-hop FSO systems over Gamma-Gamma channels," in *Proc. IEEE Int. Conf. Photon.*, 2013, pp. 175–177.
- [253] L. Yang, X. Gao, and M.-S. Alouini, "Performance analysis of relay-assisted all-optical FSO networks over strong atmospheric turbulence channels with pointing errors," *J. Lightw. Technol.*, vol. 32, no. 23, pp. 4613–4620, Dec. 1, 2014.
- [254] J.-Y. Wang, J.-B. Wang, M. Chen, and X. Song, "Performance analysis for free-space optical communications using parallel all-optical relays over composite channels," *IET Commun.*, vol. 8, no. 9, pp. 1437–1446, Jun. 2014.
- [255] P. V. Trinh, N. T. Dang, and A. T. Pham, "All-optical relaying FSO systems using EDFA combined with optical hard-limiter over atmospheric turbulence channels," *J. Lightw. Technol.*, vol. 33, no. 19, pp. 4132–4144, Oct. 1, 2015.
- [256] F. E. Zocchi, "A simple analytical model of adaptive optics for direct detection free-space optical communication," *Opt. Commun.*, vol. 248, nos. 4–6, pp. 359–374, Apr. 2005.
- [257] P. R. Barbier, D. W. Rush, M. L. Plett, and P. Polak-Dingels, "Performance improvement of a laser communication link incorporating adaptive optics," in *Proc. SPIE Artif. Turbul. Imaging Wave Propag.*, vol. 3432. San Diego, CA, USA, 1998, pp. 93–102.
- [258] R. K. Tyson, *Principles of Adaptive Optics*. Boston, MA, USA: Academic Press, 1998.
- [259] N. B. Baranova, A. V. Mamaev, N. F. Pilipetsky, V. V. Shkunov, and B. Y. Zel'dovich, "Wavefront dislocation: Topological limitations for adaptive systems with phase conjugation," *J. Opt. Soc. America*, vol. 73, no. 5, pp. 525–528, 1983.
- [260] D. L. Fried, "Branch point problem in adaptive optics," *J. Opt. Soc. America A*, vol. 15, no. 10, pp. 2759–2768, 1998.
- [261] M. A. Vorontsov, G. W. Carhart, and J. C. Ricklin, "Adaptive phase-distortion correction based on parallel gradient-descent optimization," *Opt. Lett.*, vol. 22, no. 12, pp. 907–909, 1997.
- [262] M. A. Vorontsov and V. P. Sivokon, "Stochastic parallel-gradient-descent technique for high-resolution wave-front phase-distortion correction," *J. Opt. Soc. America A*, vol. 15, no. 10, pp. 2745–2758, 1998.
- [263] C. A. Thompson *et al.*, "Free space optical communications utilizing MEMS adaptive optics correction," in *Proc. SPIE Free Space Laser Commun. Laser Imaging II*, vol. 4821. 2002, pp. 129–138.
- [264] T. Weyrauch *et al.*, "Microscale adaptive optics: Wave-front control with a μ -mirror array and a VLSI stochastic gradient descent controller," *Appl. Opt.*, vol. 40, no. 24, pp. 4243–4253, 2001.
- [265] A. Viswanath, S. Singh, V. K. Jain, and S. Kar, "Design and implementation of MOEMS based ground to satellite free space optical link under turbulence condition," *Proc. Comput. Sci.*, vol. 46, pp. 1216–1222, Dec. 2015.
- [266] K. Cahoy, A. Marinan, C. E. Kerr, K. Cheng, and S. Jamil, "Cubesat deformable mirror demonstration," in *Proc. SPIE Space Tele. Instrum. Opt. Infrared Millim. Wave*, vol. 8442. Amsterdam, The Netherlands, 2012, pp. 84424F1-1–84424F1-11.
- [267] N. Védrenne, J.-M. Conan, C. Petit, and V. Michau, "Adaptive optics for high data rate satellite to ground laser link," in *Proc. SPIE Free Space Laser Commun. Technol. XXVIII*, vol. 9739. San Francisco, CA, USA, 2016, pp. 1–28.
- [268] S. S. Olivier and D. T. Gavel, "Tip/tilt compensation for astronomical imaging," *J. Opt. Soc. America A*, vol. 11, no. 1, pp. 368–374, 1994.
- [269] J. W. Armstrong, C. Yeh, and K. E. Wilson, "Earth-to-deep-space optical communications system with adaptive tilt and scintillation correction by use of near-earth relay mirrors," *Opt. Lett.*, vol. 23, no. 14, pp. 1087–1089, 1998.
- [270] J. C. Juarez, D. M. Brown, and D. W. Young, "Antenna gain of actively compensated free-space optical communication systems under strong turbulence conditions," *Opt. Express*, vol. 22, no. 10, pp. 12551–12562, 2014.
- [271] D. P. Greenwood, "Bandwidth specification for adaptive optics systems," *J. Opt. Soc. America*, vol. 67, no. 3, pp. 390–393, 1977.
- [272] A. Viswanath, H. Kaushal, V. K. Jain, and S. Kar, "Evaluation of performance of ground to satellite free space optical link under turbulence conditions for different intensity modulation schemes," in *Proc. SPIE Free Space Laser Commun. Atmospheric Propag. (XXVI)*, vol. 8971. San Francisco, CA, USA, 2014, pp. 1–12.
- [273] X. Zhu and J. M. Kahn, "Pilot-symbol assisted modulation for correlated turbulent free-space optical channels," in *Proc. SPIE Int. Symp. Opt. Sci. Technol.*, San Diego, CA, USA, 2001, pp. 138–145.
- [274] N. D. Chatzidiamantis, G. K. Karagiannidis, and M. Uysal, "Generalized maximum-likelihood sequence detection for photon-counting free space optical systems," *IEEE Trans. Commun.*, vol. 58, no. 12, pp. 3381–3385, Dec. 2010.
- [275] M. L. B. Riediger, R. Schober, and L. Lampe, "Blind detection of on-off keying for free-space optical communications," in *Proc. IEEE Can. Conf. Elect. Comput. Eng. (CCECE)*, Niagara Falls, ON, Canada, 2008, pp. 1361–1364.
- [276] N. D. Chatzidiamantis, M. Uysal, T. A. Tsiftsis, and G. K. Karagiannidis, "Iterative near maximum-likelihood sequence detection for MIMO optical wireless systems," *J. Lightw. Technol.*, vol. 28, no. 7, pp. 1064–1070, Apr. 1, 2010.
- [277] B. Moision and J. Hamkins, "Deep-space optical communications downlink budget: Modulation and coding," Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, IPN Progr. Rep. 42-154, 2003.
- [278] A. Khatoon, W. Cowley, and N. Letzepis, "Capacity of adaptive free-space optical channel using bi-directional links," in *Proc. SPIE Laser Commun. Propag. Through Atmos. Oceans*, vol. 8517. San Diego, CA, USA, 2012, Art. no. 85170X.
- [279] R. M. Gagliardi and S. Karp, *Optical Communications*. New York, NY, USA: Wiley, 1976.
- [280] R. M. Gagliardi and S. Karp, "M-ary Poisson detection and optical communications," *IEEE Trans. Commun. Technol.*, vol. 17, no. 2, pp. 208–216, Apr. 1969.
- [281] B. Reiffen and H. Sherman, "An optimum demodulator for Poisson processes: Photon source detectors," *Proc. IEEE*, vol. 51, no. 10, pp. 1316–1320, Oct. 1963.

- [282] R. G. Lipes, "Pulse-position-modulation coding as near-optimum utilization of photon counting channel with bandwidth and power constraints," Commun. Syst. Res. Section, Nat. Aeronautics Space Admin., Pasadena, CA, USA, DSN Tech. Rep. PR 42-56, 1980.
- [283] M. K. Simon and V. A. Vlnrotter, "Multi-pulse pulse-position-modulation signaling for optical communication with direct detection," Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, IPN Progr. Rep. 42-155, 2003.
- [284] D. Zwillinger, "Differential PPM has a higher throughput than PPM for the band-limited and average-power-limited optical channel," *IEEE Trans. Inf. Theory*, vol. 34, no. 5, pp. 1269–1273, Sep. 1988.
- [285] S. Tiwari, V. K. Jain, and S. Kar, "Performance evaluation of different pulse position modulation schemes in atmospheric turbulence channel for ground-to-satellite optical communication," in *Proc. Int. Conf. Opt. Eng.*, Belgam, India, 2012, pp. 1–6.
- [286] P. Gopal, V. K. Jain, and S. Kar, "Performance analysis of ground to satellite FSO system with DAPPM scheme in weak atmospheric turbulence," in *Proc. Int. Conf. Fiber Opt. Photon.*, 2012, p. 43.
- [287] C. Liu *et al.*, "Packet error rate analysis of DPIM for free-space optical links with turbulence and pointing errors," *Chin. Opt. Lett.*, vol. 12, no. 1, 2014, Art. no. S10101.
- [288] M. Choudhary, R. Bose, and V. K. Jain, "Study of trellis coded overlapping PPM and overlapping multi-pulse PPM schemes for deep space optical communication systems," in *Proc. Int. Conf. Optoelectron. Fiber Opt. Photon.*, Kochi, India, 2004, pp. 1–10.
- [289] C. N. Georgiades, "Modulation and coding for throughput-efficient optical free-space links," Dept. Elect. Eng., Texas A&M Univ., College Station, TX, USA, Tech Rep. NASA-CR-193079, 1993.
- [290] D.-S. Shiu and J. M. Kah, "Differential pulse-position modulation for power-efficient optical communication," *IEEE Trans. Commun.*, vol. 47, no. 8, pp. 1201–1210, Aug. 1999.
- [291] D. Zwillinger, "Differential PPM has a higher throughput than PPM for the band-limited and average-power-limited optical channel," *IEEE Trans. Inf. Theory*, vol. 34, no. 5, pp. 1269–1273, Sep. 1988.
- [292] N. M. Aldibbiat, Z. F. Ghassemlooy, and R. McLaughlin, "Performance of dual header-pulse interval modulation (DH-PIM) for optical wireless communication systems," in *Proc. SPIE Opt. Wireless Commun. III*, vol. 4214, Boston, MA, USA, 2001, pp. 144–152.
- [293] I. B. Djordjevic, "Adaptive modulation and coding for free-space optical channels," *IEEE/OSA J. Opt. Commun. Netw.*, vol. 2, no. 5, pp. 221–229, May 2010.
- [294] M. Gubergits, R. E. Goot, U. Mahlab, and S. Arnon, "Adaptive power control for satellite to ground laser communication," *Int. J. Satellite Commun. Netw.*, vol. 25, no. 4, pp. 323–348, 2007.
- [295] A. Eslami, S. Vangala, and H. Pishro-Nik, "Hybrid channel codes for efficient FSO/RF communication systems," *IEEE Trans. Commun.*, vol. 58, no. 10, pp. 2926–2938, Oct. 2010.
- [296] A. Andò, G. Messineo, L. Curcio, S. Mangione, P. Gallo, and A. C. Busacca, "Rateless codes performance analysis in correlated channel model for GEO free space optics downlinks," in *Proc. Int. Conf. Space Opt. Syst. Appl. (ICSOS)*, Corsica, France, 2012, pp. 1–6.
- [297] A. Andò *et al.*, "Fading mitigation coding techniques for space to ground free space optical communications," in *Proc. Euro Med Telco Conf. (EMTC)*, Naples, Italy, 2014.
- [298] W. Zhang and S. Hranilovic, "Short-length raptor codes for mobile free-space optical channels," in *Proc. IEEE Int. Conf. Commun.*, 2009, pp. 2546–2550.
- [299] S. Arnon, J. R. Barry, G. K. Karagiannidis, R. Schober, and M. Uysal, Eds., *Advanced Optical Wireless Communication System*. Cambridge, U.K.: Cambridge Univ. Press, 2012.
- [300] N. Perlot and T. de Cola, "Throughput maximization of optical LEO-ground links," in *Proc. SPIE Free Space Laser Commun. Technol. XXIV*, vol. 8246, 2012, Art. no. 82460V.
- [301] N. D. Chatzidiamantis, A. S. Lioumpas, G. K. Karagiannidis, and S. Arnon, "Adaptive subcarrier PSK intensity modulation in free space optical systems," *IEEE Trans. Commun.*, vol. 59, no. 5, pp. 1368–1377, May 2011.
- [302] H. Kaushal, V. K. Jain, and S. Kar, "Improvement of ground to satellite FSO link performance using transmit diversity in weak atmospheric turbulence," in *Proc. Int. Conf. Intell. Adv. Syst.*, Kuala Lumpur, Malaysia, 2010, pp. 1–6.
- [303] R. Lange and B. Smutny, "Homodyne BPSK-based optical intersatellite communication links," in *Proc. SPIE Free Space Laser Commun. Technol. XIX*, vol. 6457, 2007, pp. 1–9.
- [304] J. H. Sinsky *et al.*, "RZ-DPSK transmission using a 42.7-Gb/s integrated balanced optical front end with record sensitivity," *J. Lightw. Technol.*, vol. 22, no. 1, pp. 180–185, Jan. 2004.
- [305] W. A. Atia and R. S. Bonduant, "Demonstration of return-to-zero signaling in both OOK and DPSK formats to improve receiver sensitivity in an optically preamplified receiver," in *Proc. LEOS*, San Francisco, CA, USA, 1999, pp. 226–227.
- [306] A. H. Gnauck *et al.*, "2.5 Tb/s (64 x 42.7 Gb/s) transmission over 40x100 km NZDSF using RZ-DPSK format and all-Raman-amplified spans," in *Proc. OFC Conf.*, Anaheim, CA, USA, 2002, pp. FC2-1–FC2-3.
- [307] W. Christoph *et al.*, "Ten Gb/s optically pre-amplified RZ-DPSK for FSO communications systems with very large link losses," in *Proc. SPIE Free Space Laser Commun. Technol. VIII*, vol. 7091, San Diego, CA, USA, 2008, pp. 709103-1–709103-12.
- [308] B. Moision and J. Hamkins, "Coded modulation for the deep space optical channel: Serially concatenated PPM," Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, IPN Progr. Rep. 42-161, 2005.
- [309] I. B. Djordjevic, "Deep-space and near-Earth optical communications by coded orbital angular momentum (OAM) modulation," *Opt. Express*, vol. 19, no. 15, pp. 14277–14289, 2011.
- [310] A. García-Zambrana, C. Castillo-Vázquez, and B. Castillo-Vázquez, "Space-time trellis coding with transmit laser selection for FSO links over strong atmospheric turbulence channels," *Opt. Express*, vol. 18, no. 6, pp. 5356–5366, 2010.
- [311] F. Xu, A. Khalighi, P. Caussé, and S. Bourennane, "Channel coding and time-diversity for optical wireless links," *Opt. Express*, vol. 17, no. 2, pp. 872–887, 2009.
- [312] R. McEliece, "Practical codes for photon communication," *IEEE Trans. Inf. Theory*, vol. 27, no. 4, pp. 393–398, Jul. 1981.
- [313] B. Moision, J. Hamkins, and M. Cheng, "Design of a coded modulation for deep space optical communications," in *Proc. Inf. Theory Appl. (ITA) Workshop*, San Diego, CA, USA, 2006.
- [314] X. Sun *et al.*, "Simultaneous laser ranging and communication from an Earth-based satellite laser ranging station to the lunar reconnaissance orbiter in lunar orbit," in *Proc. SPIE Free Space Laser Commun. Atmospheric Propag. (XXV)*, vol. 8610, San Francisco, CA, USA, 2013, pp. 861003-1–861003-12.
- [315] X. Sun *et al.*, "Free space laser communication experiments from Earth to the lunar reconnaissance orbiter in lunar orbit," *Opt. Express*, vol. 21, no. 2, pp. 1865–1871, 2013.
- [316] N. Kumar, V. K. Jain, and S. Kar, "Evaluation of the performance of FSO system using OOK and M-PPM modulation schemes in inter-satellite links with turbo codes," in *Proc. IEEE Int. Conf. Elect. Commun. Comput. Technol.*, Viluppuram, India, 2011, pp. 59–63.
- [317] M. K. K. Cheng, B. E. Moision, J. Hamkins, and M. A. Nakashima, "Implementation of a coded modulation for deep space optical communications," in *Proc. IEEE GLOBECOM*, San Francisco, CA, USA, 2006, pp. 1–5.
- [318] C. P. Fewer, M. F. Flanagan, and A. D. Fagan, "A versatile variable rate LDPC codec architecture," *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 54, no. 10, pp. 2240–2251, Oct. 2007.
- [319] I. B. Djordjevic, "LDPC-coded MIMO optical communication over the atmospheric turbulence channel using Q-ary pulse-position modulation," *Opt. Express*, vol. 16, no. 16, pp. 10026–10032, 2007.
- [320] B. Barua and D. Barua, "Analysis the performance of a LDPC coded FSO system with Q-ary pulse-position modulation," in *Proc. IEEE 3rd Int. Conf. Comput. Res. Develop. (ICCRD)*, vol. 1, Shanghai, China, 2011, pp. 339–343.
- [321] M. F. Barsoum, B. Moision, M. Fitz, D. Divsalar, and J. Hamkins, "Iterative coded pulse-position-modulation for deep-space optical communications," in *Proc. IEEE Inf. Theory Workshop*, Bergen, Norway, 2007, pp. 66–71.
- [322] S. Benedetto, D. Divsalar, G. Montorsi, and F. Pollara, "Soft-output decoding algorithm in iterative decoding of turbo code," Commun. Syst. Res. Section, Jet Propul. Lab., Pasadena, CA, USA, TDA Progr. Rep. 42-124, 1996.
- [323] J. Hagenauer, "Source-controlled channel decoding," *IEEE Trans. Commun.*, vol. 43, no. 9, pp. 2449–2457, Sep. 1995.
- [324] H. R. Sadjadpour, "Maximum a posteriori decoding algorithms for turbo codes," *Proc. SPIE Digit. Wireless Commun. II*, vol. 4045, Orlando, FL, USA, pp. 73–83, 2000.
- [325] H.-J. Chen, R. M. Bishop, Jr., and B. N. Agrawal, "Payload pointing and active vibration isolation using hexapod platforms," in *Proc. Int. Conf. Struct. Struct. Dyn. Mater. (AIAA)*, Norfolk, VA, USA, 2003, pp. 1–19.
- [326] N. E. Goodzeit, "System and disturbance identification for adaptive disturbance-rejection control," Ph.D. dissertation, Dept. Mech. Aerosp. Eng., Princeton Univ., Princeton, NJ, USA, 1998.
- [327] M. A. McEver and R. L. Clark, "Active jitter suppression of optical structures," in *Proc. SPIE Smart Struct. Mater. Smart Struct. Integr. Syst.*, vol. 4327, Newport Beach, CA, USA, 2001, pp. 591–599.
- [328] V. A. Skormin, M. A. Tascillo, and T. E. Busch, "Adaptive jitter rejection technique applicable to airborne laser communication systems," *Opt. Eng.*, vol. 34, no. 5, pp. 1263–1268, 1995.
- [329] R. J. Watkins and B. N. Agrawal, "Use of least means squares filter in control of optical beam jitter," *J. Guid. Control Dyn.*, vol. 30, no. 4, pp. 1116–1122, 2007.

- [330] R. Zhang, J. Wang, G. Zhao, and J. Lv, "Fiber-based free-space optical coherent receiver with vibration compensation mechanism," *Opt. Express*, vol. 21, no. 15, pp. 18434–18441, 2013.
- [331] S. P. Rose, B. A. Scoville, and J. M. Roth, "Design, build, and testing of an aircraft lasercom terminal compact optical module (ALT-COM)," Massachusetts Inst. Technol., Lincoln Lab., Cambridge, MA, USA, Tech. Rep. FA8721-05-C-0002, 2008. [Online]. Available: https://web.wpi.edu/Pubs/E-project/Available/E-project-101608-163652/unrestricted/ALTCOM_MQP_Report.pdf
- [332] P. K. Orzechowski *et al.*, "Nonlinear adaptive control of optical jitter with a new liquid crystal beam steering device," in *Proc. Amer. Control Conf.*, Seattle, WA, USA, 2008, pp. 4185–4190.
- [333] G. G. Ortiz, J. V. Sandusky, and A. Biswas, "Design of an opto-electronic receiver for deep-space optical communications," Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, TMO Progr. Rep. 42-142, 2000.
- [334] S. Lee, K. E. Wilson, and M. Troy, "Background noise mitigation in deep-space optical communications using adaptive optics," Jet Propulsion Lab., California Inst. Technol., Pasadena, CA, USA, IPN Progr. Rep. 42-161, 2005.
- [335] A. J. Hashmi, A. A. Eftekhari, A. Adibi, and F. Amoozegar, "Analysis of adaptive optics-based telescope arrays in a deep-space inter-planetary optical communications link between Earth and Mars," *Opt. Commun.*, vol. 333, pp. 120–128, Dec. 2014.
- [336] K. Wilson *et al.*, "Daytime adaptive optics for deep space optical communication," in *Proc. Space Activities Cooperation Contributing Pac. Basin Countries (ISCOPS)*, Tokyo, Japan, 2003, pp. 481–492.
- [337] V. W. S. Chan, "Intersatellite optical heterodyne communication systems," *Lincoln Lab. J.*, vol. 1, no. 2, pp. 169–186, 1988.
- [338] L. B. Stotts *et al.*, "Hybrid optical RF airborne communications," *Proc. IEEE*, vol. 97, no. 6, pp. 1109–1127, Jun. 2009.
- [339] H.-J. Liu, "Overview of U.S. military airborne RF and FSO hybrid communication," *Telecommun. Eng.*, vol. 54, no. 2, pp. 1711–1716, 2014.
- [340] H. Wu and M. Kavehrad, "Availability evaluation of ground-to-air hybrid FSO/RF links," *Int. J. Wireless Inf. Netw.*, vol. 14, no. 1, pp. 33–45, 2007.
- [341] Y. Tang, M. Brandt-Pearce, and S. G. Wilson, "Adaptive coding and modulation for hybrid FSO/RF systems," in *Proc. IEEE 43rd Asilomar Conf. Signals Syst. Comput.*, Pacific Grove, CA, USA, 2009, pp. 1644–1649.
- [342] W. Zhang, S. Hranilovic, and C. Shi, "Soft-switching hybrid FSO/RF links using short-length raptor codes: Design and implementation," *IEEE J. Sel. Areas Commun.*, vol. 27, no. 9, pp. 1698–1708, Dec. 2009.
- [343] H. Wu, B. Hamzeh, and M. Kavehrad, "Availability of airborne hybrid FSO/RF links," in *Proc. SPIE Digit. Wireless Commun. VII Space Commun. Tech.*, vol. 5819, Orlando, FL, USA, 2005, pp. 89–100.
- [344] S. S. Kulkarni, E. E. Etemad, and C. G. Davis, "Hybrid free-space optical/RF networks and networks for tactical operations," in *Proc. Mil. Commun. Conf. (MILCOM)*, Monterey, CA, USA, 2004, pp. 404–415.
- [345] A. Kashyap and M. Shayman, "Routing and traffic engineering in hybrid RF/FSO networks," in *Proc. IEEE Int. Conf. Commun.*, vol. 5, Seoul, South Korea, 2005, pp. 3427–3433.
- [346] S. Chia, M. Gasparroni, and P. Brick, "The next challenge for cellular networks: Backhaul," *IEEE Microw. Mag.*, vol. 10, no. 5, pp. 54–66, Aug. 2009.
- [347] R. C. Peach and A. J. Michaels, "Dynamic packet redundancy for a free space optical communication link," U.S. Patent 0 233 960 A1, 2014.
- [348] V. V. Mai, T. C. Thang, and A. T. Pham, "Performance of TCP over free-space optical atmospheric turbulence channels," *IEEE/OSA J. Opt. Commun. Netw.*, vol. 5, no. 11, pp. 1168–1177, Nov. 2013.
- [349] B. Epple, "Performance optimization of free-space optical communication protocols based on results from FSO demonstrations," in *Proc. SPIE Free Space Laser Commun. VII*, vol. 6709, San Diego, CA, USA, 2007, Art. no. 670915.
- [350] S. Tati and T. F. L. Porta, *Design of Link Layer Protocol for Free Space Optical Links*, Pennsylvania State Univ., State College, PA, USA.
- [351] K. Kiasaleh, "Hybrid ARQ for FSO communications through turbulent atmosphere," *IEEE Commun. Lett.*, vol. 14, no. 9, pp. 866–868, Sep. 2010.
- [352] S. Parthasarathy, D. Giggenbach, and A. Kirstädter, "Channel modelling for free-space optical inter-HAP links using adaptive ARQ transmission," in *Proc. SPIE Unmanned/Unattended Sens. Sens. Netw. X*, vol. 9248, Amsterdam, The Netherlands, 2014, pp. 92480Q-1–92480Q-11.
- [353] I. F. Akyildiz and W. Liu, "A general analysis technique for ARQ protocol performance in high speed networks," in *Proc. IEEE INFOCOM*, 1991, pp. 498–507.
- [354] K. S. Pathapati, J. P. Rohrer, and J. P. G. Sterbenz, "End-to-end ARQ: Transport-layer reliability for airborne telemetry networks," in *Proc. Int. Telemeter. Conf. (ITC)*, San Diego, CA, USA, 2010, pp. 1–10.
- [355] S. Parthasarathy, A. Kirstädter, and D. Giggenbach, "Simulative performance analysis of ARQ schemes for free-space optical inter-HAP channel model," in *Proc. Conf. Photonische Netze*, Leipzig, Germany, 2015, pp. 1–5.
- [356] C. Kose and T. R. Halford, "Incremental redundancy hybrid ARQ protocol design for FSO links," in *Proc. Mil. Commun. Conf. (MILCOM)*, 2009, pp. 1–7.
- [357] E. Zedini, A. Chelli, and M.-S. Alouini, "On the performance analysis of hybrid ARQ with incremental redundancy and with code combining over free-space optical channels with pointing errors," *IEEE Photon. J.*, vol. 6, no. 4, Aug. 2014, Art. no. 7902118.
- [358] G. Caire and D. Tuninetti, "The throughput of hybrid-ARQ protocols for the Gaussian collision channel," *IEEE Trans. Inf. Theory*, vol. 47, no. 5, pp. 1971–1988, Jul. 2001.
- [359] H. Inoue, E. Okamoto, Y. Shoji, Y. Takayama, and M. Toyoshima, "Comparative study on low-rate forward error correction codes in downlink satellite-to-ground laser communications," in *Proc. Int. Conf. Space Opt. Syst. Appl.*, Kobe, Japan, May 2014, pp. 1–5.
- [360] Y. Yamashita *et al.*, "An efficient LDGM coding scheme for optical satellite-to-ground link based on a new channel model," in *Proc. IEEE GLOBECOM*, 2010, pp. 1–6.
- [361] S. M. Aghajanzadeh and M. Uysal, "Information theoretic analysis of hybrid-ARQ protocols in coherent free-space optical system," *IEEE Trans. Commun.*, vol. 60, no. 5, pp. 1432–1442, May 2012.
- [362] C. Abou-Rjeily and S. Haddad, "Cooperative FSO systems: Performance analysis and optimal power allocation," *J. Lightw. Technol.*, vol. 29, no. 7, pp. 1058–1065, Apr. 1, 2011.
- [363] V. V. Mai and A. T. Pham, "Performance analysis of cooperative-ARQ schemes in free-space optical communications," *IEICE Trans. Commun.*, vol. E94-B, no. 1, pp. 1–10, Jan. 2011.
- [364] A. R. Hammons, Jr., "Systems and methods for a rateless round robin protocol for adaptive error control," U.S. Patent 20 100 281 331 A1, 2010.
- [365] R. A. Hammons and F. Davidson, "Diversity rateless round robin for networked FSO communications," in *OSA Tech. Dig.*, 2011.
- [366] A. R. Hammons, Jr., and F. Davidson, "On the design of automatic repeat request protocols for turbulent free-space optical links," in *Proc. Mil. Commun. Conf. (MILCOM)*, 2010, pp. 808–813.
- [367] I. K. Son, *Design and Optimization of Free Space Optical Networks*, Ph.D. dissertation, Dept. Elect. Comput. Eng., Graduate Faculty Auburn Univ., Auburn, AL, USA, 2010.
- [368] F. Liu, U. Vishkin, and S. D. Milner, "Bootstrapping free-space optical networks," *IEEE J. Sel. Areas Commun.*, vol. 24, no. 12, pp. 13–22, Dec. 2006.
- [369] S. Guru-513-M. Atiquzzaman, "Dynamic path reconfiguration among hybrid FSO/RF nodes," in *Proc. IEEE GLOBECOM*, 2008, pp. 1–5.
- [370] C. C. Davis, I. I. Smoly513nov, and S. D. Milner, "Flexible optical

- [381] S. Burleigh *et al.*, "Delay-tolerant networking: An approach to inter-planetary Internet," *IEEE Commun. Mag.*, vol. 41, no. 6, pp. 128–136, Jun. 2003.
- [382] T. Lei *et al.*, "Massive individual orbital angular momentum channels for multiplexing enabled by dammann gratings," *J. Light Sci. Appl.*, vol. 4, no. 3, 2015, Art. no. e257.
- [383] H. Huang *et al.*, "Crosstalk mitigation in a free-space orbital angular momentum multiplexed communication link using 4x4 MIMO equalization," *Opt. Lett.*, vol. 39, no. 15, pp. 4360–4363, 2014.
- [384] S. Li *et al.*, "Experimental demonstration of free-space optical communications using orbital angular momentum (OAM) array encoding/decoding," in *Proc. IEEE Conf. Lasers Elect. Opt. (CLEO)*, 2015, pp. 1–2.
- [385] L. Allen, M. W. Beijersbergen, R. J. C. Spreeuw, and J. P. Woerdman, "Orbital angular momentum of light and the transformation of Laguerre–Gaussian laser modes," *Phys. Rev. A*, vol. 45, no. 11, pp. 8185–8189, 1992.
- [386] G. Gibson *et al.*, "Free-space information transfer using light beams carrying orbital angular momentum," *Opt. Express*, vol. 12, no. 22, pp. 5448–5456, 2004.
- [387] J. Leach *et al.*, "Interferometric methods to measure orbital and spin, or the total angular momentum of a single photon," *Phys. Rev. Lett.*, vol. 92, no. 1, 2004, Art. no. 013601.
- [388] M. T. Gruneisen, W. A. Miller, R. C. Dymale, and A. M. Sweiti, "Holographic generation of complex fields with spatial light modulators: Application to quantum key distribution," *Appl. Opt.*, vol. 47, no. 4, pp. A32–A42, 2008.
- [389] J. Wang *et al.*, "Terabit free-space data transmission employing orbital angular momentum multiplexing," *Nat. Photon.*, vol. 6, no. 7, pp. 488–496, 2012.
- [390] H. Huang *et al.*, "100 Tbit/s free-space data link using orbital angular momentum mode division multiplexing combined with wavelength division multiplexing," in *OFC/NFOEC Tech. Dig.*, 2013.
- [391] J. A. Anguita, M. A. Neifeld, and B. V. Vasic, "Turbulence-induced channel crosstalk in an orbital angular momentum-multiplexed free-space optical link," *Appl. Opt.*, vol. 47, no. 13, pp. 2414–2429, 2008.
- [392] C. Paterson, "Atmospheric turbulence and orbital angular momentum of single photons for optical communication," *Phys. Rev. Lett.*, vol. 94, no. 15, 2005, Art. no. 153901.
- [393] Y. Ren *et al.*, "Atmospheric turbulence effects on the performance of a free space optical link employing orbital angular momentum multiplexing," *Opt. Lett.*, vol. 38, no. 20, pp. 4062–4065, 2013.
- [394] I. B. Djordjevic and M. Arabaci, "LDPC-coded orbital angular momentum (OAM) modulation for free-space optical communication," *Opt. Exp.*, vol. 18, no. 24, pp. 24722–24728, 2010.
- [395] Z. J. Zhao, R. Liao, S. D. Lyke, and M. C. Roggemann, "Reed–Solomon coding for free-space optical communications through turbulent atmosphere," in *Proc. IEEE Aerosp. Conf.*, 2010, pp. 1–12.
- [396] S. Zhao *et al.*, *Turbulence Mitigation Scheme for Optical Communications Using Orbital Angular Momentum Multiplexing Based on Channel Coding and Wavefront Correction*, Cornell Univ. Library Opt., Ithaca, NY, USA, Jan. 2014.
- [397] S. M. Zhao *et al.*, "Improving the atmosphere turbulence tolerance in holographic ghost imaging system by channel coding," *J. Lightw. Technol.*, vol. 31, no. 17, pp. 2823–2828, Sep. 1, 2013.
- [398] Y. Ren *et al.*, "Simultaneous pre-and post-turbulence compensation of multiple orbital-angular-momentum 100-Gbit/s data channels in a bidirectional link using a single adaptive-optics system," in *Proc. Front. Opt.*, Orlando, FL, USA, 2013.
- [399] S. M. Zhao, J. Leach, L. Y. Gong, J. Ding, and B. Y. Zheng, "Aberration corrections for free-space optical communications in atmosphere turbulence using orbital angular momentum states," *Opt. Exp.*, vol. 20, no. 1, pp. 452–461, 2012.
- [400] Y. Ren *et al.*, "Free-space optical communications using orbital-angular-momentum multiplexing combined with MIMO-based spatial multiplexing," *Opt. Lett.*, vol. 40, no. 18, pp. 4210–4213, 2015.
- [401] G. Xie *et al.*, "Performance metrics and design considerations for a free-space optical orbital-angular-momentum-multiplexed communication link," *Optica*, vol. 2, no. 4, pp. 357–365, 2015.
- [402] T. Taleb, "Toward carrier cloud: Potential, challenges, and solutions," *IEEE Wireless Commun.*, vol. 21, no. 3, pp. 80–91, Jun. 2014.
- [403] M. Chen, S. Mao, and Y. Liu, "Big data: A survey," *Mobile Netw. Appl.*, vol. 19, no. 2, pp. 171–209, 2014.
- [404] M. Alzenad, M. Z. Shaker, H. Yanikomeroglu, and M.-S. Alouini, "FSO-based vertical backhaul/fronthaul framework for 5G+ wireless networks," *IEEE Commun. Mag.*, arXiv:1607.01472, Netw. Internet Architect., 2016.
- [405] H. Dahrouj, A. Douik, F. Rayal, T. Y. Al-Naffouri, and M.-S. Alouini, "Cost-effective hybrid RF/FSO backhaul solution for next generation wireless systems," *IEEE Wireless Commun.*, vol. 22, no. 5, pp. 98–104, Oct. 2015.
- [406] "U.S. mobile backhaul forecast: 2011–2016," iGR Res., Austin, TX, USA, Tech. Rep. 012012-10, 1st Quart., 2012.
- [407] O. Tipmongkolsilp, S. Zaghoul, and A. Jukan, "The evolution of cellular backhaul technologies: Current issues and future trends," *IEEE Commun. Surveys Tuts.*, vol. 13, no. 1, pp. 97–113, 1st Quart., 2011.
- [408] Y. Li, M. Pioro, and V. Angelakis, "Design of cellular backhaul topology using the FSO technology," in *Proc. IEEE Opt. Wireless Commun.*, Newcastle upon Tyne, U.K., 2013, pp. 6–10.
- [409] M. Antonini, E. Cianca, A. D. Luke, M. Pratesi, and M. Ruggieri, "Stratospheric relay: Potentialities of new satellite-high altitude platforms integrated scenarios," in *Proc. IEEE Aerosp. Conf.*, 2003, pp. 1211–1219.
- [410] F. Fidler, M. Knappek, J. Horwath, and W. R. Leeb, "Optical communications for high-altitude platforms," *IEEE J. Sel. Topics Quantum Electron.*, vol. 16, no. 5, pp. 1058–1070, Sep./Oct. 2010.
- [411] H. Henniger, D. Giggenbach, J. Horwath, and C. Rapp, "Evaluation of optical up-and downlinks from high altitude platforms using IM/DD," in *Proc. SPIE Free Space Laser Commun. Technol. XVII*, vol. 5712, 2005, pp. 24–36.
- [412] S. Karapantazis and F. Pavlidou, "Broadband communications via high-altitude platforms: A survey," *IEEE Commun. Surveys Tuts.*, vol. 7, no. 1, pp. 2–31, 1st Quart., 2005.
- [413] J. Horwath, N. Perlot, M. Knappek, and F. Moll, "Experimental verification of optical backhaul links for high-altitude platform networks: Atmospheric turbulence and downlink availability," *Int. J. Satellite Commun. Netw.*, vol. 25, no. 5, pp. 501–528, 2007.
- [414] D. Grace *et al.*, "An overview of the European CAPANINA project-broadband for all from high altitude platforms," in *Proc. 5th Stratospheric Platforms Syst. Workshop*, Tokyo, Japan, 2005, pp. 1–8.
- [415] J. Horwath, D. Grace, D. Giggenbach, M. Knappek, and N. Perlot, "Optical communication from HAPs-Overview of the stratospheric optical payload experiment (STROPEX)," in *Proc. AIAA 22nd Int. Commun. Satellite Syst. Conf.*, Monterey, CA, USA, 2004.
- [416] D. Giggenbach and J. Horwath, "Optical free-space communications downlinks from stratospheric platforms-overview on STROPEX, the optical communications experiment of CAPANINA," in *Proc. 14th IST Mobile Wireless Commun. Summit*, Dresden, Germany, Jun. 2005.
- [417] E. Katimertzoglou, D. Vouyioukas, P. Veltsistas, and P. Constantinou, "Optical interplatform links scenarios for 20 km altitude," in *Proc. IEEE 16th IST Mobile Wireless Commun. Summit*, 2007, pp. 1–5.
- [418] D. Giggenbach, R. Purvinskis, M. Werner, and M. Holzbock, "Stratospheric optical inter-platform links for high altitude platforms," in *Proc. 20th AIAA Int. Commun. Satellite Syst. Conf. Exhibit.*, Montreal, QC, Canada, 2002, p. 1910.
- [419] F. Fidler, "Optical backhaul links between HAPs and satellites in the multi-gigabit regime," in *Proc. IEEE GLOBECOM*, New Orleans, LA, USA, 2008, pp. 1–5.
- [420] S. Betti, E. Duca, and I. Toselli, "HAP-GEO optical links: Performance analysis under weak turbulence conditions," in *Proc. Int. Symp. Commun. Syst. Netw. Digit. Signal Process.*, 2008, pp. 77–81.
- [421] M. Antonini, S. Betti, V. Carrozzo, E. Duca, and M. Ruggieri, "Feasibility analysis of a HAP-LEO optical link for data relay purposes," in *Proc. IEEE Aerosp. Conf.*, Big Sky, MT, USA, 2006.
- [422] N. Perlot, E. Duca, J. Horwath, D. Giggenbach, and E. Leitgeb, "System requirements for optical HAP-satellite links," in *Proc. Int. Symp. Commun. Syst. Netw. Digit. Signal Process.*, 2008, pp. 72–76.
- [423] O. Korçak and F. Alagöz, "Efficient integration of HAPs and mobile satellites via free-space optical links," *Comput. Netw.*, vol. 55, no. 13, pp. 2942–2953, 2011.
- [424] M. Mohorcic, C. Fortuna, A. Vilhar, and J. Horwath, "Evaluation of wavelength requirements for stratospheric optical transport networks," *J. Commun.*, vol. 4, no. 8, pp. 588–596, 2009.
- [425] A. Harris, J. J. Sluss, H. H. Refai, and P. G. Lopresti, "Free-space optical wavelength diversity scheme for fog mitigation in a ground-to-unmanned-aerial-vehicle communications link," *Opt. Eng.*, vol. 45, no. 8, 2006, Art. no. 086001.
- [426] D. Kedar, D. Grace, and S. Arnon, "Laser nonlinearity effects on optical broadband backhaul communication links," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 46, no. 4, pp. 1797–1803, Oct. 2010.
- [427] D. Grace and M. Mohorcic, *Broadband Communications via High Altitude Platforms: FSO in HAP-Based Communication Systems*. Hoboken, NJ, USA: Wiley, 2010, Ch. 7.
- [428] E. Katimertzoglou, D. Vouyioukas, P. Veltsistas, and P. Constantinou, "High altitude platforms-optical inter-platform scenarios at 500 km distance," in *Proc. COST-297 HAPCOS Conf.*, 2009.
- [429] E. Magli, G. Olmo, J.-P. Thiran, and N. Schibli, "The Helinet on-board optical payload," in *Proc. DASIA*, Dublin, Ireland, 2002, pp. 51.1Ü–51.9.
- [430] C. Fuchs *et al.*, "Broadband communications for aeronautical networks: The ATENAA outer optical link validation," in *Proc. 1st CEAS Eur. Air Space Conf.*, Berlin, Germany, 2007, pp. 491–498.
- [431] I. Kim *et al.*, "Advances in communications: New FSO provides reliable 10 Gbit/s and beyond backhaul connections," vol. 49, no. 10, pp. 47–50, 2013.

- [432] P. E. Mogensen *et al.*, "LTE- Advanced: The path towards gigabit/s in wireless mobile communications," in *Proc. IEEE Int. Conf. Wireless Commun. Veh. Technol. Inf. Theory Aerosp. Elect. Syst. Technol.*, 2009, pp. 147–151.
- [433] D. G. Aviv, *Laser Space Communications*. Norwood, MA, USA: Artech House, 2006.
- [434] H. A. Willebrand and B. S. Ghuman, "Fiber optics without fiber," *IEEE Spectr.*, vol. 38, no. 8, pp. 40–45, Aug. 2001.
- [435] D. Cohen, "Facebook's connectivity lab: Drones, planes, satellites, lasers to further Internet.org mission of bringing connectivity to the whole world," Facebook, Menlo Park, CA, USA, Tech. Rep., 2014. [Online]. Available: <http://www.adweek.com/socialtimes/connectivity-lab/433690>
- [436] "Facebook targets free space optical tech to connect the unconnected," 2014. [Online]. Available: <http://www.mobileurope.co.uk/press-wire/facebook-targets-free-space-optical-tech-to-connect-the-unconnected>
- [437] J. D. Feichtner, "Satellite to submarine laser communications (SLC): Advanced filter technology," Lockheed Missiles Space Company, Tech. Rep. LMSC-P000187R, 1992.
- [438] B. S. Robinson, D. M. Boroson, D. A. Burianek, and D. V. Murphy, "Overview of the lunar laser communications demonstration," in *Proc. SPIE Free Space Laser Commun. Technol. XXII*, vol. 7923. San Francisco, CA, USA, 2011, Art. no. 792302.
- [439] D. Cornwell, "Space-based laser communications break threshold," *Opt. Photon. News*, vol. 27, no. 5, pp. 24–31, 2016.
- [440] K. Martin, K. O'Keefe, and L. Finucan, "Emerging technologies and the global regulatory agenda," Int. Telecommun. Union, Tech. Rep. GSR-16, 2016.



Georges Kaddoum (M'11) received the bachelor's degree in electrical engineering from the École Nationale Supérieure de Techniques Avancées, Brest, France, the M.S. degree in telecommunications and signal processing (circuits, systems, and signal processing) from the Université de Bretagne Occidentale and Telecom Bretagne, Brest, in 2005, and the Ph.D. (Hons.) degree in signal processing and telecommunications from the National Institute of Applied Sciences, University of Toulouse, Toulouse, France, in 2009. Since 2013, he has been an Assistant Professor of electrical engineering with the École de Technologie Supérieure (ETS), University of Quebec, Montreal, QC, Canada. In 2014, he was the ETS Research Chair in physical-layer security for wireless networks. Since 2010, he has been a Scientific Consultant in the field of space and wireless telecommunications for several companies (Intelcan Techno-Systems, MDA Corporation, and Radio-IP companies). He has published over 80 journal and conference papers and has two pending patents. His recent research activities cover wireless communication systems, chaotic modulations, secure transmissions, and space communications and navigation. He was a recipient of the Best Paper Award at the 2014 IEEE International Conference on Wireless and Mobile Computing, Networking, and Communications, with three co-authors, and the 2015 IEEE TRANSACTIONS ON COMMUNICATIONS Top Reviewer Award.



Hemani Kaushal received the bachelor's degree in electronics and communication engineering from Punjab Technical University, India, in 2001, the master's degree in electronics product design and technology from the PEC University of Technology, Chandigarh, India, in 2003, and the Ph.D. degree in electrical engineering from the Indian Institute of Technology Delhi, India, in 2012. She joined NorthCap University (formerly, ITM University), Gurgaon, India, as an Associate Professor with the Electrical, Electronics and Communication

Engineering Department in 2012. She has worked on various industry sponsored projects related to free space optical communication for Indian Space Research Organization, and Aeronautical Development Agency, Department of Defense Research and Development, Bengaluru, India. Her areas of research include wireless communication systems specifically in free-space, underwater, and indoor visible-light optical communications.