






ARP 3620 wooden case Rev0.1 - without lid

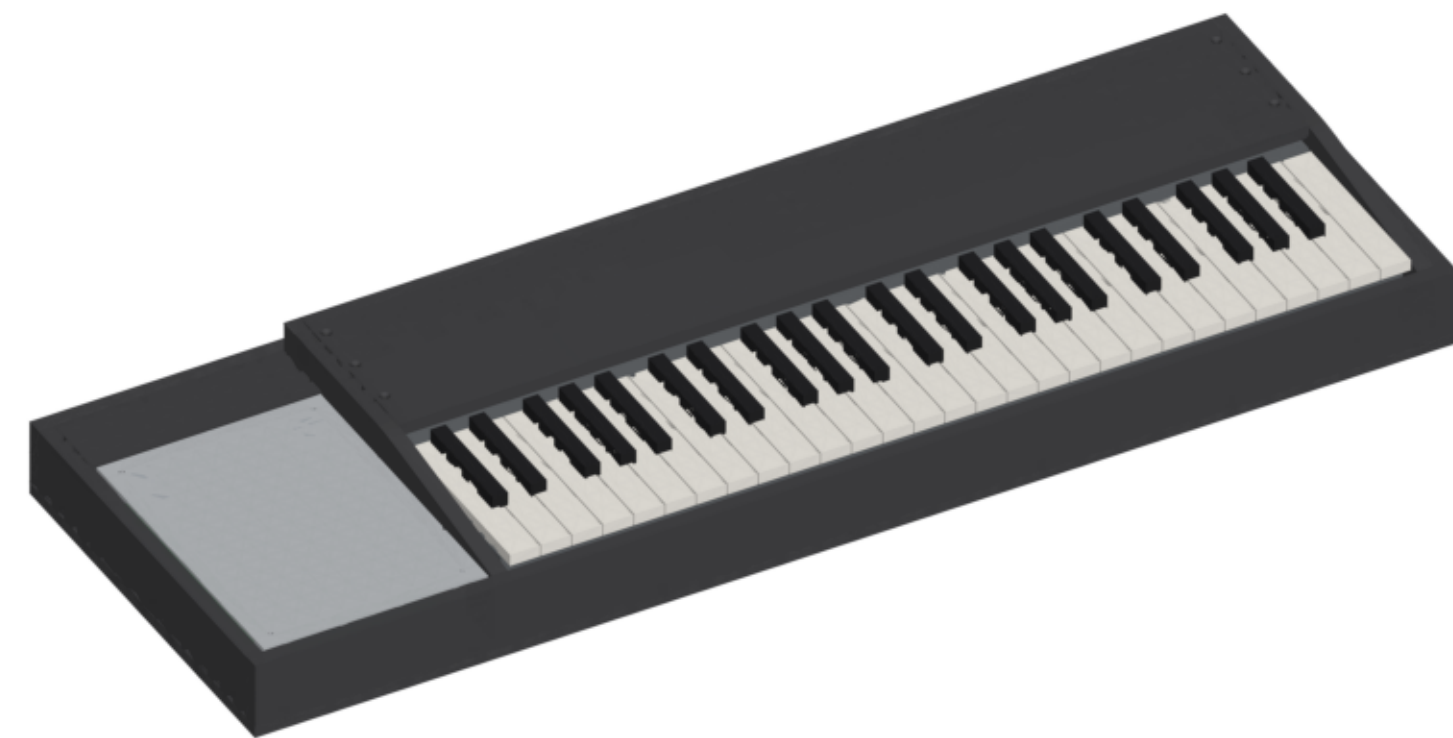

strip lifted: electronics bay (emulator, power supply)

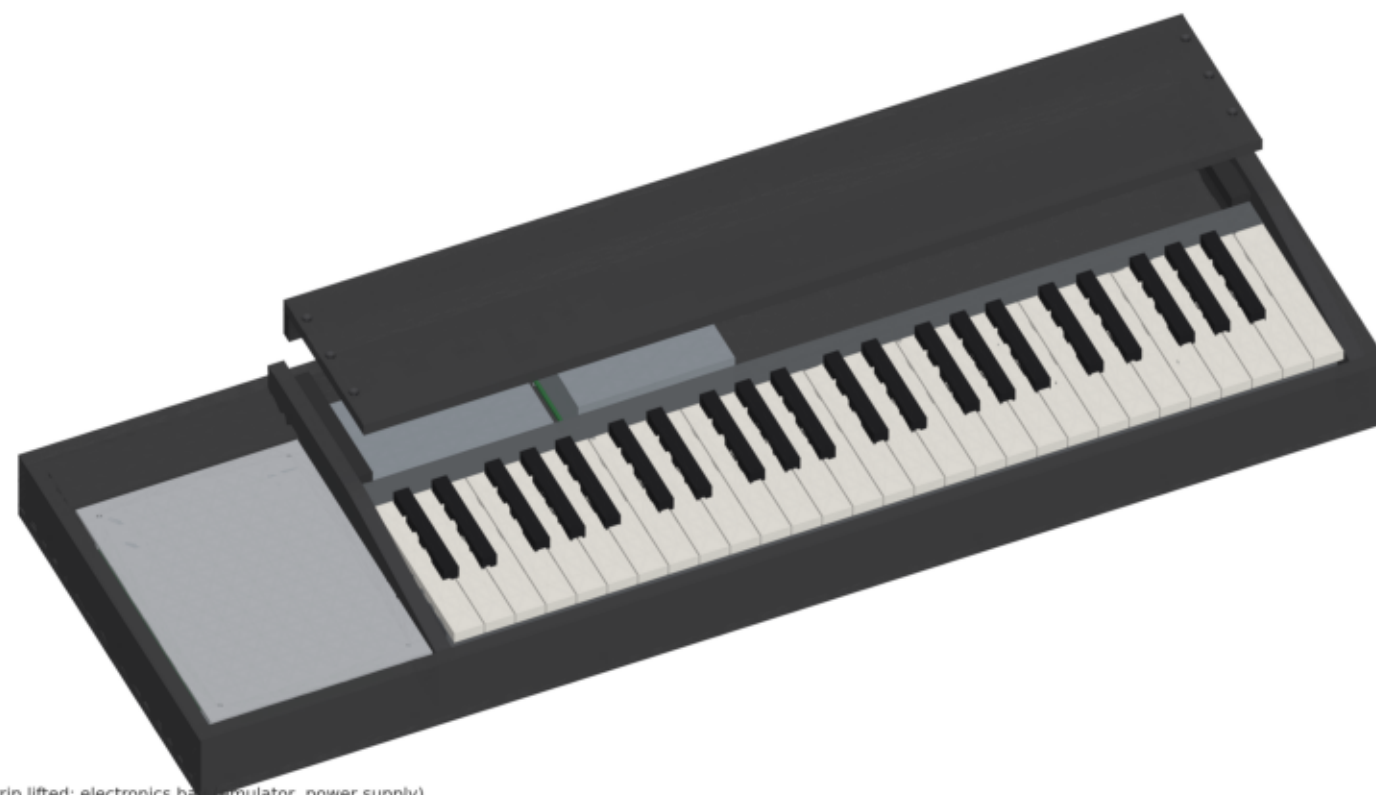

rear: connector plate

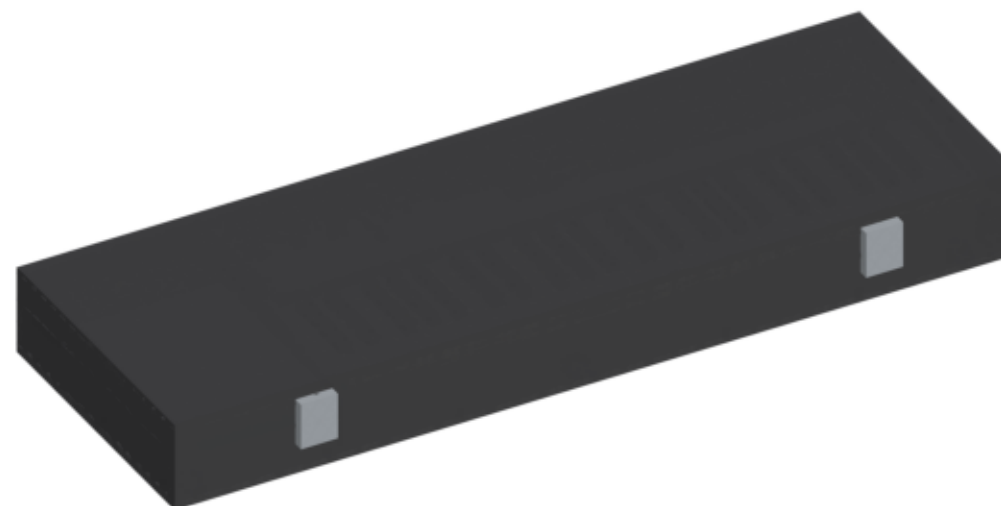

with lid

Key data

Outside: 911 x 310 mm, height 59 (walls) / 82 (strip) / 95 with lid, plus feet 12

Birch plywood 12 / 9 / 6 mm, covered in black tolex, lid with 4 latches

Keybed Fatar TP/9S 49 on two 12 mm risers, control panel 170 x 230 flush with the walls

Electronics bay under the removable strip: bus emulator 160 x 110, power supply 126 x 80

Rear plate (aluminium 2 mm): USB (option), DC IN, POWER, SUPPLY 2600/INT, MIDI IN, MIDI OUT

ARP 3620 replica - wooden case





Rev0.1 08.10.2026

Overview

CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase


sheet 1

renders not to scale

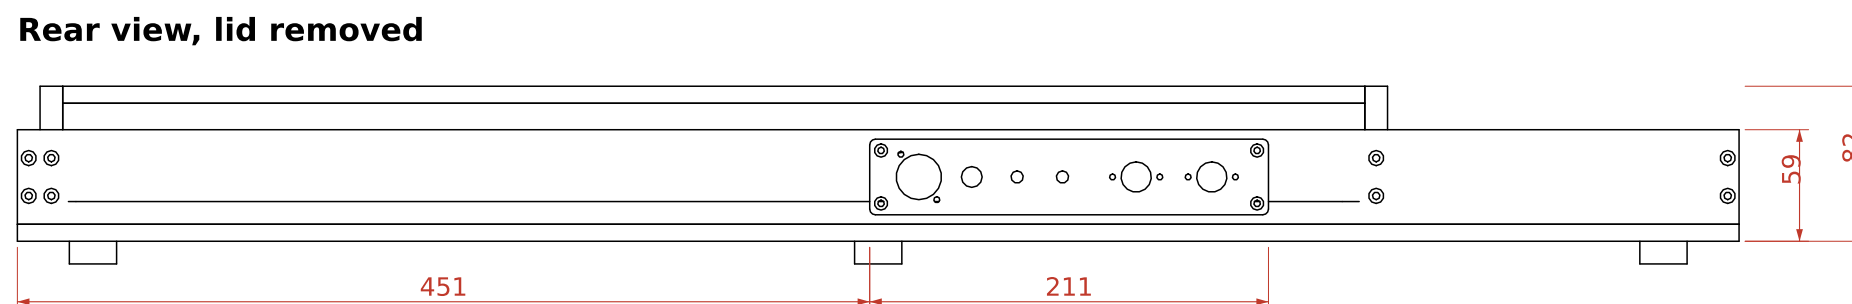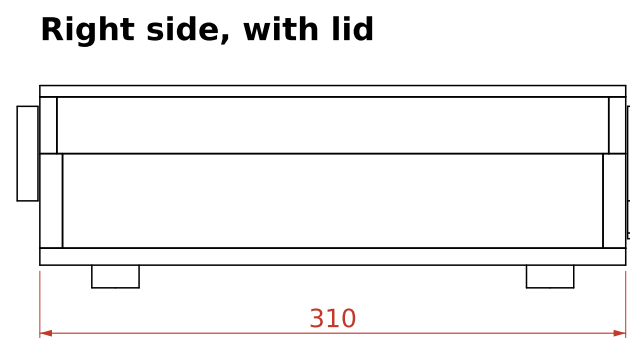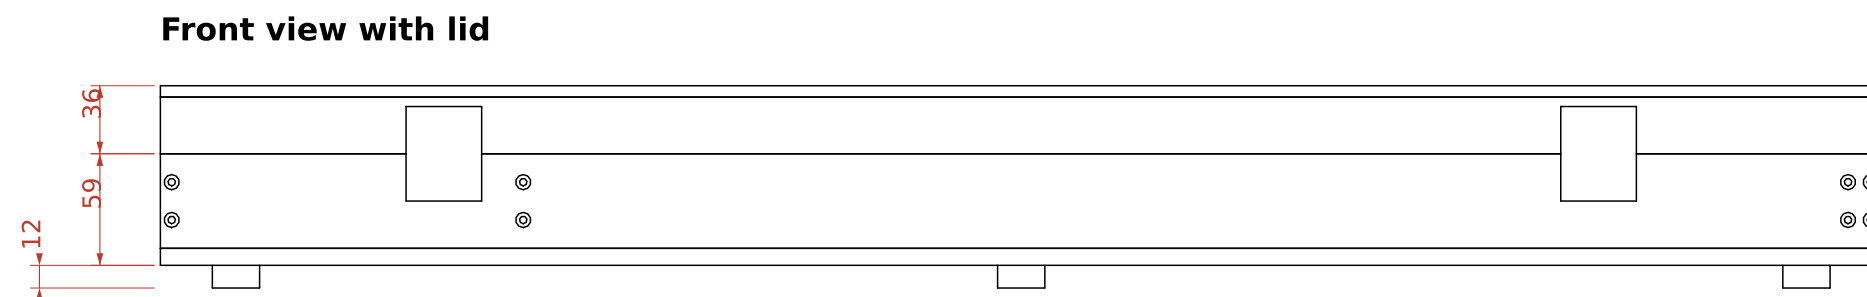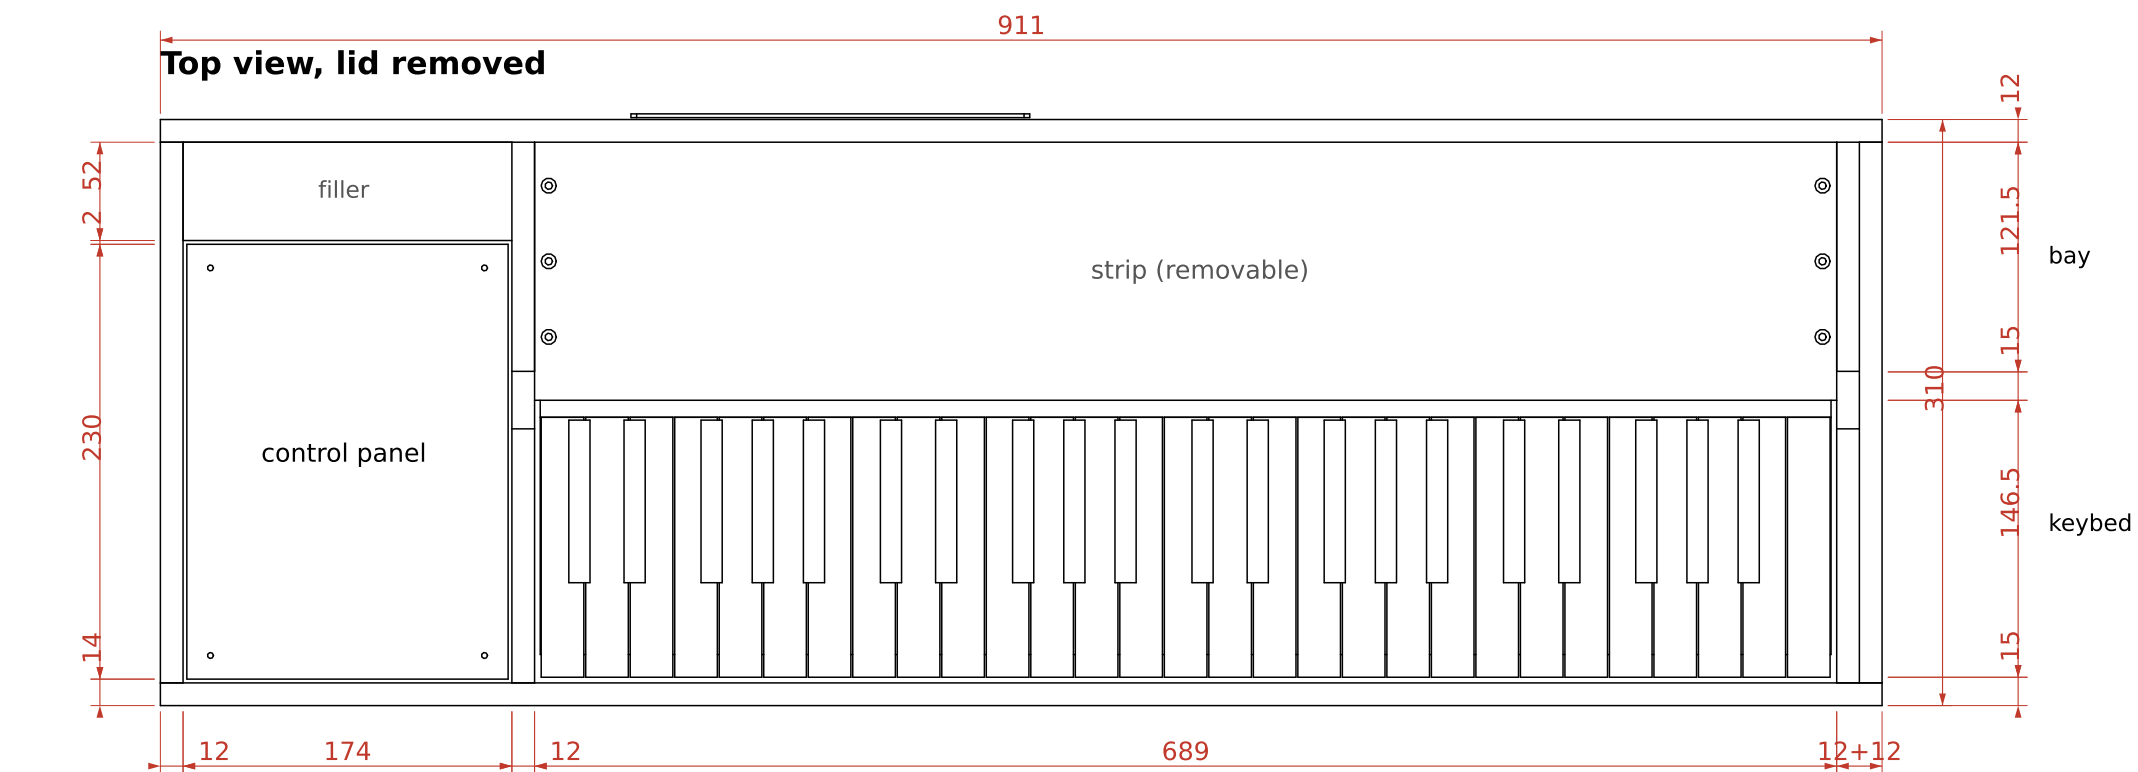


ARP 3620 replica - wooden case	Rev0.1 08.10.2026
General arrangement CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	sheet 2 scale 1:4

Section A-A at x = 440 (keyboard, power supply), seen from the right

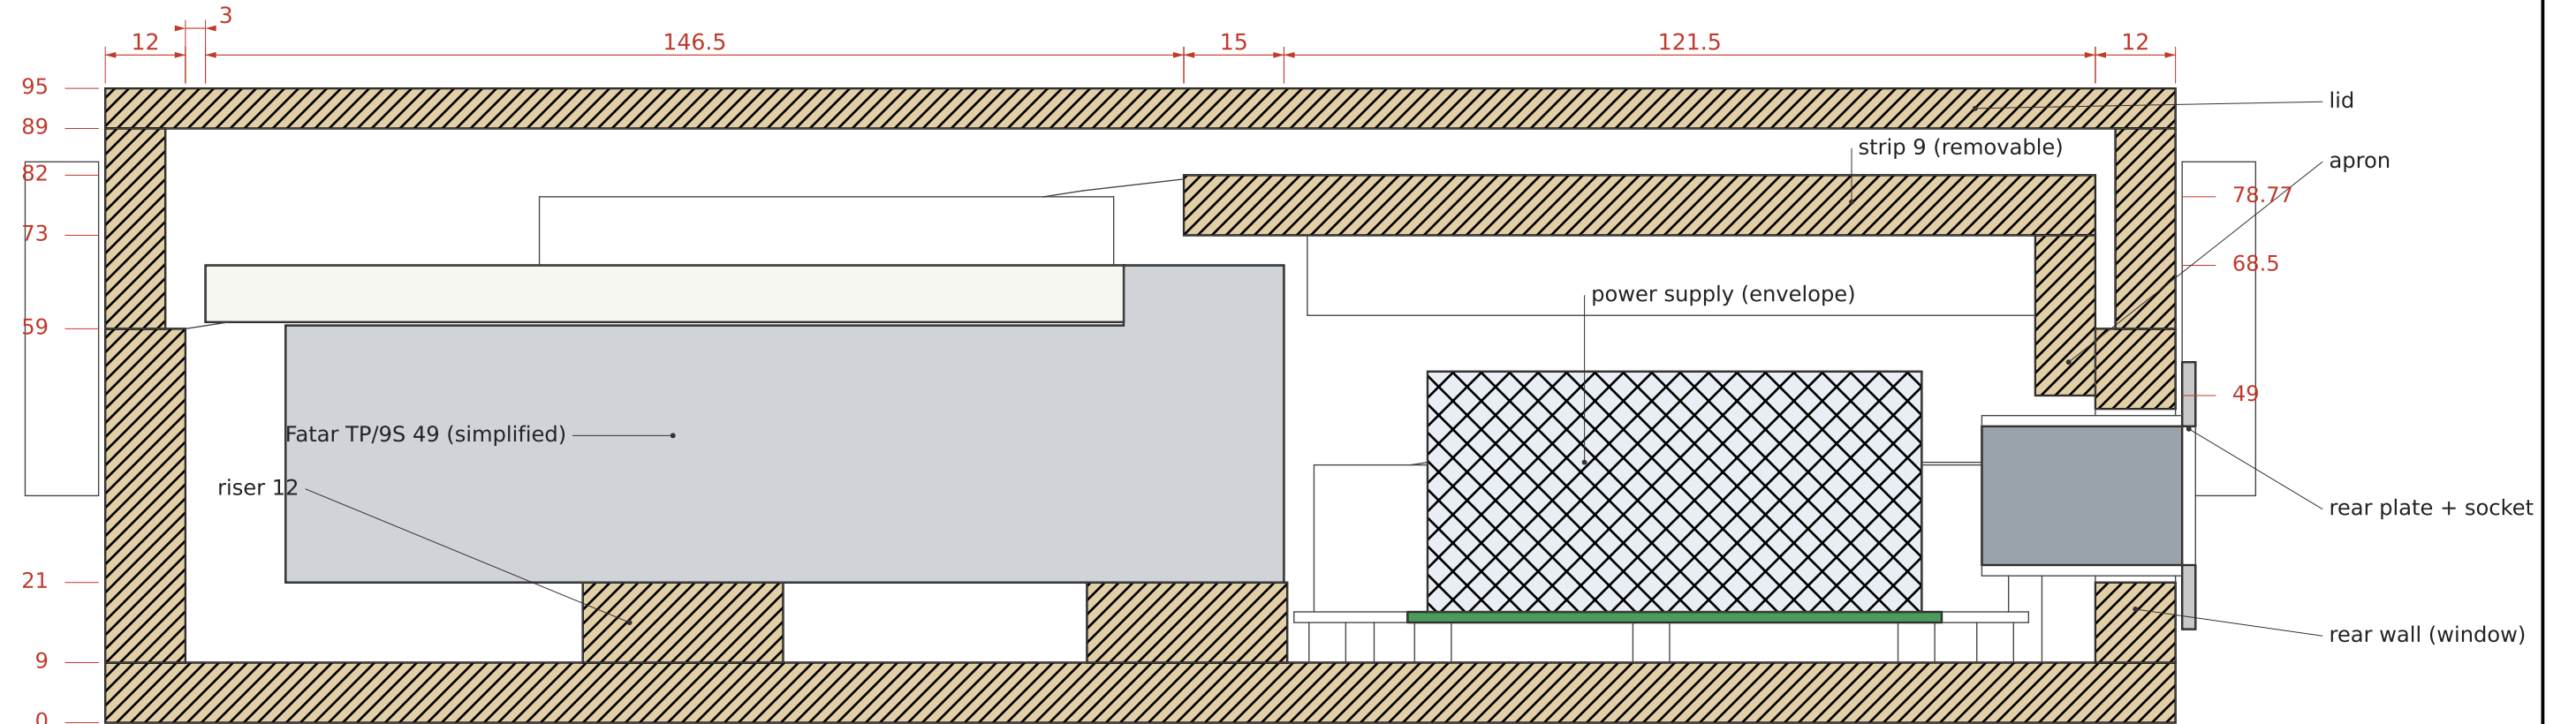

Section B-B at x = 100 (control panel)

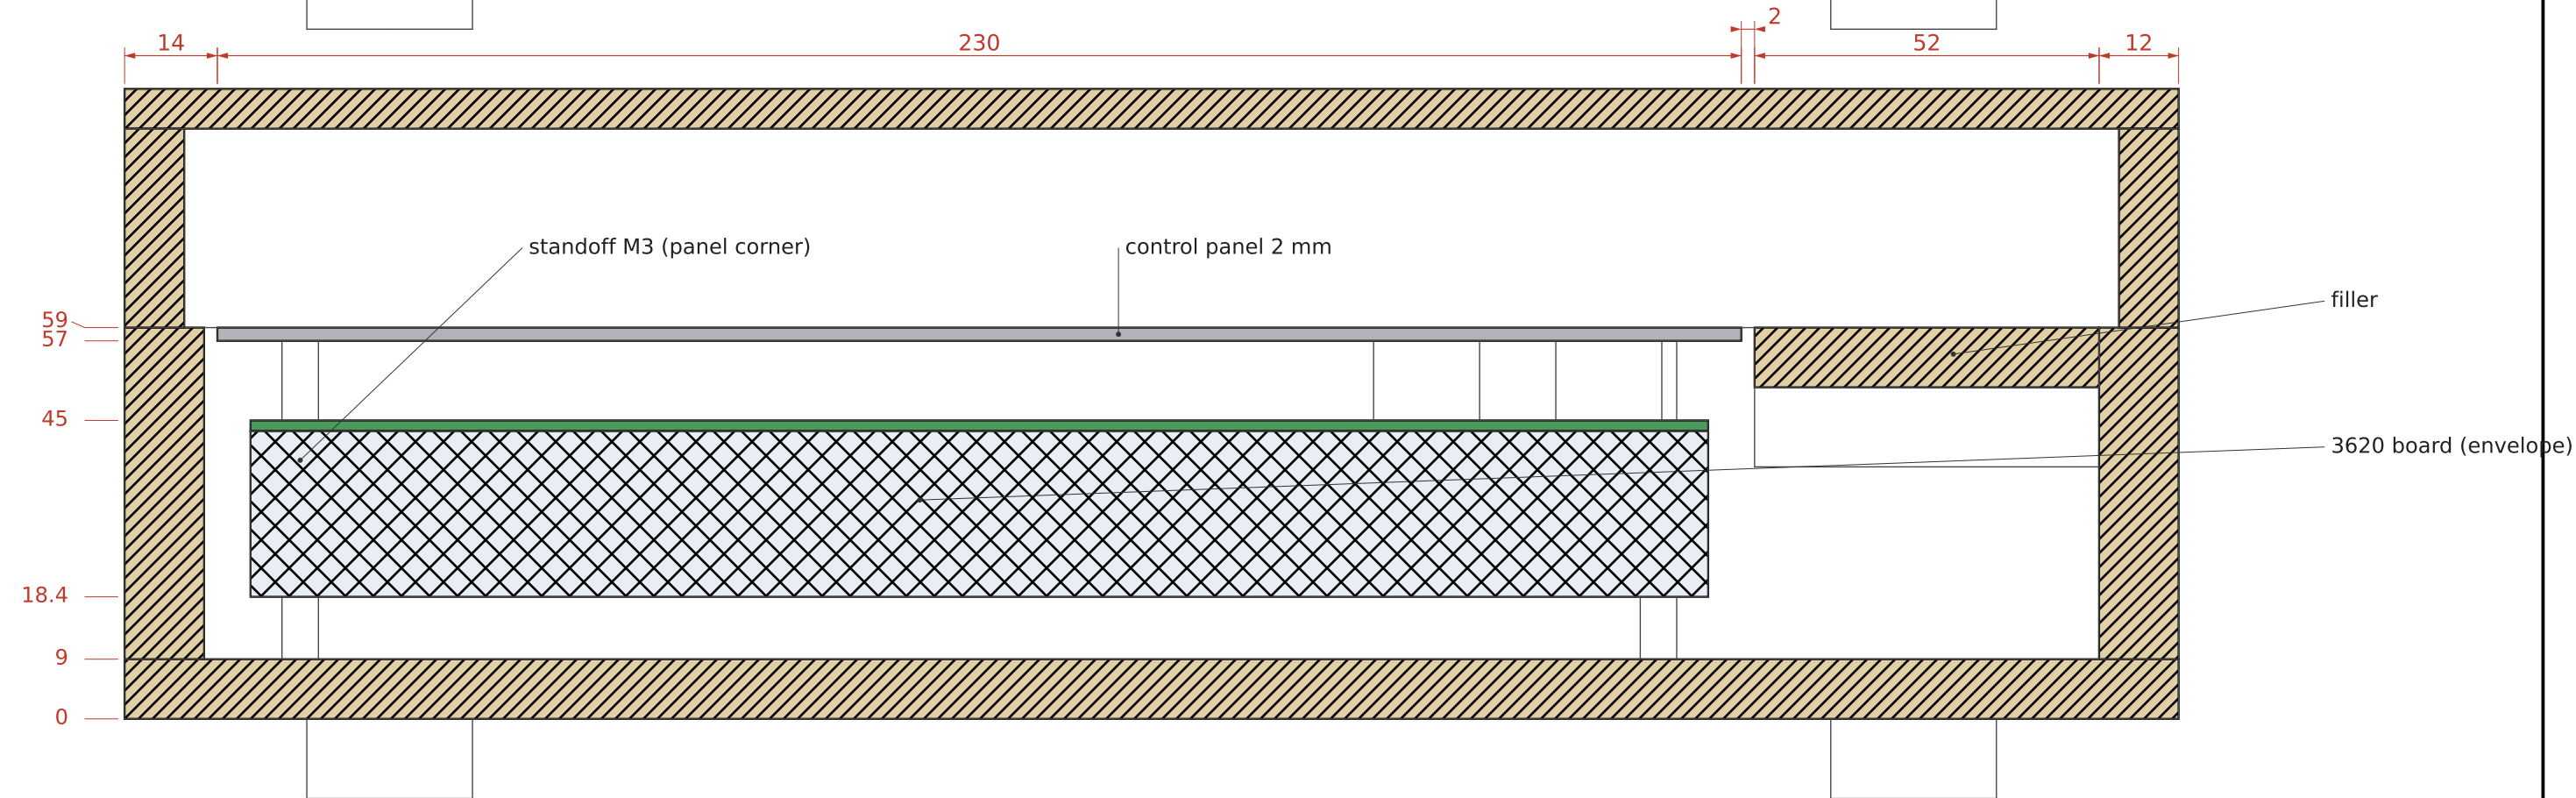


Heights follow from the keybed: the lower edge of the white key fronts (39 above the mounting plane, scaled from the Fatar drawing) sits 1 above the wall top. Measure it on the real keybed before cutting - all heights follow from it (params.py: KB_LIP). Board spacer 12 and 25 for parts and plugs under the 3620 board are estimates. Electronics are simplified boxes (parts height emulator 22, power supply 36).

ARP 3620 replica - wooden case	Rev0.1 08.10.2026
Sections CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	sheet 3 scale 1:1

Base - 1 x

birch plywood 9 mm, seen from above [base]

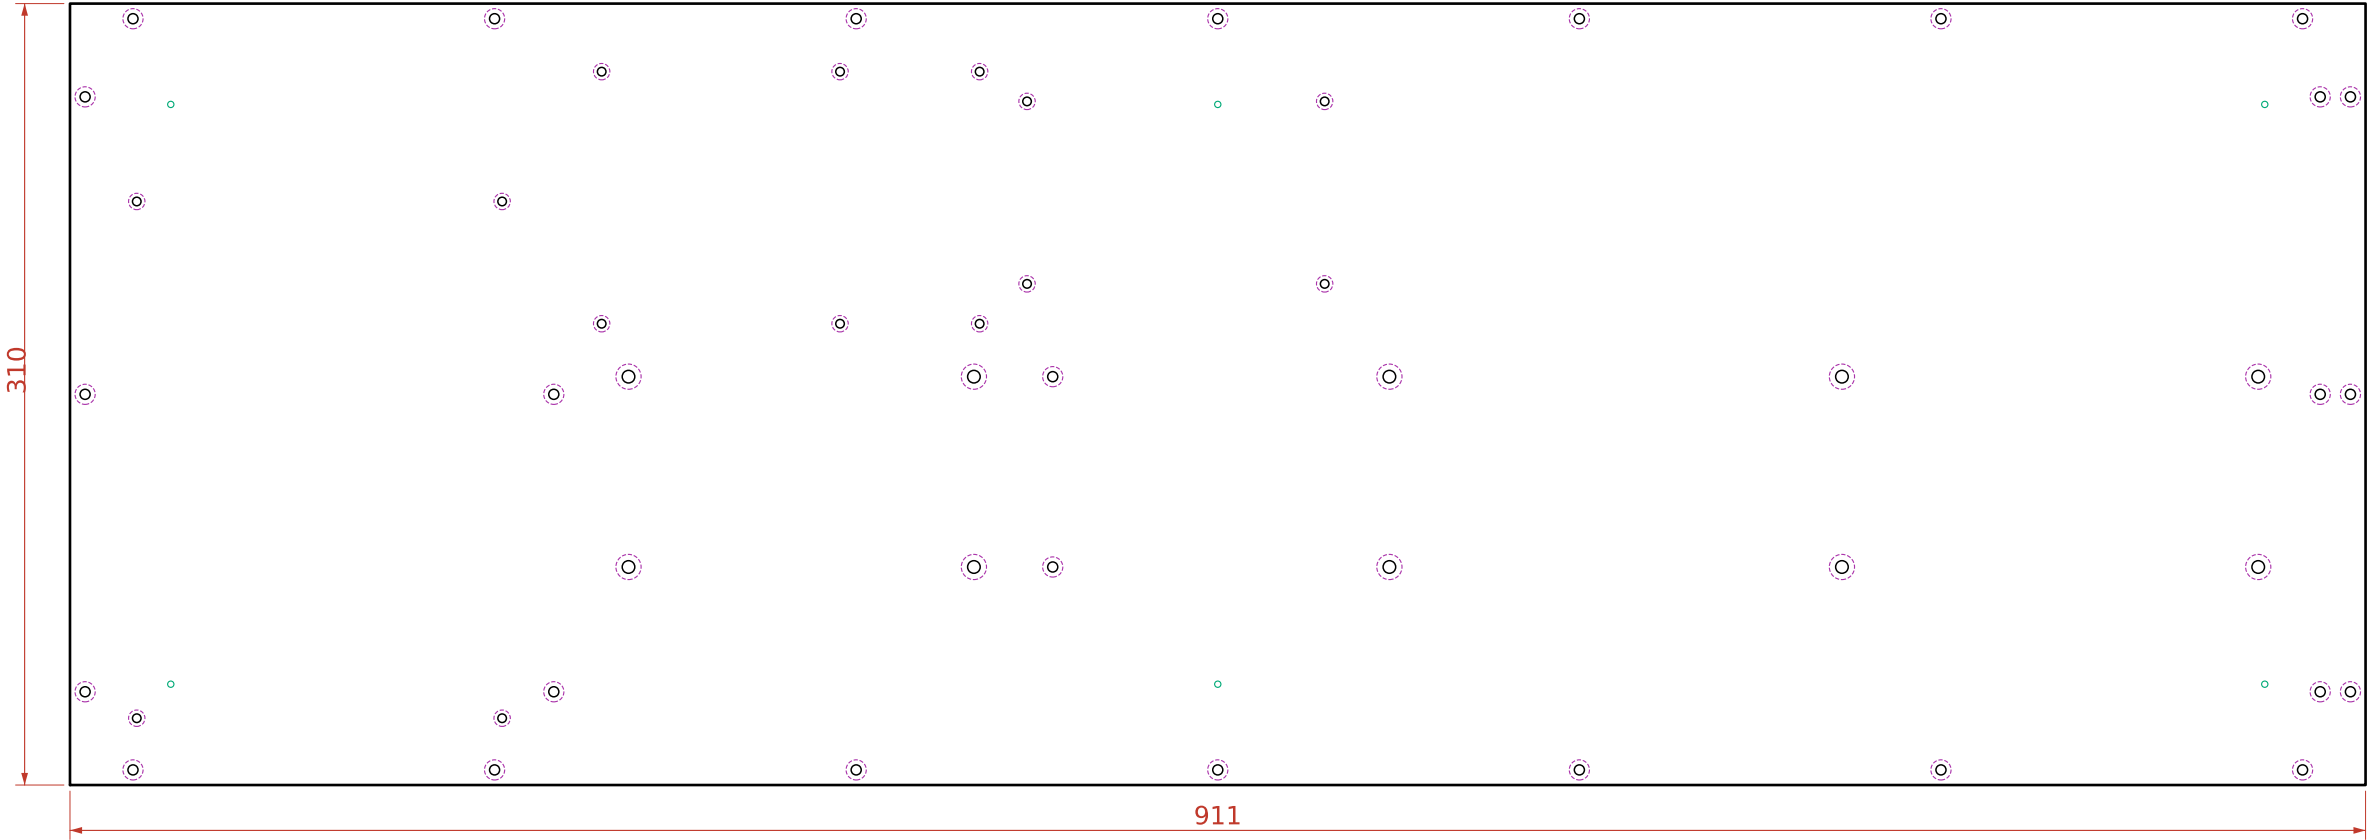

seen from above (inside). Countersinks: dashed = on the underside. Coordinates x/y from the front left corner.

dia 5 csk 10 far face (10 x) keybed, screw from below

221.65/86.5 358.72/86.5 523.61/86.5 703.2/86.5 868.4/86.5 221.65/162 358.72/162 523.61/162 703.2/162 868.4/162

dia 4 csk 8 far face (27 x) assembly screw 4 x 30

25/6 168.5/6 312/6 455.5/6 599/6 742.5/6 886/6 6/37 192/37 893/37 905/37 390/86.5 6/155 192/155 893/155 905/155 390/162 6/273 893/273 905/273 25/304 168.5/304 312/304 455.5/304 599/304 742.5/304 886/304

dia 3.4 csk 6.5 far face (4 x) panel standoff M3

26.5/26.5 171.5/26.5 26.5/231.5 171.5/231.5

dia 3.4 csk 6.5 far face (6 x) emulator standoff M3

211/183 305.6/183 361/183 211/283 305.6/283 361/283

dia 3.4 csk 6.5 far face (4 x) power supply standoff M3

379.81/198.81 497.92/198.81 379.81/271.2 497.92/271.2

pilot 2.5 (6 x) foot

40/40 455.5/40 871/40 40/270 455.5/270 871/270

ARP 3620 replica - wooden case

Rev0.1 08.10.2026

Base


CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase

sheet 4

scale 1:3

Front wall - 1 x

birch plywood 12 mm, seen from the front [front]

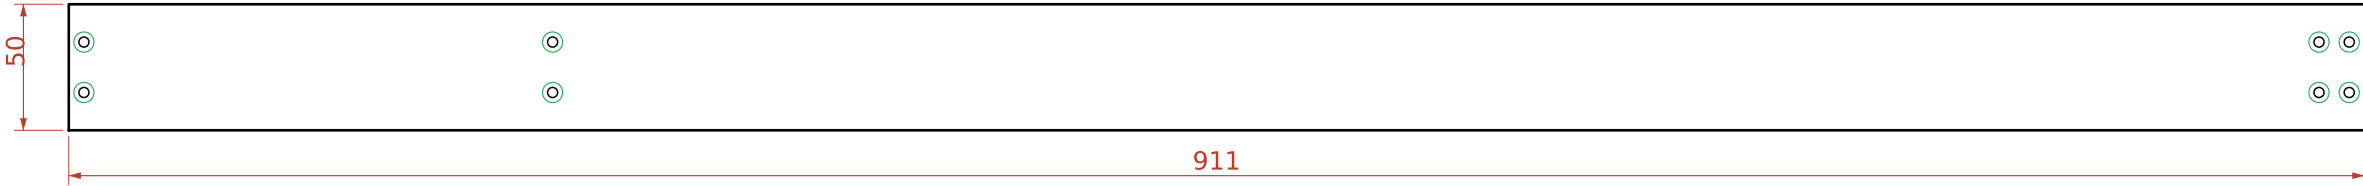


Countersinks on this face (outside), heads under the tolex.

dia 4 csk 8 this face (8 x) screw 4 x 40 into end wall / cheek
6/15 192/15 893/15 905/15 6/35 192/35 893/35 905/35

Rear wall - 1 x

birch plywood 12 mm, seen from the front [rear]

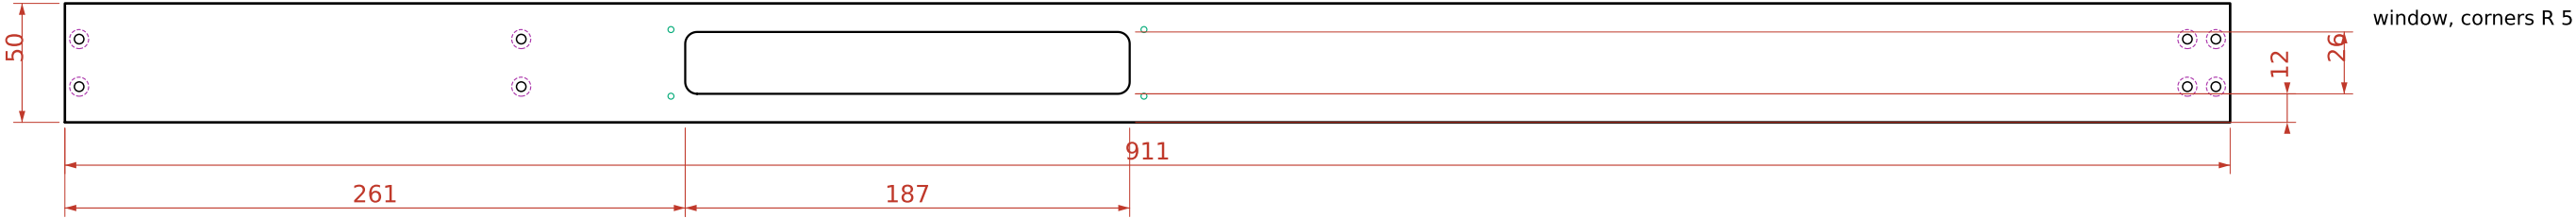

Seen from inside. Countersinks on the far face (outside), heads under the tolex. Window for the bodies of the rear plate parts.

dia 4 csk 8 far face (8 x) screw 4 x 40 into end wall / cheek
6/15 192/15 893/15 905/15 6/35 192/35 893/35 905/35
pilot 2.5 (4 x) rear plate, screw 3.5 x 16
255/11 454/11 255/39 454/39

End wall - 2 x


birch plywood 12 mm, seen from the right [end_l, end_r]



End walls: plain, no holes - screws come through the front/rear wall and the base.

Cheek left - 1 x

birch plywood 12 mm, seen from the right [cheek_l]

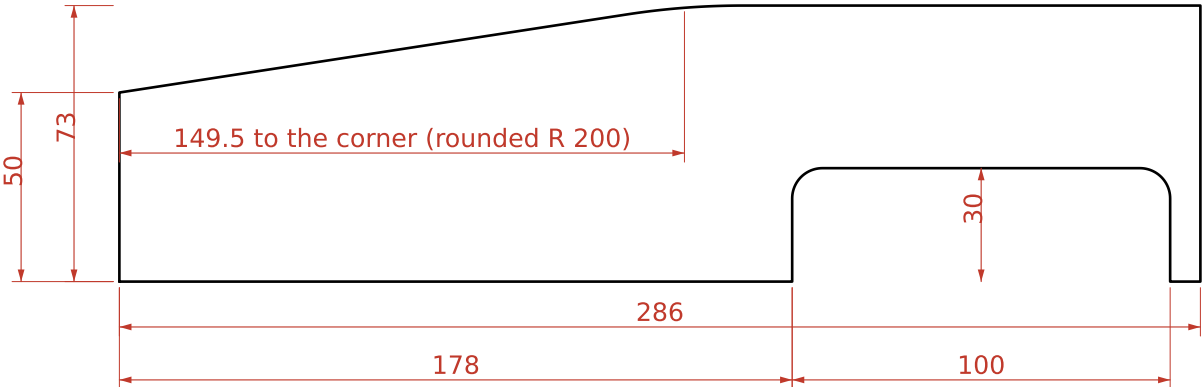


front edge (left) against the front wall,
rear edge against the rear wall.
Slope from 50 to 73 high, blending into the
flat top with R 200 (tangent points in the DXF).
Tolex on both faces and the top edge.

Cable notch 100 x 30, corners R 8: cables
from the electronics bay to the panel section.

Cheek right - 1 x

birch plywood 12 mm, seen from the right [cheek_r]

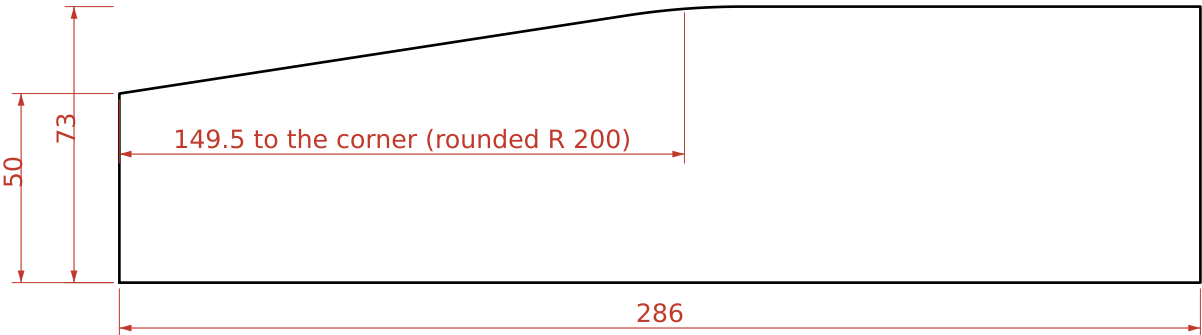

front edge (left) against the front wall,
rear edge against the rear wall.
Slope from 50 to 73 high, blending into the
flat top with R 200 (tangent points in the DXF).
Tolex on both faces and the top edge.

ARP 3620 replica - wooden case	Rev0.1 08.10.2026
Cheeks	sheet 6
CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	scale 1:2

Strip behind the keys - 1 x

birch plywood 9 mm, seen from above [strip]



seen from above; screws into the cleats on the cheeks, countersunk on top (black screws)

dia 4 csk 8 this face (6 x) screw 3.5 x 20 into cleat

7.5/33.5 681.5/33.5 7.5/73.5 681.5/73.5 7.5/113.5 681.5/113.5

Apron under the strip - 1 x


birch plywood 9 mm, seen from the front [apron]



glued under the rear edge of the strip, flush with its rear edge; reaches 10 mm below the wall top

Keybed riser - 2 x

birch plywood 12 mm, seen from above [riser_1, riser_2]

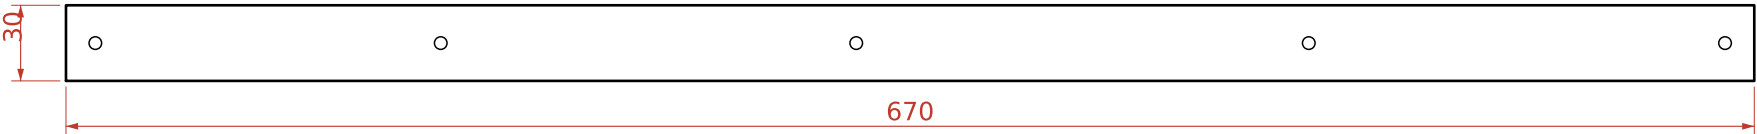


two risers along the rows of keybed feet, glued and screwed onto the base

dia 5 (5 x) keybed screw

11.65/15 148.72/15 313.61/15 493.2/15 658.4/15

Strip cleat - 2 x


birch plywood 12 mm, seen from the right [cleat_l, cleat_r]



glued + 2 screws to the cheek,
top 9 below the strip top

Filler cleat - 2 x


birch plywood 12 mm, seen from the right [fcleat_l, fcleat_r]



carry the filler (left wall, left cheek)

Filler behind the panel - 1 x

birch plywood 9 mm, seen from above [filler]

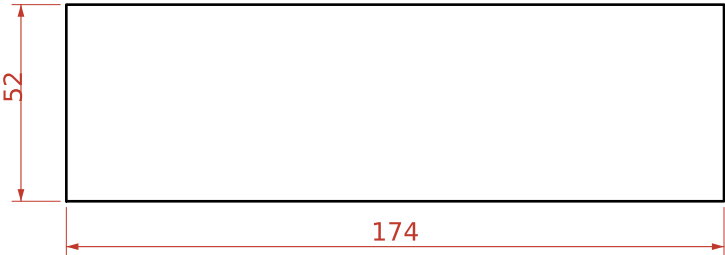

glued onto the cleats, flush with the wall top

ARP 3620 replica - wooden case

Rev0.1 08.10.2026

Strip, risers, cleats, filler


CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase

sheet 7

scale 1:3 / 1:2


Lid top - 1 x

birch plywood 6 mm, seen from above [lid_top]



Lid front/rear - 2 x

birch plywood 9 mm, seen from the front [lid_front, lid_rear]



Lid end - 2 x

birch plywood 9 mm, seen from the right [lid_end_l, lid_end_r]




Walls 9 mm, inside height 30 above the case walls (7 clear above the strip).
Front and rear walls run through, the ends sit between them, the top lies on the walls.
Glue and pin; tolex outside and around the lower edge.
The lid sits on the case walls, flush outside. 4 latches centred on the joint (2 front, 2 rear)
keep it in place; the latches also locate it sideways.

ARP 3620 replica - wooden case	Rev0.1 08.10.2026
Lid	sheet 8
CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	scale 1:4

Rear plate - 1 x

aluminium 2 mm, seen from the rear [plate]

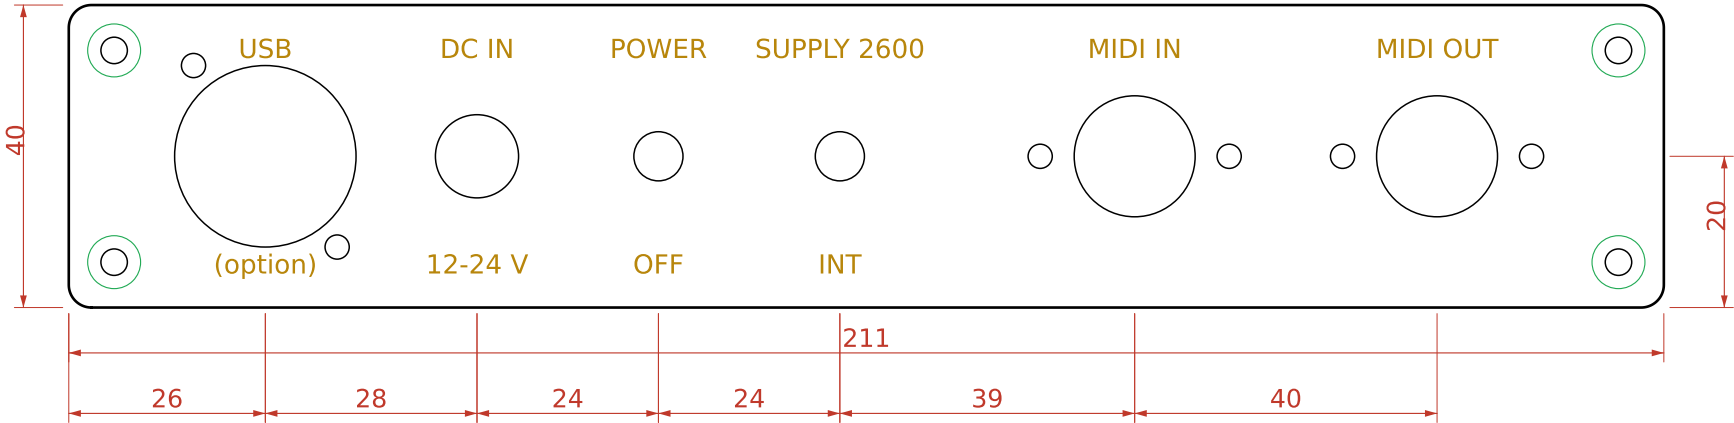

- dia 24 (1 x) USB
26/20
- dia 16 (1 x) MIDI IN
141/20
- dia 16 (1 x) MIDI OUT
181/20
- dia 11 (1 x) DC IN
54/20
- dia 6.5 (1 x) POWER
78/20
- dia 6.5 (1 x) SUPPLY 2600
102/20
- dia 3.5 csk 7 this face (4 x) screw 3.5 x 16
6/6 205/6 6/34 205/34
- dia 3.2 (2 x) USB
35.5/8 16.5/32
- dia 3.2 (2 x) MIDI IN
128.5/20 153.5/20
- dia 3.2 (2 x) MIDI OUT
168.5/20 193.5/20

Aluminium 2 mm, black anodised, legend engraved or printed white.
Seen from outside (from the rear of the case).
Mounted on the outside of the rear wall, over the tolex,
with 4 countersunk screws 3.5 x 16 (pilot holes in the rear wall).
Seen from the rear, the plate starts 451 from the left end of the case;
its lower edge is 14 above the underside of the base.
The window in the rear wall takes the bodies of the parts.
Behind the emulator only 25 mm depth is free; the deep USB
extension sits at the left end, behind the power supply.
Hole sizes are placeholders until the parts are chosen.

ARP 3620 replica - wooden case	Rev0.1 08.10.2026
Rear plate	sheet 9
CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	scale 1:1

Cut list (finished sizes, mm)

part	qty	material	length	width	covering / finish
Base	1	birch plywood 9	911	310	underside painted black, top edge covered by the tolex of the walls
Front wall	1	birch plywood 12	911	50	tolex outside, over the top edge, 20 mm down the inside
Rear wall	1	birch plywood 12	911	50	tolex outside, over the top edge, 20 mm down the inside
End wall	2	birch plywood 12	286	50	tolex outside, over the top edge
Cheek left	1	birch plywood 12	286	73	tolex on both faces and the top edge
Cheek right	1	birch plywood 12	286	73	tolex on both faces and the top edge
Keybed riser	2	birch plywood 12	670	30	black paint
Strip behind the keys	1	birch plywood 9	689	136.5	tolex on top, front edge and ends
Apron under the strip	1	birch plywood 9	689	24	black paint, glued and screwed under the strip
Strip cleat	2	birch plywood 12	109	12	black paint
Filler behind the panel	1	birch plywood 9	174	52	tolex on top and front edge
Filler cleat	2	birch plywood 12	52	12	black paint
Lid top	1	birch plywood 6	911	310	tolex outside
Lid front/rear	2	birch plywood 9	911	30	tolex outside and over the lower edge
Lid end	2	birch plywood 9	292	30	tolex outside and over the lower edge
Rear plate	1	aluminium 2	211	40	black anodised, engraved white (or printed)

net area: birch plywood 9 mm: 0.47 m2, birch plywood 12 mm: 0.21 m2, birch plywood 6 mm: 0.28 m2, aluminium 2 mm: 0.01 m2

Hardware

- Tolex, black (vinyl case covering), approx. 1.1 m2 incl. 25 % waste
outside, see covering notes
- contact cement for tolex, wood glue (PVAc)
- 27 x countersunk wood screw 4 x 30
base -> walls, cheeks, risers (from below)
- 16 x countersunk wood screw 4 x 40
front/rear wall -> end walls and cheeks
- 6 x countersunk wood screw 3.5 x 20, black
strip -> cleats (removable strip)
- 6 x wood screw 3 x 20
apron -> strip (from above, under the tolex) and cleats -> cheeks
- 4 x countersunk screw 3.5 x 16, black
rear plate
- 10 x keybed screw from below through base and riser
length ~ 21 mm + thread in the keybed foot; type to be confirmed on the keybed (hole 4.5)
- 4 x M3 standoff, total length 48 mm (e.g. 40 + 8, female/male)
panel corners, M3 x 12 countersunk from below, M3 x 6 black from the top
- 10 x M3 standoff 6 mm, 10 x M3 x 12 countersunk
emulator (6), power supply (4)
- 6 x rubber foot dia 25 x 12 with screw
- 4 x draw latch (case latch), small, ~40 mm wide
lid: 2 front, 2 rear, centre on the lid joint
- rear plate parts: 2 x DIN 5-pin panel socket, DC jack 5.5/2.1, 2 x toggle switch, USB extension (option)
hole sizes on the plate are placeholders - confirm with the chosen parts
- optional: 8 x case corner, carrying handle

Assembly

1. Cut all parts, drill and countersink as per DXF (CSK_BACK = countersink on the far face).
2. Check KB_LIP and the screws on the real keybed first; fit the keybed onto the risers dry.
3. Risers onto the base (glue + screws from below).
4. Cheeks and end walls onto the base, then front and rear wall (glue, screws through the base and the walls).
5. Cleats onto the cheeks, filler cleats, filler glued in.
6. Apron glued and screwed under the strip; the strip stays removable.
7. Lid: front, rear, ends, top - glue and pins.
8. Fill the screw heads, sand, round all outside edges to about R2.
9. Paint the inside black, then tolex outside with contact cement; wrap 20 mm over the top edges. Strip, filler and cheeks get tolex on all visible faces.
10. Rear plate, latches, feet; panel on its standoffs, electronics on the base, keybed screwed from below.

Open points

- KB_LIP 39 (key front lower edge) scaled from the Fatar drawing - measure.
- Keybed screw type and length (foot hole 4.5).
- Board spacer 12 and parts height under the 3620 board.
- Rear plate parts and their hole sizes.
- Latch type; optional handle and case corners.

ARP 3620 replica - wooden case	Rev0.1 08.10.2026
Cut list, hardware, assembly	sheet 10
CC BY-SA 4.0 (c) 2026 Dsl-man.de - github.com/dslmande/arp3620-woodcase	mm