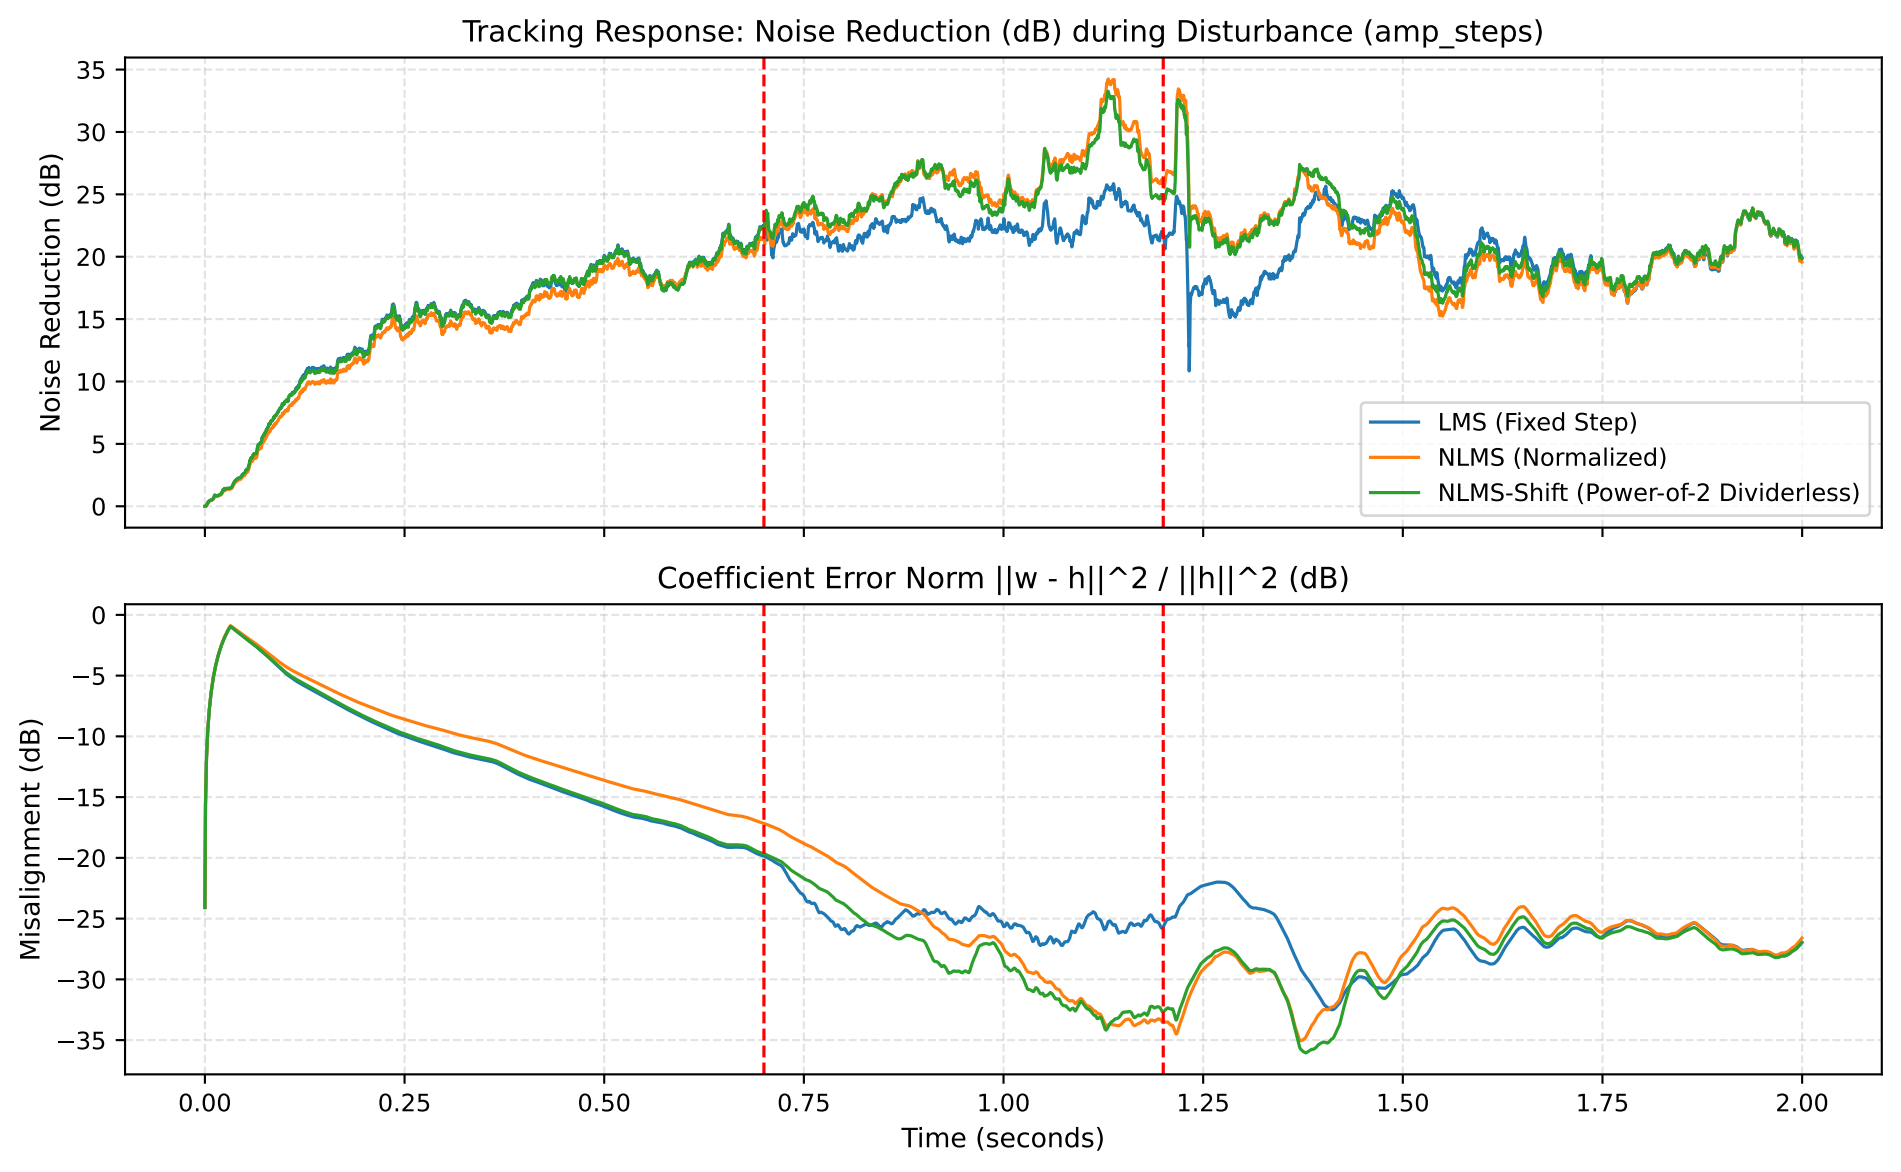

Tracking Response: Noise Reduction (dB) during Disturbance (amp_steps)
Noise Reduction (dB)
35
30
25
20
15
10
5
0
LMS (Fixed Step)
NLMS (Normalized)
NLMS-Shift (Power-of-2 Dividerless)
Coefficient Error Norm ||w - h||^2 / ||h||^2 (dB)
Misalignment (dB)
0
−5
−10
−15
−20
−25
−30
−35
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
Time (seconds)