DO NOT SCALE

COMPONENT	SIZE, TYPE	W.L.NO.	QTY.
R1	27K ¼W 5%	330-4028	1
R2	33K ¼W 5%	330-4034	1
R3,6	2.2K ¼W	330-3022	2
R4,5	1.8K ¼W	330-3018	2
R7	180Ω ¼W	330-2018	1
R8	220Ω ¼W	330-2022	1
R9,10,11,12,13,14,15,16	10K ¼W	330-4010	8
R17,20	470Ω ¼W	330-2047	2
R18,19	3.3K ¼W	330-3033	2
C1	.0015μf MYL.	300-2015	1
C2	.0022μf MYL.	300-2022	1
C3,21,22,23	.05μf	300-1900	4
C4,5,6,7,8,9,10,11	330μμf	300-1330	8
C12,14	220μμf	300-1220	2
C13,15,27	.001μf	300-1906	3
C16,17,18	680μμf	300-1680	3
C19,20	10μf/15V	380-3006	2
C24,25	15μf/20V TANT.	300-4022	2
C26	.0047μf 500V	300-1910	1
D1,2,6,7,8,9	SIL. DIODE	380-1001	6
D3,4,5	GER. DIODE	380-0000	3

SEE NOTE

I.C. LOCATION	TYPE	W.L. NO.	TERM FOR ±0V	TERM FOR VCC +5VR	QTY.
L1,3,7,9,13,18	SN7404N	376-0010	7	14	6
L2	F9932	376-0046	7	14	1
L4,5,17	SN7495N	376-0059	7	14	3
L6	SN7437N	376-0068	7	14	1
L8,15*	SN7403N	376-0028	7	14	2
L10	F9935	376-0025	7	14	1
L11	F9602	376-0104	8	16	1
L12,21	SN74H00N	376-0037	7	14	2
L14	SN7475N	376-0013	12	5	1
L16	SN7426N	376-0087	7	14	1
L16A	SN7400N	376-0002	7	14	1
L19,20	SN7406N	376-0055	7	14	2

SIGNAL-TERMINAL DESIGNATIONS, VIEW FROM BOTTOM (WIRING) SIDE OF CONNECTOR

CONN.4

±0V	A 1		M.S.V. (-13V)
CHA. GND.	B 2		+5VR
	C 3	$\overline{A_9}$	A_{10}
OPR4	D 4		A_{11}
OPR3	E 5		$\overline{A_{11}}$
OPR2	F 6		$\overline{A_{10}}$
OPR1	H 7		$\overline{A_3}$
	J 8	$\overline{A_2}$	A_0
$\overline{RWC}$	K 9		$\overline{A_1}$
	L 10		$\overline{A_4}$
	M 11		$\overline{A_5}$
	N 12		$\overline{A_6}$
	P 13		$\overline{A_7}$
	R 14		$\overline{A_8}$
No	S 15		+12V

COMP. SIDE — WIRING SIDE

CONN.1

$\overline{RWC}$	A 1		KK2
+5VR	B 2		KK0
±0V	C 3		KK1
$\overline{IOC}$	D 4		$\overline{IOB_3}$
$\overline{GISN}$	E 5		$\overline{IOB_1}$
$\overline{GLRN}$	F 6		$\overline{IOB_2}$
$\overline{RBS}$	H 7		$\overline{mop_{15}}$
mop_{12}	J 8		$\overline{GKB_3}$
$\overline{SKB_1}$	K 9		$\overline{KB_2}$
$\overline{KB_3}$	L 10		$\overline{GKB_2}$
$\overline{GKB_1}$	M 11		CHA. GND.
$\overline{GKA_0}$	N 12		KBL
$\overline{GKA_1}$	P 13		$\overline{CR1}$
CDP	R 14		$\overline{GKA_3}$
$\overline{GKA_2}$	S 15		$\overline{GKB_0}$

CONN.2

$\overline{CE_1}$	A 1		$\overline{KB_0}$
$\overline{CE_2}$	B 2		$\overline{KB_1}$
CE_2	C 3		$\overline{KA_3}$
CE_1	D 4		$\overline{KA_2}$
MC	E 5		$\overline{KA_0}$
CK5	F 6		$\overline{KA_1}$
CK1234	H 7		CBD
Rb_0B	J 8		$\overline{KBD_3}$
$\overline{Rb_3B}$	K 9		$\overline{GKBD}$
Rb_3B	L 10		$\overline{No\,B}$
RB_3	M 11		$\overline{N_3B}$
RB_2	N 12		$\overline{GI_0A_2Fb}$
RB_0	P 13		$\overline{N_1B}$
RB_1	R 14		$\overline{N_2B}$
$\overline{Rb_1B}$	S 15		$\overline{GI_0A_3Fb}$

CONN.3

C_1	A 1		KAP
R_5	B 2		KBP
C_5	C 3		$\overline{GI_0B_0Fb}$
C_4	D 4		$\overline{GI_0B_1Fb}$
C_3	E 5		$\overline{GI_0B_2Fb}$
C_2	F 6		$\overline{GI_0B_3Fb}$
N_2	H 7		$\overline{GI_0A_1Fb}$
N_1	J 8		$\overline{GI_0A_0Fb}$
N_3	K 9		$\overline{TKWS}$
No	L 10		$\overline{GISO}$
$\overline{TKA_0}$	M 11		$\overline{TKA_1}$
$\overline{TKB_3}$	N 12		+12V
$\overline{TKB_2}$	P 13		±0V
$\overline{TKB_1}$	R 14		+5VR
$\overline{TKB_0}$	S 15		M.S.V. (-13V)

COMP. SIDE — WIRING SIDE

SIGNAL-TERMINAL DESIGNATIONS, VIEW FROM BOTTOM (WIRING) SIDE OF CONNECTOR

NOTE:
ON MODEL 600 USING THE WIRED BRAID REMOVE CAP, "C26". FOR MODEL 600 USING MOS ROM DO NOT REMOVE "C26".

COMPONENT LAYOUT 6185

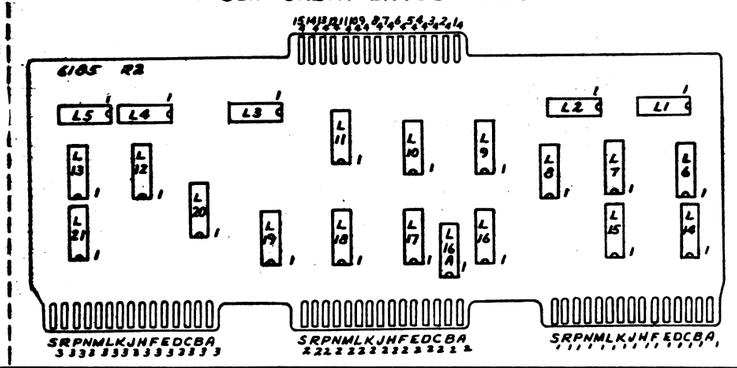

NO.	REVISION	BY	CHK	APP'D
1	REVISED: PER E.C.#3203 APP'D. 3/4/74	KK	TAS	
2	REVISED: PER E.C.#3127 APP'D. 3/4/74	DE	TAS	
3	REVISED: PER E.C.#3356 APP'D. 5/1/74	LE	TAS	
4	REVISED: PER E.C.#3304 APP'D. 5/24/74	LE	TAS	
5	REVISED: PER E.C.#3867 APP'D. 8/21/74	LE	TAS	
6	REVISED: PER E.C.#4015 APP'D. 9/4/74	KK	TAS	
7	REVISED: PER E.C.#4113 APP'D. 9/24/74	LE	TAS	
8	REVISED: PER E.C.#4232 APP'D. 10/24/74	KK	TAS	
9	REVISED: PER E.C.#4316 APP'D. 11/14/74	KK	TAS	
10	REVISED: PER E.C.#4516 APP'D. 1/6/75	LE	TAS	

WANG LABORATORIES INC.
TEWKSBURY, MASS.

MODEL NO.	DRAWN	APP.
SEE NOTE	F.S.S. 2-16-72	S.F. 1/10 1/10/72
500/520/600	CHECKED 1-13-75	APP.

TITLE: SCHEMATIC LOGIBLOC #6185 I/O BUFFER FOR MOD. 600

SHT 4 OF 5 — DWG. NO. D 6185 — REV. 10

WLT# 210-6185