

HOTA




D6 PRO

合格证
已检验

AC/DC双通道智能充电器

功能参数

输入电压	AC 100~240V / DC 6.5~30V	平衡电流	最大1600mA x 2
充电电流	0.1~15A x 2	放电电流	0.1~3A x 2
充电功率	DC 325W x 2 @ input voltage > 24V	外部放电电流	1~15A x 2
	AC 200W (自动分配)	USB输出口	5V / 2.1A
放电功率	内部放电: 15W x 2(平衡口10Wx2)	存储温度	-20~60°C
	外部放电: 325W x 2(650W)	工作温度	0~40°C
电池类型	LiHV/LiPo/LiFe/LiIon/Liix: 1~6S NiZn/NiCd/NiMH: 1~16S Smart Battery: 1~6S Lead Acid(Pb): 1~12S(2~24V) Eneloop: 1~16S	显示屏尺寸	2.8" 320x240 26万色
		外形尺寸	108mmx105mmx76mm
		净重	575g

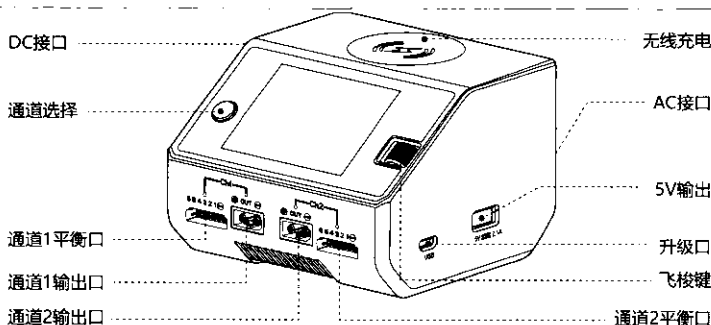

- 不得拆解本产品。
- 不得使本产品暴露于热源、火源或温度高于60°C (140°F) 的环境中。
- 避免存放在阳光直射处。
- 不得将本产品短路。
- 不得使本产品接受机械性冲击。
- 孩童使用本产品时必须要有成人从旁监督。
- 结束充电后请从插座上拔下充电器。
- AC接入的情况下DC输入口禁止接入电池等任何设备。
- 电源模式工作状态下输出端口禁止接入电池。



警告!



火源!

安全注意事项:

请勿在无人监督下使用充电器!

- 如果操作不当,充电器和电池将有严重的火灾风险;
- 使用充电器前请仔细阅读完整的使用手册;
- 充电器使用过程中可能会散发热量;
- 仅在通风处操作充电器,远离易燃物品;
- 不遵守安全程序可能导致财产损失或人身伤害。

制造商: 深圳市红太华科技有限公司

地址: 深圳市龙华区龙华街道富康社区宜德行工业厂区A栋2层215

执行标准: GB 4943.1-2022




D6 PRO

AC/DC Dual Channel Smart Charger

Specifications

Input Voltage	AC 100~240V / DC 6.5~30V	Balance Current	1600mA x 2
Charge Current	0.1~15A x 2	Discharge Current	0.1~3A x 2
Charge Power	DC 325W x 2 @ input voltage > 24V	External Discharge Current	1~15A x 2
	AC 200W (Support power distribution)	USB Output	5V / 2.1A
Discharge Power	Internal Discharge: 15W x 2 (Balance port 10W x 2)	Storage Temperature	-20~60°C
	External Discharge: 325W x 2 (650W)	Operating Temperature	0~40°C
Battery Type	LiHV/LiPo/LiFe/LiIon/Liix : 1~6S NiZn/NiCd/NiMH : 1~16S Smart Battery : 1~6S Lead Acid(Pb) : 1~12S(2~24V) Eneloop : 1~16S	Screen Size	2.8" 320x240 260000 colors
		Dimensions	108mmx105mmx76mm
		Net Weight	575g

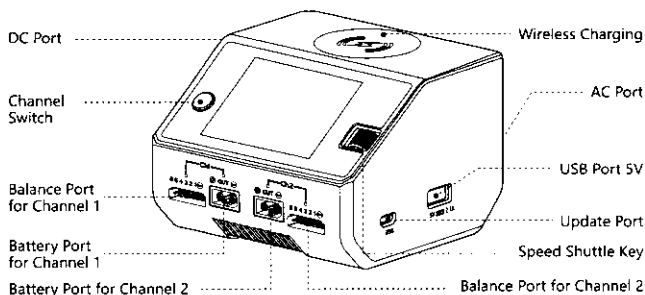

Warning

- Do not disassemble this product.
- Do not expose this product to heat, fire or any environment with temperature above 60°C (140°F).
- Avoid storing it in direct sunlight.
- Do not short-circuit this product.
- Do not subject this product to mechanical shock.
- Children must be supervised by adults when using this product.
- After charging is complete, unplug the charger from the socket.
- In the case of AC connection, the DC input port is prohibited from linking to any equipment such as batteries.
- In power mode while operating, it is forbidden to connect to the battery.



WARNING!



FIRE HAZARD!

NEVER USE CHARGER UNSUPERVISED!

- Batteries pose a SEVERE risk of fire if not properly handled.
- Read Entire operation manual before using charger.
- This unit may emit heat during use.
- Only operate this device in a cool ventilated area away from flammable objects.
- Failure to observe safety procedures may cause damages to property or injury.