

This drawing is NOT to be used for making reproductions thereof, or for making or using any apportus, equipment, subject matter, or technical information without written authorization of Neptune Research and Development, Inc. All prints are to be returned to Neptune immediately upon completion of work.

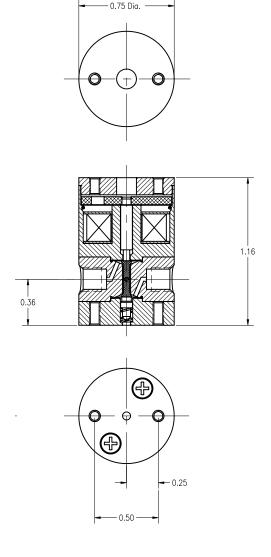



## **SPECIFICATIONS:**

Mechanical: (Each Port)

TYPE: 3w diverter

PORT CONNECTION: #10-32 Flat bottom.

NOMINAL ORIFICE: 0.040 In. (1.0 mm)

OPERATING PRESSURE: Vacuum to 30 PSI (2 Bars)

TEST PRESSURE: 30 PSI N<sub>2</sub> (Less than 3µI/Min. Leakage.)

INTERNAL VOLUME: 27 microliters total from

bottom of ports.

WETTED MATERIALS: TEFLON®
MOUNTING ORIENTATION: Any Position

Electrical: (At 70° F No Pressure Applied)

OPERATING VOLTAGE: 12 VDC

12 to 24 VDC subject to duty

cycle and / or holding voltage

applied.

POWER CONSUMPTION: 1.13 Watts at 12 VDC (Approximately)

LEAD WIRES: #26 AWG, TFE Insulated

Yellow 12 Inches (305mm) long.

TEST VOLTAGE (ON): < 9 VDC
TEST VOLTAGE (OFF): 0.5 to 4 VDC
RESPONSE TIME (ON): < 20ms at 12 VDC

5 to 20 ms subject to

applied voltage and driving

circuits.

RESPONSE TIME (OFF): < 30ms from 12 VDC

30 to 5 ms adjustable by

driving circuits.

NOTE 1.)

Continouos rating applies to solenoid construction only. Since other materials incorporated in the product may not tolerate temperature variations as well as the solenoid application of holding voltage is strongly reccommended.

NOTICE:

This product is protected by one or more of the following United States Patents: 4,496,133; 4,993,456; 5,143,118; Re. 34,261 5,433,244. Other Patents Pending.

UNLESS OTHERWISE SPECIFIED			<b>Scale</b> 2 : 1 (B)	Material As noted	
Fractions	± 1/64	± 0.005 All Small Fin. Radii 0.003-0.008 ± 0.002 All surfaces shall be Concentric,	Dr. By A. Sule	<b>Date</b> 07-23-1995	Nesearch
2 Pl. Dec. 3 Pl. Dec.	± 0.005 + 0.002		Rev. By F.Tarnok	<b>Date</b> 04-21-2010	
Angular	± 0.06°		Part Name		Drawing Number
All Fin. Surf.		to Each Other within 0.001 T.I.R.	.161T031 3w	12vdc	.161V258