

Fault Detection and Isolation - Report

Emmeran Colot

I. INTRODUCTION

This report covers the different implementations of fault detection and isolation methods for discrete-time systems. It shows and analyses the results obtained based on the theoretical explanations given by Prof. M. Kinnaert in the *Model-Based and Data-Driven Fault Detection and Isolation* course.

The discrete-time state space model is given by

$$\begin{cases} x[k+1] = Ax[k] + Bu[k] + E_d d[k] + E_f f[k] \\ y[k] = Cx[k] + Du[k] + G_d d[k] + G_f f[k] \end{cases} \quad (1)$$

where $x \in \mathbb{R}^{n \times 1}$ is the state, $u \in \mathbb{R}^{m \times 1}$ the input to the system, $y \in \mathbb{R}^{p \times 1}$ the output of the system, $d \in \mathbb{R}^{n_d \times 1}$ the disturbance and $f \in \mathbb{R}^{n_f \times 1}$ the fault. The exact values for those matrices are given in Appendix A.

II. PARITY RELATIONS BASED METHOD

A. Overview of the method

Based on the state space representation (1), $y[k]$ can be expressed as a function of the state at time instance $k-s$ and the input, disturbance and fault from time instance $k-s$ up to k . This was derived by recurrence and the resulting equation, in a matrix form, is

$$Y_s(k) = \Theta_s x(k-s) + T_s^u U_s(k) + T_s^d D_s(k) + T_s^f F_s(k). \quad (2)$$

The "signal matrices" are built as follows

$$Y_s(k) = \begin{bmatrix} y[k-s] \\ \vdots \\ y[k] \end{bmatrix} \quad \cdots \quad F_s(k) = \begin{bmatrix} f[k-s] \\ \vdots \\ f[k] \end{bmatrix}, \quad (3)$$

and the "weight matrices":

$$\Theta_s = \begin{bmatrix} C \\ CA \\ \vdots \\ CA^s \end{bmatrix}, \quad T_s^u = \begin{bmatrix} D & \mathbf{0} & \cdots & \mathbf{0} \\ CB & D & \ddots & \vdots \\ \vdots & \ddots & \ddots & \mathbf{0} \\ CA^{s-1}B & \cdots & CB & D \end{bmatrix} \quad (4)$$

$$T_s^{d/f} = \begin{bmatrix} G_{d/f} & \mathbf{0} & \cdots & \mathbf{0} \\ CE_{d/f} & G_{d/f} & \ddots & \vdots \\ \vdots & \ddots & \ddots & \mathbf{0} \\ CA^{s-1}E_{d/f} & \cdots & CE_{d/f} & G_{d/f} \end{bmatrix}$$

Because of their nature, disturbances are unknown (stochastic noise, nonlinearities, unmeasured input signal, ...) and the state is often not measured. To only keep from (2) the fault and the measured signals, they are split from the other terms and both sides of the equation is then multiplied by Ω_s .

The unknown side of the equation can then be cancelled with a clever choice for Ω_s , i.e. a basis of the left null space of $[\Theta_s \ T_s^d]$:

$$\Omega_s (Y_s(k) - T_s^u U_s(k) - T_s^f F_s(k)) = \mathbf{0}. \quad (5)$$

It is worth mentioning the existence condition for Ω_s , which depends on the rank of the matrix to cancel:

$$\text{rank} [\Theta_s \ T_s^d] < (s+1)p \quad (6)$$

This leads to the definition of the residual vector, which is equal to $\mathbf{0}$ in case there is no fault and is computed by

$$r[k] = \Omega_s (Y_s(k) - T_s^u U_s(k)). \quad (7)$$

B. Fault detection

Applied to a system with 1 input and 2 outputs, a simulation has been done with $s = 2$. It contains a sinusoidal disturbance and a fault on the sensors. Fig. 1 shows what is computed by the simulation in a case where no fault is present.

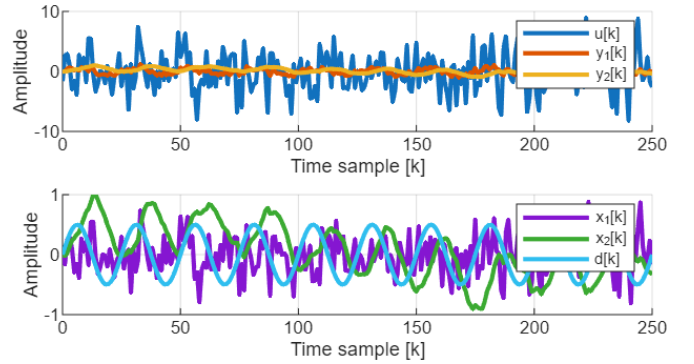


Fig. 1. Measured signals (top) and internal signals (bottom) in a faultless scenario.

The simulation is ran with a constant bias error on each of the two sensors and the resulting residual vector norm is shown on Fig. 2.

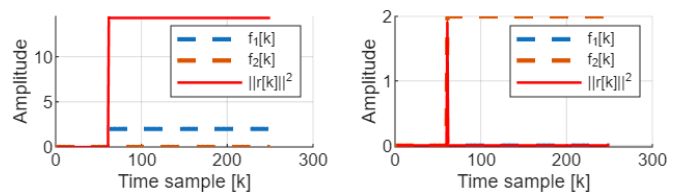


Fig. 2. Applied fault (on state 1 on the left plot and state 2 on the right plot) and resulting residual.

The residual on the right subplot indicates that the fault can be detected but is forgotten after a few samples. This

is because the second state integrates the input, meaning a constant error will not be detected. On the other hand, the first state is simply amplifying the input. A constant difference between the expected output and the measured one is therefore easily detected.

For the same reason, a ramp-shaped fault will generate a ramp shaped-residual when applied on the first state and a constant residual in the other case, as shown on Fig. 3.

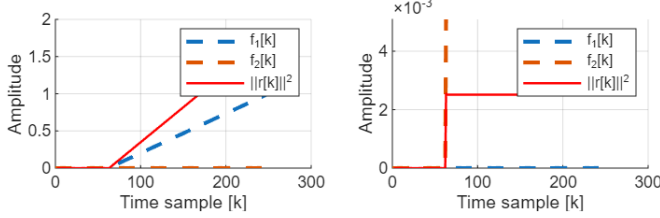


Fig. 3. Applied fault (on state 1 on the left plot and state 2 on the right plot) and resulting residual. The second fault looks like a step due to the scale difference between the residual vector norm and the fault signal.

C. Fault Isolation

To isolate the fault, i.e. determine which is the faulty sensor, residuals must be crafted by considering some faults as disturbances using a incidence matrix. Because on the existence condition on the left null space of $[\Theta_s \ T_s^d]$ given by (6), a residual generally cannot be built to control a single fault.

To understand how fault isolation works, the system is slightly modified by adding a second sensor on the first output. Three distinct residuals are then built, each targeting all but one fault according to the following incidence matrix:

	f_1	f_2	f_3
r_1	0	$\times$	$\times$
r_2	$\times$	0	$\times$
r_3	$\times$	$\times$	0

To generate r_1 , the disturbance matrices E_d , G_d and the fault matrices E_f , G_f are modified. By moving some columns from the fault matrices to the disturbance matrices as follows,

$$\begin{cases} E_d = \begin{bmatrix} E_{d1} \\ E_{f1} & E_{f2} & E_{f3} \end{bmatrix} \\ G_d = \begin{bmatrix} G_{d1} \end{bmatrix} \\ G_f = \begin{bmatrix} G_{f1} & G_{f2} & G_{f3} \end{bmatrix} \end{cases} \Rightarrow \begin{cases} E_d = \begin{bmatrix} E_{d1} & E_{f1} \\ E_{f2} & E_{f3} \end{bmatrix} \\ G_d = \begin{bmatrix} G_{d1} & G_{f1} \\ G_{f2} & G_{f3} \end{bmatrix} \end{cases} \quad (8)$$

the residual r_1 will now only detects faults on the 2nd and 3rd sensors. The same approach allows to generate 3 residuals, and therefore a fault can be isolated by inspecting which residual has not increased.

Fig. 4 shows a fault applied on different sensors and the corresponding residuals. Looking at the ones that are activated and combining it with the knowledge of the incidence matrix shows it is working as intended.

If multiple errors occur at the same time, there is no way of determining which sensor is faulty as shown on Fig. 5. As

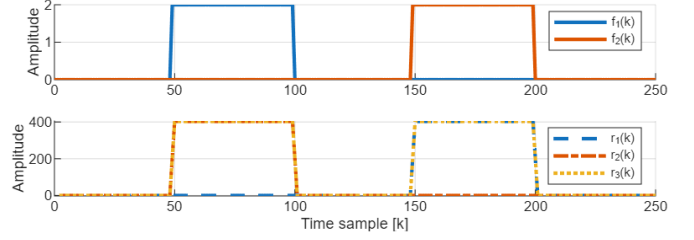


Fig. 4. Applied faults (top) and resulting residuals (bottom).

all the residuals are active between the 100th and the 150th samples, faults are still detected but cannot be isolated.

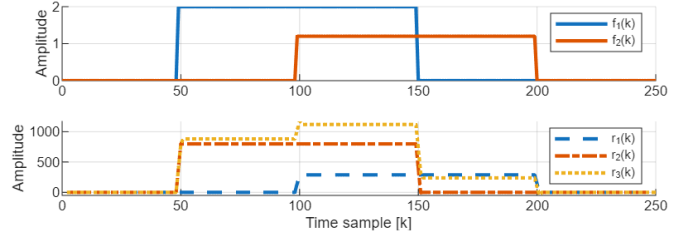


Fig. 5. Applied faults (top) and resulting residuals (bottom).

D. Redundant sensors

This section shows how a parity-based approach can be used to detect and isolate faults in a stochastic framework. The studied system is described in Appendix B and its simpler form compared to (1) facilitates the residual computation. The absence of a state update means Ω becomes the left null space of C only, and the residual becomes:

$$\begin{aligned} r[k] &= \Omega y[k] \\ &= \Omega (f[k] + \xi[k]) \end{aligned} \quad (9)$$

The variance of the residual can be computed as follows, taking into account ξ is zero-mean.

$$\mathbb{E}\left\{(r[k] - \Omega f[k])(r[k] - \Omega f[k])^T\right\} = \Omega R \Omega^T \quad (10)$$

This leads to the definition of the normalized residual such that $\tilde{r} \sim \mathcal{N}(0, 1)$.

$$\tilde{r}[k] = F y[k] \quad (11)$$

$$\text{where } F = [F_1 \ F_2 \ F_3] = (\Omega R \Omega^T)^{-\frac{1}{2}} \Omega$$

A decision layer is then built on top of this residual to estimate when a fault is occurring and when not. For this purpose, a detection measure $d[k]$ is defined based on sum of squares of residuals, meaning $d \sim \chi^2(d_f)^1$. Two decision criterions are used here:

$$d[k] = \begin{cases} \tilde{r}_1^2[k] + \tilde{r}_2^2[k], & \text{the overall criterion} \\ \sum_{i=0}^{N_w} \tilde{r}_1^2[k-i] + \tilde{r}_2^2[k-i], & \text{the windowed criterion} \end{cases} \quad (12)$$

¹ d_f is the number of degrees of freedom of variable d , which depends on its definition

The threshold value is determined based on this χ^2 distribution and is here chosen to let 1% of the samples to be above it. For a measure to be considered faulty, the percentage of residuals above this threshold should be larger than the theoretical 1%.

Fig. 6 shows that a faultless scenario (here with 10^4 samples) generates around 1% of above-threshold residuals, as expected. This number goes up to $\simeq 1.5\%$ in this test scenario (fault of 10% of the steady state value).

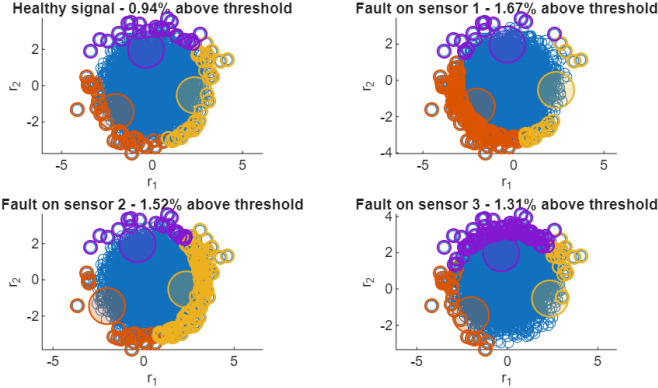


Fig. 6. Residuals (blue) and fault directions: F_1 in orange, F_2 in yellow and F_3 in purple. Residuals above the threshold are colored with the fault they are attributed to.

Isolation is performed by matching above-threshold residuals to the fault vector F_i they are the closest (angularly). Fig. 6 shows that the faulty sensor is correctly identified.

1) *Decision criterion comparison:* From (12), it can be seen that the overall criterion is equal to the windowed criterion, if the window length N_w is set to 1. Therefore, the decision criterion is compared for a set of window lengths as shown on Fig. 7.

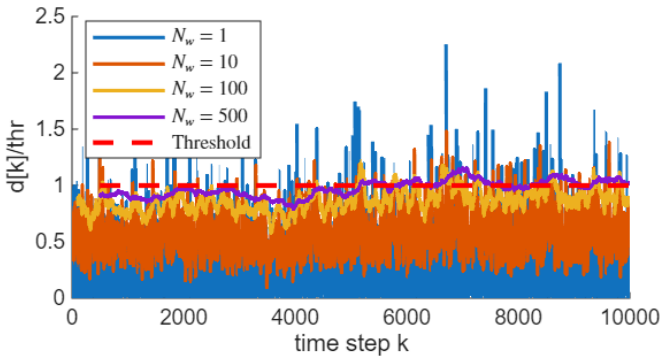


Fig. 7. Decision variable depending on the window length for a fault occurring from sample 5000 until the last sample. $d[k]$ is scaled by their threshold such that their overlapping has a meaning.

It can be seen that increasing the window length smoothen $d[k]$, which makes it stick closer to the threshold. Once the default has occurred, almost every sample is detected as being faulty and the above-threshold percentage increases with the window size, as shown in Table I.

TABLE I
PERCENTAGE OF SAMPLES ABOVE THRESHOLD DEPENDING ON THE WINDOW LENGTH .

Window length N_w	Above-threshold percentage
1	1.33%
10	2.10%
100	6.60%
500	23.16%

III. OBSERVER BASED METHOD

In this section, faults will be detected and isolated using methods based on state estimation. Depending on the type of model, Luenberger estimators or Kalman filters will be applied to build residuals.

The objective is to perform fault detection and isolation on the output signal of a tree-phased signal, which model is derived in Appendix C. Because there is no input to the system, all the equations in this section do not contain the input term u nor the related matrices of the state space model B and D .

A. Deterministic model

Starting from the discrete-time state space model (1), it is here considered to be free of any disturbance. A Luenberger observer is then built such that $\hat{x}$ estimates the true state x using

$$\hat{x}[k+1] = A\hat{x}[k] + L(y[k] - C\hat{x}[k]). \quad (13)$$

The residual is then defined as the difference between the estimated output $\hat{y}$ and the measured one

$$\begin{aligned} \Leftrightarrow r[k] &= y[k] - \hat{y}[k] \\ \Leftrightarrow r[k] &= y[k] - C\hat{x}[k] \end{aligned} \quad (14)$$

To go towards fault isolation, the C matrix is truncated of one or more outputs, which build observers of a subsystem. This allows to detect faults that appear on a specific subset of sensors.

There is a condition on the existence of this observer which is quite obvious: $(A, C_{i,:})$ should be observable, where $C_{i,:}$ represents the i^{th} row of C^2 .

A first set of observers were built using the following incidence matrix:

	f_1	f_2	f_3
r_1	$\times$	0	0
r_2	0	$\times$	0
r_3	0	0	$\times$

Applied on the faulty signal, the measured signals and the residuals are shown on Fig. 8 and the bias on the second signal is clearly identified. The initial estimated state is randomly chosen, which explains why the residuals are not null in the first few samples.

A different incidence matrix:

²This condition can be weakened as the observer could be built to only observe the observable subsystem.

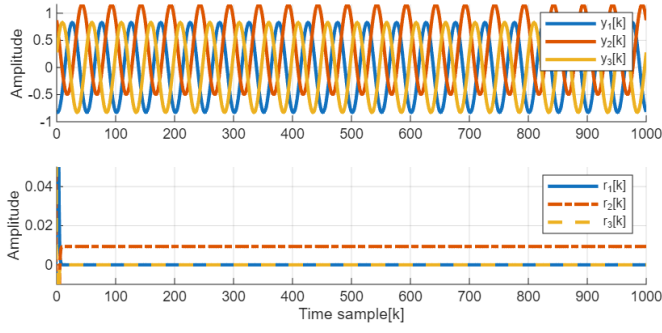


Fig. 8. Measured signals (top) and resulting residuals (bottom).

	f_1	f_2	f_3
r_1	0	$\times$	$\times$
r_2	$\times$	0	$\times$
r_3	$\times$	$\times$	0

was applied on the same signal and the residuals also allow to isolate the fault, as the 1st and the 3rd residuals are non-zero on Fig. 9.

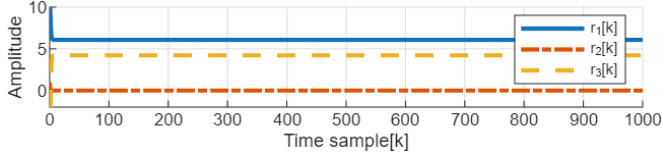


Fig. 9. Residuals with the alternative incidence matrix.

B. Stochastic model

For cases where uncorrelated white gaussian noise is present, it is known that the Kalman filter is the optimal state estimator. The fault isolation method is therefore modified.

The estimated state $\hat{x}$ is obtained by

$$\hat{x}[k+1] = A\hat{x}[k] + K[k](y[k] - C\hat{x}[k]), \quad (15)$$

which is the basic Kalman state update. The gain K equation and the state variance Σ are also kept as usual:

$$K[k] = A\Sigma[k]C^T (C\Sigma[k]C^T + R)^{-1} \quad (16)$$

$$\Sigma[k+1] = A\Sigma[k]A^T - K[k]C\Sigma[k]A^T \quad (17)$$

R is the measurement noise matrix, measured by computing the variance of the difference between the noisy (non-faulty) signal and the perfect one. Note the process noise matrix Q has been removed from the equation as no process noise is present. Finally, the residual is defined just like (14):

$$r[k] = y[k] - C\hat{x}[k] \quad (18)$$

As in Sec. III-A, different observers can be built by selecting specific rows of the output matrix C , effectively selecting outputs on which checking for fault. With a diagonal incidence matrix, the fault isolation algorithm has been tested on a noisy faultless signal on Fig. 10 where it can be seen that the mean residuals lay close to zero.

Fig. 11 showcases the effectiveness of fault isolation as only the second residual has a non-zero mean.

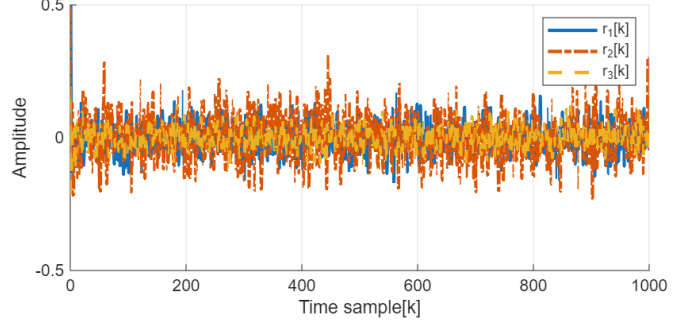


Fig. 10. Residuals in a faultless scenario.

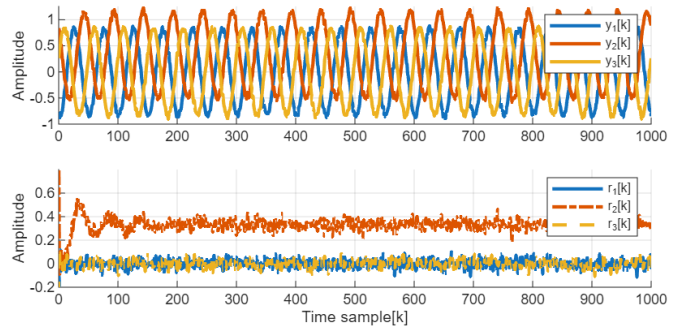


Fig. 11. Measured signal (top) and residuals (bottom).

APPENDIX A EXACT SHIP MODEL

The model used in the simulations is, in continuous time,

$$\dot{x}(t) = A_c x(t) + B_c u(t) + E_{d,c} d(t) + E_{f,c} f(t), \quad (19)$$

$$y(t) = C_c x(t) + D_c u(t) + G_{d,c} d(t) + G_{f,c} f(t), \quad (20)$$

with

$$A_c = \begin{bmatrix} b\eta_1 & 0 \\ 1 & 0 \end{bmatrix}, \quad B_c = \begin{bmatrix} b \\ 0 \end{bmatrix}, \quad E_{d,c} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad (21)$$

$$E_{f,c} = \mathbf{0}, \quad \text{and} \quad \begin{cases} b = 2.2 \\ \eta_1 = -10 \end{cases}. \quad (22)$$

The output equation matrices are

$$C_c = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}, \quad D_c = 0, \quad (23)$$

$$G_{d,c} = \begin{bmatrix} 1 \\ 0 \end{bmatrix}, \quad G_{f,c} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}. \quad (24)$$

The discrete-time model in (1) is finally obtained using a ZOH discretization with sampling time $T_s = 0.2$ seconds.

APPENDIX B REDUNDANT PRESSURE SENSORS MODEL

The system contains a constant state $x = 2\text{bars}$ measured by 3 sensors. Those sensors are corrupted by uncorrelated zero-mean white gaussian noise with covariance $\mathbf{R}$. It is therefore described by:

$$y[k] = \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix} x[k] + f(k) + \xi[k], \quad (25)$$

where

$$\xi \sim \mathcal{N}(\mathbf{0}, \mathbf{R}) \quad \text{and} \quad \mathbf{R} = \begin{bmatrix} 0.1 & 0 & 0 \\ 0 & 0.1 & 0 \\ 0 & 0 & 0.2 \end{bmatrix} \text{bar}^2. \quad (26)$$

APPENDIX C THREE-PHASED SIGNAL MODEL

Fig. 12 shows the signal in a case no fault is applied. Knowing the sampling period $T_s = 1\text{ms}$, the frequency of the signal is computed by

$$\omega_{\text{exc}} = \frac{2\pi}{50T_s} \quad (27)$$

because there are 50 measurements per period.

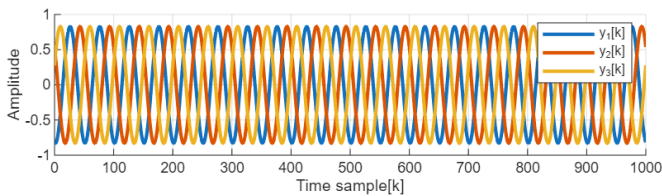


Fig. 12. Three-phased signal measured by 3 (faultless) sensors.

The continuous-time state space model of this system (which has no input) is given by

$$\dot{\mathbf{x}} = \begin{bmatrix} 0 & \omega_{\text{exc}} \\ -\omega_{\text{exc}} & 0 \end{bmatrix} \mathbf{x}. \quad (28)$$

Because there is an offset between the three phases, the output relationship is expressed as follows, where $\mathbf{f}$ is the fault vector:

$$\mathbf{y} = \begin{bmatrix} \cos(0) & \sin(0) \\ \cos(-\frac{2\pi}{3}) & \sin(-\frac{2\pi}{3}) \\ \cos(\frac{2\pi}{3}) & \sin(\frac{2\pi}{3}) \end{bmatrix} \mathbf{x} + \mathbf{f}. \quad (29)$$

This continuous-time model is then discretized using the ZOH with the known sampling frequency.