omnimo PINOUT nRF52840 v 1.2

OSHW DZ000001

https://github.com/eAFAQ/omnimo-nRF52840

- GPIO Name
- Arduino Pin Number
- Arduino and CircuitPython Label
- CircuitPython Label
- Analog Input Name
- Control
- Debug
- Power
- LS Low-Speed I/O (up to 10 KHz). Using these pins at frequencies higher than 10 kHz may impact radio performance.
- Information

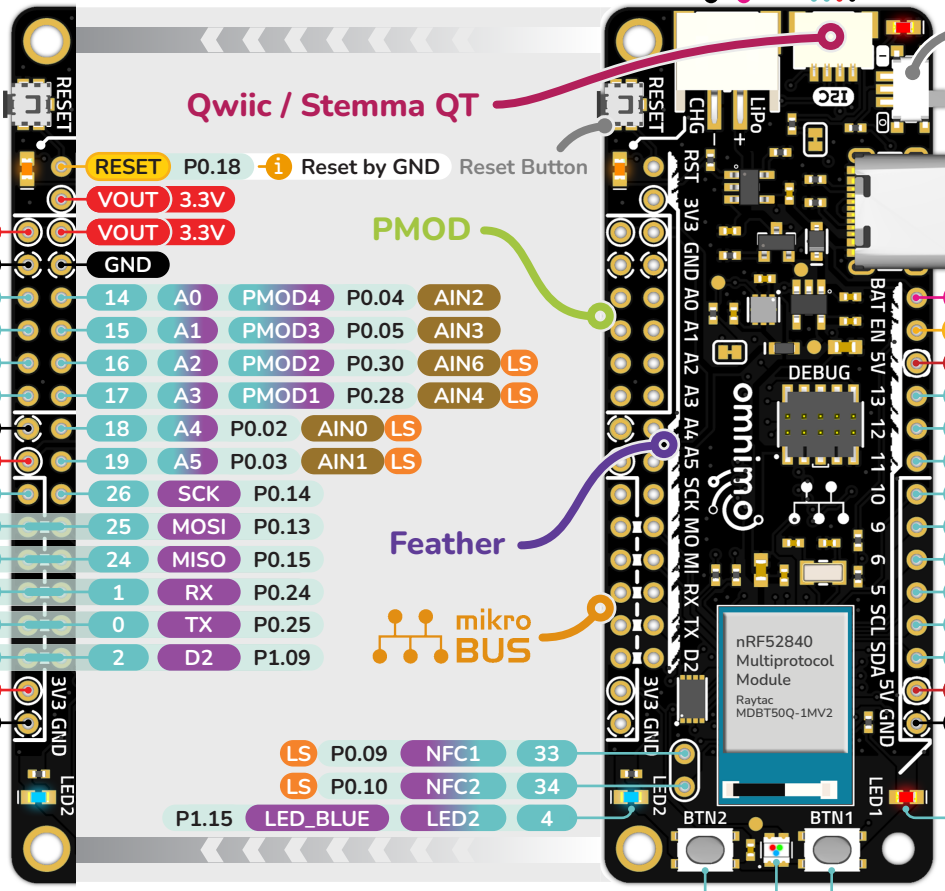

Lithium Polymer Battery 3.7 - 4.2 V: + VBAT, − GND

35 QWIIC_SCL P0.06
36 QWIIC_SDA P0.08
VOUT 3.3V
GND

On/Off Switch: ON / OFF

DEBUG PORT: RESET, NC, SWO, SWCLK, SWDIO, GND, NC, GND, GND, VDD

USB Type-C: VUSB 5V, GND and Data

RESET P0.18 — Reset by GND — Reset Button

VOUT 3.3V
3.3V VOUT
VOUT 3.3V
GND
GND

LS	P1.11	PMOD5	39	14	A0	PMOD4	P0.04 AIN2
LS	P1.01	PMOD6	40	15	A1	PMOD3	P0.05 AIN3
LS	P1.03	PMOD7	41	16	A2	PMOD2	P0.30 AIN6 LS
LS	P1.05	PMOD8	42	17	A3	PMOD1	P0.28 AIN4 LS
			GND	18	A4		P0.02 AIN0 LS
			3.3V VOUT	19	A5		P0.03 AIN1 LS
LS AIN7	P0.31	mikroBUS_AN	A7	21	26	SCK	P0.14
		mikroBUS_RST			25	MOSI	P0.13
		mikroBUS_CS			24	MISO	P0.15
		mikroBUS_SCK			1	RX	P0.24
		mikroBUS_MISO			0	TX	P0.25
		mikroBUS_MOSI			2	D2	P1.09
			3.3V VOUT				
			GND				

VBAT
EN — High: Power Enabled; Low: Power Disabled; Not connected: Using the On/Off Switch
VUSB 5V

13	D13	P1.12	
12	D12	P1.13	
11	D11	P1.14	
10	mikroBUS_PWM	D10	P0.27
9	mikroBUS_INT	D9	P0.26
6	mikroBUS_RX	D6	P0.07
5	mikroBUS_TX	D5	P1.08
23	mikroBUS_SCL	SCL	P0.11
22	mikroBUS_SDA	SDA	P0.12

VUSB 5V — 5V is unavailable when using the battery
GND

LS	P0.09	NFC1	33
LS	P0.10	NFC2	34
P1.15	LED_BLUE	LED2	4

3 LED1 LED_RED P1.10

P1.07 BTN2 37

7 BTN1 P1.02

8 NEOPIXEL P0.16 — Powered by VOUT

AIN5 P0.29 VOLTAGE_MONITOR A6 20 — Battery Voltage Monotiring = VBAT/2 ± 0.5 %

P1.04 VOUTEN 38 — VOUT (3.3V) Enable
- High: VOUT Enabled
- Low: VOUT Disabled
- Not specified: VOUT Enabled, by an on-board pull-up resistor

eAFAQ

- Any pin can be used for peripherals such as UART, SPI, I2C, I2S, PDM, etc.
- GPIO operating voltage: 3.3 V
- Maximum load on VOUT: 600 mA