



TYPE-C_INTERFACE_SHEET



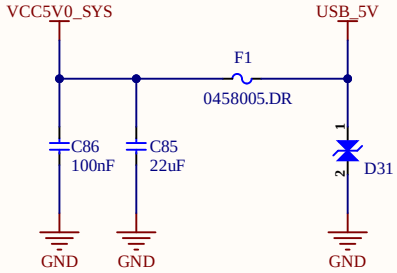

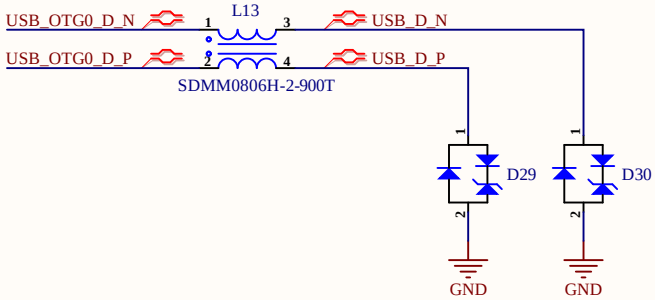

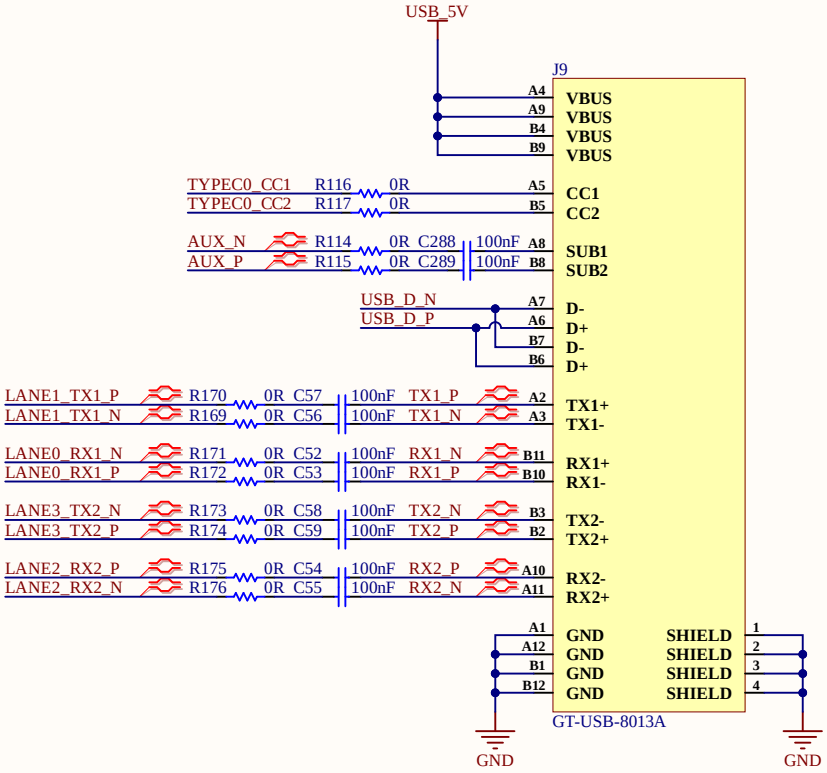


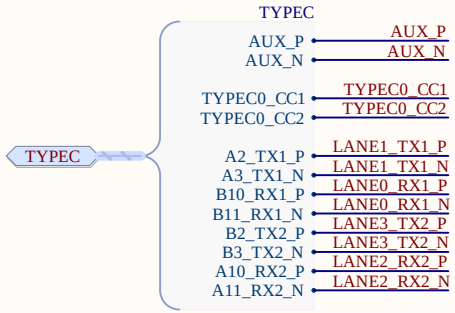





Title: TYPE-C_INTERFACE_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 12/12/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 23

POWER_LDO_SHEET

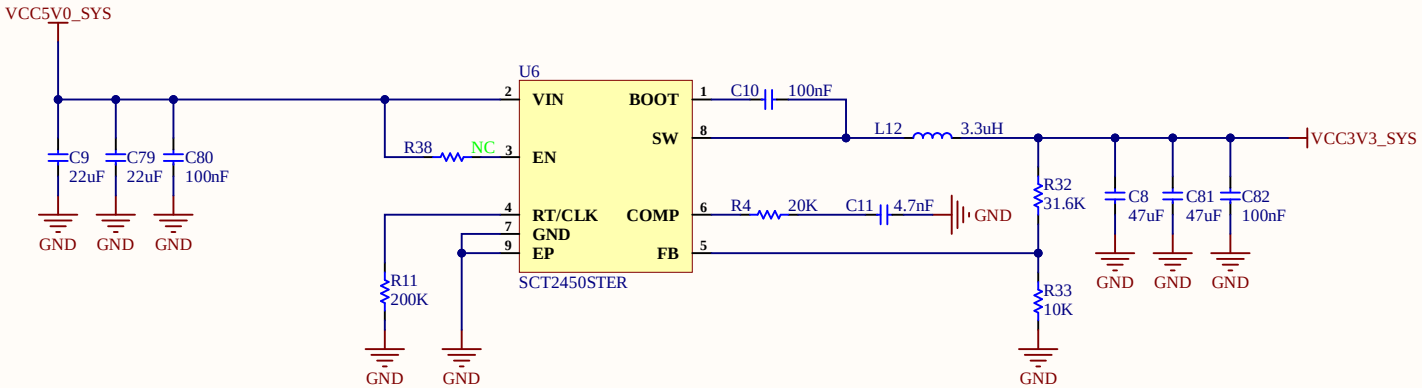

TEST POINTs








eSpark Consulting Group


Title: POWER_LDO_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 21/11/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 23

POWER_OTHER_SHEET

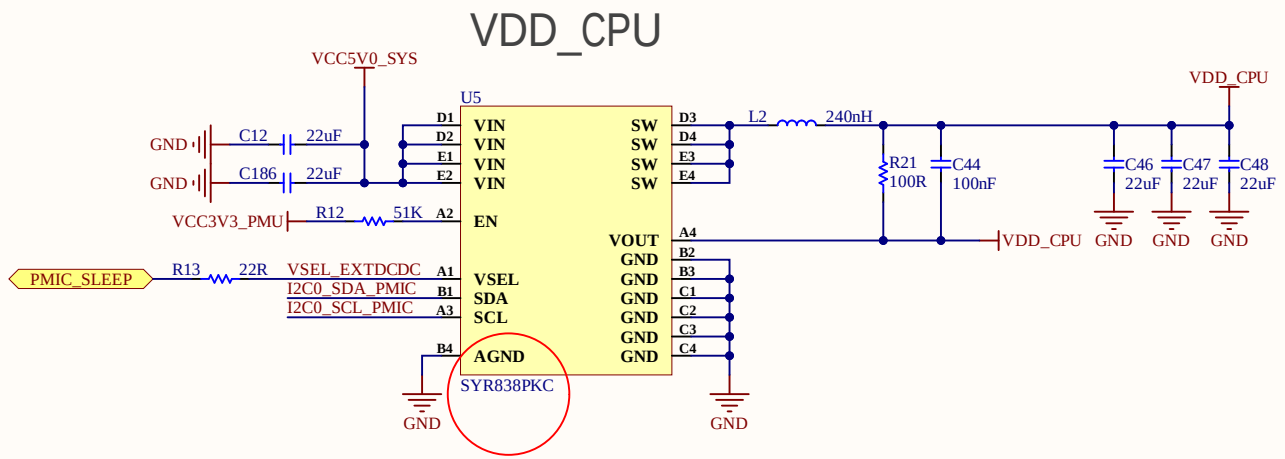

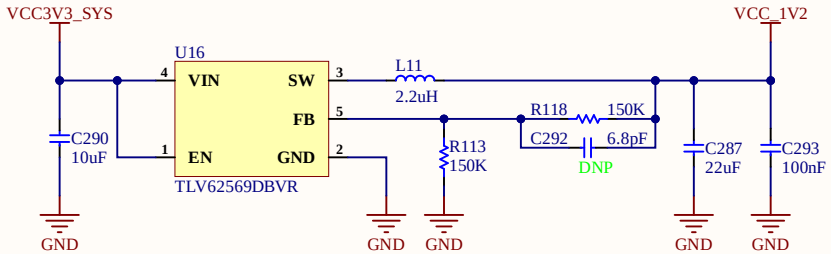






eSpark Consulting Group

Title: POWER_OTHER_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 28/10/2024	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 23

PMIC RK809 DC-DC

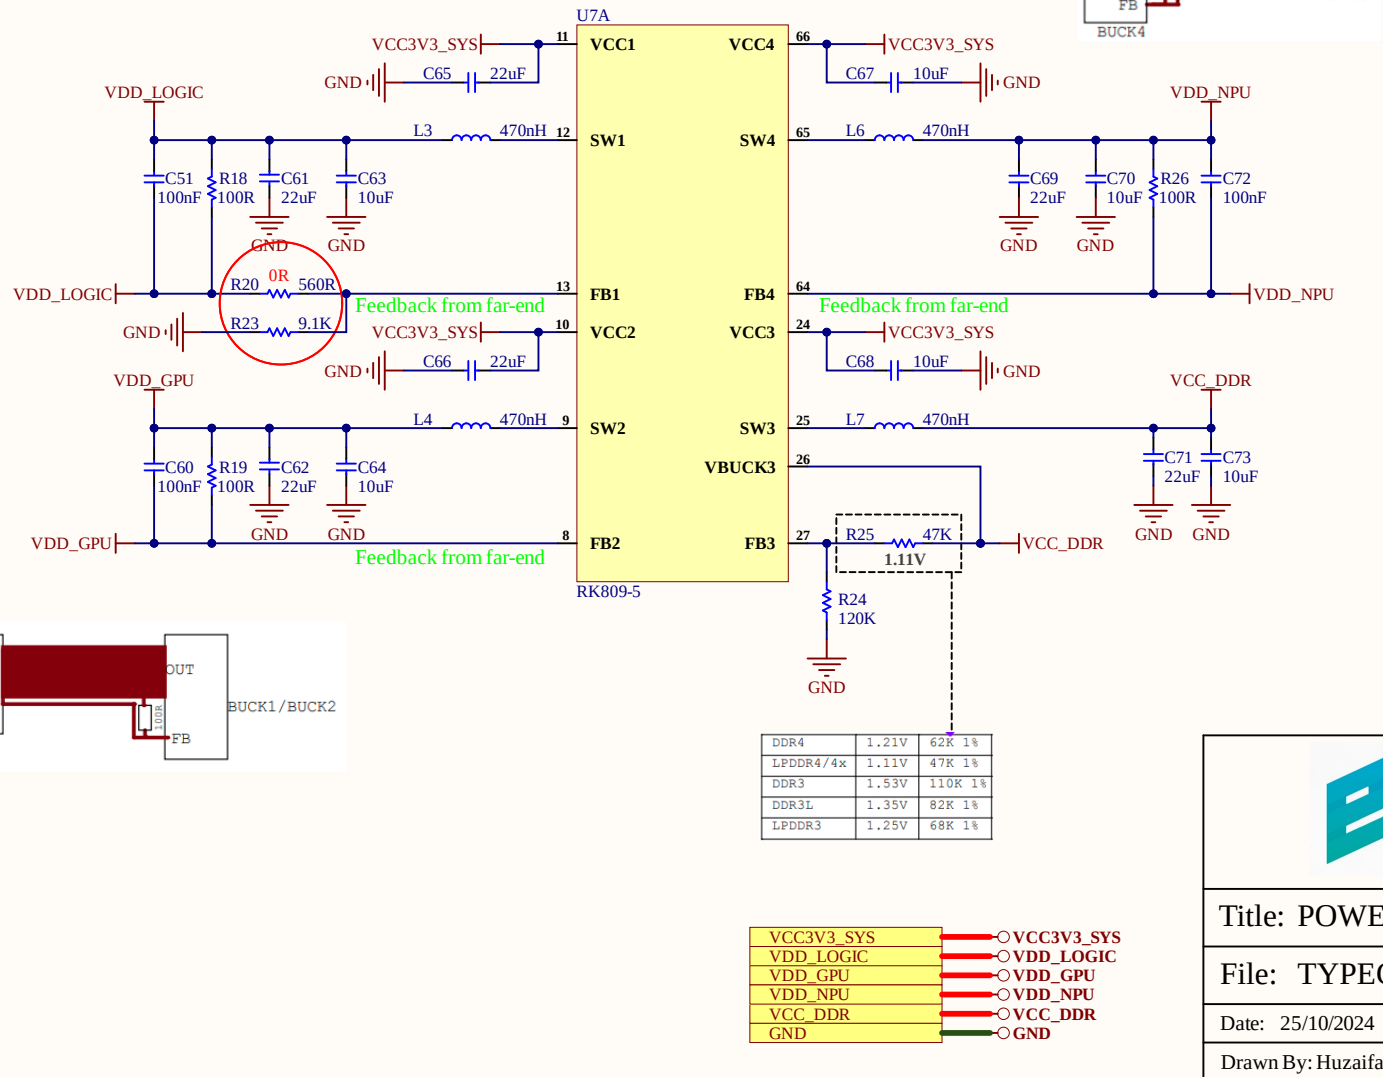


VCC3V3_SYS	VCC3V3_SYS
VDD_LOGIC	VDD_LOGIC
VDD_GPU	VDD_GPU
VDD_NPU	VDD_NPU
VCC_DDR	VCC_DDR
GND	GND

eSpark Consulting Group

Title: POWER_PMIC_RK809_DC DC.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 25/10/2024	Page	Num: 4
Drawn By: Huzaifa Ali	Page	Total: 23

PMIC RK809 LDO

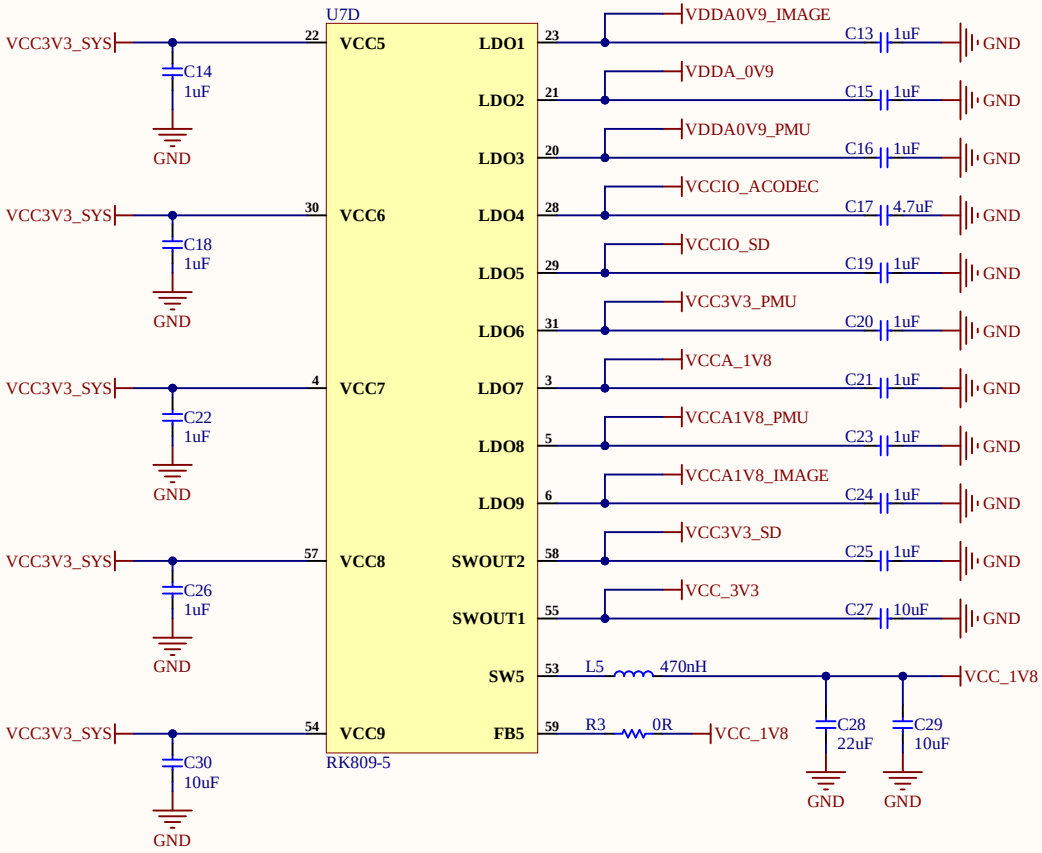

VDDA0V9_IMAGE	VDDA0V9_IMAGE
VDDA_0V9	VDDA_0V9
VDDA0V9_PMU	VDDA0V9_PMU
VCCIO_ACODEC	VCCIO_ACODEC
VCCIO_SD	VCCIO_SD
VCC3V3_PMU	VCC3V3_PMU
VCCA_1V8	VCCA_1V8
VCCA1V8_PMU	VCCA1V8_PMU
VCCA1V8_IMAGE	VCCA1V8_IMAGE
VCC3V3_SD	VCC3V3_SD
VCC_3V3	VCC_3V3
VCC_1V8	VCC_1V8
VCC3V3_SYS	VCC3V3_SYS
GND	GND


eSpark Consulting Group


Title: POWER_PMIC_RK809_LDO.SchDoc


File: TYPEC_4KTransmitter-v1.0.PrjPcb


Date: 25/10/2024	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 23

PMIC RK809 Management

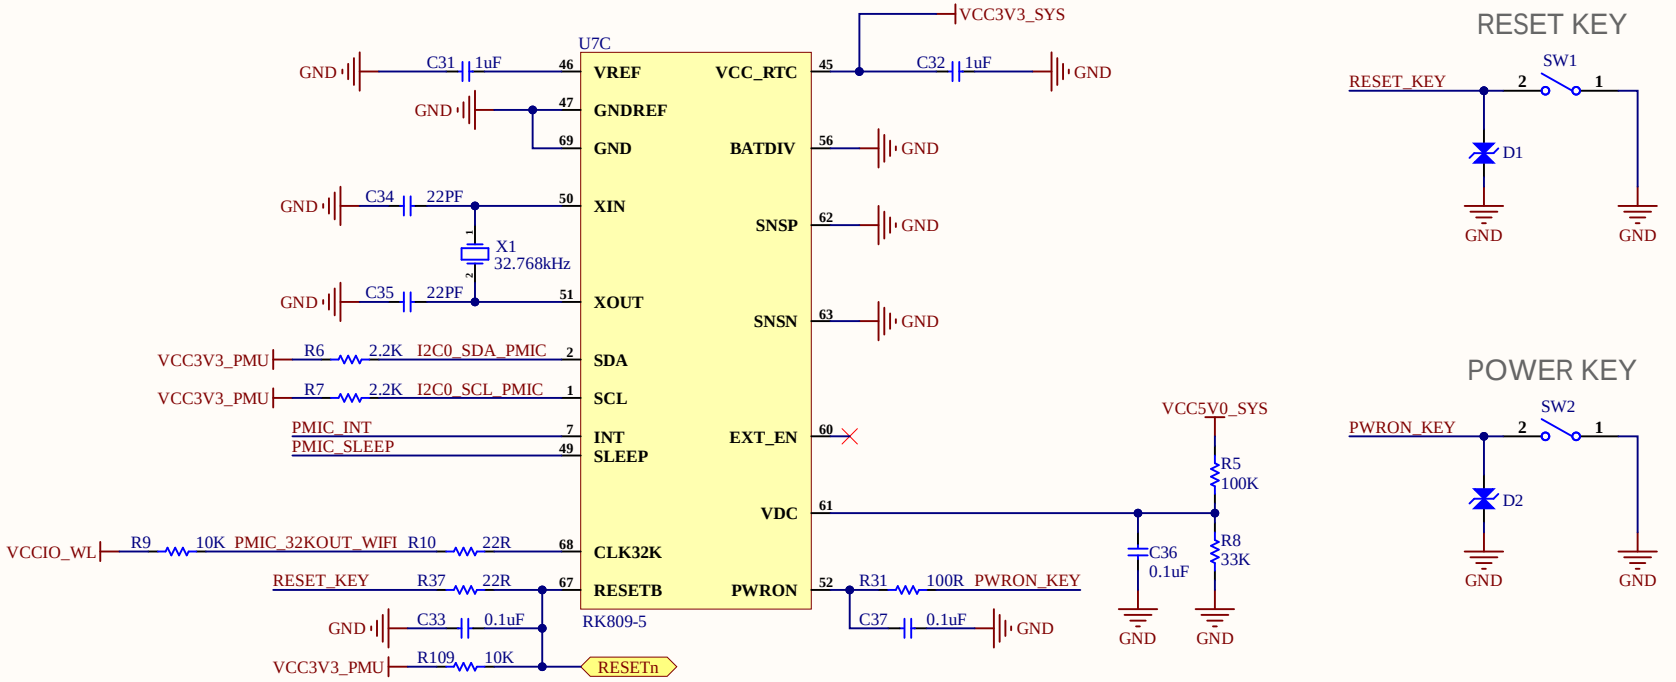

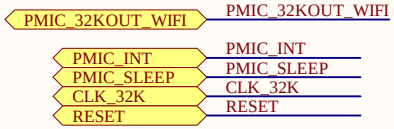







Title: POWER_PMIC_RK809_MGM.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 26/11/2024	Page Num: 6
Drawn By: Huzaifa Ali	Page Total: 23

PMIC RK809 CODEC

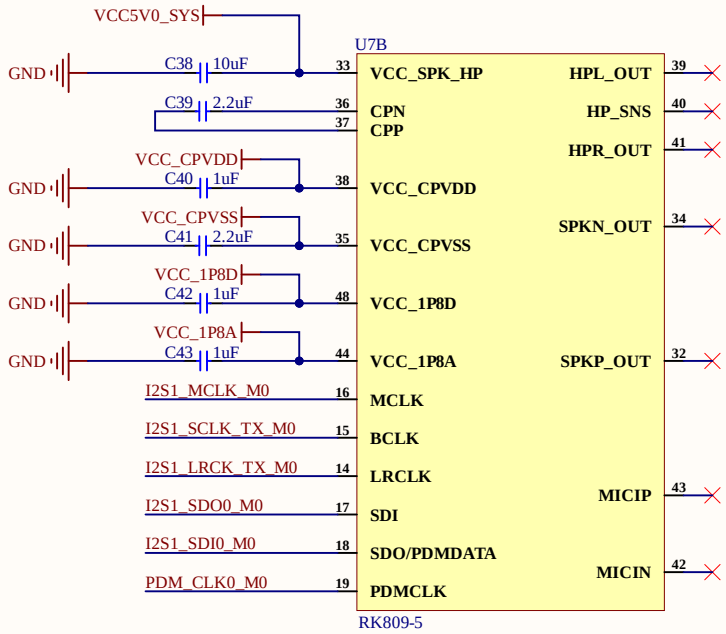

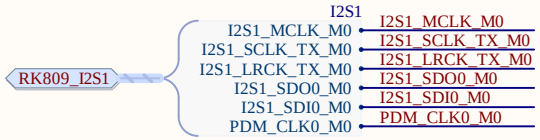




eSpark Consulting Group

Title: POWER_PMIC_RK809_CODEC.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 25/10/2024	Page Num: 7
Drawn By: Huzaifa Ali	Page Total: 23

RK3566_POWER & GROUND

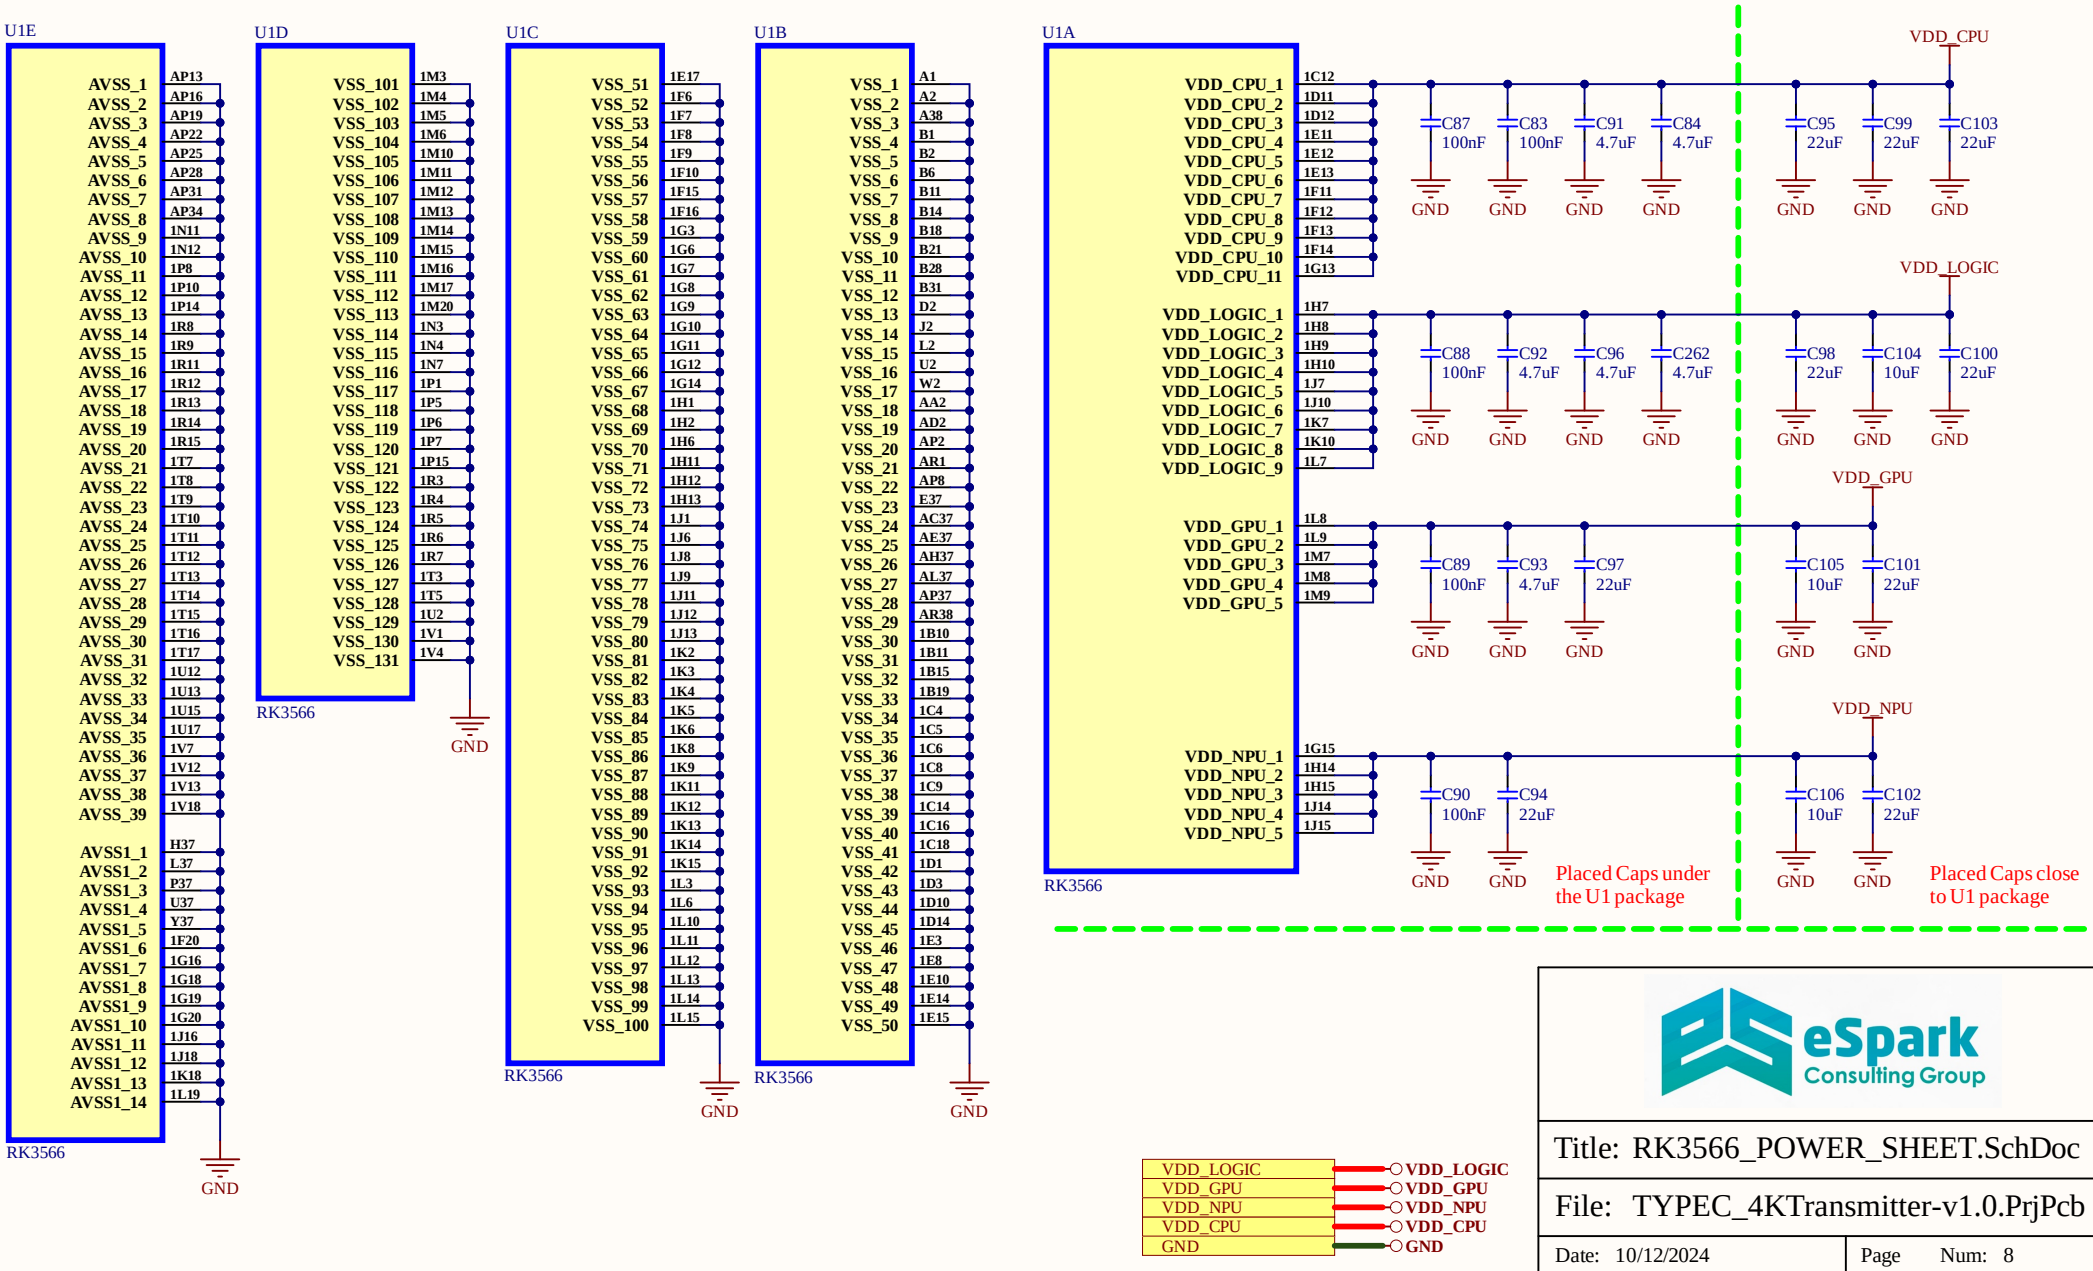

eSpark Consulting Group

Title: RK3566_POWER_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	8
Drawn By: Huzaifa Ali	Page Total:	23

RK3566-DDR-LPDDR

U1F

	DDR4	LPDDR4	DDR3	LPDDR3		
LPDDR4_DQ0_A G2	DDR_DQ0_A	/ DDR4_DQL0_A	/ LPDDR4_DQ0_A	/ DDR3_DQ0	/ LPDDR3_DQ15	
LPDDR4_DQ1_A F2	DDR_DQ1_A	/ DDR4_DQL2_A	/ LPDDR4_DQ1_A	/ DDR3_DQ1	/ LPDDR3_DQ14	
LPDDR4_DQ2_A F1	DDR_DQ2_A	/ DDR4_DQL4_A	/ LPDDR4_DQ2_A	/ DDR3_DQ2	/ LPDDR3_DQ10	
LPDDR4_DQ3_A E1	DDR_DQ3_A	/ DDR4_DQL6_A	/ LPDDR4_DQ3_A	/ DDR3_DQ3	/ LPDDR3_DQ9	
LPDDR4_DQ4_A M2	DDR_DQ4_A	/ DDR4_DQL7_A	/ LPDDR4_DQ4_A	/ DDR3_DQ4	/ LPDDR3_DQ13	
LPDDR4_DQ5_A K1	DDR_DQ5_A	/ DDR4_DQL5_A	/ LPDDR4_DQ5_A	/ DDR3_DQ5	/ LPDDR3_DQ12	
LPDDR4_DQ6_A K2	DDR_DQ6_A	/ DDR4_DQL3_A	/ LPDDR4_DQ6_A	/ DDR3_DQ6	/ LPDDR3_DQ8	
LPDDR4_DQ7_A 1E1	DDR_DQ7_A	/ DDR4_DQL1_A	/ LPDDR4_DQ7_A	/ DDR3_DQ7	/ LPDDR3_DQ11	
LPDDR4_DM0_A 1E2	DDR_DM0_A	/ DDR4_DML_A	/ LPDDR4_DM0_A	/ DDR3_DM0	/ LPDDR3_DM1	
LPDDR4_DQS0_A_P H2	DDR_DQS0P_A	/ DDR4_DQSL_P_A	/ LPDDR4_DQS0P_A	/ DDR3_DQS0P	/ LPDDR3_DQS1P	
LPDDR4_DQS0_A_N H1	DDR_DQS0N_A	/ DDR4_DQSL_N_A	/ LPDDR4_DQS0N_A	/ DDR3_DQS0N	/ LPDDR3_DQS1N	
LPDDR4_DQ8_A P2	DDR_DQ8_A	/ DDR4_DQU3_A	/ LPDDR4_DQ8_A	/ DDR3_DQ8	/ LPDDR3_DQ25	
LPDDR4_DQ9_A R1	DDR_DQ9_A	/ DDR4_DQU1_A	/ LPDDR4_DQ9_A	/ DDR3_DQ9	/ LPDDR3_DQ24	
LPDDR4_DQ10_A R2	DDR_DQ10_A	/ DDR4_DQU7_A	/ LPDDR4_DQ10_A	/ DDR3_DQ10	/ LPDDR3_DQ28	
LPDDR4_DQ11_A T2	DDR_DQ11_A	/ DDR4_DQU5_A	/ LPDDR4_DQ11_A	/ DDR3_DQ11	/ LPDDR3_DQ29	
LPDDR4_DQ12_A M1	DDR_DQ12_A	/ DDR4_DQU2_A	/ LPDDR4_DQ12_A	/ DDR3_DQ12	/ LPDDR3_DQ26	
LPDDR4_DQ13_A 1F2	DDR_DQ13_A	/ DDR4_DQU4_A	/ LPDDR4_DQ13_A	/ DDR3_DQ13	/ LPDDR3_DQ31	
LPDDR4_DQ14_A 1F1	DDR_DQ14_A	/ DDR4_DQU6_A	/ LPDDR4_DQ14_A	/ DDR3_DQ14	/ LPDDR3_DQ30	
LPDDR4_DQ15_A 1G2	DDR_DQ15_A	/ DDR4_DQU0_A	/ LPDDR4_DQ15_A	/ DDR3_DQ15	/ LPDDR3_DQ27	
LPDDR4_DM1_A 1G1	DDR_DM1_A	/ DDR4_DMU_A	/ LPDDR4_DM1_A	/ DDR3_DM1	/ LPDDR3_DM3	
LPDDR4_DQS1_A_P N1	DDR_DQS1P_A	/ DDR4_DQSU_P_A	/ LPDDR4_DQS1P_A	/ DDR3_DQS1P	/ LPDDR3_DQS3P	
LPDDR4_DQS1_A_N N2	DDR_DQS1N_A	/ DDR4_DQSU_N_A	/ LPDDR4_DQS1N_A	/ DDR3_DQS1N	/ LPDDR3_DQS3N	
LPDDR4_DQ0_B B12	DDR_DQ0_B	/ DDR4_DQU7_B	/ LPDDR4_DQ0_B	/ DDR3_DQ16	/ LPDDR3_DQ1	
LPDDR4_DQ1_B B10	DDR_DQ1_B	/ DDR4_DQU5_B	/ LPDDR4_DQ1_B	/ DDR3_DQ17	/ LPDDR3_DQ5	
LPDDR4_DQ2_B 1A8	DDR_DQ2_B	/ DDR4_DQU3_B	/ LPDDR4_DQ2_B	/ DDR3_DQ18	/ LPDDR3_DQ6	
LPDDR4_DQ3_B 1A7	DDR_DQ3_B	/ DDR4_DQU1_B	/ LPDDR4_DQ3_B	/ DDR3_DQ19	/ LPDDR3_DQ4	
LPDDR4_DQ4_B B13	DDR_DQ4_B	/ DDR4_DQU0_B	/ LPDDR4_DQ4_B	/ DDR3_DQ20	/ LPDDR3_DQ2	
LPDDR4_DQ5_B 1A10	DDR_DQ5_B	/ DDR4_DQU6_B	/ LPDDR4_DQ5_B	/ DDR3_DQ21	/ LPDDR3_DQ3	
LPDDR4_DQ6_B 1B9	DDR_DQ6_B	/ DDR4_DQU4_B	/ LPDDR4_DQ6_B	/ DDR3_DQ22	/ LPDDR3_DQ7	
LPDDR4_DQ7_B 1A9	DDR_DQ7_B	/ DDR4_DQU2_B	/ LPDDR4_DQ7_B	/ DDR3_DQ23	/ LPDDR3_DQ0	
LPDDR4_DM0_B 1B8	DDR_DM0_B	/ DDR4_DMU_B	/ LPDDR4_DM0_B	/ DDR3_DM2	/ LPDDR3_DM0	
LPDDR4_DQS0_B_P A13	DDR_DQS0P_B	/ DDR4_DQSU_P_B	/ LPDDR4_DQS0P_B	/ DDR3_DQS2P	/ LPDDR3_DQS0P	
LPDDR4_DQS0_B_N A12	DDR_DQS0N_B	/ DDR4_DQSU_N_B	/ LPDDR4_DQS0N_B	/ DDR3_DQS2N	/ LPDDR3_DQS0N	
LPDDR4_DQ8_B B19	DDR_DQ8_B	/ DDR4_DQL0_B	/ LPDDR4_DQ8_B	/ DDR3_DQ24	/ LPDDR3_DQ18	
LPDDR4_DQ9_B A19	DDR_DQ9_B	/ DDR4_DQL2_B	/ LPDDR4_DQ9_B	/ DDR3_DQ25	/ LPDDR3_DQ19	
LPDDR4_DQ10_B A20	DDR_DQ10_B	/ DDR4_DQL4_B	/ LPDDR4_DQ10_B	/ DDR3_DQ26	/ LPDDR3_DQ22	
LPDDR4_DQ11_B B20	DDR_DQ11_B	/ DDR4_DQL6_B	/ LPDDR4_DQ11_B	/ DDR3_DQ27	/ LPDDR3_DQ23	
LPDDR4_DQ12_B A15	DDR_DQ12_B	/ DDR4_DQL7_B	/ LPDDR4_DQ12_B	/ DDR3_DQ28	/ LPDDR3_DQ16	
LPDDR4_DQ13_B B15	DDR_DQ13_B	/ DDR4_DQL5_B	/ LPDDR4_DQ13_B	/ DDR3_DQ29	/ LPDDR3_DQ17	
LPDDR4_DQ14_B 1C10	DDR_DQ14_B	/ DDR4_DQL1_B	/ LPDDR4_DQ14_B	/ DDR3_DQ30	/ LPDDR3_DQ20	
LPDDR4_DQ15_B B16	DDR_DQ15_B	/ DDR4_DQL3_B	/ LPDDR4_DQ15_B	/ DDR3_DQ31	/ LPDDR3_DQ21	
LPDDR4_DM1_B 1A11	DDR_DM1_B	/ DDR4_DML_B	/ LPDDR4_DM1_B	/ DDR3_DM3	/ LPDDR3_DM2	
LPDDR4_DQS1_B_P A17	DDR_DQS1P_B	/ DDR4_DQSL_P_B	/ LPDDR4_DQS1P_B	/ DDR3_DQS3P	/ LPDDR3_DQS2P	
LPDDR4_DQS1_B_N B17	DDR_DQS1N_B	/ DDR4_DQSL_N_B	/ LPDDR4_DQS1N_B	/ DDR3_DQS3N	/ LPDDR3_DQS2N	

Note:
Except DDR3, other DQ sequences can not be swap

RK3566

	DDR4	LPDDR4	DDR3	LPDDR3		
DDR4_A0	/ LPDDR4_CLKP_B	/ DDR3_A9	/	/ AC9	A7	LPDDR4_CLK_B_P
DDR4_A1	/	/ DDR3_A2	/	/ AC2	D2	
DDR4_A2	/ LPDDR4_A1_A	/ DDR3_A4	/ LPDDR3_A6	/ AC4	C1	LPDDR4_A1_A
DDR4_A3	/ LPDDR4_CKE1_A	/ DDR3_A3	/	/ AC3	C3	LPDDR4_CKE1_A
DDR4_A4	/ LPDDR4_A3_B	/ DDR3_BA1	/ LPDDR3_A3	/ AC5	1B6	LPDDR4_A3_B
DDR4_A5	/ LPDDR4_A5_B	/ DDR3_A11	/ LPDDR3_A2	/ AC6	B8	LPDDR4_A5_B
DDR4_A6	/ LPDDR4_A1_B	/ DDR3_A13	/ LPDDR3_A1	/ AC7	B9	LPDDR4_A1_B
DDR4_A7	/ LPDDR4_ODT0_CA_B	/ DDR3_A8	/	/ AC1	A10	LPDDR4_ODT0_CA_B
DDR4_A8	/ LPDDR4_ODT0_CA_A	/ DDR3_A6	/ LPDDR3_A9	/ AC8	E2	LPDDR4_ODT0_CA_A
DDR4_A9	/ LPDDR4_CLKN_B	/ DDR3_A5	/	/ AC0	B7	LPDDR4_CLK_B_N
DDR4_A10	/ LPDDR4_CKE0_B	/ DDR3_A10	/	/ AC10	1A3	LPDDR4_CKE0_B
DDR4_A11	/ LPDDR4_A0_A	/ DDR3_A7	/ LPDDR3_A8	/ AC11	C2	LPDDR4_A0_A
DDR4_A12	/ LPDDR4_A3_A	/ DDR3_BA2	/	/ AC12	1B3	LPDDR4_A3_A
DDR4_A13	/ LPDDR4_A0_B	/ DDR3_A14	/ LPDDR3_A0	/ AC13	A9	LPDDR4_A0_B
DDR4_A14_WEn	/ LPDDR4_A4_A	/ DDR3_A15	/ LPDDR3_A5	/ AC14	1B1	LPDDR4_A4_A
DDR4_A15_CASn	/ LPDDR4_A2_A	/ DDR3_A0	/	/ AC15	1C1	LPDDR4_A2_A
DDR4_A16_RASn	/ LPDDR4_A5_A	/ DDR3_RASn	/ LPDDR3_A7	/ AC16	1A1	LPDDR4_A5_A
DDR4_ACTn	/ LPDDR4_CKE1_B	/ DDR3_CASn	/	/ AC17	1A2	LPDDR4_CKE1_B
DDR4_BA0	/ LPDDR4_A2_B	/ DDR3_A1	/	/ AC18	B7	LPDDR4_A2_B
DDR4_BA1	/ LPDDR4_A4_B	/ DDR3_A12	/ LPDDR3_A4	/ AC19	1A6	LPDDR4_A4_B
DDR4_BG0	/ LPDDR4_ODT1_CA_B	/ DDR3_WEn	/	/ AC20	1A4	
DDR4_BG1	/ LPDDR4_ODT1_CA_A	/ DDR3_BA0	/	/ AC21	1C2	
DDR4_CKE	/ LPDDR4_CKE0_A	/ DDR3_CKE	/ LPDDR3_CKE	/ AC22	B4	LPDDR4_CKE0_A
DDR4_CLKP	/ LPDDR4_CLKP_A	/ DDR3_CLKP	/ LPDDR3_CLKP	/ AC23	A5	LPDDR4_CLK_A_P
DDR4_CLKN	/ LPDDR4_CLKN_A	/ DDR3_CLKN	/ LPDDR3_CLKN	/ AC24	B5	LPDDR4_CLK_A_N
DDR4_CS0n	/ LPDDR4_CS0n_A	/ DDR3_ODT1	/ LPDDR3_ODT0	/ AC25	B3	LPDDR4_CS0n_A
DDR4_CS1n	/LPDDR4_CS1n_A	/ DDR3_CS1n	/ LPDDR3_ODT1	/ AC26	A3	LPDDR4_CS1n_A
DDR4_ODT0	/ LPDDR4_CS1n_B	/ DDR3_ODT0	/ LPDDR3_CS1n	/ AC27	1A5	LPDDR4_CS1n_B
DDR4_ODT1	/LPDDR4_CS0n_B	/ DDR3_CS0n	/ LPDDR3_CS0n	/ AC28	1B5	LPDDR4_CS0n_B
DDR4_RESETn	/LPDDR4_RESETn	/ DDR3_RESETn	/	/ AC29	1C7	LPDDR4_RESETn

LPDDR4_RESETn

Note: Sequences can not be swap.

	VDDQ	VDDQL
DDR3L	1.35V	1.35V
DDR3	1.50V	1.50V
DDR4	1.20V	1.20V
LPDDR3	1.20V	1.20V
LPDDR4	1.10V	1.10V
LPDDR4x	1.10V	**0.60V**

DDR_RZQ 1F3 — DDR_RZQ R40 120R VCC_DDR

DDR_VREFOUT 1H3

DDR_VDDQ_1 1D5, DDR_VDDQ_2 1D6, DDR_VDDQ_3 1D7, DDR_VDDQ_4 1D8, DDR_VDDQ_5 1D9, DDR_VDDQ_6 1E4, DDR_VDDQ_7 1F4, DDR_VDDQ_8 1G4

VCC_DDR

C108 100nF, C110 100nF, C112 100nF, C114 4.7uF, C116 10uF — GND

DDR_VDDQL_1 1E6, DDR_VDDQL_2 1E7, DDR_VDDQL_3 1E9, DDR_VDDQL_4 1E5, DDR_VDDQL_5 1G5

VCC0V6_DDR

C109 100nF, C111 100nF, C113 100nF, C115 4.7uF, C117 4.7uF — GND

Caps should be placed under the U1 package

DDR_AVSS 1D4 — GND

DM(1..0)A: LPDDR4_DM0_A, LPDDR4_DM1_A — Z50 — DM(1..0)A

DM(1..0)B: LPDDR4_DM0_B, LPDDR4_DM1_B — Z50 — DM(1..0)B

DQ(15..0)A: LPDDR4_DQ0_A … LPDDR4_DQ15_A — Z50 — DQ(15..0)A

DQ(15..0)B: LPDDR4_DQ0_B … LPDDR4_DQ15_B — Z50 — DQ(15..0)B

DQS(1..0)A: LPDDR4_DQS0_A_P, LPDDR4_DQS0_A_N, LPDDR4_DQS1_A_P, LPDDR4_DQS1_A_N — DQS(1..0)A

DQS(1..0)B: LPDDR4_DQS0_B_P, LPDDR4_DQS0_B_N, LPDDR4_DQS1_B_P, LPDDR4_DQS1_B_N — DQS(1..0)B

CLK_A: LPDDR4_CLK_A_P, LPDDR4_CLK_A_N — CLK_A

CLK_B: LPDDR4_CLK_B_P, LPDDR4_CLK_B_N — CLK_B

LPDDR4_A: LPDDR4_CKE0_A, LPDDR4_CKE1_A, LPDDR4_ODT0_CA_A, LPDDR4_CS0n_A, LPDDR4_CS1n_A — Z50 — LPDDR4_A

LPDDR4_B: LPDDR4_CKE0_B, LPDDR4_CKE1_B, LPDDR4_ODT0_CA_B, LPDDR4_CS0n_B, LPDDR4_CS1n_B — Z50 — LPDDR4_B

A(5..0): LPDDR4_A0_A, LPDDR4_A1_A, LPDDR4_A2_A, LPDDR4_A3_A, LPDDR4_A4_A, LPDDR4_A5_A — Z50 — A(5..0)


B(5..0): LPDDR4_A0_B, LPDDR4_A1_B, LPDDR4_A2_B, LPDDR4_A3_B, LPDDR4_A4_B, LPDDR4_A5_B — Z50 — B(5..0)

VCC0V6_DDR — VCC0V6_DDR
VCC_DDR — VCC_DDR
GND — GND

eSpark Consulting Group

Title:	RK3566_DDR-PHY_SHEET.SchDoc
File:	TYPEC_4KTransmitter-v1.0.PrjPcb
Date: 25/10/2024	Page Num: 9
Drawn By: Huzaifa Ali	Page Total: 23

RK3566_OSC/PLL/PMUIO

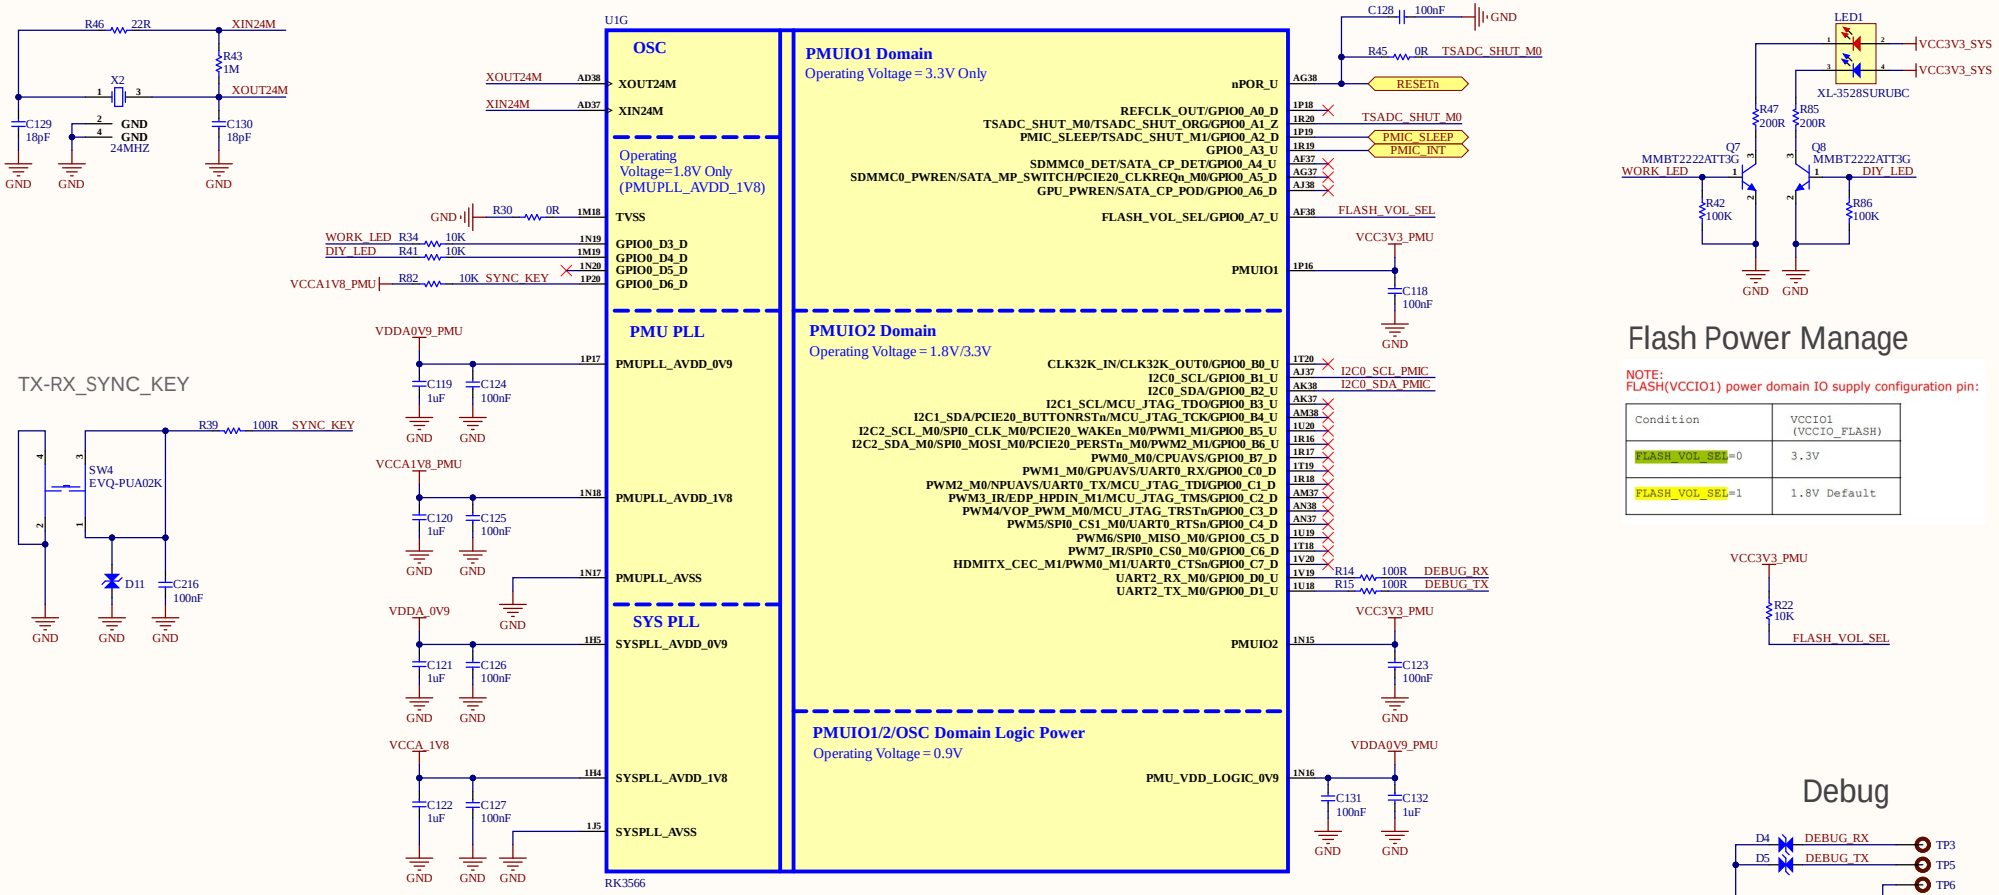

Title:	RK3566_OSC_PMUIO_SHEET.SchDoc
File:	TYPEC_4KTransmitter-v1.0.PrjPcb
Date: 26/11/2024	Page Num: 10
Drawn By: Huzaifa Ali	Page Total: 23

RK3566-eMMC_SPI-FLASH

RK3566 Flash (VCCIO2 Domain)

U1I

VCCIO2 Domain
Operating Voltage = 1.8V/3.3V

EMMC_D0/FLASH_D0/GPIO1_B4_U	A32	eMMC_DATA0
EMMC_D1/FLASH_D1/GPIO1_B5_U	B27	eMMC_DATA1
EMMC_D2/FLASH_D2/GPIO1_B6_U	B32	eMMC_DATA2
EMMC_D3/FLASH_D3/GPIO1_B7_U	B29	eMMC_DATA3
EMMC_D4/FLASH_D4/GPIO1_C0_U	B33	eMMC_DATA4
EMMC_D5/FLASH_D5/GPIO1_C1_U	A30	eMMC_DATA5
EMMC_D6/FLASH_D6/GPIO1_C2_U	B30	eMMC_DATA6
EMMC_D7/FLASH_D7/GPIO1_C3_U	A33	eMMC_DATA7
EMMC_CMD/FLASH_WR/GPIO1_C4_U	A27	eMMC_CMD
EMMC_CLKOUT/FLASH_DQS/GPIO1_C5_D	A29	R53 22R eMMC_CLK
EMMC_DATA_STROBE/FSPI_CS1/FLASH_CLE/GPIO1_C6_D	1A16	eMMC_DATA_STROBE
RST/FSPI_D2/FLASH_WP/GPIO1_C7_D	1B16	eMMC_RSTN → eMMC_RSTN
FSPI_CLK/FLASH_ALE/GPIO1_D0_D	1A15	
FSPI_D0/FLASH_RDY/GPIO1_D1_U	1A17	
FSPI_D1/FLASH_RD/GPIO1_D2_U	1A18	
FSPI_CS0n / FLASH_CS0_ / GPIO1_D3_U	1B17	
FSPI_D3/FLASH_CS1/GPIO1_D4_U	1C15	
VCCIO2	1C13	VCCIO_FLASH; C133 100nF GND

Default is determined by Pin
FLASH_VOL_SEL/GPIO0_A7_u:
L:VCCIO2 must supply 3.3V
H:VCCIO2 must supply 1.8V

RK3566

VCCIO_FLASH — R87 0R — VCC_1V8
C134 4.7uF — GND

RK3568 SD

U1J

VCCIO3 Domain
Operating Voltage = 1.8V/3.3V

SDMMC0_D0/UART2_TX_M1/UART6_TX_M1/PWM8_M1/GPIO1_D5_U	1E20	
SDMMC0_D1/UART2_RX_M1/UART6_RX_M1/PWM9_M1/GPIO1_D6_U	1F19	
SDMMC0_D2/ARM_JTAG_TCK/UART5_CTS_M0/GPIO1_D7_U	1D20	
SDMMC0_D3/ARM_JTAG_TMS/UART5_RTS_M0/GPIO2_A0_U	1F18	
SDMMC0_CMD/PWM10_M1/UART5_RX_M0/GPIO2_A1_U	1E19	
SDMMC0_CLK/TEST_CLKOUT/UART5_TX_M0/GPIO2_A2_D	G38	
VCCIO3	1F17	VCCIO_SD; C107 100nF GND

RK3566

Z50

eMMC
DATA[7..0] — eMMC_DATA[7..0]
CLK — eMMC_CLK
CMD — eMMC_CMD
STROBE — eMMC_DATA_STROBE
eMMC

VCC3V3_PMU	VCC3V3_PMU
VCCIO_FLASH	VCCIO_FLASH
VCCIO_SD	VCCIO_SD
GND	GND

eSpark Consulting Group

Title: RK3566_FLASH-SD_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	11
Drawn By: Huzaifa Ali	Page Total:	23

RK3566_SARADC_GPIO

RK3566 (SARADC)

U1O

SARADC

Recovery /

SARADC_VIN0 — 1D17 — SARADC_VIN0/RECOVERY — C156 1nF — GND

SARADC_VIN1 — 1C17 — SARADC_VIN1/HW_ID — C157 1nF — GND

SARADC_VIN2 — 1B18 — SARADC_VIN2 — C158 1nF — GND

SARADC_VIN3 — 1A19 — SARADC_VIN3 — C159 1nF — GND

SARADC_AVDD_1V8 — 1D16 — VCCA_1V8 — C155 100nF — GND

OTP

OTP_VCC18 — 1D15 — VCCA_1V8 — C154 100nF — GND

RK3566

SARADC_VIN0/RECOVERY — R60 10K — VCCA_1V8

SARADC_VIN1/HW_ID — R61 10K — VCCA_1V8

SARADC_VIN2 — R62 10K — VCCA_1V8

SARADC_VIN3 — R63 10K — VCCA_1V8

RECOVERY KEY

SARADC_VIN0/RECOVERY — R44 100R — SW3 (1, 2) — D3 — GND — GND

RK3568 (VCCIO4 Domain)

U1K

VCCIO4 Domain

Operating Voltage = 1.8V/3.3V

SDMMC1_D0/UART6_RX_M0/GPIO2_A3_U — 1C19 — SDMMC1_D0

SDMMC1_D1/UART6_TX_M0/GPIO2_A4_U — 1E18 — SDMMC1_D1

SDMMC1_D2/UART7_RX_M0/GPIO2_A5_U — 1D18 — SDMMC1_D2

SDMMC1_D3/UART7_TX_M0/GPIO2_A6_U — 1A20 — SDMMC1_D3

SDMMC1_CMD/UART9_RX_M0/GPIO2_A7_U — B35 — SDMMC1_CMD

SDMMC1_CLK/UART9_TX_M0/GPIO2_B0_D — B37 — R68 22R — SDMMC1_CLK

SDMMC1_PWREN/I2C4_SDA_M1/UART8_RTS_M0/GPIO2_B1_D — A35 — WIFI_REG_ON

SDMMC1_DET/I2C4_SCL_M1/UART8_CTS_M0/GPIO2_B2_U — B34 — WIFI_HOST_WAKE

UART1_RX_M0/GPIO2_B3_U — 1C20 — UART1_RXD

UART1_TX_M0/GPIO2_B4_U — F38 — UART1_TXD

UART1_RTS_M0/SPI1_CLK_M0/GPIO2_B5_U — F37 — UART1_RTS

UART1_CTS_M0/SPI1_MISO_M0/GPIO2_B6_U — G37 — UART1_CTS

I2S2_SCLK_RX_M0/UART6_RTS_M0/SPI1_MOSI_M0/GPIO2_B7_D — D38 — BT_REG_ON

I2S2_LRCK_RX_M0/UART6_CTS_M0/SPI1_CS0_M0/GPIO2_C0_D — A37 — BT_HOST_WAKE

I2S2_MCLK_M0/ETH0_REFCLKO_25M/UART7_RTS_M0/SPI2_CLK_M0/GPIO2_C1_D — B36 — BT_WAKE

I2S2_SCLK_TX_M0/UART7_CTS_M0/SPI2_MISO_M0/GPIO2_C2_D — C37

I2S2_LRCK_TX_M0/UART9_RTS_M0/SPI2_MOSI_M0/GPIO2_C3_D — 1D19

I2S2_SDO_M0/UART9_CTS_M0/SPI2_CS0_M0/GPIO2_C4_D — 1B20

I2S2_SDI_M0/UART8_TX_M0/SPI2_CS1_M0/GPIO2_C5_D — D37

CLK32K_OUT1/UART8_RX_M0/SPI1_CS1_M0/GPIO2_C6_D — B38 — CLK32K_OUT1_WIFI

VCCIO4 — 1E16 — VCCIO_WL — C150 100nF — GND

RK3566

UART_WIFI

UART_WIFI — UART1_CTS, UART1_RTS, UART1_TXD, UART1_RXD

WIFI

SDIO_WIFI — SDMMC1_D0, SDMMC1_D1, SDMMC1_D2, SDMMC1_D3, SDMMC1_CMD, SDMMC1_CLK

CLK32K_OUT1_WIFI

WIFI_REG_ON

WIFI_HOST_WAKE

BT_REG_ON

BT_HOST_WAKE

BT_WAKE

VCCIO_WL

VCC3V3_SYS

VCC_3V3

VCC_1V8

VCCA_1V8

GND

eSpark Consulting Group

Title: RK3566_SARADC_GPIO.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	12
Drawn By: Huzaifa Ali	Page Total:	23

RK3566_USB_PCIe_SHEET

U1U

RK3568 USB3.0/SATAPCIe2.0

USB2.0 OTG_0
HS/FS/LS
(Download Port)

USB_OTG0_DP
USB_OTG0_DM
USB_OTG0_VBUSDET
USB_OTG0_ID

R37 USB_OTG0_D_P
R38 USB_OTG0_D_N
T38 OTG0_VBUSDET
T37
R16 15K GND
R17 10K VCC5V0_SYS
C141 100nF GND

USB2.0 HOST_1
HS/FS/LS
(DP/DM for USB3.0 HOST)

USB_HOST1_DP
USB_HOST1_DM

1J19
1J20

USB2.0 Power
(for OTG_0 and HOST_1)

USB_AVDD1_0V9
USB_AVDD1_1V8
USB_AVDD1_3V3

1J17 VDDA_0V9
C135 100nF GND
1H16 VCCA_1V8
C136 100nF GND
1H18 VCC_3V3
C137 100nF GND

MULTI PHY U_S
(SS for USB3.0 HOST or SATA3_1)

USB3_HOST1_SSTXP/SATA1_TXP
USB3_HOST1_SSTXN/SATA1_TXN
USB3_HOST1_SSRXP/SATA1_RXP
USB3_HOST1_SSRXN/SATA1_RXN

W37
W38
V38
V37

MULTI PHY P_S
(PCIE2.0 or SATA3_2)

PCIE20_TXP/SATA2_TXP
PCIE20_TXN/SATA2_TXN
PCIE20_RXP/SATA2_RXP
PCIE20_RXN/SATA2_RXN
PCIE20_REFCLKP
PCIE20_REFCLKN

AA37
AA38
AB37
AB38
1K19
1K20

MULTI PHY Power
(for MULTI PHY U_S and P_S)

MULTI_PHY_AVDD_0V9
MULTI_PHY_AVDD_1V8

1K16 VDDA_0V9
C138 0.1uF GND
VDDA_0V9 C139 4.7uF GND
1K17 VCCA_1V8
C140 100nF GND
VCCA_1V8 C142 4.7uF GND

RK3568 USB2.0 HOST

U1V

USB2.0
(for HOST_2 and HOST_3)

USB_HOST2_DP
USB_HOST2_DM
USB_HOST3_DP
USB_HOST3_DM
USB_AVDD2_0V9
USB_AVDD2_1V8
USB_AVDD2_3V3

V2 USB2_HOST2_D_P
V1 USB2_HOST2_D_N
Y2
Y1
1J4 VDDA_0V9
C143 100nF GND
1J3 VCCA_1V8
C145 100nF GND
1J2 VCC_3V3
C147 100nF GND

RK3566

USB2.0 USB2_HOST2_D_P USB2_HOST2_D_N USB2_HOST2_D_P USB2_HOST2_D_N

OTG0 USB_OTG0 USB_OTG0_D_P USB_OTG0_D_N USB_OTG0_D_P USB_OTG0_D_N

VCC5V0_SYS VCC5V0_SYS
VCC_3V3 VCC_3V3
VDDA_0V9 VDDA_0V9
VCCA_1V8 VCCA_1V8
GND GND

eSpark Consulting Group

Title: RK3566_USB_PCIe_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 10/12/2024	Page Num: 13
Drawn By: Huzaifa Ali	Page Total: 23

RK3566_VI_INTERFACE

U1M

VCCIO6 Domain
Operating Voltage = 1.8V/3.3V

RK3568 (VCCIO6 Domain)

CIF_D0/EBC_SDDO0/SDMMC2_D0_M0/I2S1_MCLK_M1/VOP_BT656_D0_M1/GPIO3_C6_D	1T2
CIF_D1/EBC_SDDO1/SDMMC2_D1_M0/I2S1_SCLK_TX_M1/VOP_BT656_D1_M1/GPIO3_C7_D	1U1
CIF_D2/EBC_SDDO2/SDMMC2_D2_M0/I2S1_LRCK_TX_M1/VOP_BT656_D2_M1/GPIO3_D0_D	AP1
CIF_D3/EBC_SDDO3/SDMMC2_D3_M0/I2S1_SDO0_M1/VOP_BT656_D3_M1/GPIO3_D1_D	AN2
CIF_D4/EBC_SDDO4/SDMMC2_CMD_M0/I2S1_SDI0_M1/VOP_BT656_D4_M1/GPIO3_D2_D	AM2
CIF_D5/EBC_SDDO5/SDMMC2_CLK_M0/I2S1_SDI1_M1/VOP_BT656_D5_M1/GPIO3_D3_D	AM1
CIF_D6/EBC_SDDO6/SDMMC2_DET_M0/I2S1_SDI2_M1/VOP_BT656_D6_M1/GPIO3_D4_D	1R2
CIF_D7/EBC_SDDO7/SDMMC2_PWREN_M0/I2S1_SDI3_M1/VOP_BT656_D7_M1/GPIO3_D5_D	1T1
CIF_D8/EBC_SDDO8/GMAC1_TXD2_M1/UART1_TX_M1/PDM_CLK0_M1/GPIO3_D6_D	AL2
CIF_D9/EBC_SDDO9/GMAC1_TXD3_M1/UART1_RX_M1/PDM_SDI0_M1/GPIO3_D7_D	AL1
CIF_D10/EBC_SDDO10/GMAC1_TXCLK_M1/PDM_CLK1_M1/GPIO4_A0_D	AK2
CIF_D11/EBC_SDDO11/GMAC1_RXD2_M1/PDM_SDI1_M1/GPIO4_A1_D	1P2
CIF_D12/EBC_SDDO12/GMAC1_RXD3_M1/UART7_TX_M2/PDM_SDI2_M1/GPIO4_A2_D	1R1
CIF_D13/EBC_SDDO13/GMAC1_RXCLK_M1/UART7_RX_M2/PDM_SDI3_M1/GPIO4_A3_D	AJ2
CIF_D14/EBC_SDDO14/GMAC1_TXD0_M1/UART9_TX_M2/I2S2_LRCK_TX_M1/GPIO4_A4_D	1N2
CIF_D15/EBC_SDDO15/GMAC1_TXD1_M1/UART9_RX_M2/I2S2_LRCK_RX_M1/GPIO4_A5_D	AJ1
ISP_FLASHTRIGOUT/EBC_SDCE0/GMAC1_TXEN_M1/SPI3_CS0_M0/I2S1_SCLK_RX_M1/GPIO4_A6_D	AH2
CAM_CLKOUT0/EBC_SDCE1/GMAC1_RXD0_M1/SPI3_CS1_M0/I2S1_LRCK_RX_M1/GPIO4_A7_D	1N1
CAM_CLKOUT1/EBC_SDCE2/GMAC1_RXD1_M1/SPI3_MISO_M0/I2S1_SDO1_M1/GPIO4_B0_D	1L2 → LONT_RESET
ISP_PRELIGHT_TRIG/EBC_SDCE3/GMAC1_RXDV_CRS_M1/I2S1_SDO2_M1/GPIO4_B1_D	AG2
I2C4_SDA_M0/EBC_VCOM/GMAC1_RXER_M1/SPI3_MOSI_M0/I2S2_SDI_M1/GPIO4_B2_D	AF2 → I2C4_SDA_M1
I2C4_SCL_M0/EBC_GDOE/ETH1_REFCLKO_25M_M1/SPI3_CLK_M0/I2S2_SDO_M1/GPIO4_B3_D	AE2 → I2C4_SCL_M1
I2C2_SDA_M1/EBC_GDSP/ISP_FLASH_TRIGIN/VOP_BT656_CLK_M1/GPIO4_B4_D	AF1
I2C2_SCL_M1/EBC_SDSHR/I2S1_SDO3_M1/GPIO4_B5_D	AD1
CIF_HREF/EBC_SDLE/GMAC1_MDC_M1/UART1_RTS_M1/I2S2_MCLK_M1/GPIO4_B6_D	1L1
CIF_VSYNC/EBC_SDOE/GMAC1_MDIO_M1/I2S2_SCLK_TX_M1/GPIO4_B7_D	AC2
CIF_CLKOUT/EBC_GDCLK/PWM11_IR_M1/GPIO4_C0_D	AB2
CIF_CLKIN/EBC_SDCLK/GMAC1_MCLKINOUT_M1/UART1_CTS_M1/I2S2_SCLK_RX_M1/GPIO4_C1_D	AB1
VCCIO6_1	1L4
VCCIO6_2	1L5

RK3566

VCCIO6 — 1L4 / 1L5 — R93 0R — VCC_1V8

C144 100nF — GND

U1P

MIPI CSI RX

RK3568 (MIPI CSI RX)

MIPI_CSI_RX_D0P	AP18 MIPI_CSI_RX_D0_P
MIPI_CSI_RX_D0N	AR18 MIPI_CSI_RX_D0_N
MIPI_CSI_RX_D1P	AR17 MIPI_CSI_RX_D1_P
MIPI_CSI_RX_D1N	AP17 MIPI_CSI_RX_D1_N
MIPI_CSI_RX_D2P	AP15 MIPI_CSI_RX_D2_P
MIPI_CSI_RX_D2N	AR15 MIPI_CSI_RX_D2_N
MIPI_CSI_RX_D3P	AR14 MIPI_CSI_RX_D3_P
MIPI_CSI_RX_D3N	AP14 MIPI_CSI_RX_D3_N
MIPI_CSI_RX_CLK0P	1V9 MIPI_CSI_RX_CLK0_P
MIPI_CSI_RX_CLK0N	1U9 MIPI_CSI_RX_CLK0_N
MIPI_CSI_RX_CLK1P	1V8
MIPI_CSI_RX_CLK1N	1U8
MIPI_CSI_RX_AVDD_0V9	1N9 → VDDA0V9_IMAGE
MIPI_CSI_RX_AVDD_1V8	1P9 → VCCA1V8_IMAGE

RK3566

MIPI_CSI_RX_AVDD_0V9: C148 0.1uF — GND; C149 1uF — GND

MIPI_CSI_RX_AVDD_1V8: C168 100nF — GND; C169 1uF — GND

VCC_1V8 — R111 2.2K — I2C4_SCL_M1

VCC_1V8 — R112 2.2K — I2C4_SDA_M1

I2C4 — I2C4_SDA_M1 — I2C4_SCL_M1

MIPI_CSI

MIPI_CSI_RX_D0_P	MIPI_CSI_RX_D0_P
MIPI_CSI_RX_D0_N	MIPI_CSI_RX_D0_N
MIPI_CSI_RX_D1_P	MIPI_CSI_RX_D1_P
MIPI_CSI_RX_D1_N	MIPI_CSI_RX_D1_N
MIPI_CSI_RX_D2_P	MIPI_CSI_RX_D2_P
MIPI_CSI_RX_D2_N	MIPI_CSI_RX_D2_N
MIPI_CSI_RX_D3_P	MIPI_CSI_RX_D3_P
MIPI_CSI_RX_D3_N	MIPI_CSI_RX_D3_N
MIPI_CSI_RX_CLK0_P	MIPI_CSI_RX_CLK0_P
MIPI_CSI_RX_CLK0_N	MIPI_CSI_RX_CLK0_N


VCC_3V3	VCC_3V3
VDDA0V9_IMAGE	VDDA0V9_IMAGE
VCCA1V8_IMAGE	VCCA1V8_IMAGE
VCC_1V8	VCC_1V8
GND	GND

eSpark Consulting Group


Title: RK3566_VI_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	14
Drawn By: Huzaifa Ali	Page Total:	23

RK3566_VO_INTERFACE_1


RK3566 (MIPI DSI TX0)

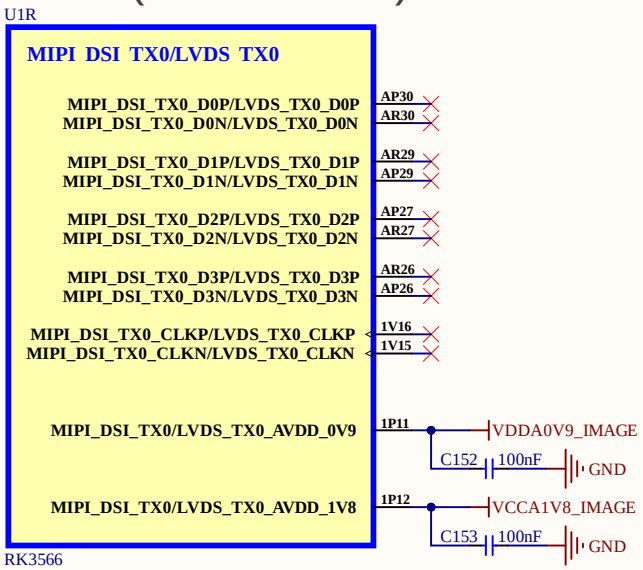


RK3566 (MIPI DSI TX1)

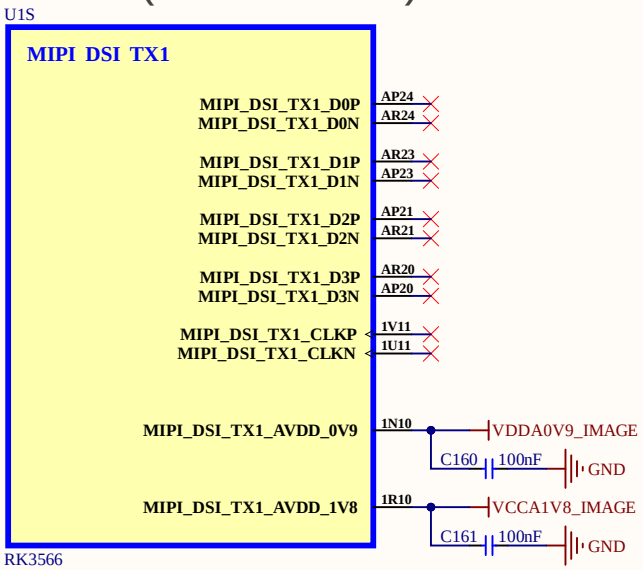


RK3566 (eDP TX)

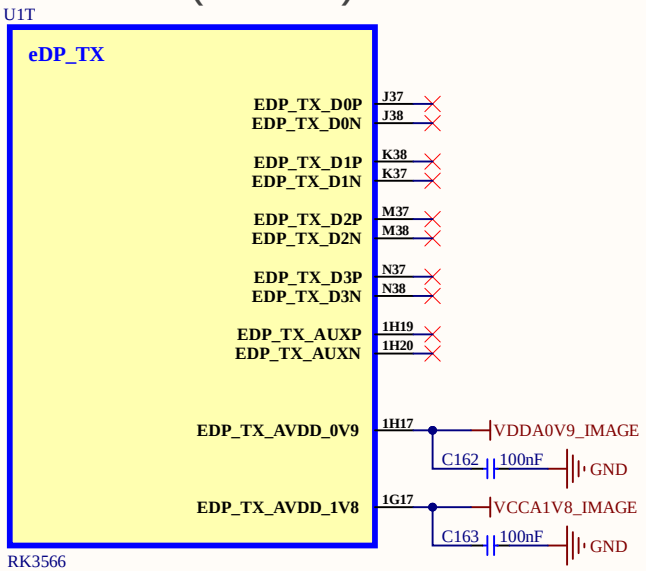

RK3566 (HDMI2.0 TX)

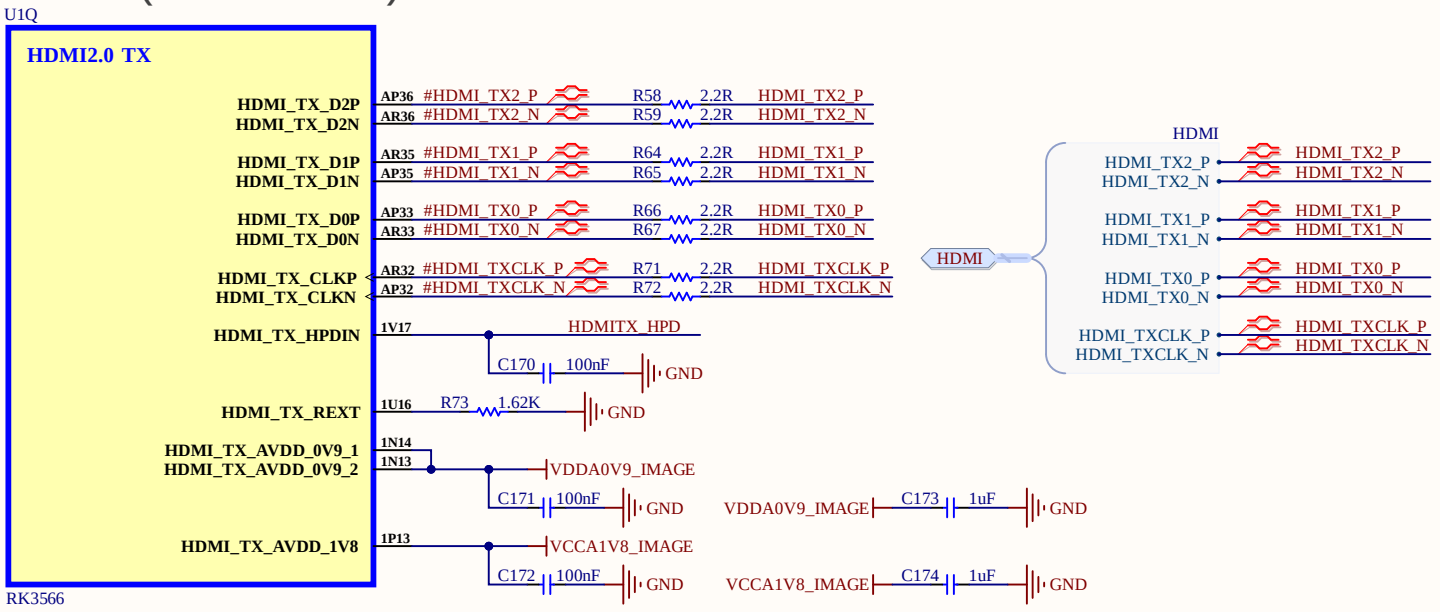



eSpark Consulting Group

Title: RK3566_VO_SHEET_1.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	15
Drawn By: Huzaifa Ali	Page Total:	23

RK3566_VO_INTERFACE_2


RK3566 (VCCIO5 Domain)

U1L

VCCIO5 Domain
Operating Voltage = 1.8V/3.3V

VOP_BT1120_D0/SPI1_CS0_M1/SDMMC2_D0_M1/GPIO3_A1_D	1U5
VOP_BT1120_D1/GMAC1_TXD2_M0/I2S3_MCLK_M0/SDMMC2_D1_M1/GPIO3_A2_D	AR10
VOP_BT1120_D2/GMAC1_TXD3_M0/I2S3_SCLK_M0/SDMMC2_D2_M1/GPIO3_A3_D	AP10
VOP_BT1120_D3/GMAC1_RXD2_M0/I2S3_LRCK_M0/SDMMC2_D3_M1/GPIO3_A4_D	AR9
VOP_BT1120_D4/GMAC1_RXD3_M0/I2S3_SDO_M0/SDMMC2_CMD_M1/GPIO3_A5_D	AP9
VOP_BT1120_CLK/GMAC1_TXCLK_M0/I2S3_SDI_M0/SDMMC2_CLK_M1/GPIO3_A6_D	1U4
VOP_BT1120_D5/GMAC1_RXCLK_M0/SDMMC2_DET_M1/GPIO3_A7_D	1V3
VOP_BT1120_D6/ETH1_REFCLKO_25M_M0/SDMMC2_PWREN_M1/GPIO3_B0_D	AR7
VOP_BT1120_D7/GMAC1_RXD0_M0/UART4_RX_M1/PWM8_M0/GPIO3_B1_D	AP7
VOP_BT1120_D8/GMAC1_RXD1_M0/UART4_TX_M1/PWM9_M0/GPIO3_B2_D	AR6
VOP_BT1120_D9/GMAC1_RXDV_CRS_M0/I2C5_SCL_M0/PDM_SDI0_M2/GPIO3_B3_D	AP6
VOP_BT1120_D10/GMAC1_RXER_M0/I2C5_SDA_M0/PDM_SDI1_M2/GPIO3_B4_D	1U3
VOP_BT1120_D11/GMAC1_TXD0_M0/I2C3_SCL_M1/PWM10_M0/GPIO3_B5_D	1T4
VOP_BT1120_D12/GMAC1_TXD1_M0/I2C3_SDA_M1/PWM11_IR_M0/GPIO3_B6_D	1V2
PWM12_M0/GMAC1_TXEN_M0/UART3_TX_M1/PDM_SDI2_M2/GPIO3_B7_D	AP5
PWM13_M0/GMAC1_MCLKINOUT_M0/UART3_RX_M1/PDM_SDI3_M2/GPIO3_C0_D	AR4
VOP_BT1120_D13/SPI1_MOSI_M1/PCIE20_PERST_M1/I2S1_SDO2_M2/GPIO3_C1_D	AP4
VOP_BT1120_D14/SPI1_MISO_M1/UART5_TX_M1/I2S1_SDO3_M2/GPIO3_C2_D	AP3
VOP_BT1120_D15/SPI1_CLK_M1/UART5_RX_M1/I2S1_SCLK_RX_M2/GPIO3_C3_D	AR2
PWM14_M0/VOP_PWM_M1/GMAC1_MDC_M0/UART7_TX_M1/PDM_CLK1_M2/GPIO3_C4_D	1P3
PWM15_IR_M0/SPDIF_TX_M1/GMAC1_MDIO_M0/UART7_RX_M1/I2S1_LRCK_RX_M2/GPIO3_C5_D	1P4
VCCIO5_1	1N5
VCCIO5_2	1N6

RK3566





eSpark Consulting Group

Title: RK3566_VO_SHEET_2.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	16
Drawn By: Huzaifa Ali	Page Total:	23

RK3566-Audio-Interface

RK3568 (VCCIO1 Domain)

U1H

VCCIO1 Domain
Operating Voltage = 1.8V/3.3V

I2C3_SDA_M0/UART3_RX_M0/AUDIOPWM_LOUT_P/GPIO1_A0_U	A22
I2C3_SCL_M0/UART3_TX_M0/AUDIOPWM_LOUT_N/GPIO1_A1_U	B22
I2S1_MCLK_M0/UART3_RTS_M0/SCR_CLK/GPIO1_A2_D	A23 — I2S1_MCLK_M0
I2S1_SCLK_TX_M0/UART3_CTS_M0/SCR_IO/GPIO1_A3_D	B23 — I2S1_SCLK_TX_M0
I2S1_SCLK_RX_M0/UART4_RX_M0/PDM_CLK1_M0/SPDIF_TX_M0/GPIO1_A4_D	1A13
I2S1_LRCK_TX_M0/UART4_RTS_M0/SCR_RST/GPIO1_A5_D	B24 — I2S1_LRCK_TX_M0
I2S1_LRCK_RX_M0/UART4_TX_M0/PDM_CLK0_M0/AUDIOPWM_ROUT_P/GPIO1_A6_D	1A14 — PDM_CLK0_M0
I2S1_SDO0_M0/UART4_CTS_M0/SCR_DET/AUDIOPWM_ROUT_N/GPIO1_A7_D	B25 — I2S1_SDO0_M0
I2S1_SDO1_M0/I2S1_SDI3_M0/PDM_SDI3_M0/PCIE20_CLKREQ_M2/GPIO1_B0_D	1B13
I2S1_SDO2_M0/I2S1_SDI2_M0/PDM_SDI2_M0/PCIE20_WAKE_M2/GPIO1_B1_D	A26
I2S1_SDO3_M0/I2S1_SDI1_M0/PDM_SDI1_M0/PCIE20_PERST_M2/GPIO1_B2_D	B26
I2S1_SDI0_M0/PDM_SDI0_M0/GPIO1_B3_D	1B14 — I2S1_SDI0_M0
VCCIO1	1D13 — VCCIO_ACODEC; C180 100nF GND

RK3566

RK3568 (VCCIO7 Domain)

U1N

VCCIO7 Domain
Operating Voltage = 1.8V/3.3V

PWM14_M1/SPI3_CLK_M1/I2S3_MCLK_M1/GPIO4_C2_D	1U7 R119 0R I2S3_MCLK_M1
PWM15_IR_M1/SPI3_MOSI_M1/I2S3_SCLK_M1/GPIO4_C3_D	AP12 R120 0R I2S3_SCLK_M1
EDP_HPDIN_M0/SPDIF_TX_M2/SATA2_ACT_LED/I2S3_LRCK_M1/GPIO4_C4_D	1V6 R121 0R I2S3_LRCK_M1
PWM12_M1/SPI3_MISO_M1/SATA1_ACT_LED/UART9_TX_M1/I2S3_SDO_M1/GPIO4_C5_D	1U6
PWM13_M1/SPI3_CS0_M1/SATA0_ACT_LED/UART9_RX_M1/I2S3_SDI_M1/GPIO4_C6_D	1T6 R123 0R I2S3_SDO_M1
HDMITX_SCL/I2C5_SCL_M1/GPIO4_C7_U	AR12 HDMITX_SCL
HDMITX_SDA/I2C5_SDA_M1/GPIO4_D0_U	AP11 HDMITX_SDA
HDMITX_CEC_M0/SPI3_CS1_M1/GPIO4_D1_U	1V5 HDMITX_CEC
VCCIO7	1N8 — VCC_3V3; C181 100nF GND

RK3566

I2S3
LONT_I2S3 — I2S3_MCLK_M1, I2S3_SCLK_M1, I2S3_LRCK_M1, I2S3_SDO_M1

I2C5
HDMI_I2C5 — HDMITX_SCL, HDMITX_SDA

I2S1
RK809_I2S1 — I2S1_MCLK_M0, I2S1_SCLK_TX_M0, I2S1_LRCK_TX_M0, I2S1_SDO0_M0, I2S1_SDI0_M0, PDM_CLK0_M0

HDMITX_CEC
VCCIO_ACODEC — VCCIO_ACODEC
VCC_3V3 — VCC_3V3
GND — GND

eSpark Consulting Group

Title: RK3566_AUDIO_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page Num:	17
Drawn By: Huzaifa Ali	Page Total:	23

DRAM_LPDDR4/LPDDR4X_SHEET


512M32 (16Gb)

16Gb = 64Mb x16DQ x2CHANNEL

PCB Layout Length Matching Guideline


LPDDR4-4000 Length Matching Guideline


LPDDR4 signal (each 16-bit channel)	Group	PCB and package prop delay		Considerations
		Min	Max	
CK_t/CK_c	Clock	Short as possible	200 ps	
CA5, CA4	Address/ Command/ Control	CK_t - 50 ps	CK_t + 50 ps	Match CA5, CA4 within 2 ps
CA3, CA2, CA1, CA0				Match CA3, CA2, CA1, CA0 within 2 ps
CKE1, CKE0, CS1, CS0				Match CKE1, CKE0, CS1, CS0 within 2 ps
DQS0_t/DQS0_c	Byte 0 - DQS	CK_t - 75 ps	CK_t + 75 ps	Match the true/complement signals of DQS within 1 ps.
DM0	Byte 0 - Data	DQS0_t -50 ps	DQS0_t +50 ps	
DQ[7:0]				
DQS1_t/DQS1_c	Byte 1 - DQS	CK_t - 75 ps	CK_t + 75 ps	
DM1	Byte 1 - Data	DQS1_t -50 ps	DQS1_t +50 ps	
DQ[15:8]				

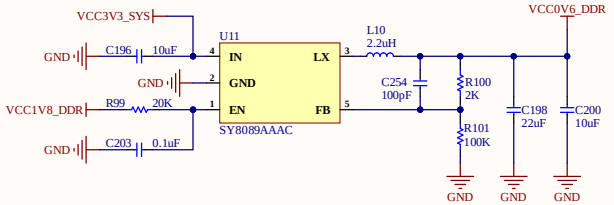



LPDDR4 MOUNT R98 REMOVE (U11,L10)

LPDDR4X REMOVE R98 MOUNT (U11,L10)



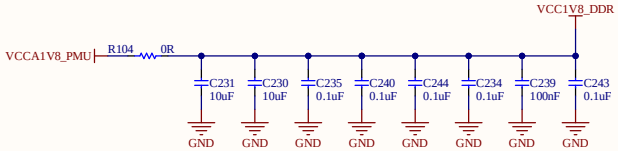

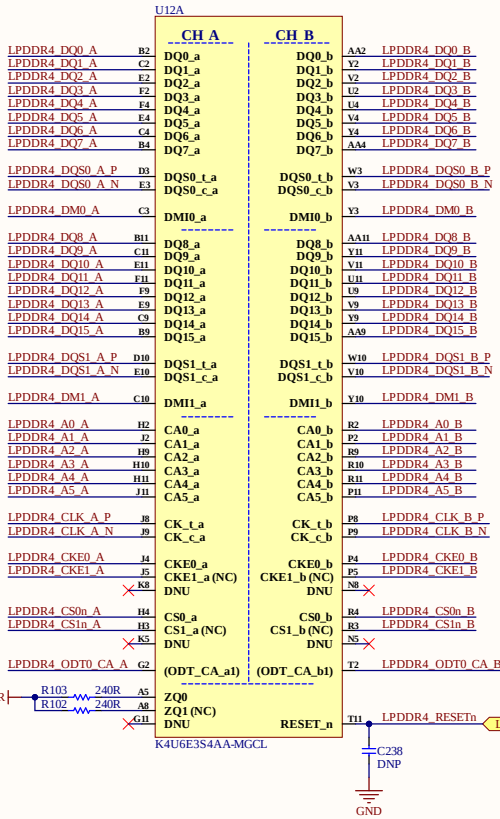


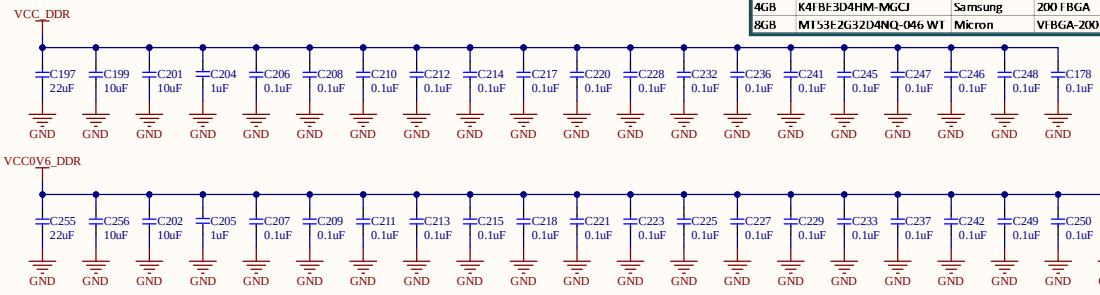


Assembly Variant Part Nubers

Size	MPN	Manufacturer	Package	Speed
1GB	K4F8F304HB-MGCJ	Samsung	200 FBGA	3733 Mbps
2GB	K4F6F3S4HM-MGCJ	Samsung	200 FBGA	3733Mbps
4GB	K4FBE3D4HM-MGCJ	Samsung	200 FBGA	3733Mbps
8GB	MT53E2G32D4NQ-046 WT	Micron	VFBGA-200 (D9ZCL)	4266Mbps



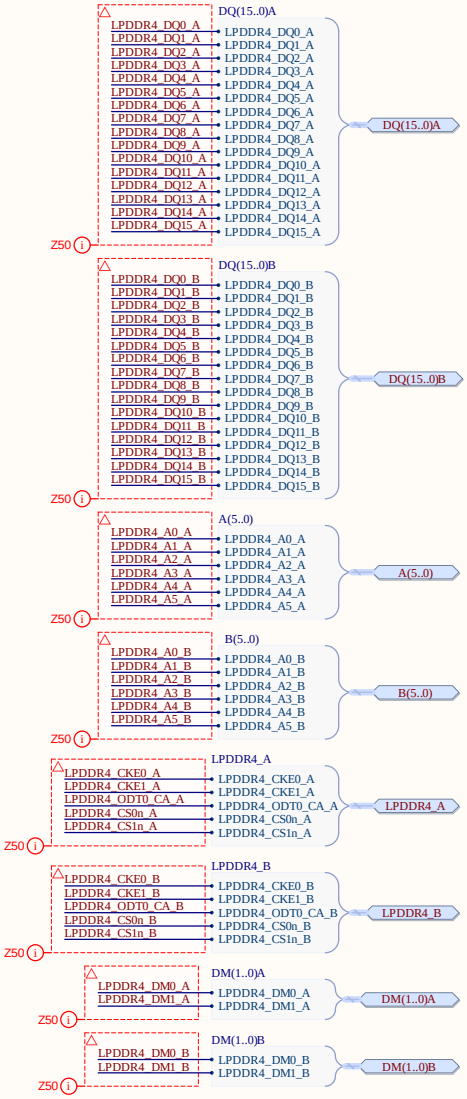






eSpark Consulting Group


Title: DRAM_LPDDR4_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 10/12/2024	Page	Num: 18
Drawn By: Huzaifa Ali	Page	Total: 23

eMMC_SPI-FLASH_SHEET

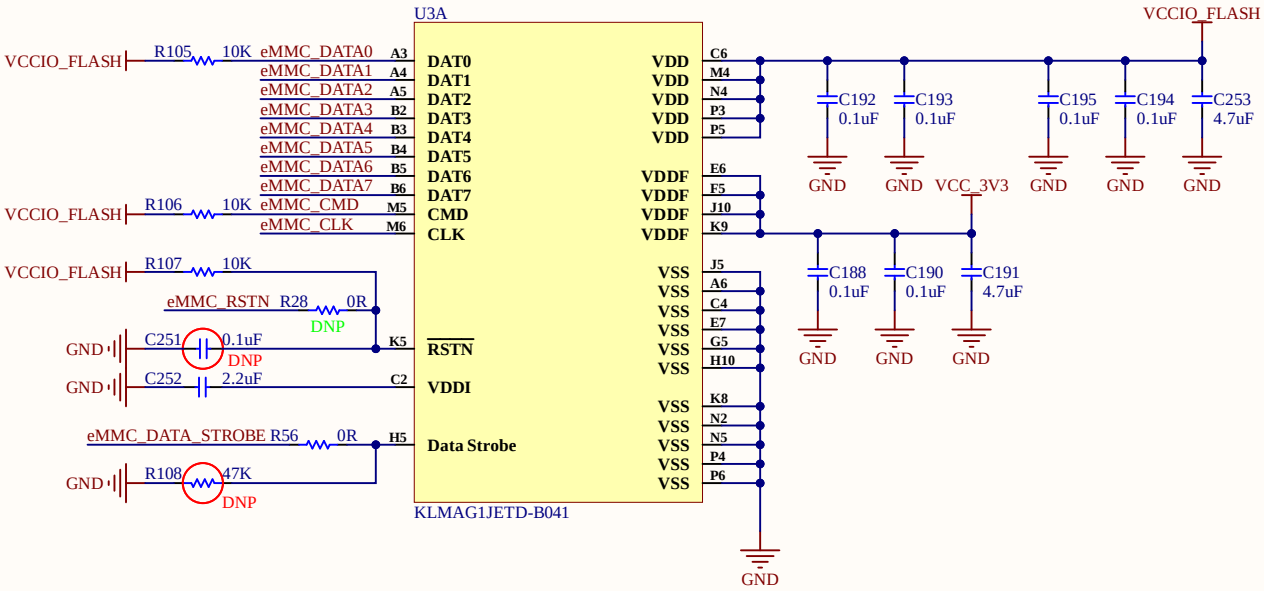

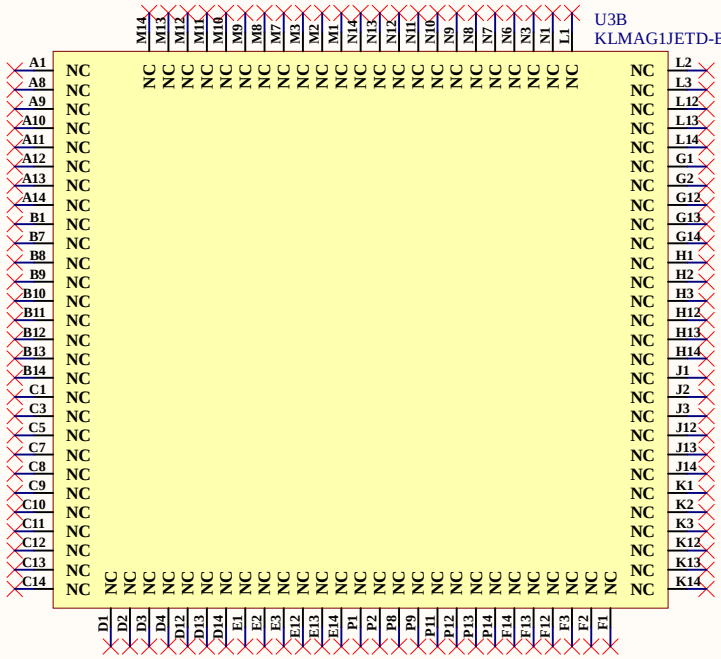



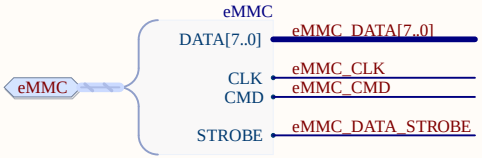


Title: eMMC_SPI-FLASH_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 11/12/2024	Page Num: 19
Drawn By: Huzaifa Ali	Page Total: 23


TYPE-C_TO_MIPI-CSI_INTERFACE


The lane of the 7911D supports swap, so the connection order defined in our DEMO and specification is different.

You can choose one of the following two connection orders, and it is recommended to choose the DEMO line order first for easier firmware creation.


Type C Receptacle	SPEC	DEMO
A2/A3	3P/3N LANE3	1P/1N LANE1
A10/A11	1N/1P LANE1	2P/2N LANE2
B2/B3	0P/0N LANE0	3P/3N LANE3
B10/B11	2N/2P LANE2	0P/0N LANE0

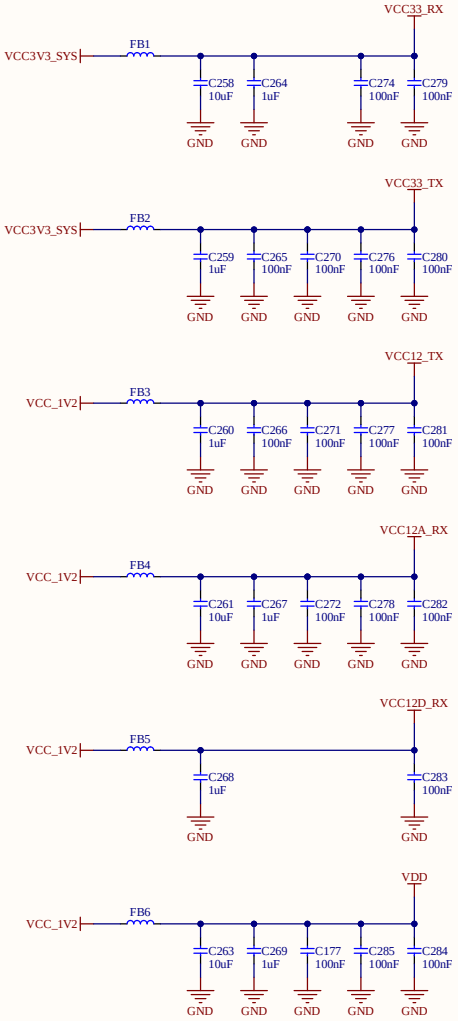


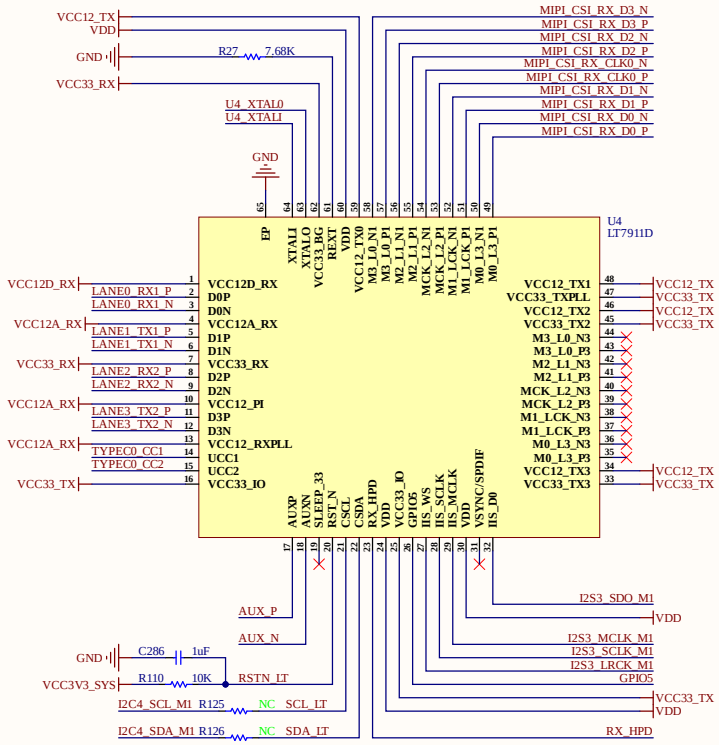






TEST POINTs




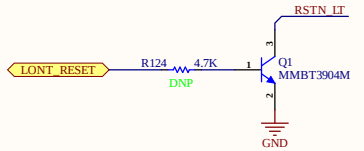

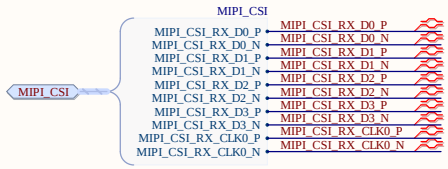












eSpark Consulting Group


Title: TYPE-C_TO_MIPI-CSI_SHEET.SchDoc		
File: TYPEC_4KTransmitter-v1.0.PrjPcb		
Date: 21/11/2024	Page	Num: 20
Drawn By: Huzaifa Ali	Page	Total: 23

HDMI2.0-INTERFACE

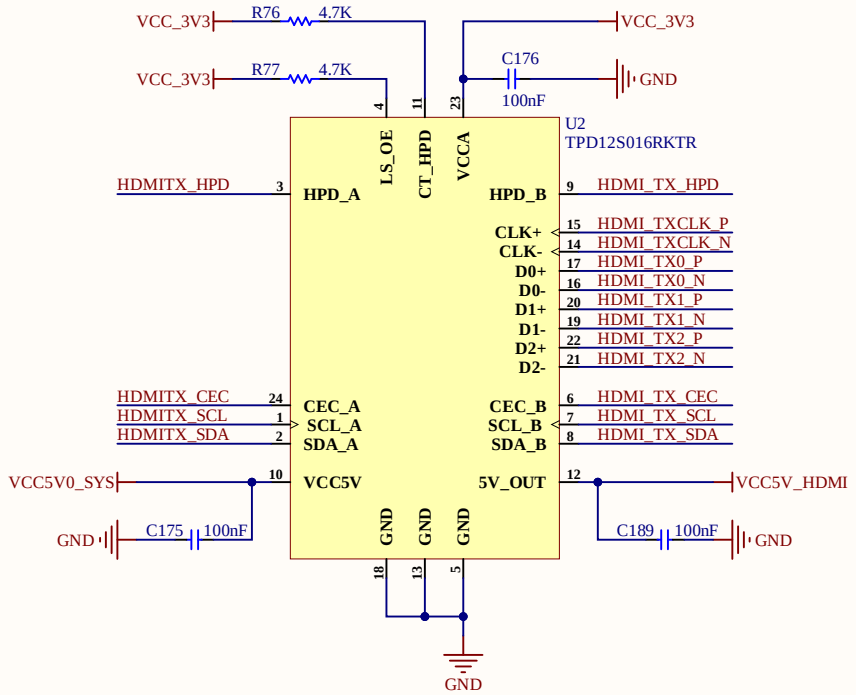

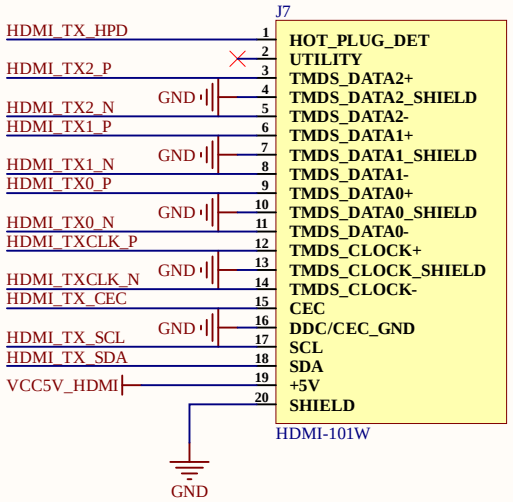


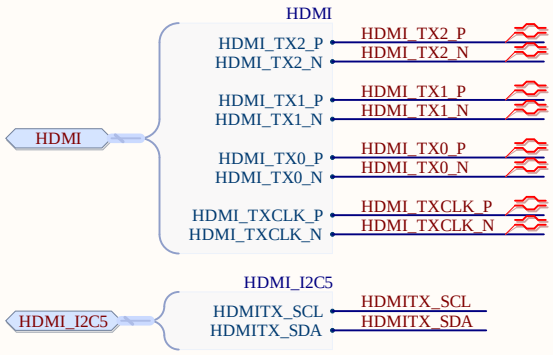




Title: HDMI2.0_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 20/11/2024	Page Num: 21
Drawn By: Huzaifa Ali	Page Total: 23

USB2.0-INTERFACE

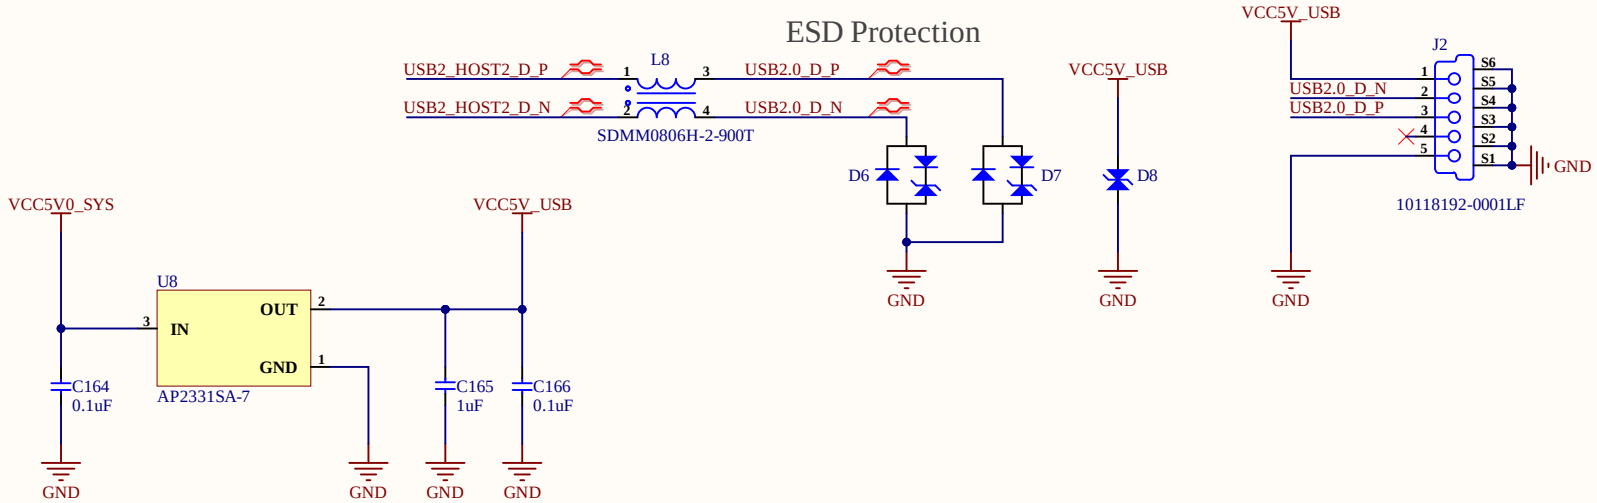


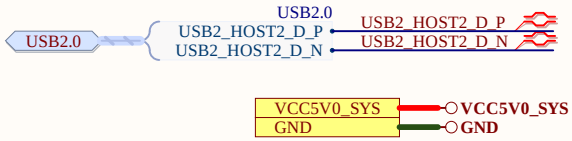



Title: USB2.0_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 05/12/2024	Page Num: 22
Drawn By: Huzaifa Ali	Page Total: 23


WIFI_INTERFACE_SHEET

Dual Band WiFi-6

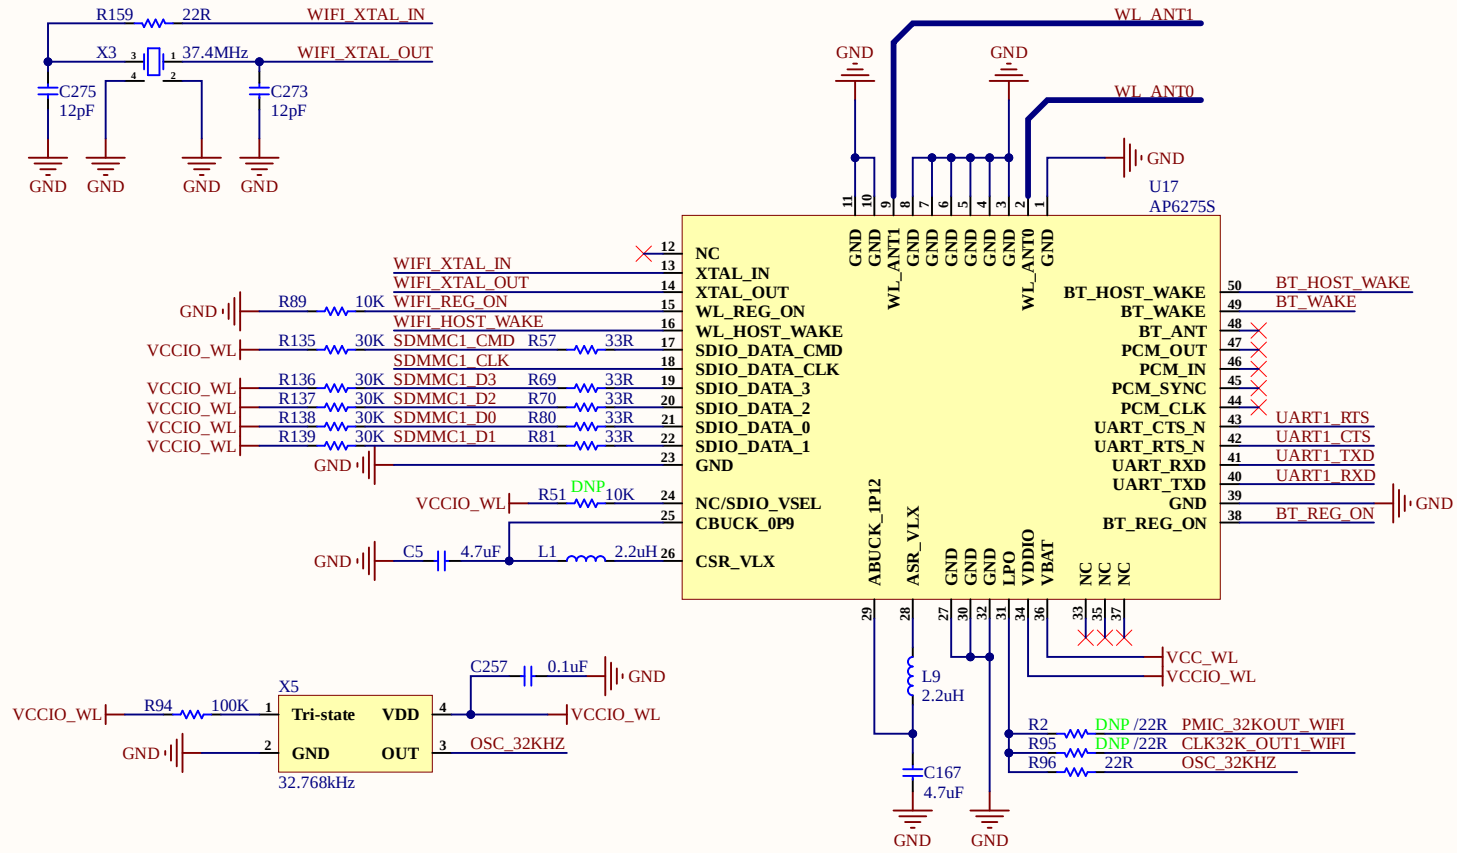

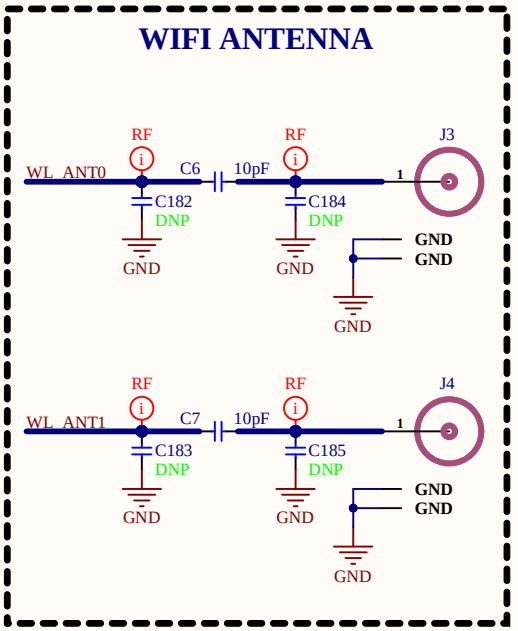

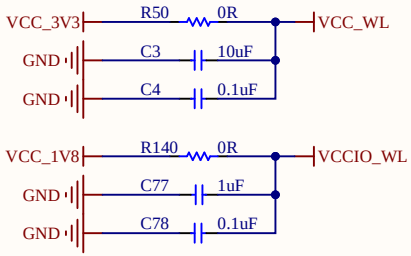

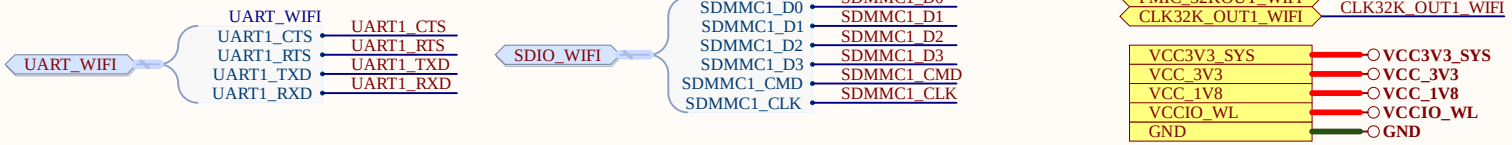

eSpark Consulting Group

Title: WIFI-6_SHEET.SchDoc	
File: TYPEC_4KTransmitter-v1.0.PrjPcb	
Date: 06/12/2024	Page Num: 23
Drawn By: Huzaifa Ali	Page Total: 23

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	SM-001	0.025mm	4	
1	Top Layer		0.035mm		
	Dielectric 1	PP-007	0.076mm	4.2	
2	GND-1	CF-004	0.035mm		
	Dielectric 2	PP-007	0.076mm	4.2	
	Dielectric 3	PP-007	0.076mm	4.2	
3	Signal L1	CF-004	0.035mm		
	Core 1	Core-024	0.203mm	4.6	
4	GND-2	CF-004	0.035mm		
	Dielectric 4	PP-1080	0.075mm	4	
5	PWR-1	CF-004	0.035mm		
	Core 2	Core-024	0.203mm	4.6	
6	PWR-2	CF-004	0.035mm		
	Dielectric 5	PP-1080	0.075mm	4	
7	GND-3	CF-004	0.035mm		
	Core 3	Core-024	0.203mm	4.6	
8	Signal L2	CF-004	0.035mm		
	Dielectric 6	PP-007	0.076mm	4.2	
	Dielectric 7	PP-007	0.076mm	4.2	
9	GND-4	CF-004	0.035mm		
	Dielectric 8	PP-007	0.076mm	4.2	
10	Bottom Layer		0.035mm		
	Bottom Solder	SM-001	0.025mm	4	
	Bottom Overlay				
Total board thickness:			1.618mm		

