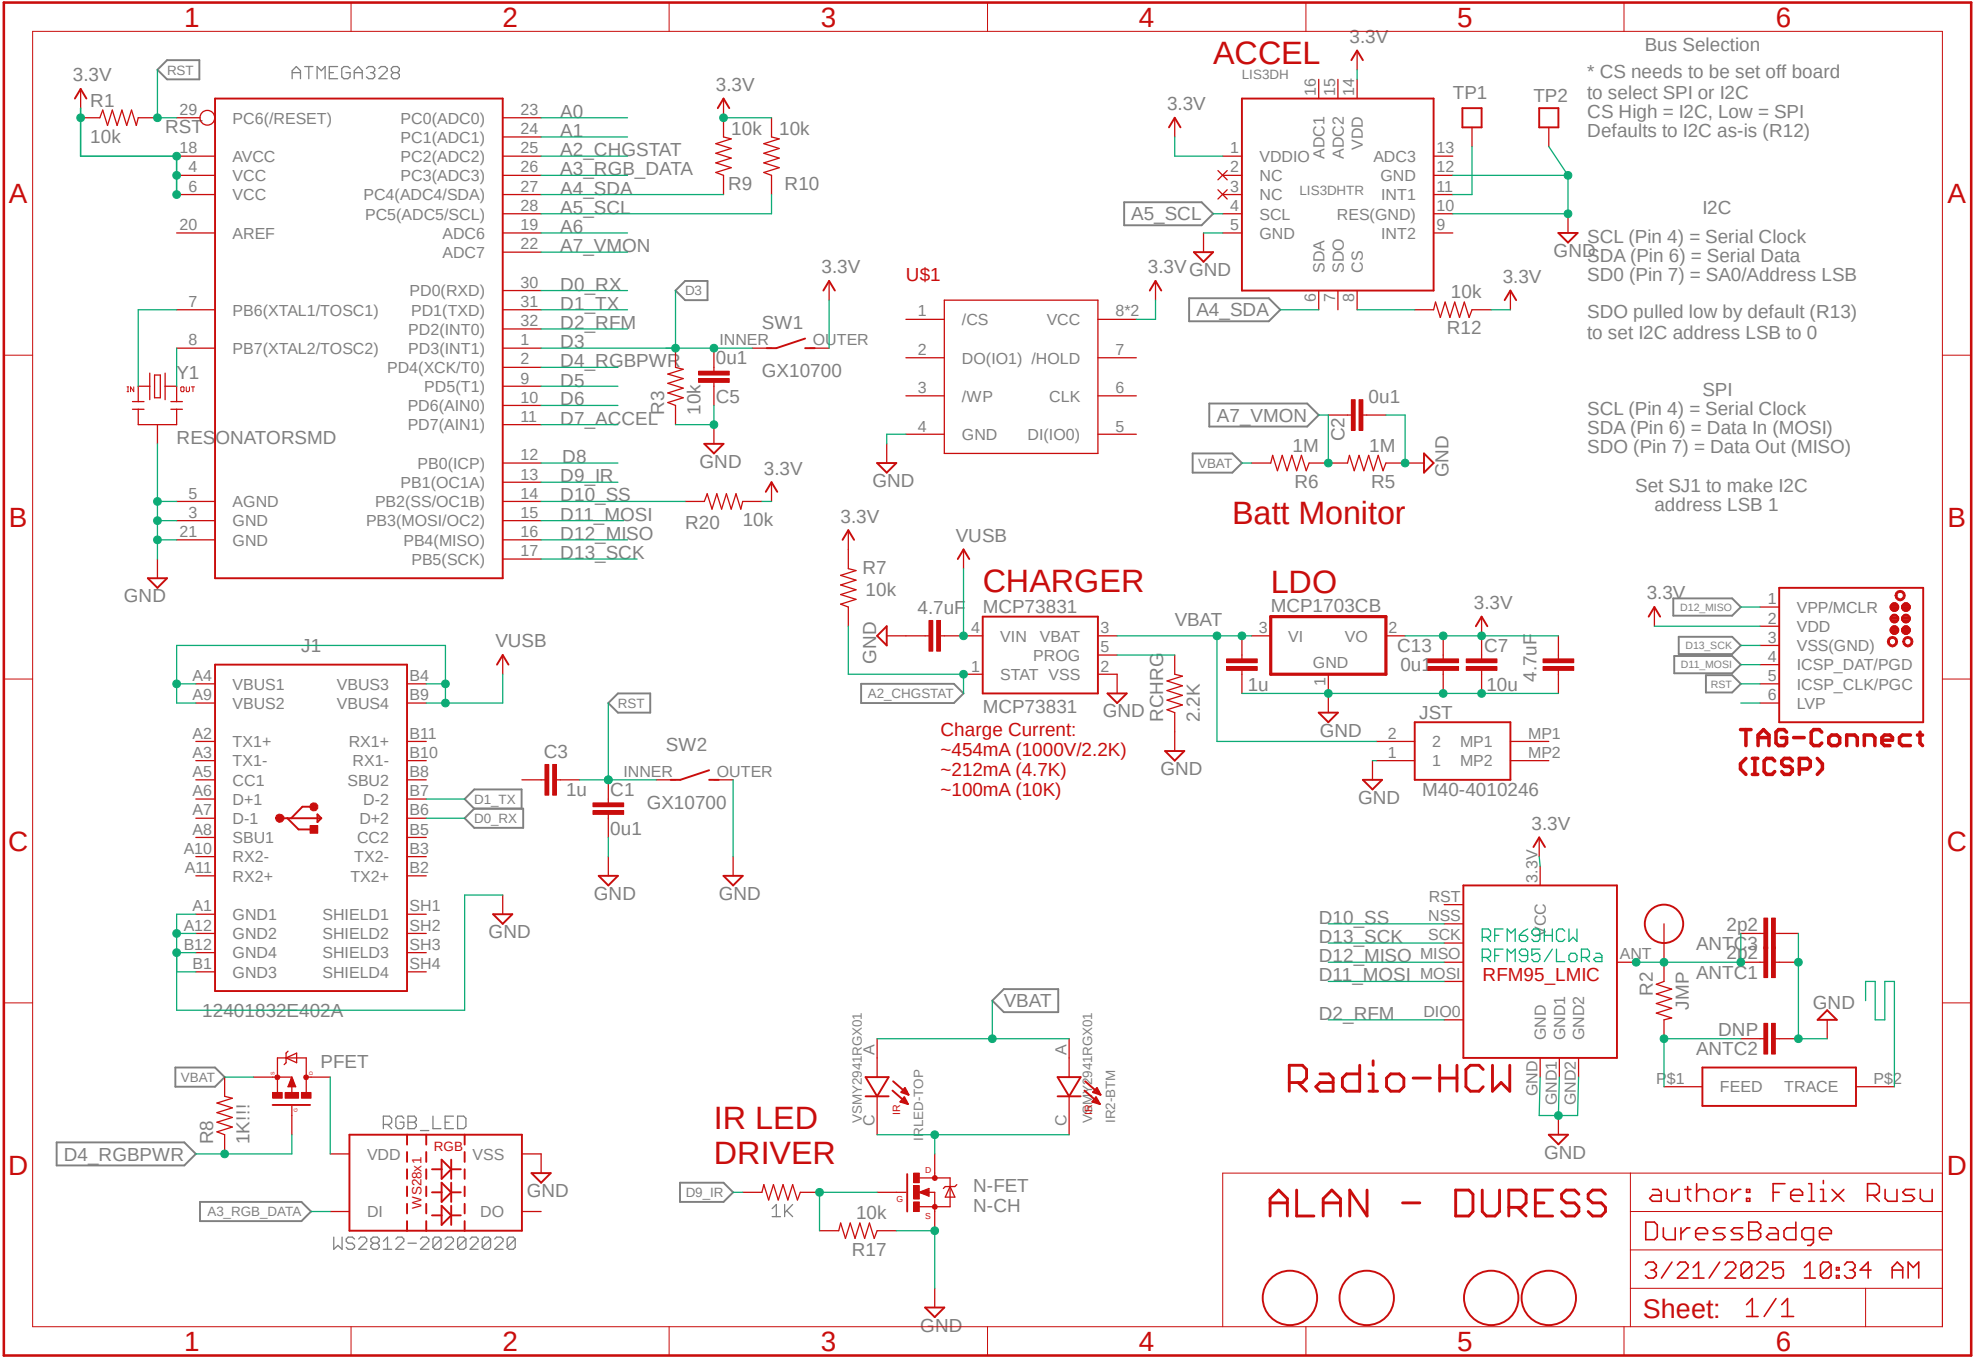

ATMEGA328
ACCEL
LIS3DH
Bus Selection
* CS needs to be set off board to select SPI or I2C
CS High = I2C, Low = SPI
Defaults to I2C as-is (R12)
I2C
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Serial Data
SDO (Pin 7) = SA0/Address LSB
SDO pulled low by default (R13) to set I2C address LSB to 0
SPI
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Data In (MOSI)
SDO (Pin 7) = Data Out (MISO)
Set SJ1 to make I2C address LSB 1
Batt Monitor
CHARGER
MCP73831
LDO
MCP1703CB
Charge Current:
~454mA (1000V/2.2K)
~212mA (4.7K)
~100mA (10K)
M40-4010246
TAG-Connect (ICSP)
Radio-HCW
RFM69HCW
RFM95/LoRa
RFM95_LMIC
IR LED DRIVER
N-FET
N-CH
PFET
RGB_LED
WS2812-20202020
12401832E402A
RESONATORSMD
ALAN - DURESS
author: Felix Rusu
DuressBadge
3/21/2025 10:34 AM
Sheet: 1/1