



EC612 | 6-axis Collaborative Robot

EC SERIES



12kg
Payload



1304mm
Radius



± 0.05 mm
Repeatability



3.2m/s
Max TCP Speed



EC612

EC SERIES

Robotic Arm




Payload	12kg	
Radius	1304mm	
Repeatability	±0.05mm	
Axis	6	
Joints rotation	J1-J6	±360°
Joints speed	J1-J2	120°/s
	J3	150°/s
	J4-J6	210°/s
Max TCP Speed	3.2m/s	
IP rating	IP54	
Operating Temperature range	0-50 °C	
Relative humidity	5%-95% (non-condensing)	
Typical power usage	435w	
Mounting	Any angle	
Tool I/O connector	12 pin	
Tool I/O ports	2 DI, 2 DO, 1 AI, 1 AO	
Tool I/O power supply	24 V	
Tool I/O communication	RS485	
Footprint	Ø 200mm	
Weight	33.5kg	
Material	Aluminum, Steel	
Cable length	5.5m	
Certifications	EN ISO 10218-1	


Teach-Pendant




Size	290mm x 225mm x 118mm
Screen display size	8.1"
Resolution	1280 x 800 pixels
Material	Aluminum, Plastic
Weight	1.8 kg
Cable length	5.5 m
IP rating	IP65
Input method	Resistive touch-screen, physical buttons

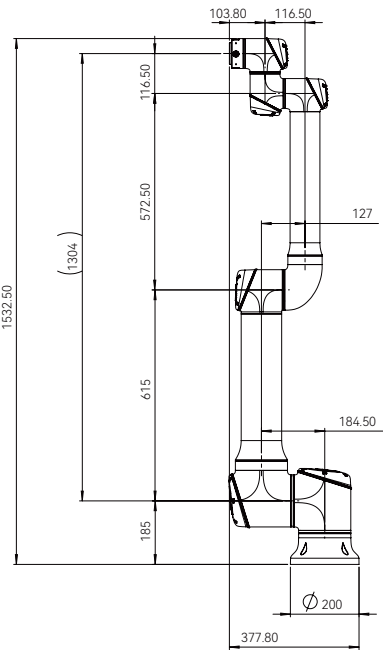


EC612 external dimensional drawing



EC612 base top view

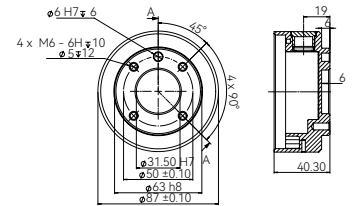


EC612 end flange

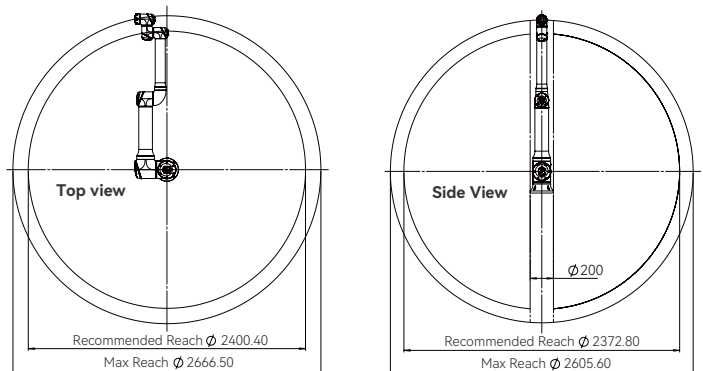

EC612 working range diagram

Controller



Size	505mm x 448mm x 245mm
Material	Aluminum, Steel
IP rating	IP44
I/O ports	16 DI, 20 DO, 2 AI, 4 AO
I/O power supply	24V; 2A (internal)
Communication ports	1 Ethernet port, 1 RS485/RS232, 1 USB 2.0
Communication protocols	TCP/IP, MODBUS TCP/RTU, EtherNet/IP, Profinet, CCLink
Power source	100-240 VAC, 50-60 Hz (M: 19-72VDC)