


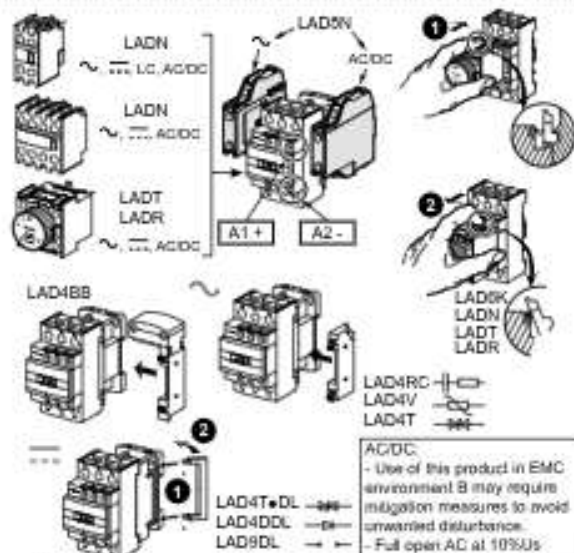

|        | One Phase / 单相 |           | Three Phases / 三相 |       |       |
|--------|----------------|-----------|-------------------|-------|-------|
|        | 230 V          | 200/208 V | 230 V             | 460 V | 575 V |
| LC1D12 | 1.5            | 2         | 3                 | 7.5   | 7.5   |
| LC1D16 | 3              | 5         | 5                 | -     | -     |
| LC1D25 | 3              | 5         | 7.5               | 15    | 20    |
| LC1D32 | 5              | 10        | 7.5               | -     | -     |

Only applicable for UL/CSA marked products except DC coil.

Schneider Electric Industries SAS  
35, rue Joseph Monier CS 30323  
F - 92506 Neuilly Malmatlon Cedex

www.schneider-electric.com/contact  
W9 1378304 0211 A09  
03/2017


#### UL/CSA Lighting Ratings / UL/CSA 照明电流额定值

| Device / 设备 | Ballast, 600 V / 镇流器 | Tungsten, 480 V / 277 V / 钨丝灯 |
|-------------|----------------------|-------------------------------|
| LC1D09      | 20 A                 | 20 A                          |
| LC1D12      | 25 A                 | 25 A (CSA only)               |
| LC1D16      | 32 A                 | 25 A                          |
| LC1D25      | 40 A                 | 40 A                          |
| LC1D32      | 50 A                 | 50 A                          |
| LC1DT20     | 20 A                 | 20 A                          |
| LC1DT25     | 25 A                 | 25 A (CSA only)               |
| LC1DT32     | 32 A                 | 25 A                          |
| LC1DT40     | 40 A                 | 40 A                          |

\*For Motor Starting Use Schneider Electric Overload Relay Series LR\*

电动机启动请使用施耐德电气LR系列热过载继电器

Only applicable for UL/CSA marked products except DC coil.



# **⚠ ⚠ DANGER / 危险**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

Disconnect all power before servicing equipment.

Failure to follow these instructions will result in death or serious injury.

可能有触电、爆炸或电弧闪络危险。

在此电力设备上执行任何工作，请务断开所有电源。

不遵循上述规定可能导致人员死亡。

|     | LC1D09/<br>D12      | LC1D20/<br>DT25/<br>D098/D128 | LC1D18              | LC1D25/<br>D32/D38  | LC1D32/<br>DT40/<br>D188/D258 | LC1D...<br>LA...    |
|-----|---------------------|-------------------------------|---------------------|---------------------|-------------------------------|---------------------|
|     | 6 mm<br>5/16"       | 12 mm<br>5/13"                | 6 mm<br>5/16"       | 10 mm<br>3/8"       | 12 mm<br>5/13"                | 6 mm<br>5/16"       |
|     | 1...4               | 1...4                         | 1...6               | 2...10              | 2...10                        | 1...4               |
|     | 1...4               | 1...4                         | 1...6               | 2...10              | 2...10                        | 1...4               |
|     | 1...4               | 1...4                         | 1...6               | 1...10              | 2...10                        | 1...4               |
|     | 1...2.5             | 1...2.5                       | 1...4               | 1...6               | 2...10                        | 1...2.5             |
|     | 1...4               | 1...4                         | 1...6               | 1...10              | 2...16                        | 1...4               |
|     | 1...4               | 1...4                         | 1...6               | 2...10              | 2...16                        | 1...4               |
| AWG | 10-16<br>CU 75°C    | 10-16<br>CU 75°C              | 6-16<br>CU 75°C     | 6-14<br>CU 75°C     | 6-12<br>CU 75°C               | 10-16<br>CU 75°C    |
|     | 6 mm                | 6 mm                          | 6 mm                | 6 mm                | 6 mm                          | 6 mm                |
|     | 1.7 N.m<br>15 lb-in | 1.7 N.m<br>15 lb-in           | 1.7 N.m<br>15 lb-in | 2.5 N.m<br>22 lb-in | 1.6 N.m<br>16 lb-in           | 1.7 N.m<br>15 lb-in |

## **⚠ ⚠ WARNING / 警告**

**RISK OF FIRE OR ELECTRIC SHOCK (FOR CONTACTOR WITH UL HI-FAULT SHORT CIRCUIT CURRENT RATINGS ONLY)**

■ The opening of the branch-circuit protective device may be an indication that a fault current has been interrupted.

■ To reduce the risk of fire or electric shock, current-carrying parts and the other components of the controller should be examined and replaced if damaged.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

可能有火灾或触电的危险（仅限以高故障短路电流额定值的接触器）。

当保护装置断开时，表明故障电流已被中断。

为降低火灾或触电风险，应检查带电部件和其他控制元件。如有损坏，应及时更换。

不遵循上述规定可能导致人员伤亡或设备损坏。

**Definite Purpose ratings, 3 Phase, Load wiring:  
breaking all lines**

**Hermetic refrigeration compressor**

**特定用途额定值，3 相，断开所有线路**

**封闭式制冷压缩机设备**

| Device | FLA | LRA   |       |       |
|--------|-----|-------|-------|-------|
|        |     | 240 V | 480 V | 600 V |
| LC1D09 | 9   | 54    | 45    | 36    |
| LC1D12 | 12  | 72    | 60    | 48    |
| LC1D15 | 15  | 105   | 90    | 72    |
| LC1D25 | 25  | 150   | 125   | 100   |
| LC1D32 | 32  | 192   | 160   | 128   |

Only applicable for UL/CSA marked products except DC coil.

3P AC TeSys D contactors are grade 3 (LC1D09 → LC1D15) and grade 2

(LC1D25 → LC1D32) according to GB 21518.

Maximum power consumption lower than 9.5 VA.

根据 GB 21518 标准，三极 TeSys D 系列交流接触器额定等级为 3 级

(LC1D09 → LC1D15) 和 2 级 (LC1D25 → LC1D32)，产品最大功耗为 9.5 VA