



1. Description

1.1. Project

Project Name	STM32G071
Board Name	custom
Generated with:	STM32CubeMX 6.18.1
Date	08/24/2026


1.2. MCU

MCU Series	STM32G0
MCU Line	STM32G0x1
MCU name	STM32G071R8Tx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	ARM Cortex-M0+
---------	----------------

2. Pinout Configuration

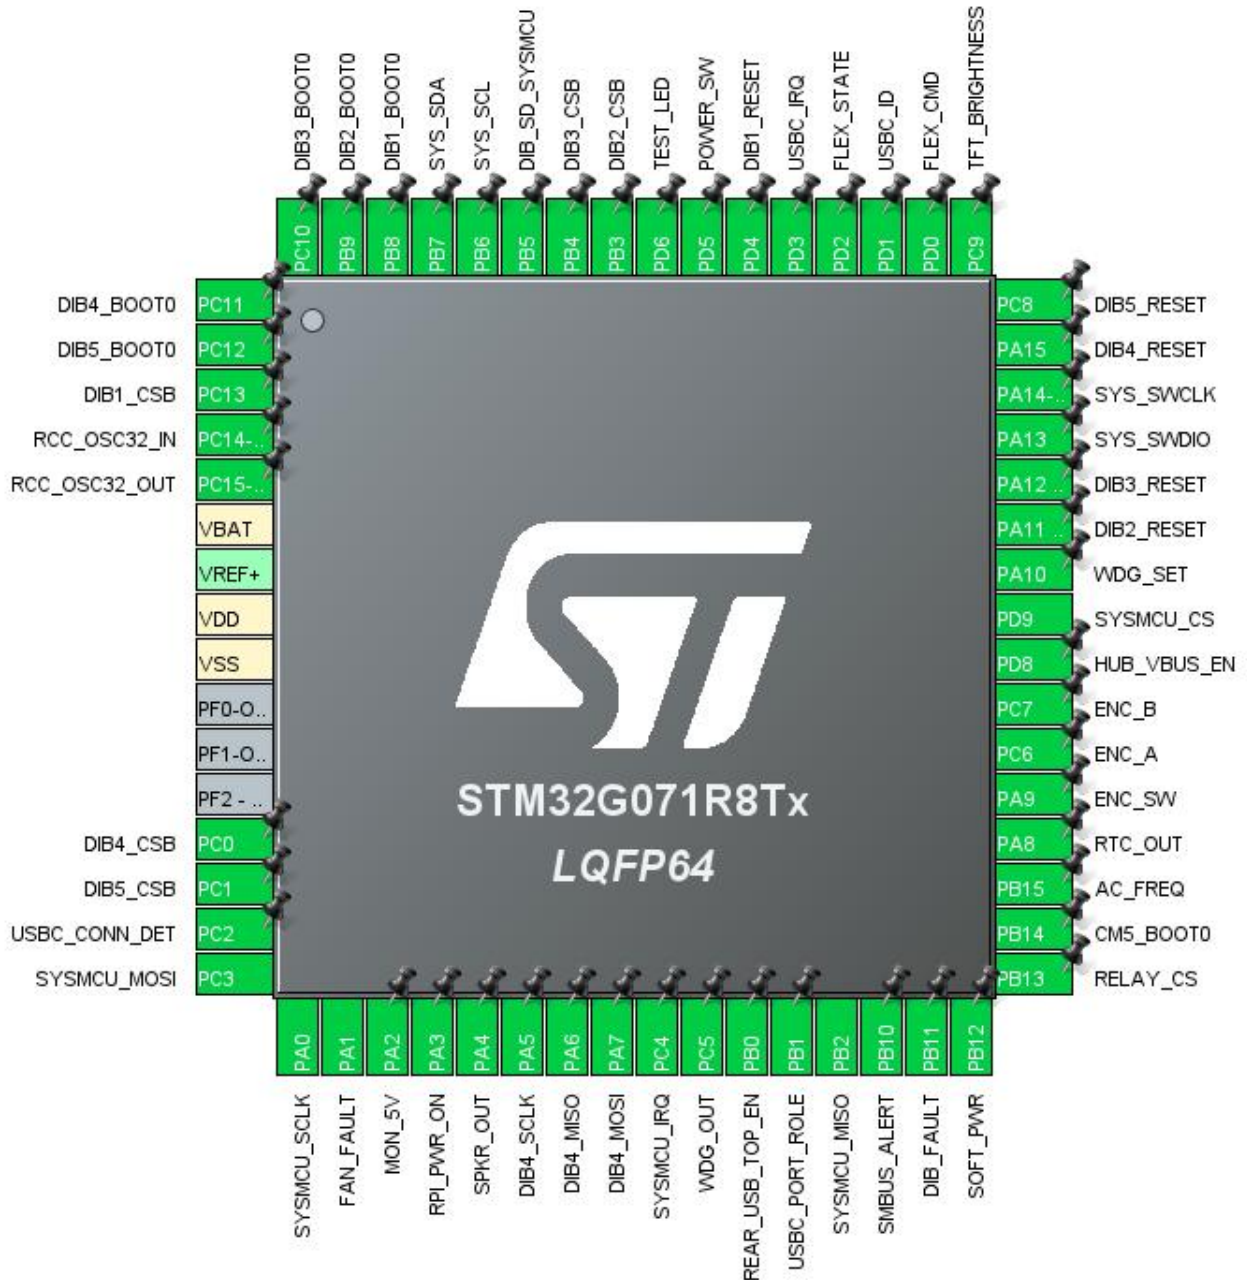

3. Pins Configuration


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PC11 *	I/O	GPIO_Output	DIB4_BOOT0
2	PC12 *	I/O	GPIO_Output	DIB5_BOOT0
3	PC13 *	I/O	GPIO_Output	DIB1_CSB
4	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
5	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
6	VBAT	Power		
8	VDD	Power		
9	VSS	Power		
13	PC0 *	I/O	GPIO_Output	DIB4_CSB
14	PC1 *	I/O	GPIO_Output	DIB5_CSB
15	PC2	I/O	GPIO_EXTI2	USBC_CONN_DET
16	PC3	I/O	SPI2_MOSI	SYSMCU_MOSI
17	PA0	I/O	SPI2_SCK	SYSMCU_SCLK
18	PA1	I/O	I2C1_SMBA	FAN_FAULT
19	PA2	I/O	ADC1_IN2	MON_5V
20	PA3 *	I/O	GPIO_Output	RPI_PWR_ON
21	PA4	I/O	DAC1_OUT1	SPKR_OUT
22	PA5	I/O	SPI1_SCK	DIB4_SCLK
23	PA6	I/O	SPI1_MISO	DIB4_MISO
24	PA7	I/O	SPI1_MOSI	DIB4_MOSI
25	PC4	I/O	GPIO_EXTI4	SYSMCU_IRQ
26	PC5 *	I/O	GPIO_Output	WDG_OUT
27	PB0 *	I/O	GPIO_Output	REAR_USB_TOP_EN
28	PB1 *	I/O	GPIO_Output	USBC_PORT_ROLE
29	PB2	I/O	SPI2_MISO	SYSMCU_MISO
30	PB10	I/O	GPIO_EXTI10	SMBUS_ALERT
31	PB11	I/O	GPIO_EXTI11	DIB_FAULT
32	PB12	I/O	GPIO_EXTI12	SOFT_PWR
33	PB13 *	I/O	GPIO_Output	RELAY_CS
34	PB14 *	I/O	GPIO_Output	CM5_BOOT0
35	PB15	I/O	RTC_REFIN	AC_FREQ
36	PA8	I/O	RCC_MCO	RTC_OUT
37	PA9	I/O	GPIO_EXTI9	ENC_SW
38	PC6	I/O	TIM3_CH1	ENC_A
39	PC7	I/O	TIM3_CH2	ENC_B
40	PD8 *	I/O	GPIO_Output	HUB_VBUS_EN

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
41	PD9	I/O	SPI1_NSS	SYSMCU_CS
42	PA10 *	I/O	GPIO_Output	WDG_SET
43	PA11 [PA9] *	I/O	GPIO_Output	DIB2_RESET
44	PA12 [PA10] *	I/O	GPIO_Output	DIB3_RESET
45	PA13	I/O	SYS_SWDIO	
46	PA14-BOOT0	I/O	SYS_SWCLK	
47	PA15 *	I/O	GPIO_Output	DIB4_RESET
48	PC8 *	I/O	GPIO_Output	DIB5_RESET
49	PC9	I/O	TIM1_CH2	TFT_BRIGHTNESS
50	PD0 *	I/O	GPIO_Output	FLEX_CMD
51	PD1	I/O	GPIO_EXTI1	USBC_ID
52	PD2 *	I/O	GPIO_Input	FLEX_STATE
53	PD3	I/O	GPIO_EXTI3	USBC_IRQ
54	PD4 *	I/O	GPIO_Output	DIB1_RESET
55	PD5	I/O	GPIO_EXTI5	POWER_SW
56	PD6 *	I/O	GPIO_Output	TEST_LED
57	PB3 *	I/O	GPIO_Output	DIB2_CSB
58	PB4 *	I/O	GPIO_Output	DIB3_CSB
59	PB5 *	I/O	GPIO_Output	DIB_SD_SYSMCU
60	PB6	I/O	I2C1_SCL	SYS_SCL
61	PB7	I/O	I2C1_SDA	SYS_SDA
62	PB8 *	I/O	GPIO_Output	DIB1_BOOT0
63	PB9 *	I/O	GPIO_Output	DIB2_BOOT0
64	PC10 *	I/O	GPIO_Output	DIB3_BOOT0

* The pin is affected with an I/O function

4. Clock Tree Configuration

~~RIF configuration not available for STM32G071R8Tx~~

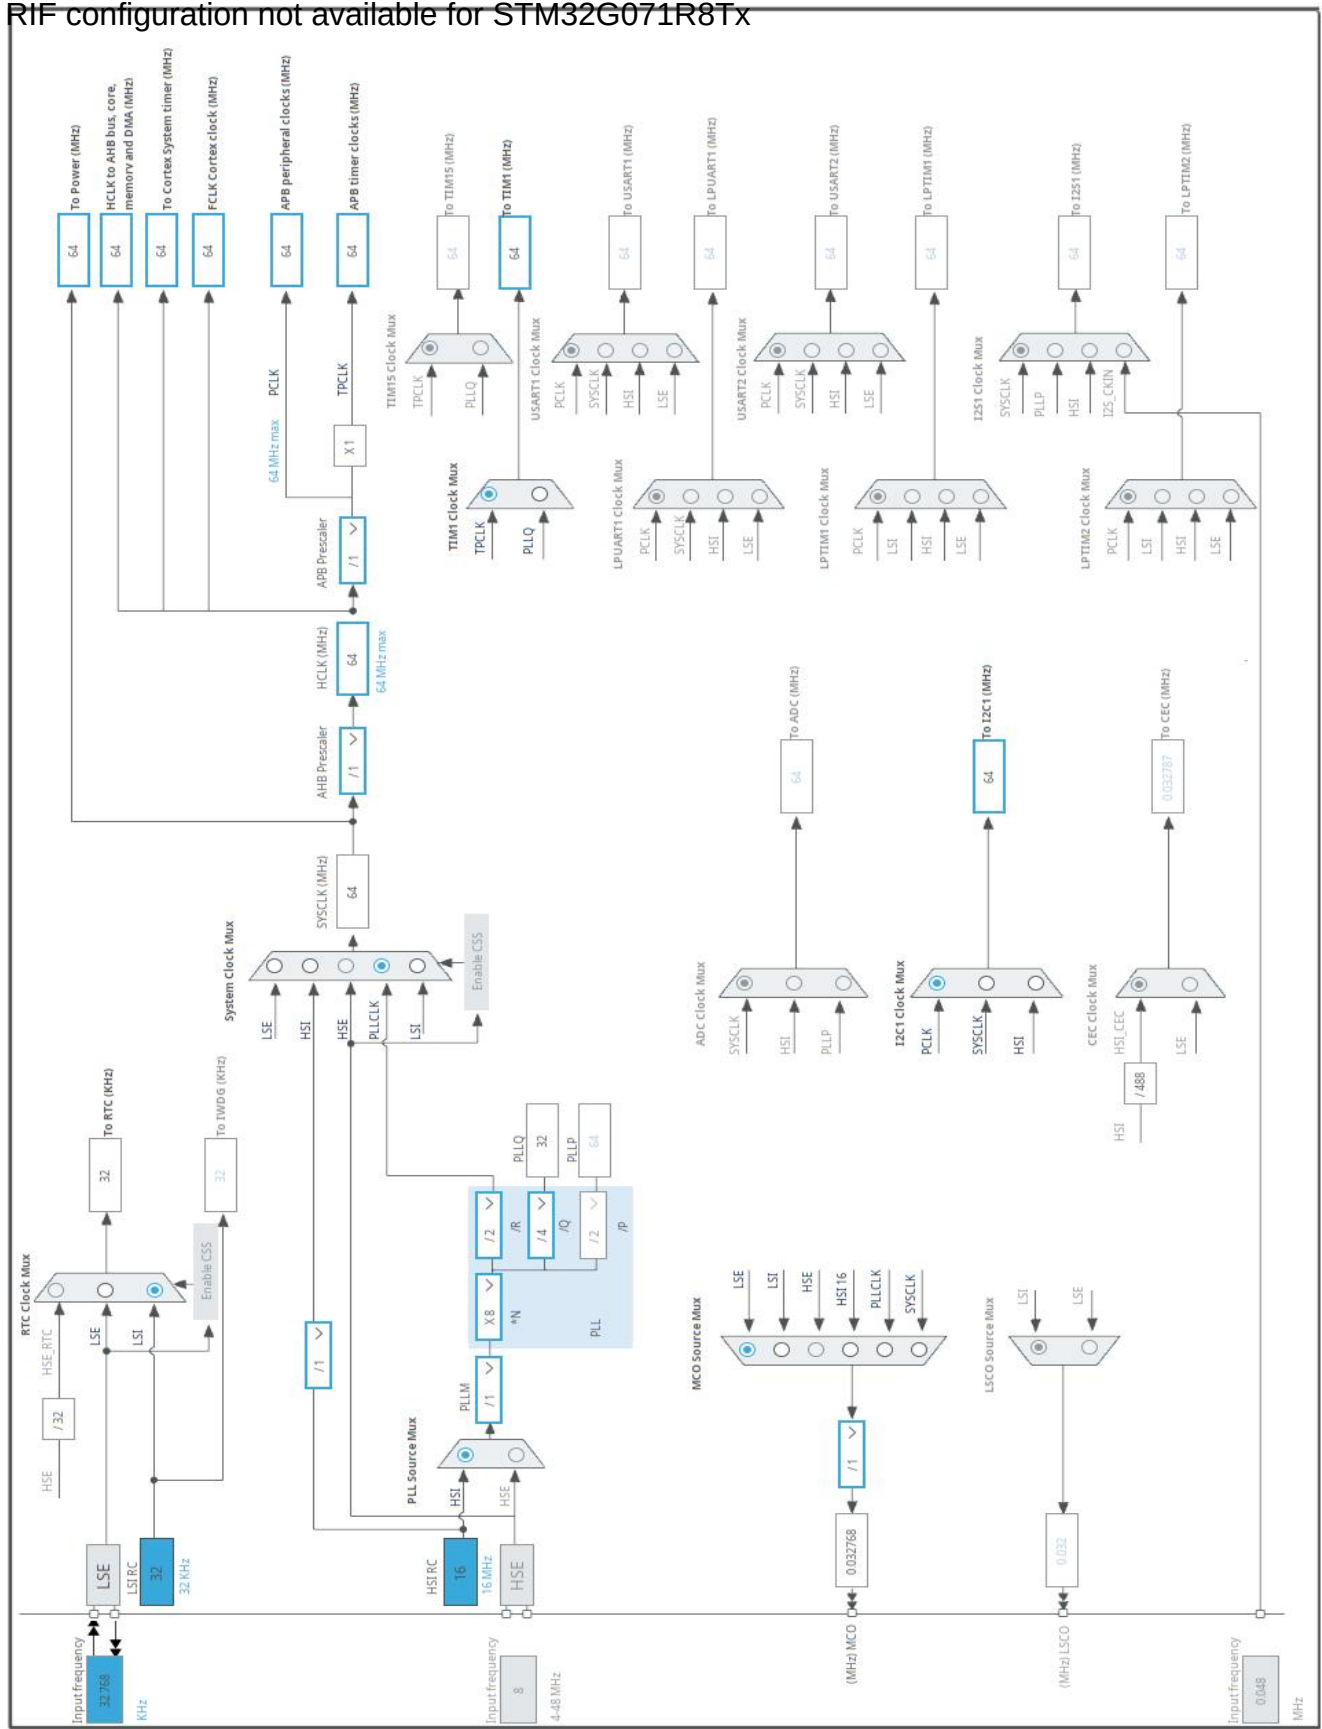

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32G0
Line	STM32G0x1
MCU	STM32G071R8Tx
Datasheet	DS12232 Rev0

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(AAA700)
Capacity	700.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	10.0 mA
Max Pulse Current	30.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	FLASH	Flash-PowerDown
CPU Frequency	64 MHz	16 MHz
Clock Configuration	HSI PLL	HSI
Clock Source Frequency	16 MHz	16 MHz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	6.4 mA	3.4 μ A
Duration	0.1 ms	0.9 ms
DMIPS	80.0	0.0
Ta Max	128.75	130
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	643.06 μ A
Battery Life	1 month, 14 days, 21 hours	Average DMIPS	80.0 DMIPS

1.6. Chart

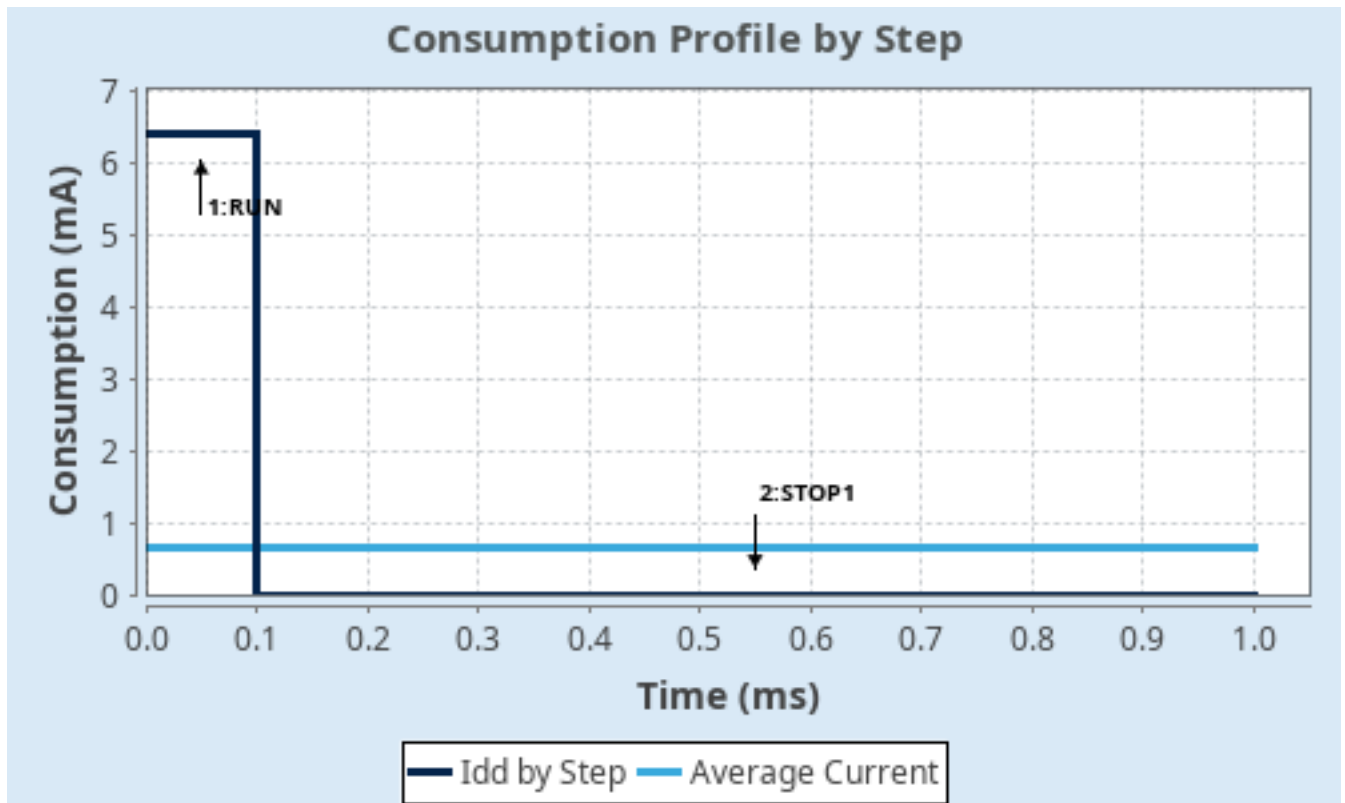

2. Software Project

2.1. Project Settings

Name	Value
Project Name	STM32G071
Project Folder	/home/denis/git-public/eez-bb3plus/CubeMX
Toolchain / IDE	EWARM V8.50
Firmware Package Name and Version	STM32Cube FW_G0 V1.6.2
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_RTC_Init	RTC
4	MX_ADC1_Init	ADC1
5	MX_DAC1_Init	DAC1
6	MX_I2C1_SMBUS_Init	I2C1
7	MX_SPI1_Init	SPI1
8	MX_TIM1_Init	TIM1
9	MX_TIM3_Init	TIM3
10	MX_SPI2_Init	SPI2

3. Peripherals and Middlewares Configuration

3.1. ADC1

mode: IN2

mode: Temperature Sensor Channel

mode: Vbat Channel

3.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	Synchronous clock mode divided by 2
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Sequencer	Sequencer set to fully configurable
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled
Auto Off	Disabled
Oversampling Mode	Disabled

ADC_Regular_ConversionMode:

SamplingTime Common 1	1.5 Cycles
SamplingTime Common 2	1.5 Cycles
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Trigger Frequency	High frequency
Rank	1

Channel

Channel Temperature sensor *

Sampling Time	Sampling time common 1
---------------	------------------------

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false
------------------------------	-------

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false
------------------------------	-------

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false
------------------------------	-------

3.2. DAC1

OUT1 connected to: only external pin

3.2.1. Parameter Settings:

DAC Out1 Settings:

Mode selected	Normal Mode
Output Buffer	Enable
Trigger	None
User Trimming	Factory trimming

3.3. I2C1

I2C: SMBus-Alert-mode

3.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	100
Fall Time (ns)	100
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10B17DB5 *

SMBus Features:

Packet Error Check Mode	PEC Disabled
Peripheral Mode	Peripheral Mode Smbus Slave

SMBus Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	1

Timeout configuration:

Extended Clock Timeout	Disabled
Idle Clock Timeout Detection	Disabled
Timeout Time (ns)	25000000
Timeout	0x0000830D *

3.4. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

mode: Master Clock Output

3.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
LSE Drive Capability	LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

Peripherals Clock Configuration:

Generate the peripherals clock configuration	TRUE
--	------

3.5. RTC

mode: Activate Clock Source

mode: Reference clock detection

3.5.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

3.6. SPI1

Mode: Full-Duplex Slave

Hardware NSS Signal: Hardware NSS Input Signal

3.6.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Input Hardware

3.7. SPI2

Mode: Full-Duplex Master

3.7.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	32.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

3.8. SYS

mode: Debug

Timebase Source: SysTick

3.9. TIM1

Channel2: PWM Generation CH2

3.9.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

Break And Dead Time management - BRK2 Configuration:

BRK2 State	Disable
BRK2 Polarity	High
BRK2 Filter (4 bits value)	0
BRK2 Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

Clear Input:

Clear Input Source	Disable
--------------------	---------

PWM Generation Channel 2:

Mode	PWM mode 1
------	------------

Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.10. TIM3

Combined Channels: Encoder Mode

3.10.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	Encoder Mode T11
--------------	------------------

____ Parameters for Channel 1 ____

Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

____ Parameters for Channel 2 ____

Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA2	ADC1_IN2	Analog mode	No pull-up and no pull-down	n/a	MON_5V
DAC1	PA4	DAC1_OUT1	Analog mode	No pull-up and no pull-down	n/a	SPKR_OUT
I2C1	PA1	I2C1_SMBA	Alternate Function Open Drain	No pull-up and no pull-down	Low	FAN_FAULT
	PB6	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	SYS_SCL
	PB7	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	SYS_SDA
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
	PA8	RCC_MCO	Alternate Function Push Pull	No pull-up and no pull-down	Low	RTC_OUT
RTC	PB15	RTC_REFIN	n/a	n/a	n/a	AC_FREQ
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	DIB4_SCLK
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	DIB4_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	DIB4_MOSI
	PD9	SPI1_NSS	Alternate Function Push Pull	No pull-up and no pull-down	Low	SYSMCU_CS
SPI2	PC3	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SYSMCU_MOSI
	PA0	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SYSMCU_SCLK
	PB2	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SYSMCU_MISO
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	
	PA14-BOOT0	SYS_SWCLK	n/a	n/a	n/a	
TIM1	PC9	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	TFT_BRIGHTNESS
TIM3	PC6	TIM3_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	ENC_A
	PC7	TIM3_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	ENC_B
GPIO	PC11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB4_BOOT0
	PC12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB5_BOOT0
	PC13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB1_CSB
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB4_CSB
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB5_CSB
	PC2	GPIO_EXTI2	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USBC_CONN_DET
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RPI_PWR_ON
	PC4	GPIO_EXTI4	External Interrupt Mode with	No pull-up and no pull-down	n/a	SYSMCU_IRQ

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			Rising edge trigger detection			
	PC5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	WDG_OUT
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	REAR_USB_TOP_EN
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USBC_PORT_ROLE
	PB10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	SMBUS_ALERT
	PB11	GPIO_EXTI11	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	DIB_FAULT
	PB12	GPIO_EXTI12	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	SOFT_PWR
	PB13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RELAY_CS
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CM5_BOOT0
	PA9	GPIO_EXTI9	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ENC_SW
	PD8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	HUB_VBUS_EN
	PA10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	WDG_SET
	PA11 [PA9]	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB2_RESET
	PA12 [PA10]	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB3_RESET
	PA15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB4_RESET
	PC8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB5_RESET
	PD0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FLEX_CMD
	PD1	GPIO_EXTI1	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USBC_ID
	PD2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	FLEX_STATE
	PD3	GPIO_EXTI3	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USBC_IRQ
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB1_RESET
	PD5	GPIO_EXTI5	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	POWER_SW
	PD6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TEST_LED
	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB2_CSB
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB3_CSB
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB_SD_SYSMCU
	PB8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB1_BOOT0
	PB9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB2_BOOT0
	PC10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIB3_BOOT0

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	3	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
EXTI line 0 and line 1 interrupts	unused		
EXTI line 2 and line 3 interrupts	unused		
EXTI line 4 to 15 interrupts	unused		
ADC1, COMP1 and COMP2 interrupts (COMP interrupts through EXTI lines 17 and 18)	unused		
TIM1 break, update, trigger and commutation interrupts	unused		
TIM1 capture compare interrupt	unused		
TIM3 global interrupt	unused		
TIM6, DAC1 and LPTIM1 interrupts (LPTIM1 interrupt through EXTI line 29)	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
System service call via SWI instruction	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

Middleware						
System Core	Analog	Timers	Connectivity	Multimedia	Computing	Utilities
DMA	ADC1 ✓	RTC ✓	I2C1 ✓			
GPIO ✓	DAC1 ✓	TIM1 ✓	SPI1 ✓			
NVIC ✓		TIM3 ✓	SPI2 ✓			
RCC ✓						
SYS ✓						

6. Docs & Resources

Type	Link
IBIS models	https://www.st.com/resource/en/ibis_model/stm32g0_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32g0-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32g0_marketing_pres.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-usb-c-pd-solutions-presentation.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-entry-level-graphics.pdf
Brochures	https://www.st.com/resource/en/brochure/humanoid-robot-reference-guide.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32g0.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32c5.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-

[guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf](#)

Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5110-stm32cube-firmware-examples-for-stm32g0-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5145-migration-of-applications-from-stm32f0-series-to-stm32g0-series--stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4777-how-to-

[optimize-power-consumption-on-stm32-mcus-stmicroelectronics.pdf](https://www.st.com/resource/en/application_note/an4894-how-to-use-eeeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf)

Application Notes https://www.st.com/resource/en/application_note/an4894-how-to-use-eeeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-uart-automatic-baud-rate-detection-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5969-migrating-between-stm32g0-and-stm32c0-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an6226-migrating-between-stm32g0-and-stm32u0-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5096-getting-started-with-stm32g0-mcus-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit

tamp-for-stm32-mcus-stmicroelectronics.pdf

Application Notes	https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6363-introduction-to-clock-requirements-and-calibration-for-stm32-mcus-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0418-stm32g071x8xb-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00412180.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0223-stm32-cortexm0-mcus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0444-stm32g0x1-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes	<a 456="" 539="" 922="" 942"="" data-label="Page-Footer" href="https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-</td></tr> </table> </div> <div data-bbox="> Page 25

& Articles	shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3083-stm32g0-series-iec-60730-selftest-library-user-guide-stmicroelectronics.pdf