

--	--


USB Port	USB type	STM32H7 CM5	Raspberry PI CM5
Rear top	USB A	FS only	USB #0, HS/SS
Rear bottom	USB A	FS/HS	USB #0, HS/PI Flex
Front	USB C	USB Hub P2, HS/SS, Dual role	
DIB #1	DIB 2.0	USB Hub P7, HS/SS	
DIB #2	DIB 2.0	USB Hub P6, HS/SS	
DIB #3	DIB 2.0	USB Hub P5, HS/SS	
DIB #4	DIB 2.0	USB Hub P4, HS/SS	
DIB #5	DIB 2.0	USB Hub P3, HS/SS	


I2C address	Device
0x51	EEPROM M24C32
0x2F	Fan controller EMC2301
0x2D	USB3 Hub
0x7A	PTN5150A USB CC controller




Title: BB3+ mainboard

Id: 1/10

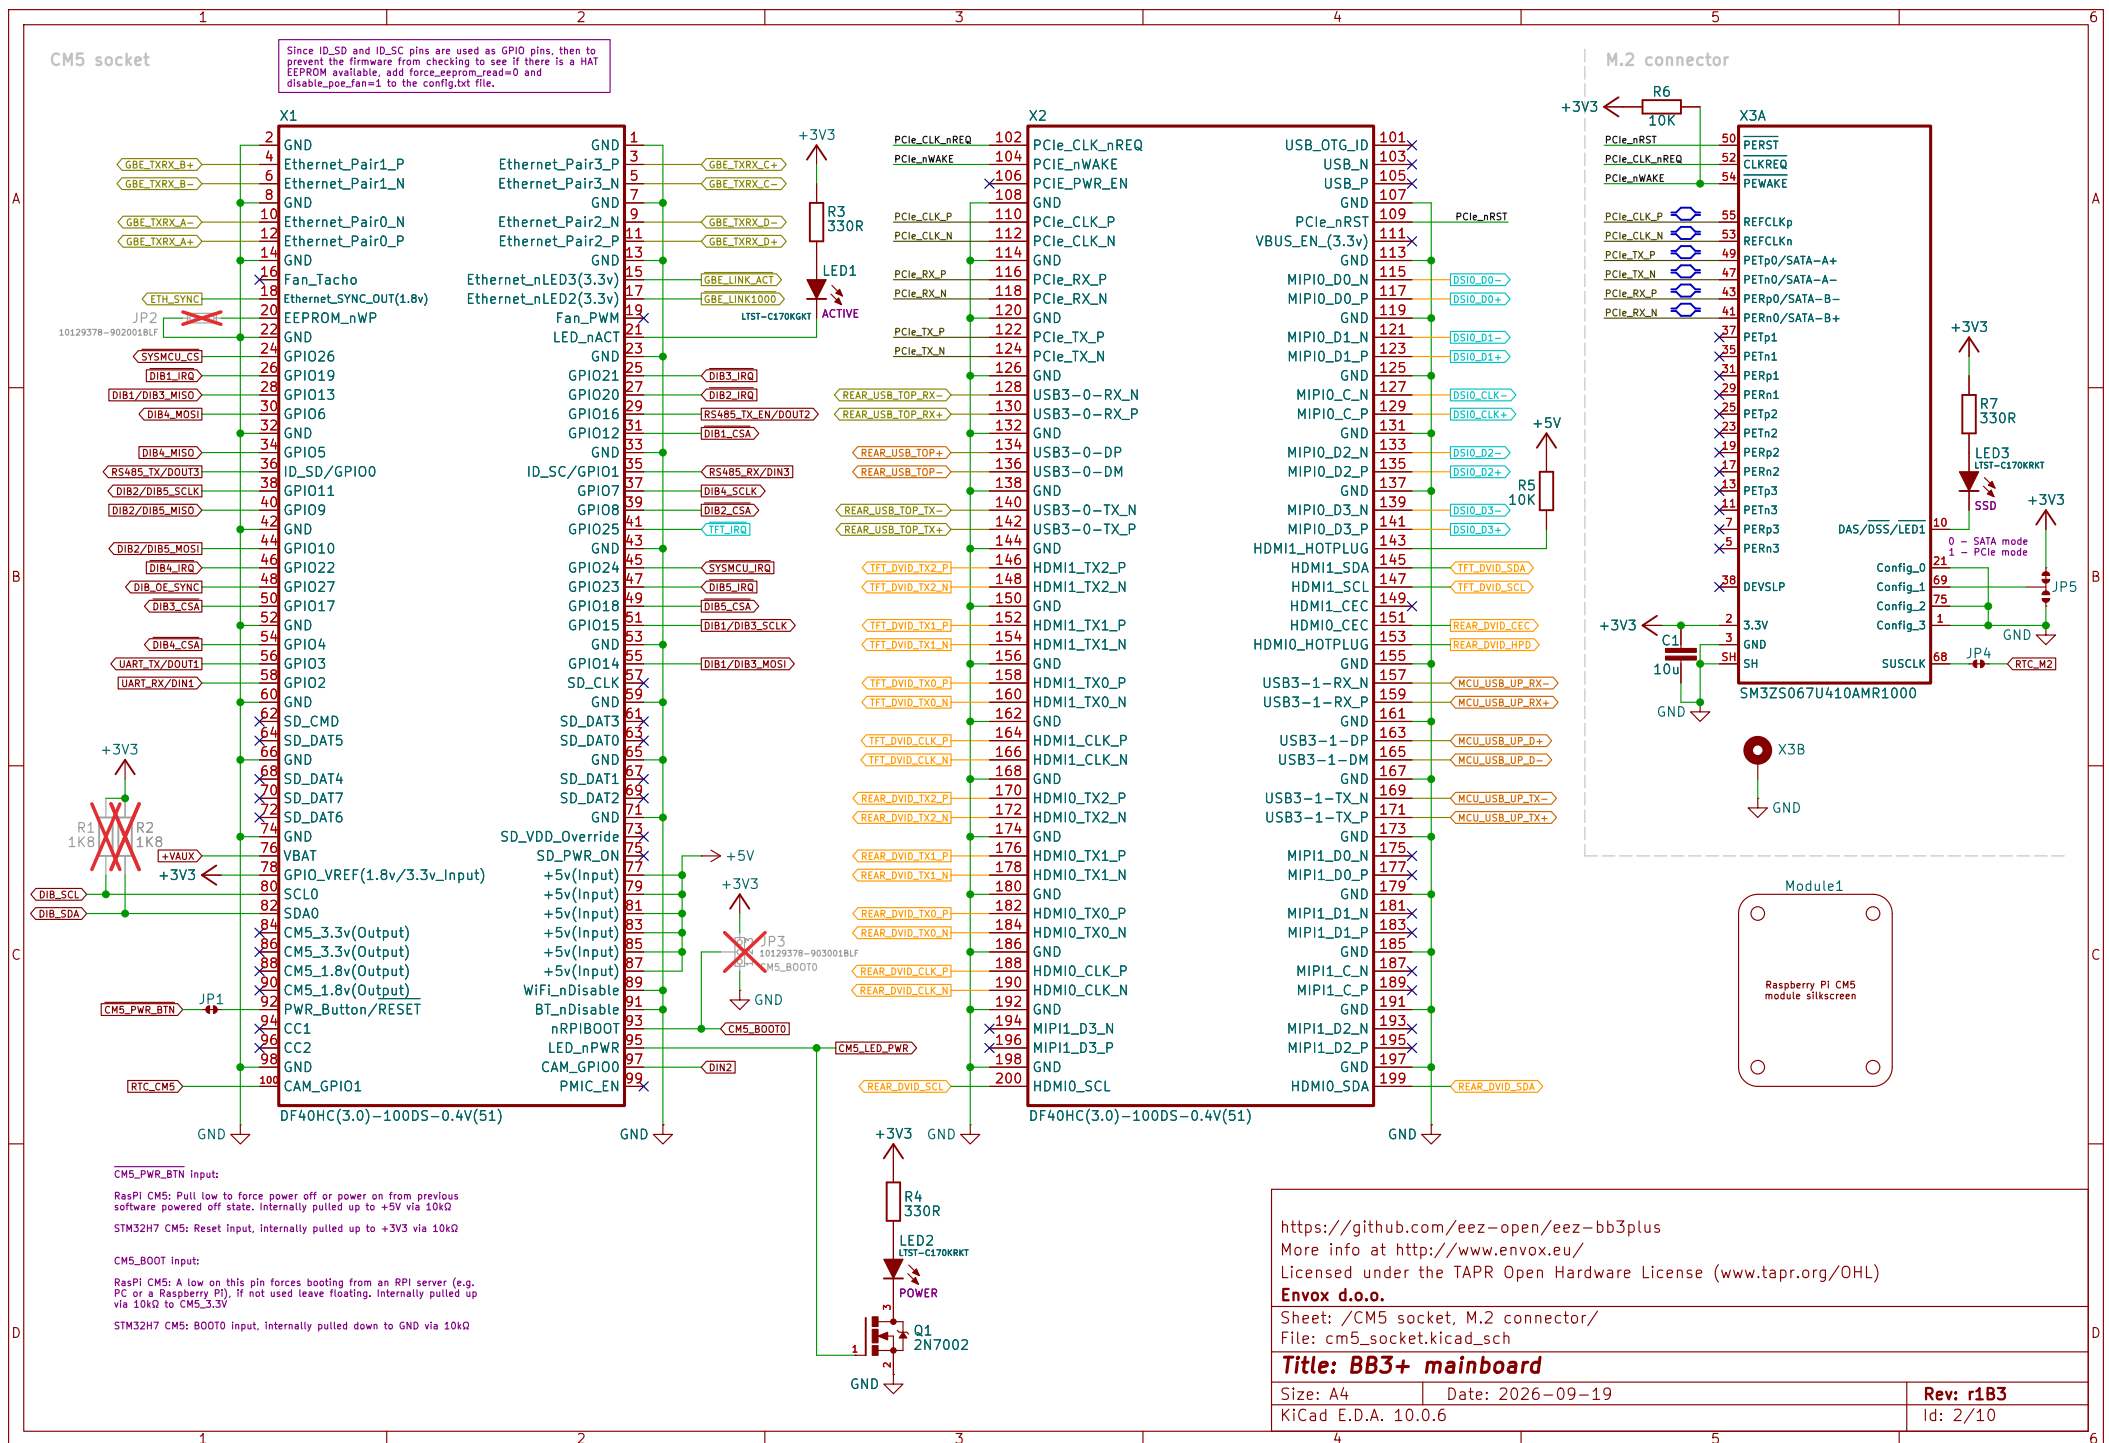


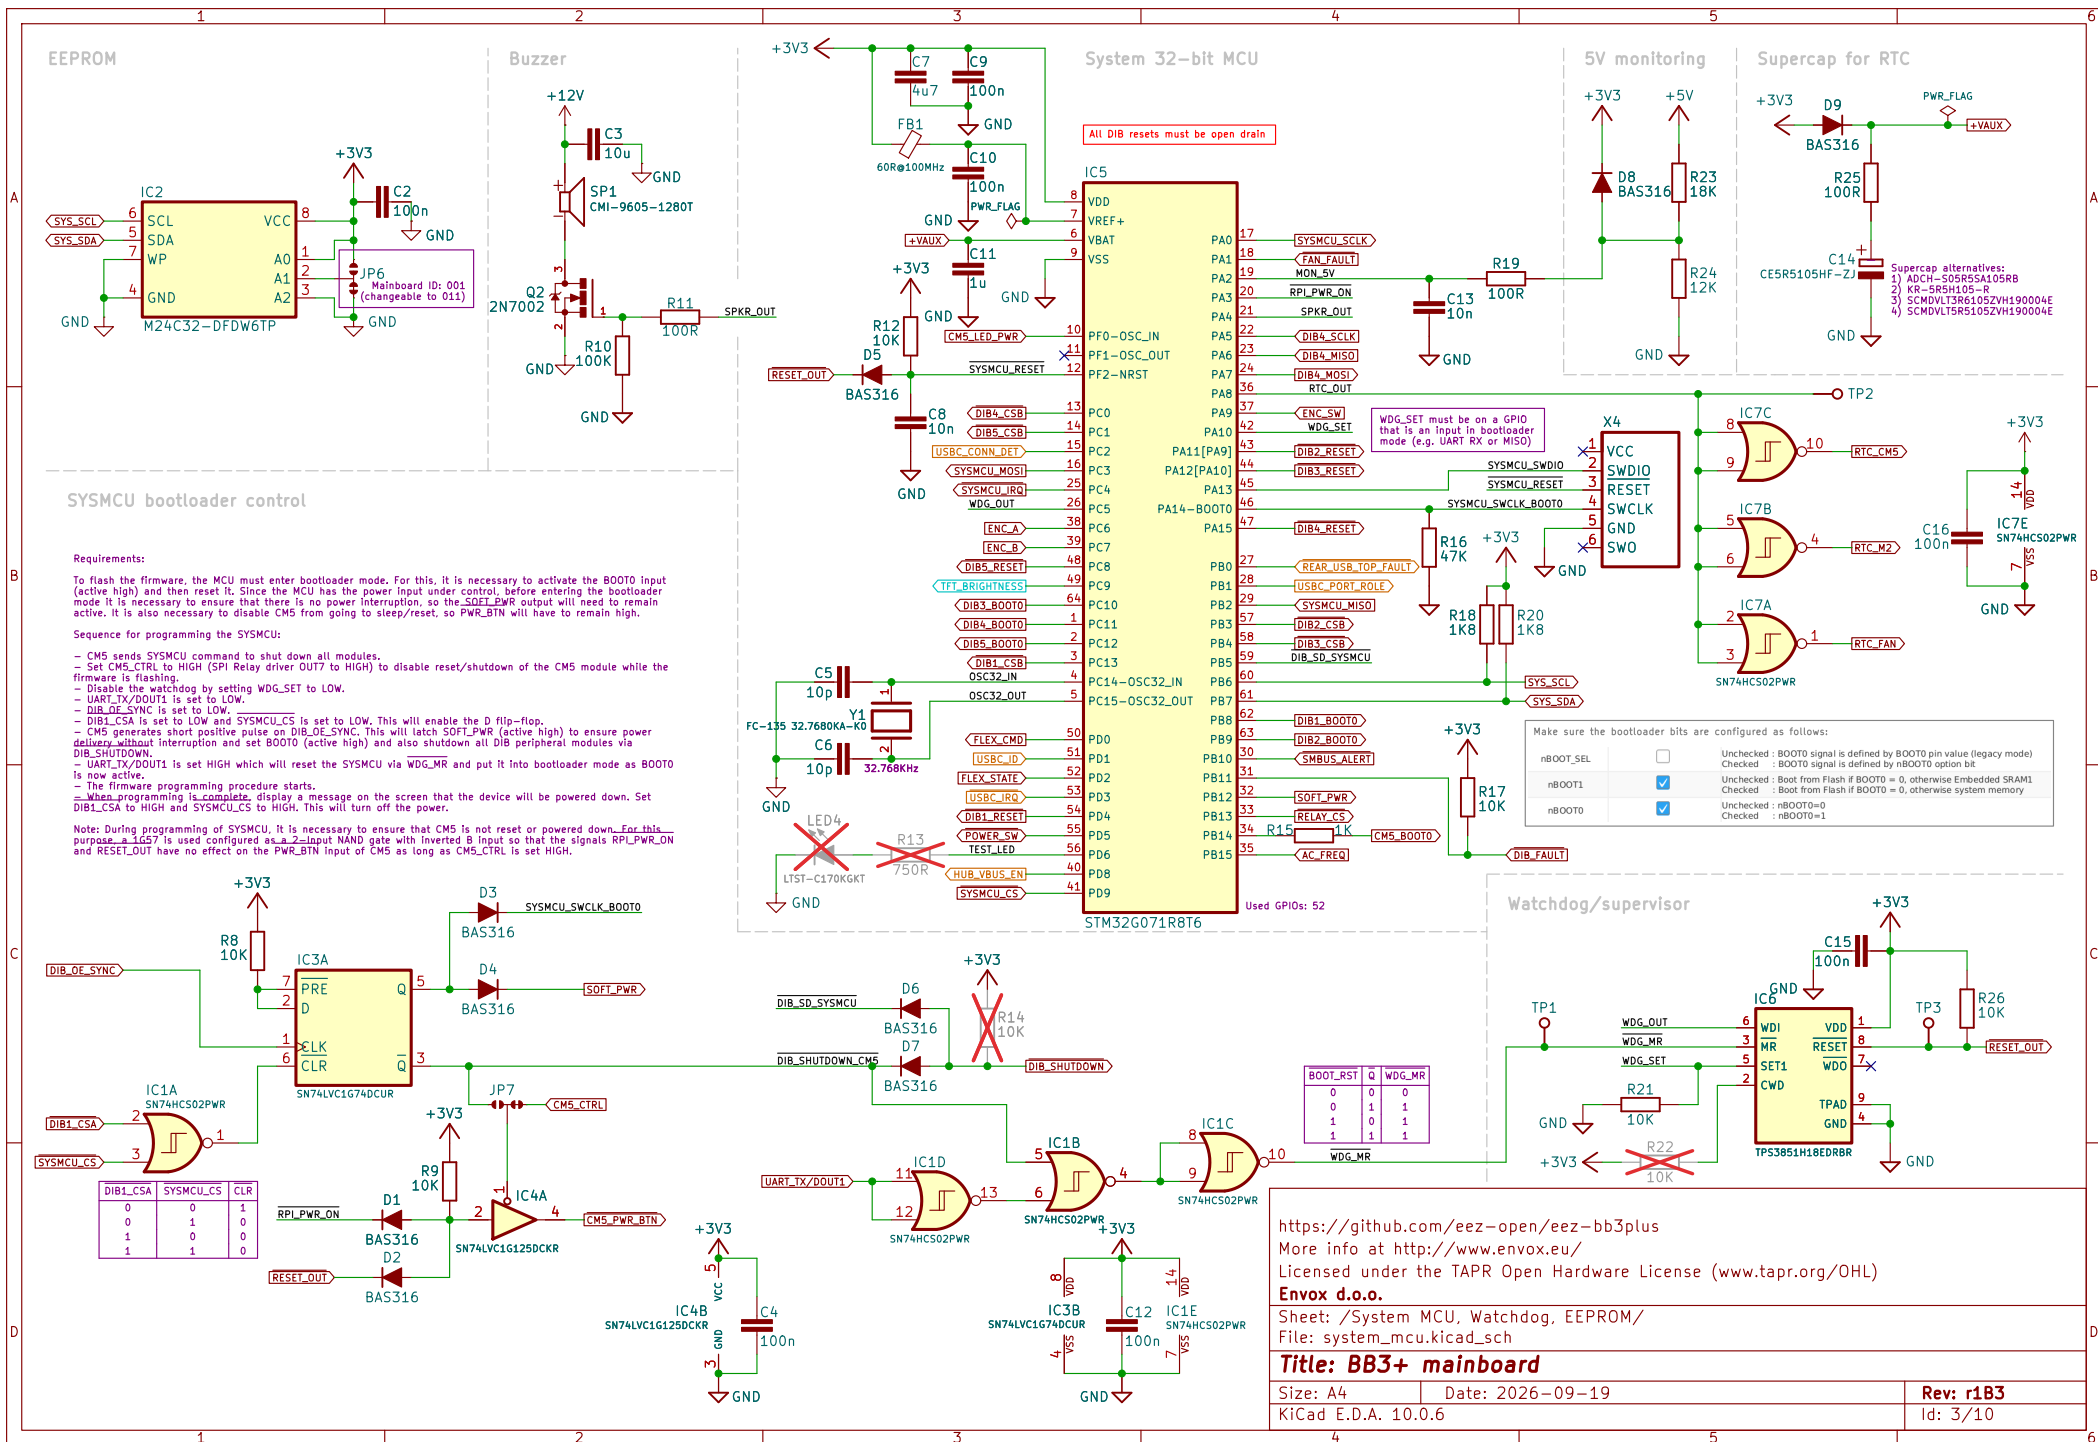


AC inlet, filtering and protection

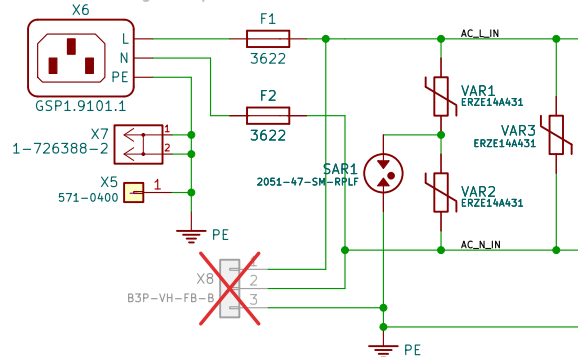


EMI compliance filter

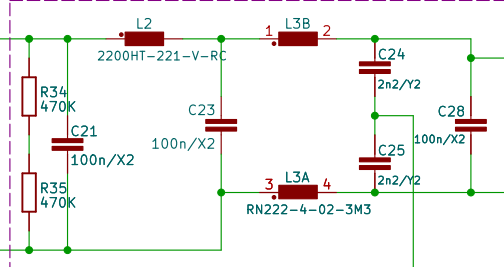


AC power control, Inrush current limiter

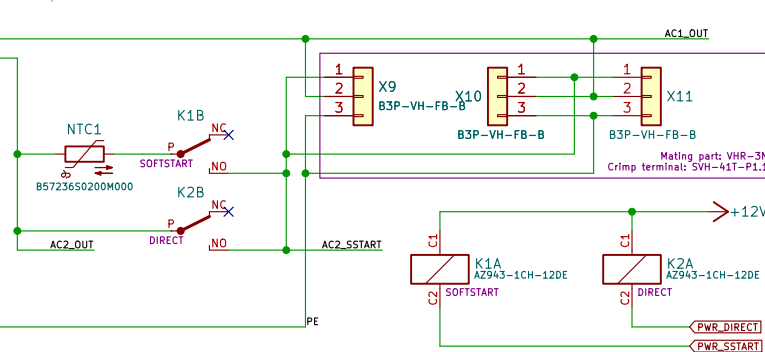


Soft power switch

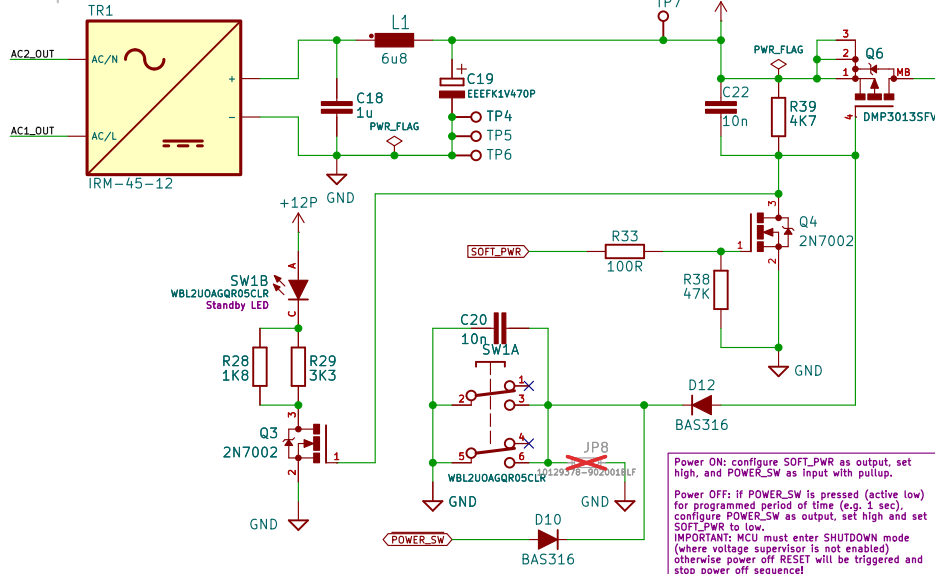

DC-DC stepdown converters (+5V, +3V3)

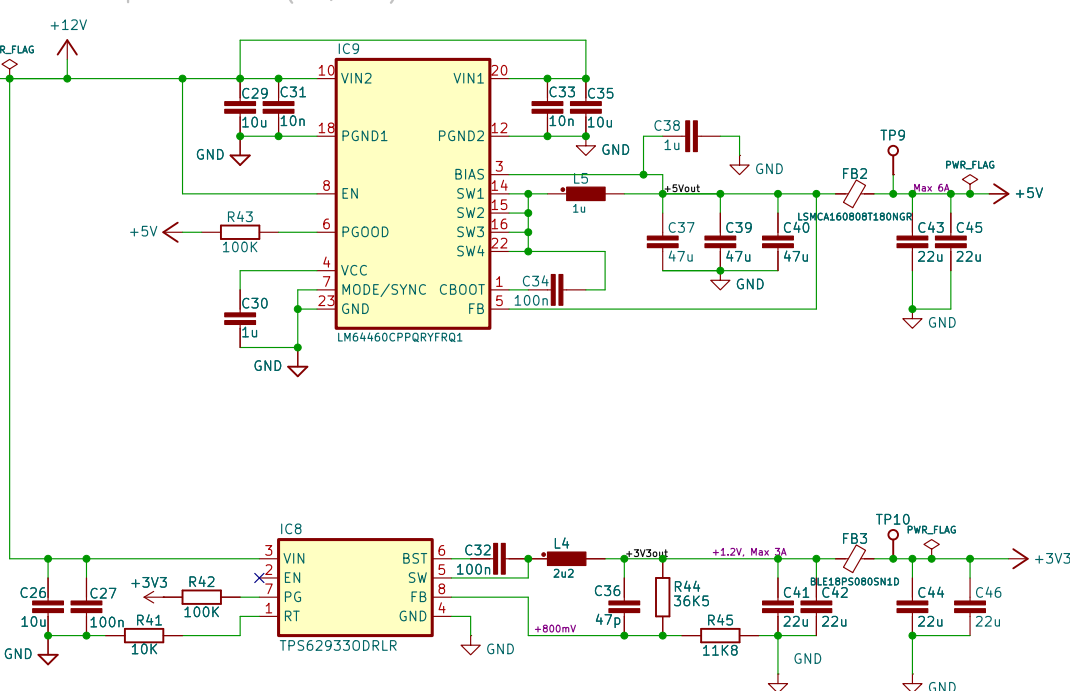

AC Mains frequency and PE fault detection

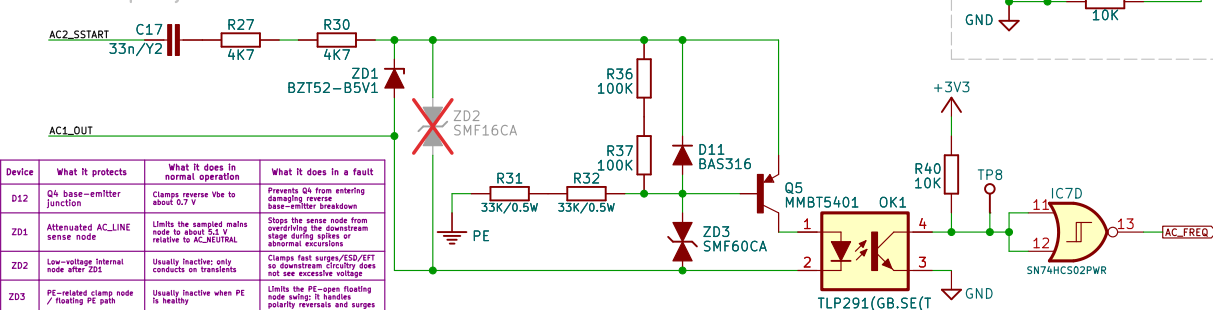

Device	What it protects	What it does in normal operation	What it does in a fault
D12	Q4 base-emitter junction		Prevents Q4 from entering damaging reverse base-emitter breakdown
ZD1	Attenuated AC_LINE sense node	Limits the sampled mains node to about 5.1V relative to AC_NEUTRAL	Stops the sense node from overdriving the downstream stage during spikes or abnormal excursions
ZD2	Low-voltage internal node after ZD1	Usually inactive; only conducts on transients	Clamps fast surges/ESD/RFI so downstream circuitry does not see excessive voltage
ZD3	PE-related clamp node / floating PE path	Usually inactive when PE is healthy	Limits the PE-open floating node swing; it handles polarity reversals and surges

<https://github.com/eez-open/eez-bb3plus>

More info at <http://www.envox.eu/>

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /AC power, DC power, AC sync/

File: ac_dc_power.kicad_sch

Title: BB3+ mainboard


Size: A4 Date: 2026-10-04

KiCad E.D.A. 10.0.6


Rev: r1B3

Id: 4/10


Isolated digital I/O & RS485 transceiver (half-duplex)

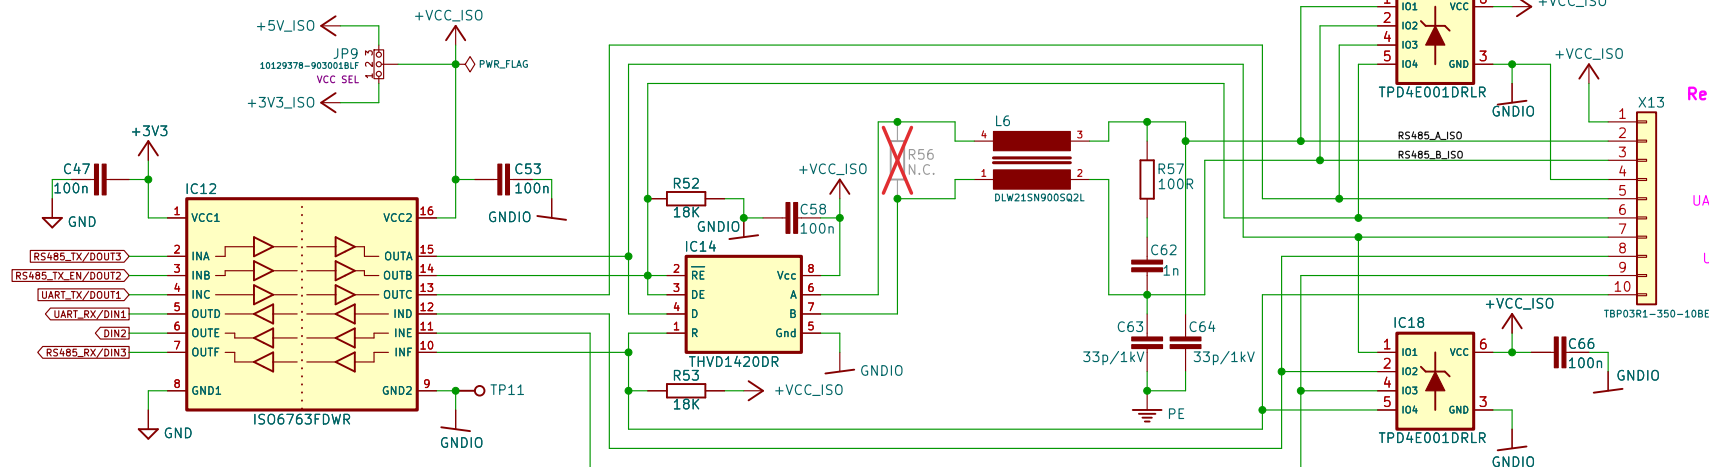


Isolated regulated power supply (+5V)

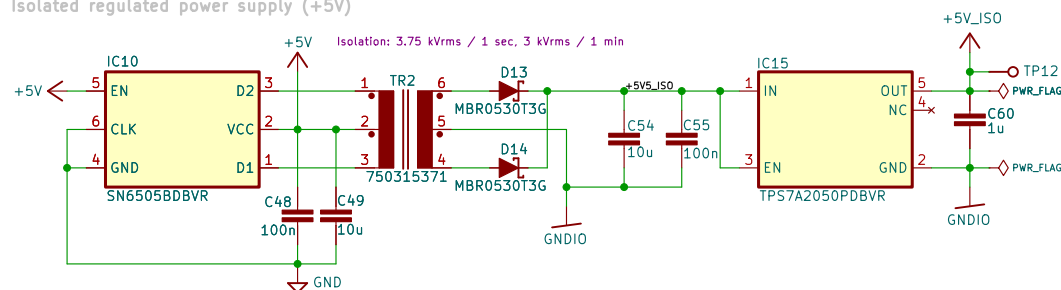

12V DC Fan speed controllers

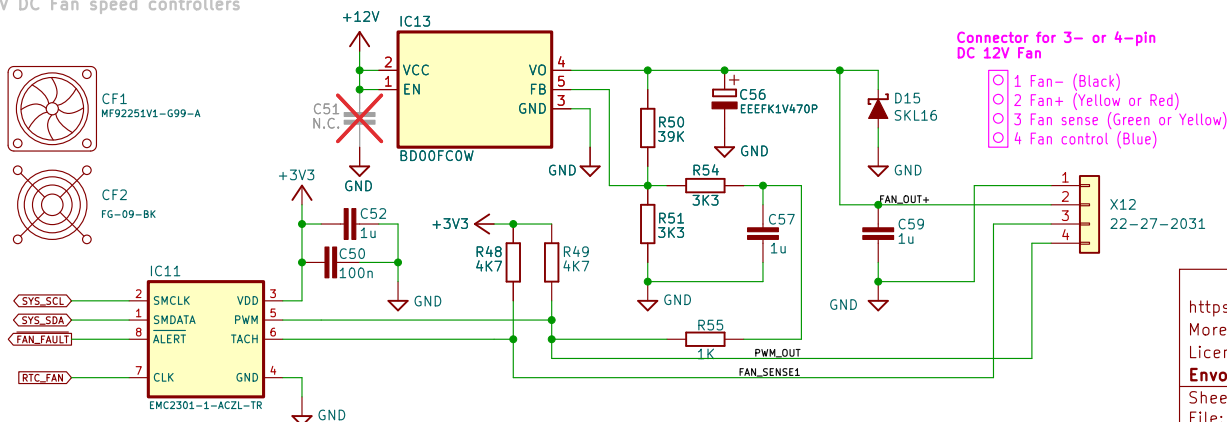

Encoder with switch

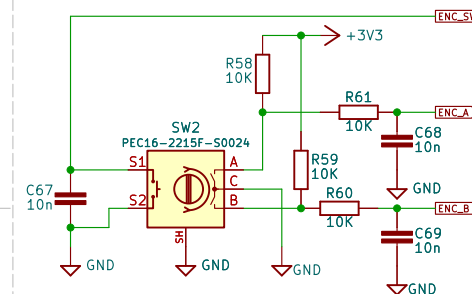

Encoder shaft length: 15 mm / Flatted
 Knob head Ø31mm A1031648 (OKW) + Knob pointer A1101007 (OKW)
 Optional: Knob head Ø31mm A3131068 (OKW) + Knob cap A3231007 (OKW)
 Knob head Ø24mm A1024648 (OKW) + Knob pointer A1101007 (OKW)

<https://github.com/eez-open/eez-bb3plus>
 More info at <http://www.envox.eu/>
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Isolated digital IO, Fan controller, Encoder/
 File: digital_io_fan_encoder.kicad_sch


Title: BB3+ mainboard

Size: A4 Date: 2026-09-19


KiCad E.D.A. 10.0.6

Rev: r1B3


Id: 5/10

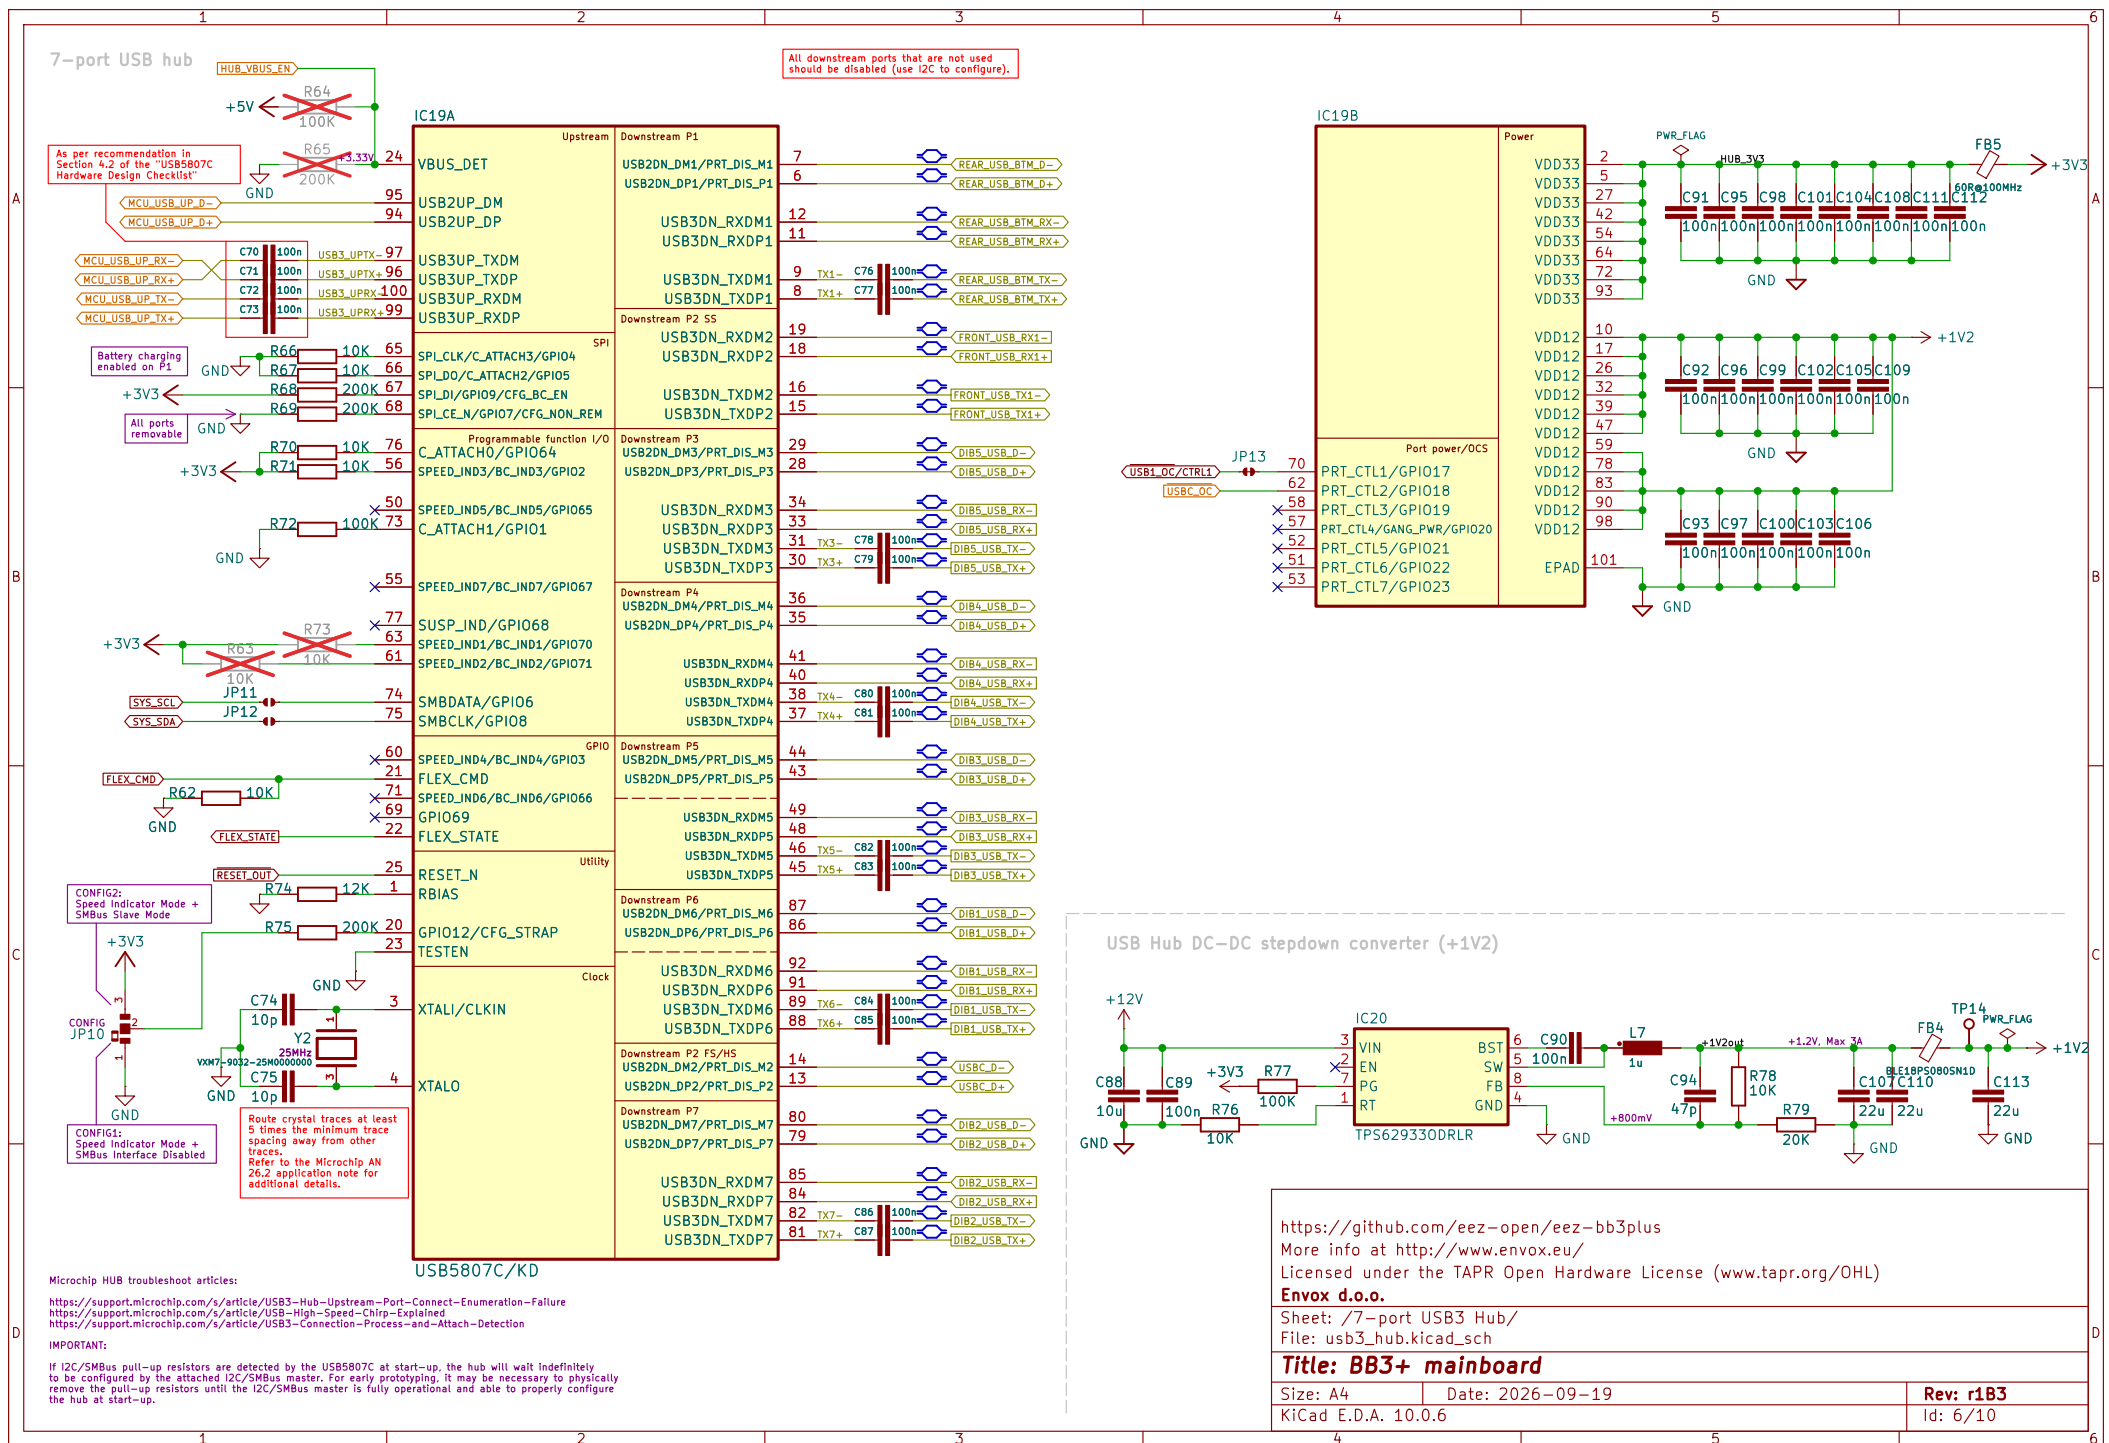


USB-C 3.0 front port (source max 1.5A)

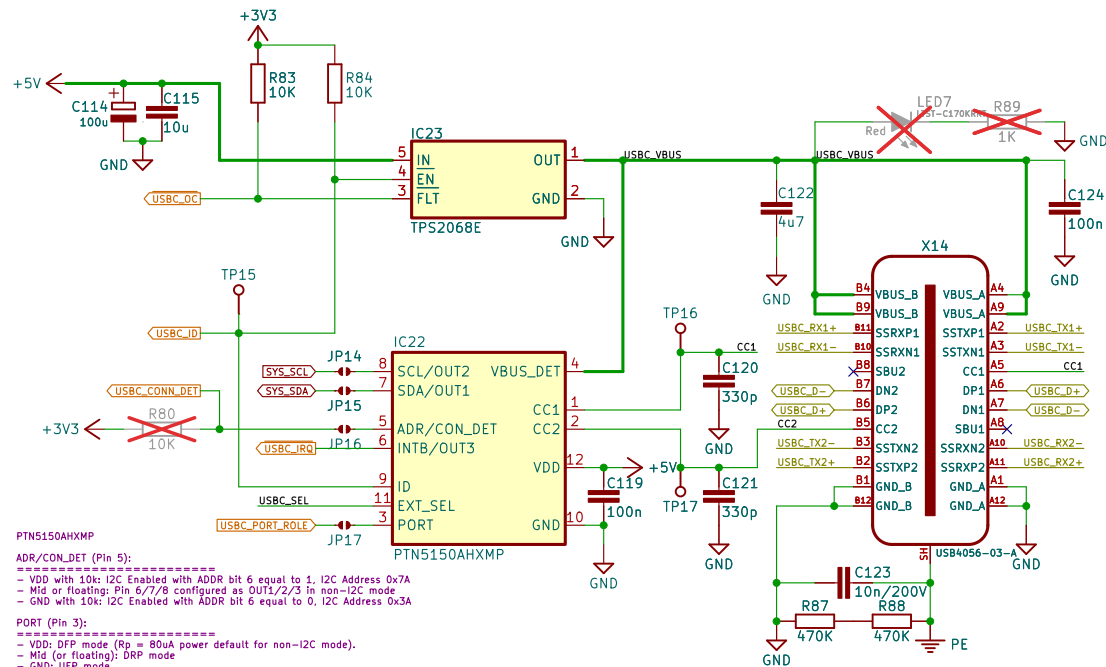


USB-C 3.0 Protection and Mux

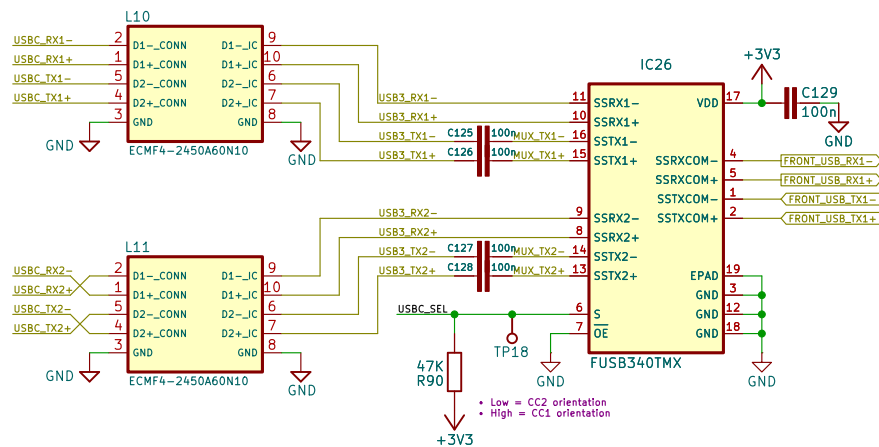

USB2.0 Type-A (Rear panel)

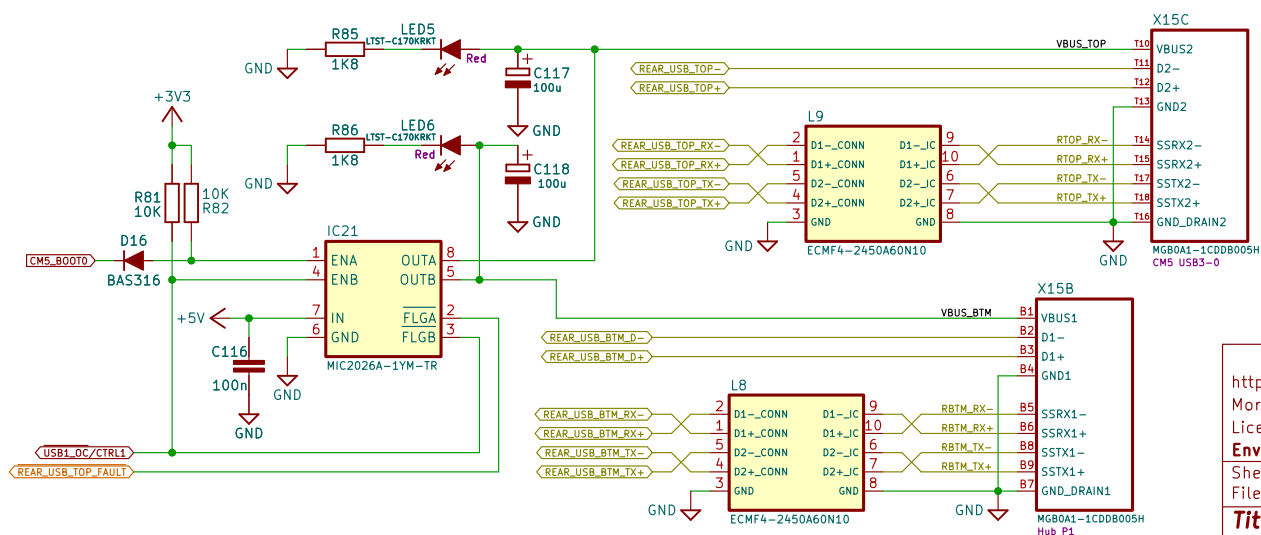

VBus Discharge Circuit

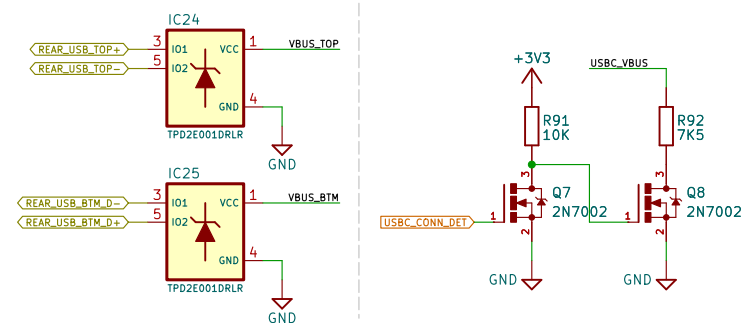

<https://github.com/eez-open/eez-bb3plus>

More info at <http://www.envox.eu/>

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Rear USB, USB-C/

File: usb_conn.kicad_sch

Title: BB3+ mainboard


Size: A4 Date: 2026-10-04

KiCad E.D.A. 10.0.6


Rev: r1B3

Id: 7/10


External monitor digital output

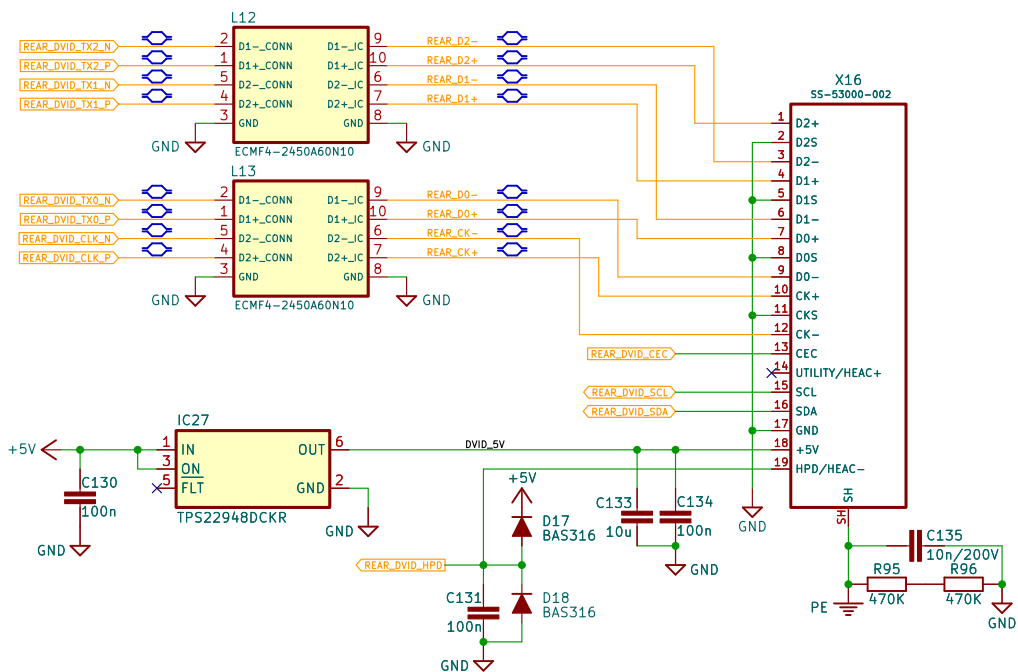


Ethernet RJ45+mag

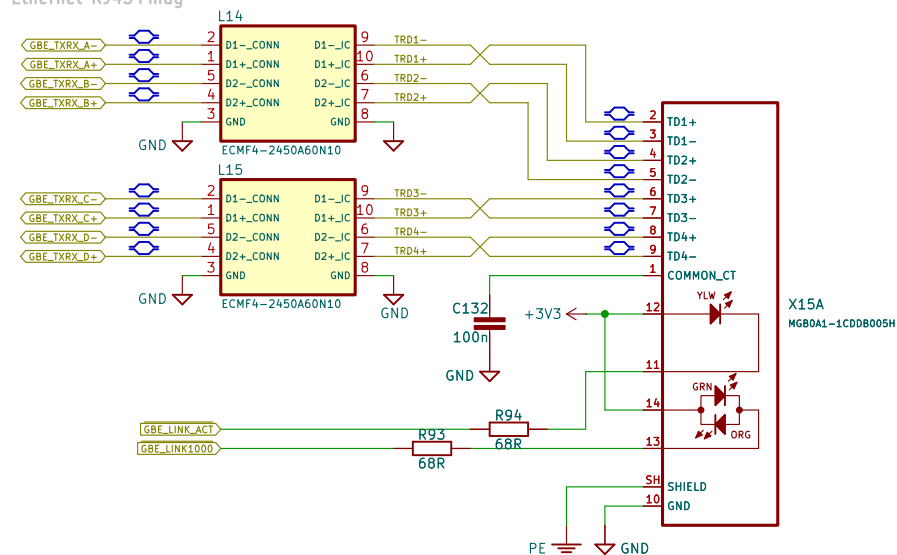

TFT Touchscreen display DVID output (22-pin FFC)

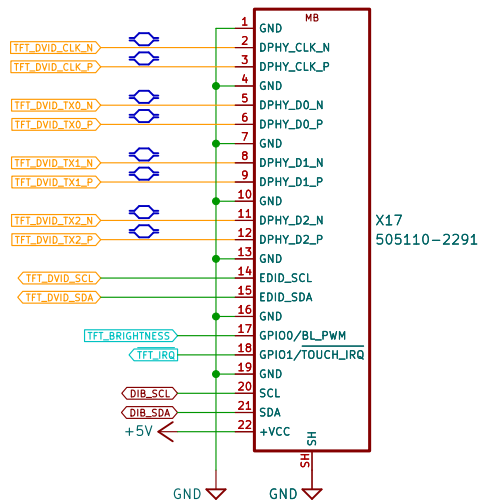

TFT Touchscreen display DSI output (22-pin FFC)

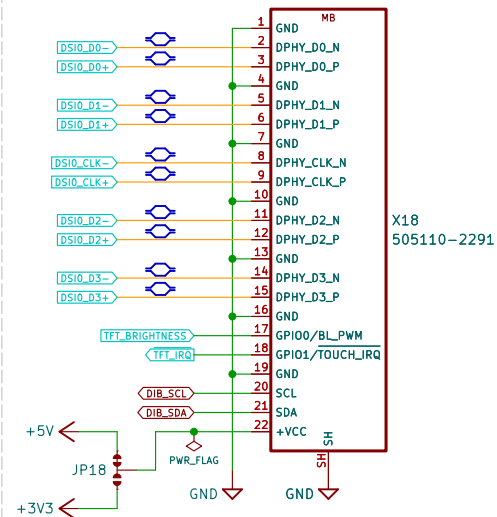

<https://github.com/eez-open/eez-bb3plus>

More info at <http://www.envox.eu/>

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Ethernet, Video outputs/

File: video_outputs.kicad_sch


Title: BB3+ mainboard

Size: A4 Date: 2026-09-19

KiCad E.D.A. 10.0.6

Rev: r1B3

Id: 8/10

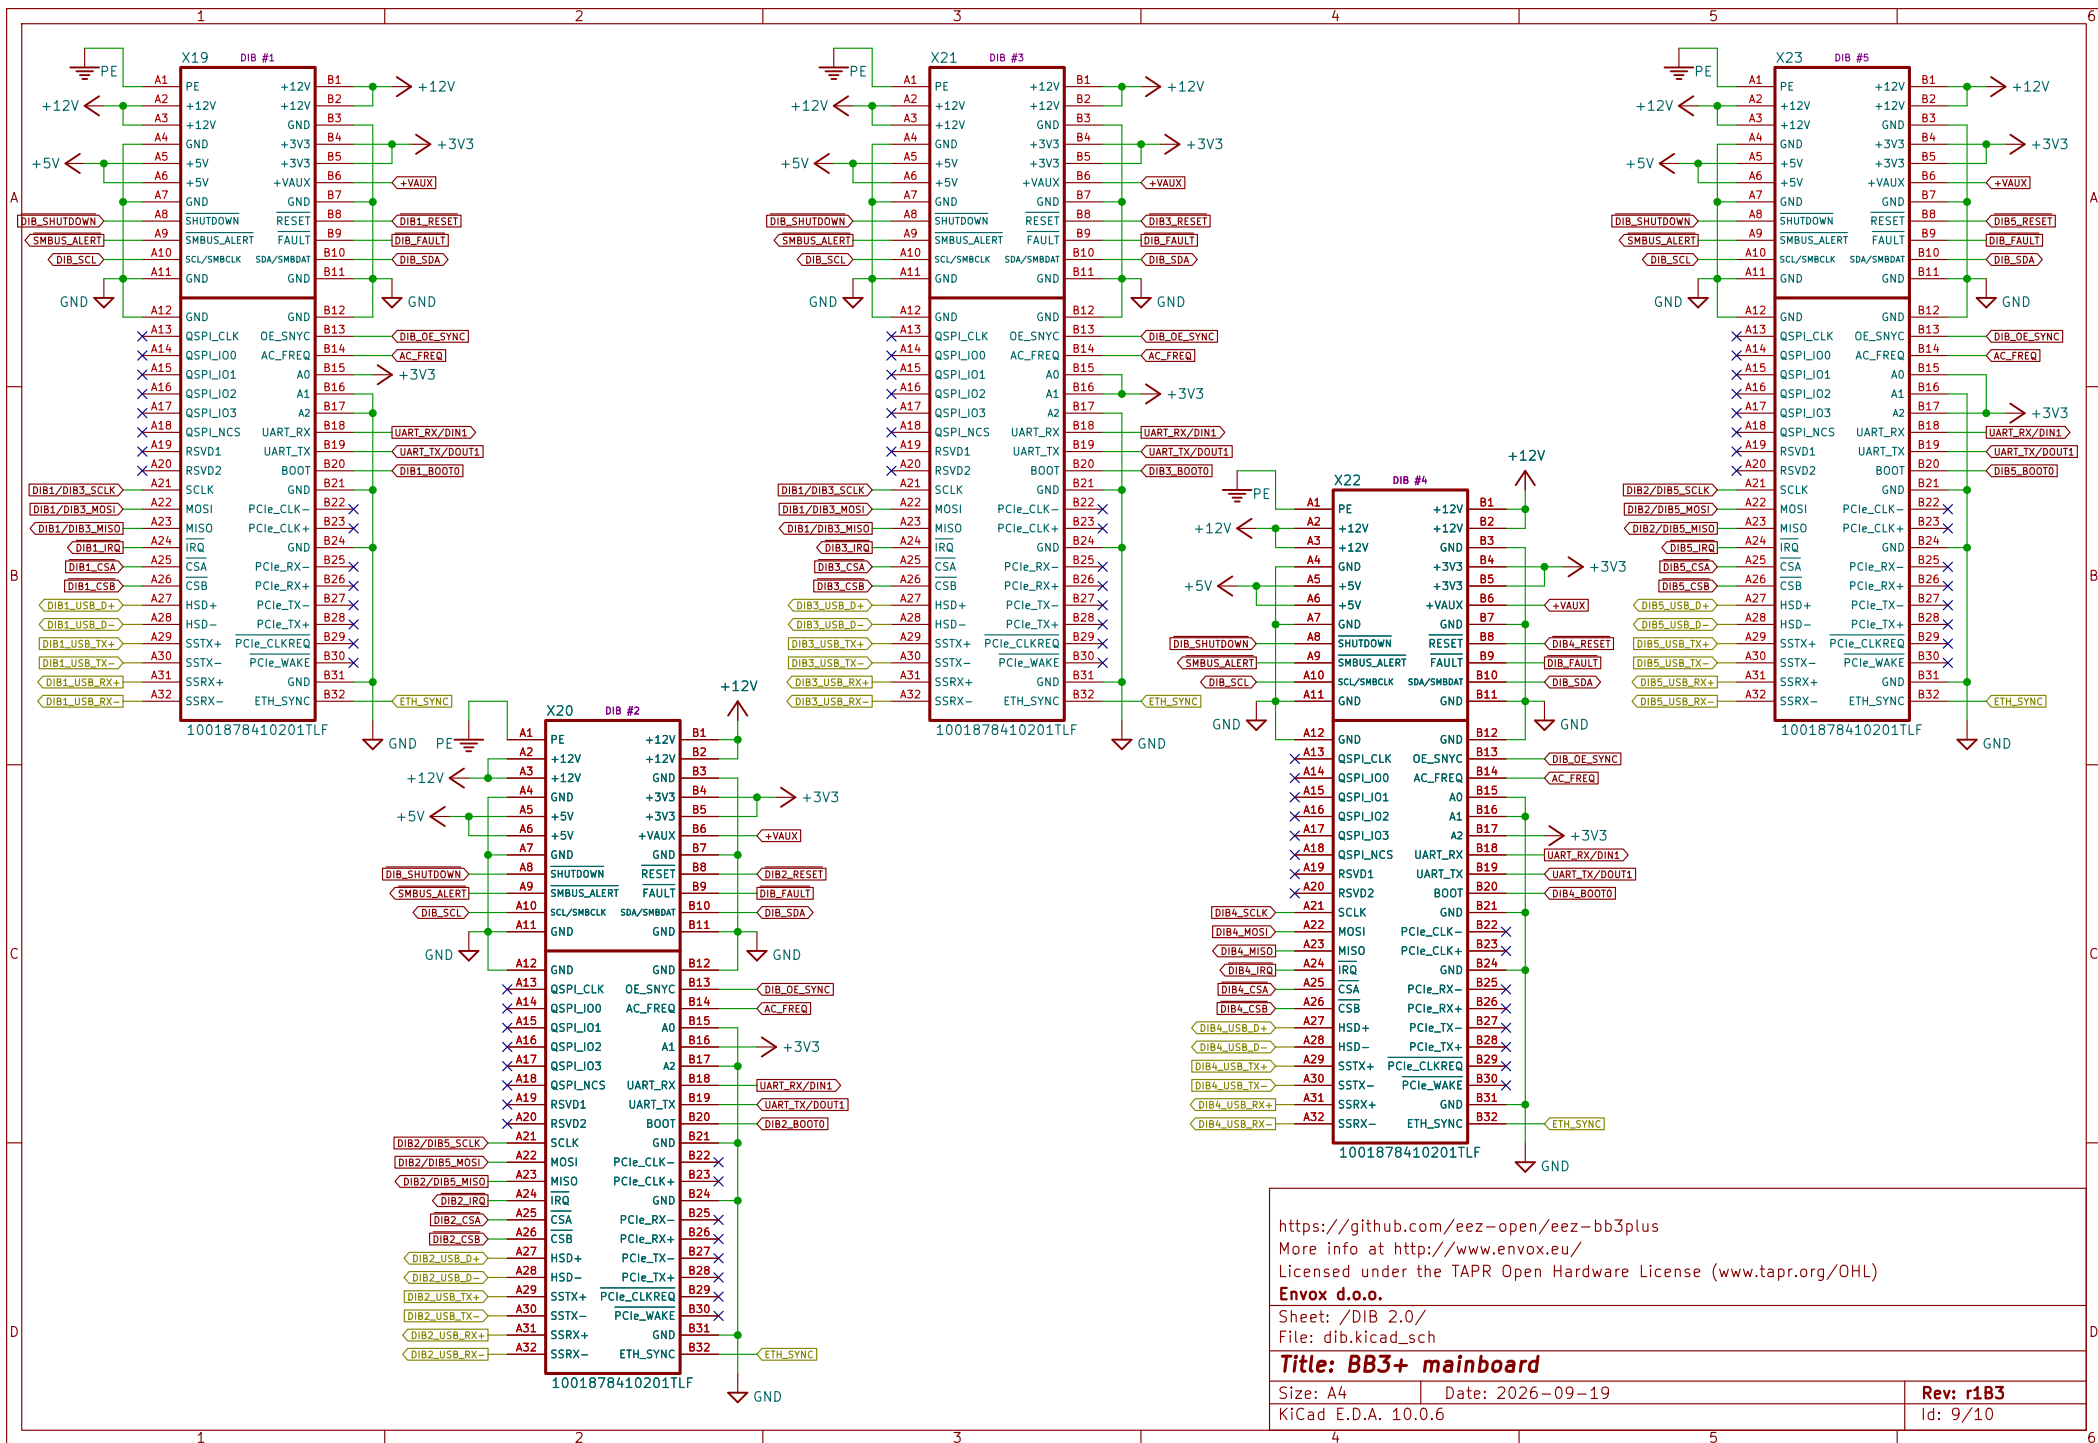



<https://github.com/eez-open/eez-bb3plus>
More info at <http://www.envox.eu/>
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
Sheet: /DIB 2.0/
File: dib.kicad_sch

Title: BB3+ mainboard	
Size: A4	Date: 2026-09-19
KiCad E.D.A. 10.0.6	Rev: r1B3 Id: 9/10


DIB 2.0 Power modules coupling

20-pin DIB v2.0 Power connector

PWR+ IN 1	2 PWR+ IN
PWR+ IN 3	4 PWR+ IN
PWR+ IN 5	6 PWR+ OUT
PWR+ OUT 7	8 PWR+ OUT
PWR+ OUT 9	10 PWR+ OUT
PWR- OUT 11	12 PWR- OUT
PWR- OUT 13	14 PWR- OUT
PWR- IN 15	16 PWR- IN
PWR- IN 17	18 PWR- IN
SENSE- 19	20 SENSE+

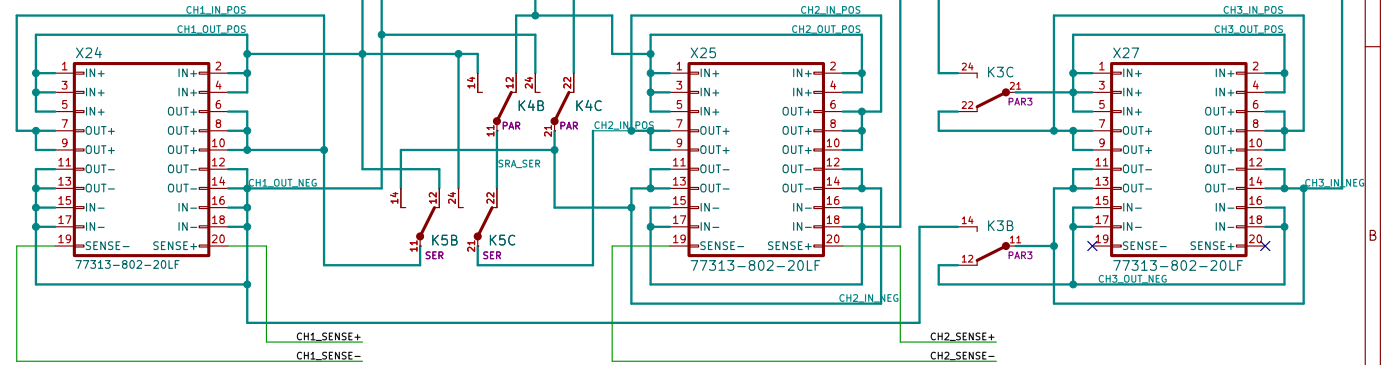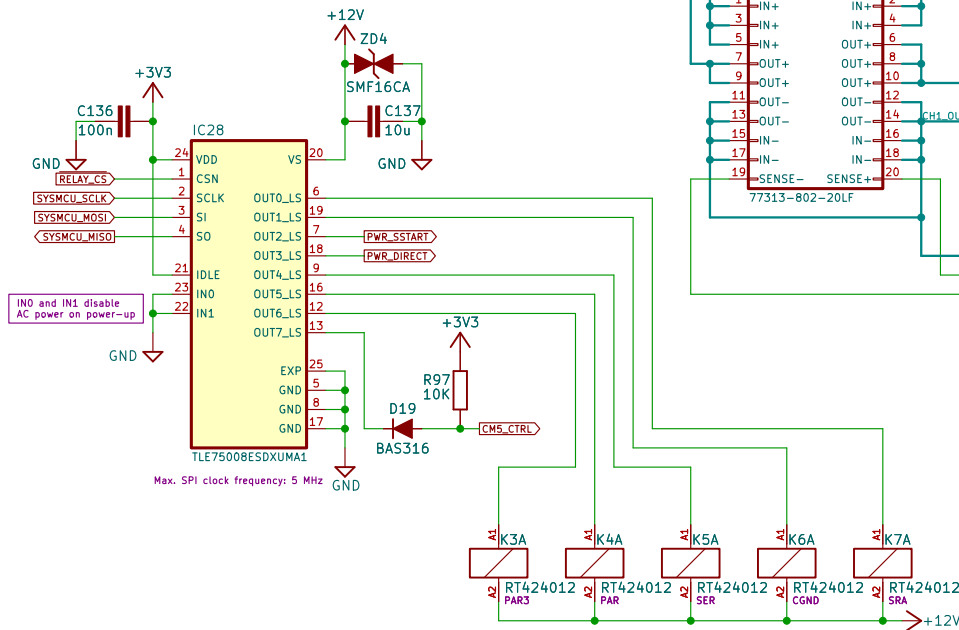

Rear front power outputs

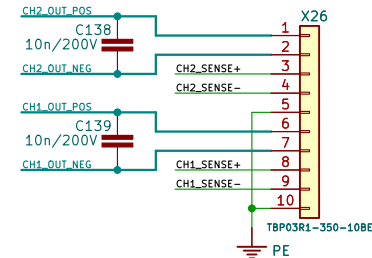

Rear panel power connector

CH2_OUT+ 1	2
CH2_OUT- 3	4
CH2_SENSE+ 5	6
CH2_SENSE- 7	8
PE 9	10
CH1_OUT+ 11	12
CH1_OUT- 13	14
CH1_SENSE+ 15	16
CH1_SENSE- 17	18
PE 19	20

<https://github.com/eez-open/eez-bb3plus>

More info at <http://www.envox.eu/>

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: //Power modules coupling/

File: power_coupling.kicad_sch

Title: BB3+ mainboard

Size: A4 Date: 2026-09-19

KiCad E.D.A. 10.0.6

Rev: r1B3

Id: 10/10