

Qualcomm NVIDIA Lianxin Intel Pinecone Series Product Brushing Guide

Technical support internal document control: TSIMXM00 Qualcomm NVIDIA Lianxin Intel Pinecone Series Product Brushing Guide V18

Update record

2018-09-19 Qualcomm NVIDIA Lianxin Intel Pinecone Series Product

- Brushing Guide V18 Change Content:
Add Xiaomi 8 Youth Edition and Xiaomi 8 Screen Fingerprint Edition Brushing Method
- Overview of Qualcomm NVIDIA Lianxin Intel Pinecone Series Product Brushing Guide
 - Content introduction
 - on applicable models
- Backup
- Fastboot Mode Brush Fastboot Mode Enter Method Brush
 - Step
- Depth brushing machine
 - Xiaomi 8 Youth Edition
 - Xiaomi 8 Transparent Exploration Edition, Xiaomi 8 Screen Fingerprint Edition
 - Xiaomi MAX3
 - Millet Tablet 4
 - Redmi 6Pro
 - Millet 8
 - Xiaomi 8 SE
 - Redmi Mobile Phone
 - S2 Xiaomi 6X
 - Millet MIX2S
 - Redmi Note5
 - Redmi Mobile 5
 - Redmi 5 Plus
 - Redmi Mobile 5A
 - Xiaomi MIX2
 - Xiaomi Note3
 - Redmi Note 5A Standard Edition, High Edition Xiaomi 5X
 -

- Millet MAX2
- Millet 6
- Xiaomi mobile phone 5C
- Redmi mobile phone 4X
- Redmi Note 4X Redmi mobile phone
- 4 Redmi mobile phone 4A
- Redmi Mobile Phone 4 High Edition Xiaomi Note2
- Xiaomi MIX Xiaomi mobile phone 5s
- Xiaomi mobile phone 5s Plus
- Redmi mobile phone 3S/3X
- Xiaomi Max
- Redmi Note3 Netcom
- Xiaomi Mobile 5
- Xiaomi mobile phone 4S
- Xiaomi mobile phone 4C Redmi mobile phone 2A
- Xiaomi Note series
- Redmi Mobile Phone 2, Redmi 2A High Edition Redmi Note4G Dual Card Edition
- Red Rice Cell Phone 3
- Redmi Note4G single card version Xiaomi mobile phone 4
- Redmi Mobile 1S Unicom/Telecom Xiaomi Mobile 3
- Xiaomi mobile phone 2A
- Xiaomi mobile phone 2/2 s

- Attention and reminder

Overview

Content introduction

This document mainly introduces the brushing methods of millet mobile phones and Redmi mobile phones on non-MTK platform, which are mainly divided into two types: Fastboot mode brushing and deep brushing.

Applicable model

Xiaomi Mobile Phone Series, Redmi Mobile Phone 1S Unicom/Telecom, Redmi Note4G Edition, Redmi Note3 Netcom, Redmi Mobile Phone 2, Redmi Mobile Phone 3, Redmi Mobile Phone 4, Redmi Note4X, Redmi Mobile Phone 4, Redmi Note5 Series and Redmi Mobile Phone 5 Series

Column, Redmi Mobile Phone S2, Redmi 6 Pro, Xiaomi Tablet 4

Backup

Make sure that the user data is effectively backed up before brushing the machine

According to different situations of users, it can guide or help users to complete data backup.

Cloud backup: Back up the address book, SMS and photos through Xiaomi account, which is the safest backup method for the above important data. Because it is based on cloud technology, it performs best in backup security and ease of use. After the data is uploaded successfully, log in to official website, millet cloud to confirm the integrity of the data. The website is <http://i.mi.com/>

Local Backup: Backup the system settings, account numbers and program data through the backup function of "backup and reset" of the mobile phone. However, since the backup files are stored in the mobile phone where the SD card cannot be removed, there will be certain risks after the swiping action, so the customer should be guided to save the backup files in the local space of the customer's computer as much as possible.

Fastboot mode brush

Applicable models: Xiaomi Mobile Phone 1, Xiaomi Mobile Phone 2/2 S, Xiaomi Mobile Phone 3, Xiaomi Mobile Phone 4, Xiaomi Note, Redmi 1S Unicom/Telecom, Redmi 2/2 A, Redmi Note4G Edition, Xiaomi Tablet Series

System Requirements: Windows 7 64-bit

Use tools: MiFlash, tool version requires 20171212 and later versions

Download address: Knowledge base search MiFlash

Brushing machine package: MIUI line brushing package

Download method: Use DT tool to update and download, and pay attention to checking and updating the brush package in time every day

Fastboot mode entry method


At the same time, press and hold the volume key + power key of the mobile phone to enter. After entering, the mobile phone enters the following interface

Note: If Xiaomi Tablet 2 cannot enter fastboot mode by using this method, you can press and hold the Volume Up + Volume Down + Power button to enter DNX mode. The DNX mode interface is white rice MI logo, and there is a string of yellow English "DNX Fastboot Mode" in the upper left corner. When brushing, Xiaomi Tablet 2 will automatically jump to fastboot mode



Brush machine step


Open the Miflash brush tool, Click "Select" to select the brush package corresponding to the model in the pop-up selection interface (note: when selecting, you can go to the brush package at the time of the brush package path, do not select under images), Then select Delete or Retain data under the tool, and "Delete All and Lock" is used to brush with BL lock. After selecting this option, BL will be locked again (note here: Delete and Retain option is only valid for Fastboot brush, and deep brush will clear data)

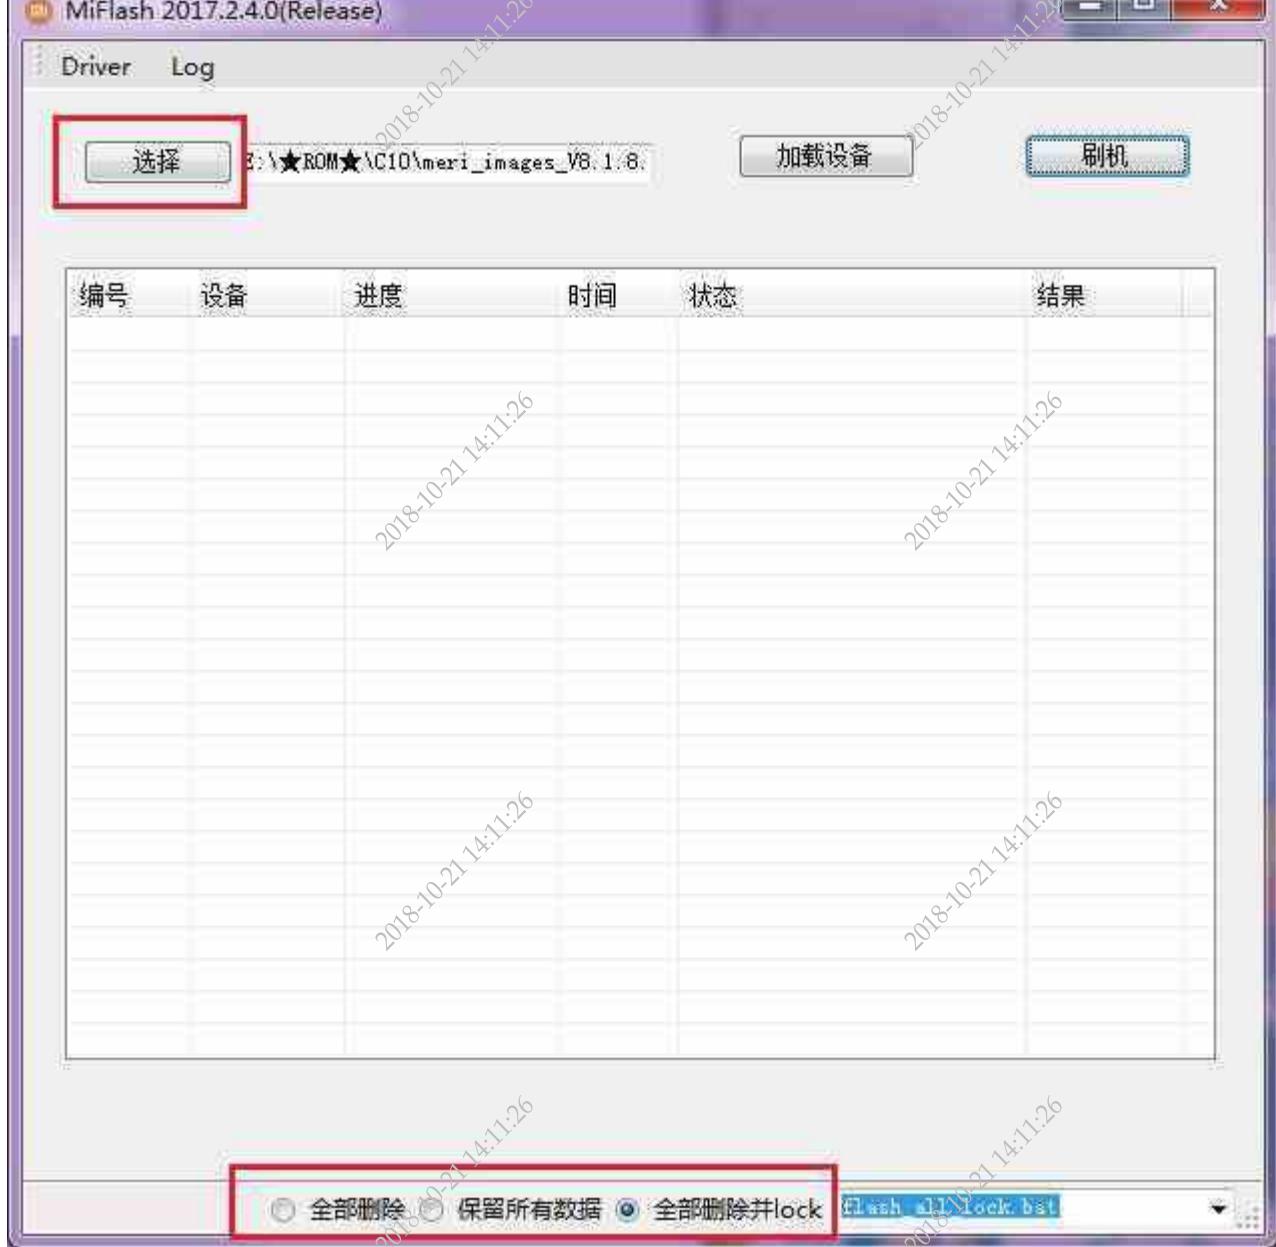

Connect the mobile phone entering Fastboot mode to the PC. After successful connection, click "Load Device", and you can see that the tool interface will refresh the connected device, and then click "Brush Machine"



When "success" is prompted at the back of the progress bar, it means that the device has been brushed. Disconnect and wait for startup

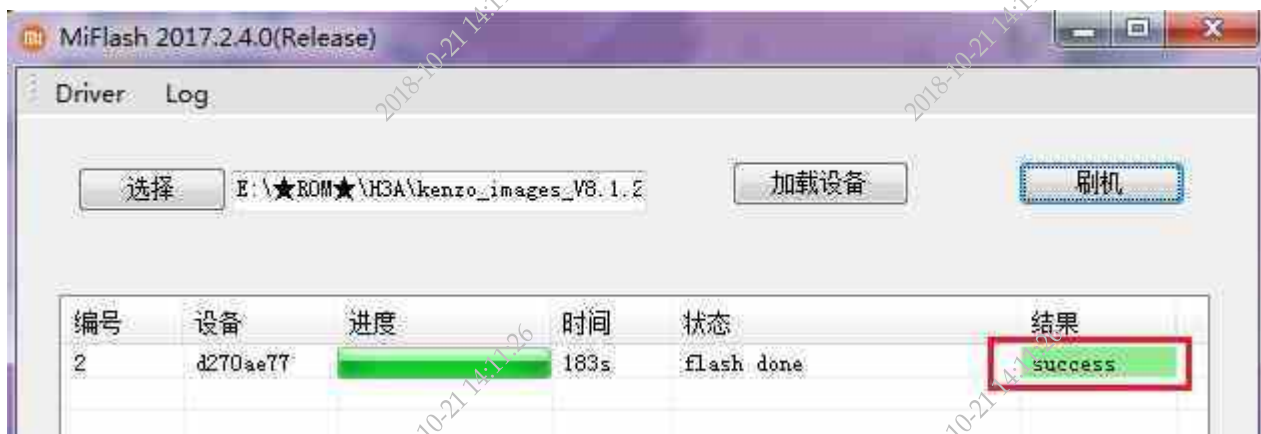

Depth brushing machine

Applicable models: Xiaomi Mobile Phone Series, Redmi Mobile Phone 1S Unicom/Telecom, Redmi Note4G Edition, Redmi Note3 Netcom, Redmi Mobile Phone 2, Redmi Mobile Phone 3, Redmi Mobile Phone 4, Redmi Note5A, Redmi Mobile Phone 5A, Redmi Note5, Redmi 6Pro, Xiaomi Tablet 4

System Requirements: Windows 7 64-bit

Use tools: MiFlash, tool version requires 20171212 and later versions


Download address: Knowledge base search MiFlash

Brushing machine package: MIUI line brushing package


Download method: Use Xiaomi Assistant to update the download, and pay attention to checking and updating the brush package in time every day

Brushing method:

The brush method of deep brush machine is basically the same as fastboot mode. The difference is that after the device entering deep brush machine mode is connected to PC, Miflash tool will refresh COM port (except Xiaomi 5C), and deep brush machine will clear all data. The clear mode selection below the tool is invalid, please pay attention

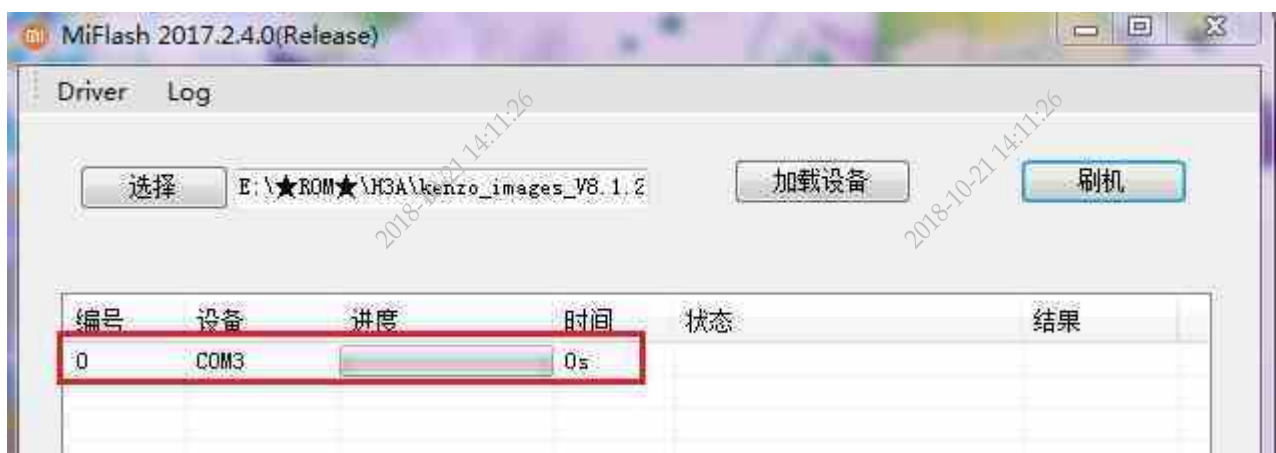

Xiaomi Tablet 4 and Xiaomi MAX3 are deeply brushed, mMiFlash is required to log in to the Xiaomi account of the outlet to obtain the deep brushing authority (the login window pops up automatically during the brushing process, and if there is no authority, you can contact your regional colleagues for confirmation)

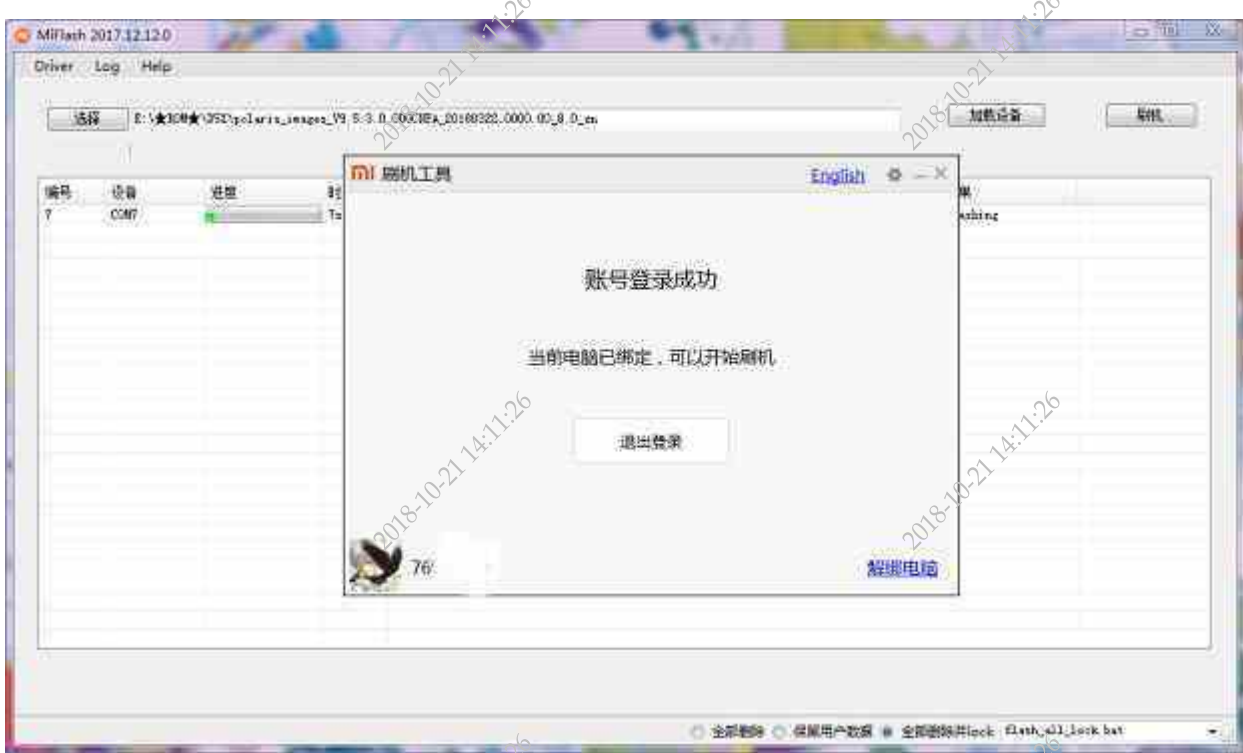

Xiaomi 8 Youth Edition

First, turn off the mobile phone, open the battery cover, use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure



连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi 8 Transparent Exploration Edition, Xiaomi 8 Screen Fingerprint Edition



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)


Qualcomm HS-USB QDLoader 9008 (COM20)

- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Millet MAX3

First, turn off the mobile phone, open the battery cover, use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure

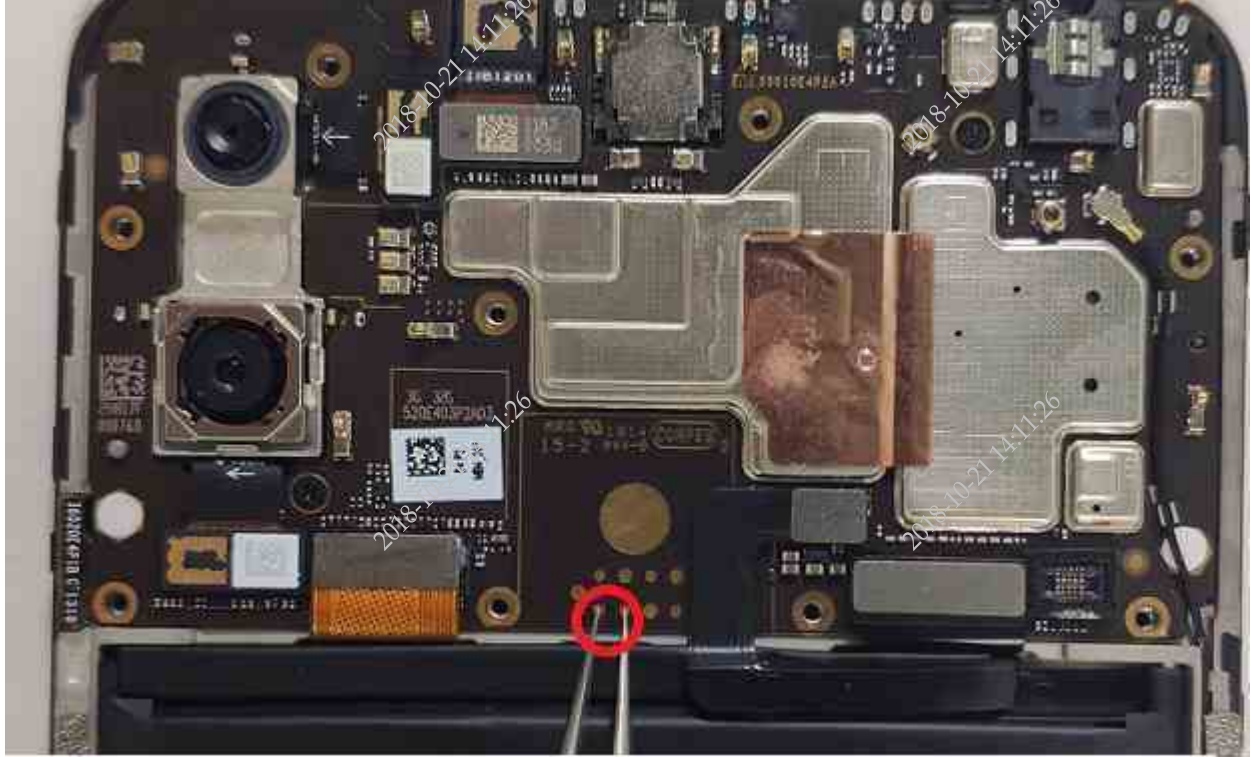

连接成功后，可以在设备管理器中查看到正确的端口

Millet Tablet 4

First, turn off the mobile phone, open the battery cover, connect the two contacts in the following figure with tweezers, and then connect the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brush mode in the computer-management-device manager. Finally, call

Open the brushing tool and select the brushing package to brush the machine. The position of the short contact is shown in the figure



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中看到正确的端口

First, turn off the mobile phone, open the battery cover, take off the small shielding cover, connect the two contacts in the following figure with tweezers, and then connect the computer through the data cable. On the computer side, you can see that the mobile phone enters the deep brush mode in the computer-management-device manager

Port, finally open the brush tool, select the brush package to brush the machine, and the short contact position is as shown in the figure



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器

连接成功后，可以在设备管理器中查看到正确的端口

First, turn off the mobile phone, open the battery cover, use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备

连接成功后，可以在设备管理器中查看到正确的端口

Millet 8 SE

First, turn off the mobile phone, Open the battery cover and the shielding cover above the motherboard, connect the two contacts in the figure with tweezers, and then connect the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器

连接成功后，可以在设备管理器中查看到正确的端口

Red rice mobile phone S2

First, turn off the mobile phone, Open the battery cover and the shielding cover above the motherboard, connect the two contacts in the figure with tweezers, and then connect the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器

连接成功后, 可以在设备管理器中查看到正确的端口

Millet 6X

First, turn off the mobile phone, Open the battery cover and the small shielding cover below it, connect the two contacts in the figure with tweezers, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The short contact position is as shown in the figure



连接成功后，可以在设备管理器中查看到正确的端口

Millet MIX2S

First, turn off the mobile phone, open the battery cover, then use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure



连接成功后，可以在设备管理器中查看到正确的端口

Red Rice Note 5

First, turn off the mobile phone, Open the battery cover, Then take off the fingerprint module and the small shielding cover below it, connect the two contacts in the figure with tweezers, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure




- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
 - Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Red Rice Cell Phone 5

First, turn off the mobile phone, open the battery cover, then use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure

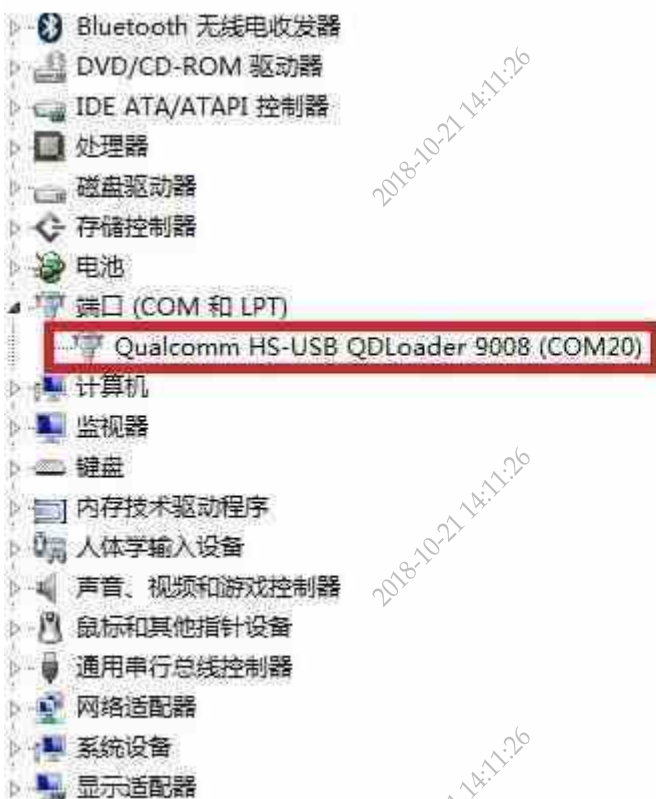

连接成功后，可以在设备管理器中查看到正确的端口

Redmi 5 Plus

First, turn off the mobile phone, open the battery cover, then use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure




- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Millet MIX2

First, turn off the mobile phone, open the battery cover, then use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure

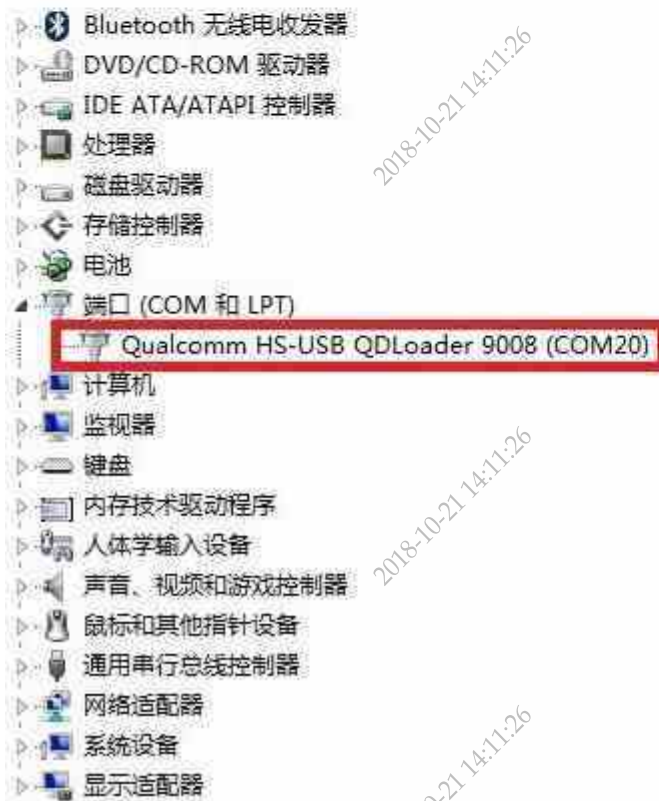

连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi Note3

First, turn off the mobile phone, Open the battery cover, remove the cable of the display screen, then use tweezers to short the two contacts in the figure, and then connect to the computer through the data cable. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure




连接成功后，可以在设备管理器中查看到正确的端口

Redmi Note5A Standard Edition and High Edition

First of all, note that the standard version and the high-profile version of the brush package are not universal

First, turn off the mobile phone, open the battery cover, then use tweezers to short connect the two contacts in the figure, and then connect to the computer through the data line. At the computer end, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure

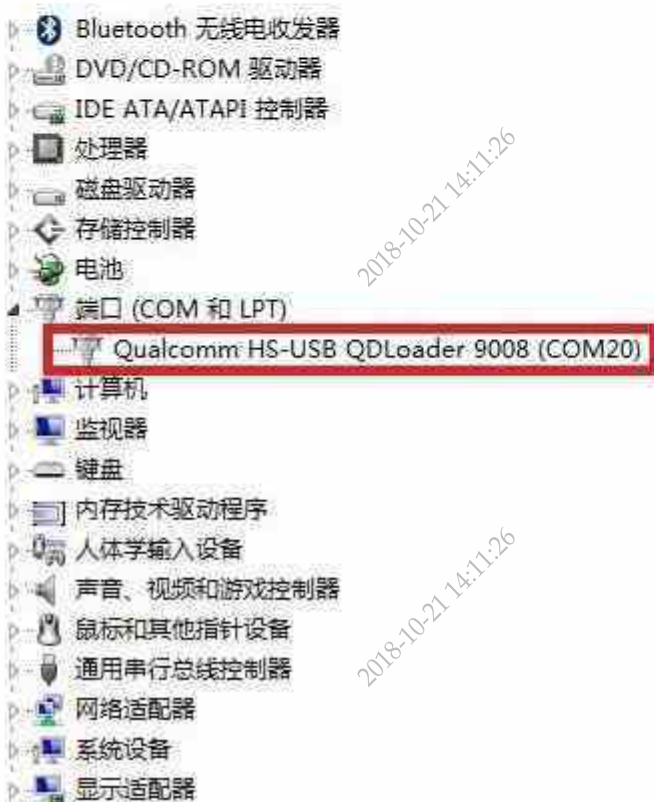

连接成功后，可以在设备管理器中查看到正确的端口

Millet 5X

First, turn off the mobile phone, open the battery cover, then connect the two contacts in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Millet MAX2



连接成功后，可以在设备管理器中查看到正确的端口

Millet 6

First, turn off the mobile phone, open the battery cover, then connect the two contacts in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi mobile phone 5C

First, turn off the mobile phone, Open the battery cover, Remove the rear shell assembly, Disconnect the battery and buckle it again, Then use tweezers to short connect the two contacts in the following figure, and then connect to the computer through the data line. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. Xiaomi 5C takes a long time to brush deeply, about 500S. The operation is as shown in the figure:



Red rice mobile phone 4X

First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:




- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
 - Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序

连接成功后，可以在设备管理器中查看到正确的端口

Red Rice Note4X

First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:

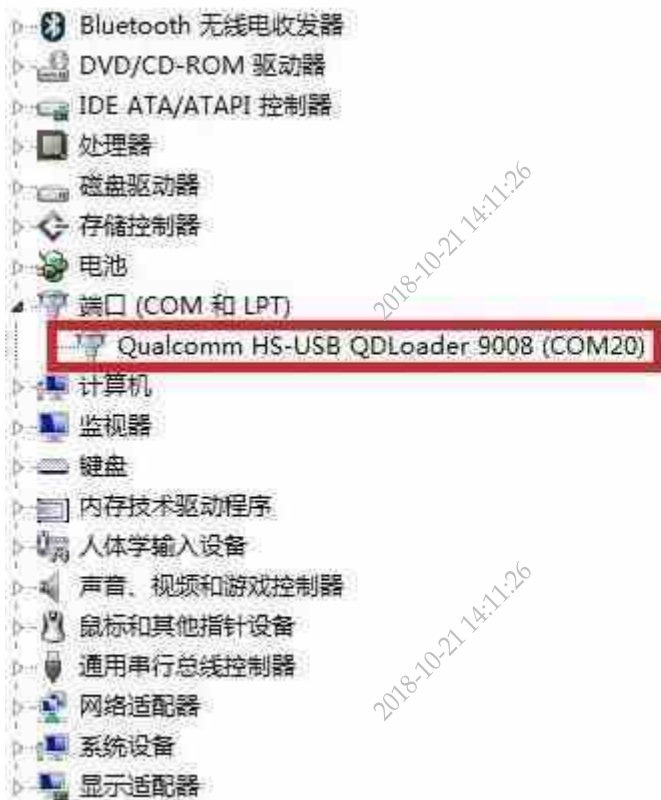

连接成功后，可以在设备管理器中查看到正确的端口

Red Rice Cell Phone 4

First, turn off the mobile phone. Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



连接成功后，可以在设备管理器中查看到正确的端口

Red rice mobile phone 4A

First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:




- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
 - Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Redmi Mobile Phone 4 High Edition

First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:

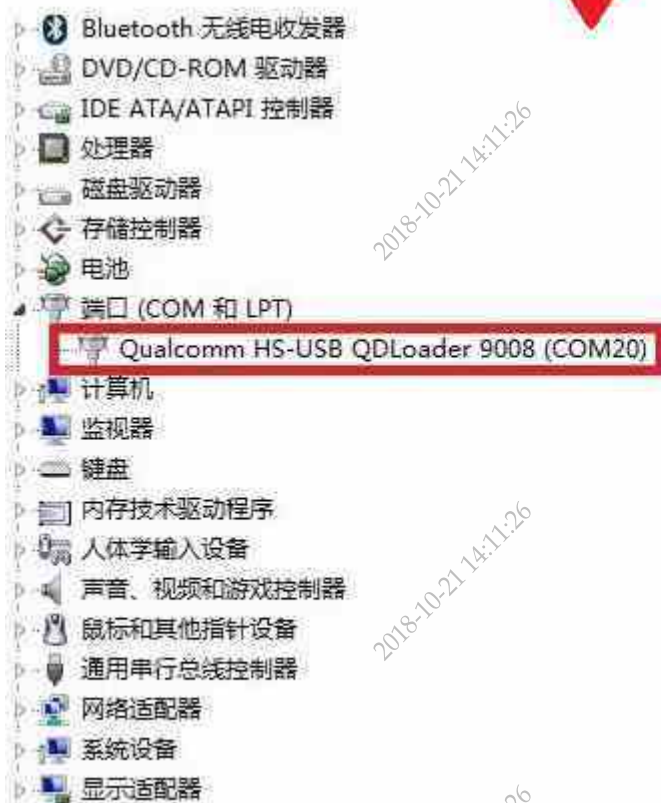

连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi Note2


First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



连接成功后，可以在设备管理器中查看到正确的端口

Millet MIX

First, turn off the mobile phone, Open the battery cover, remove the back shell assembly, then use tweezers to short the two contacts in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:

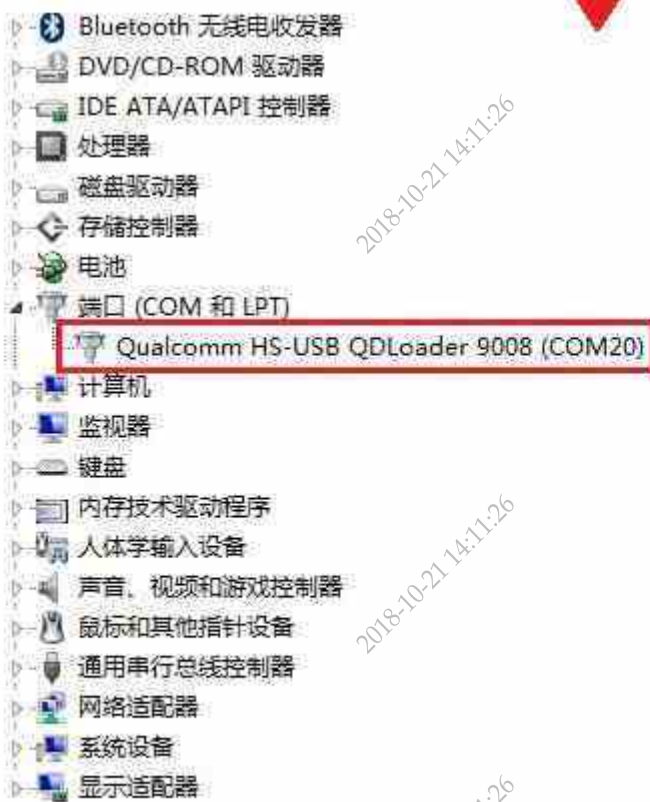

连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi mobile phone 5s

First, turn off the mobile phone, open the battery cover, then connect the two contacts in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:




- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi mobile phone 5s Plus

First, turn off the mobile phone, open the battery cover, remove the back shell assembly, then use tweezers to connect the two points in the following figure, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:

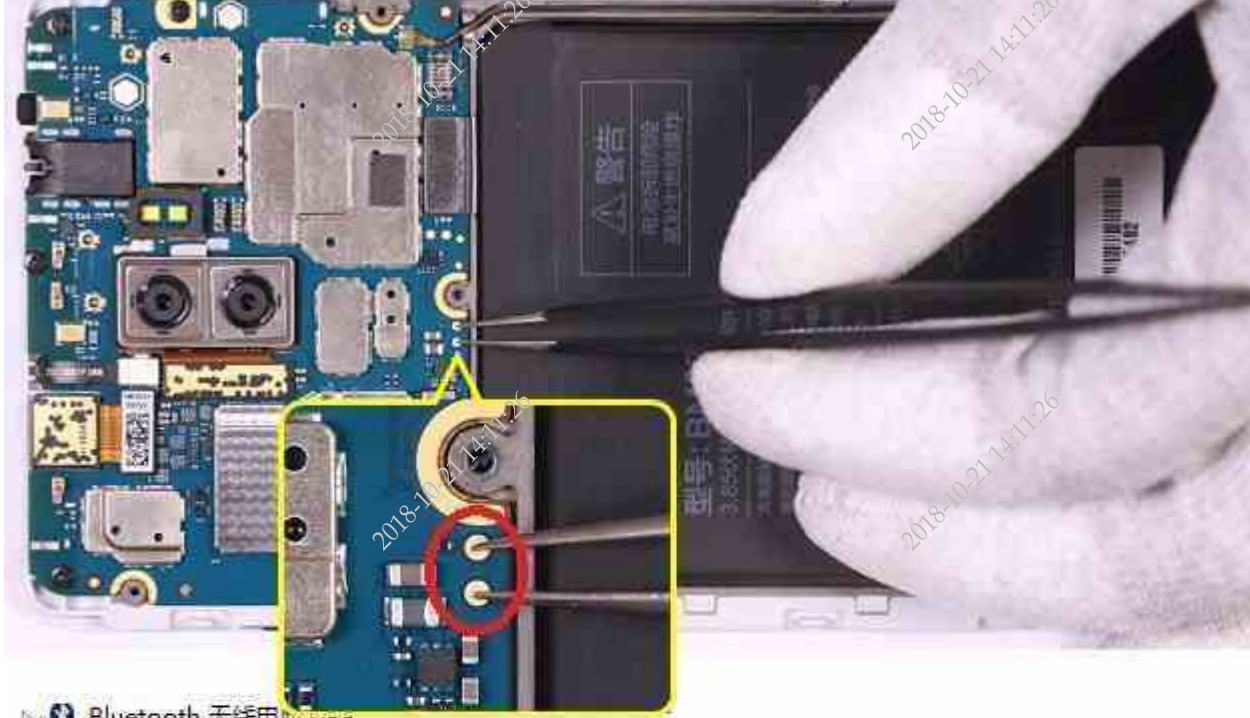


连接成功后，可以在设备管理器中查看到正确的端口

Red rice mobile phone 3S/3X

Redmi mobile phone 3S/3X supports the method of volume up and down keys to enter deep brush mode. The operation method of short contact point entering deep brush mode is as follows:

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then connect the two points in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:

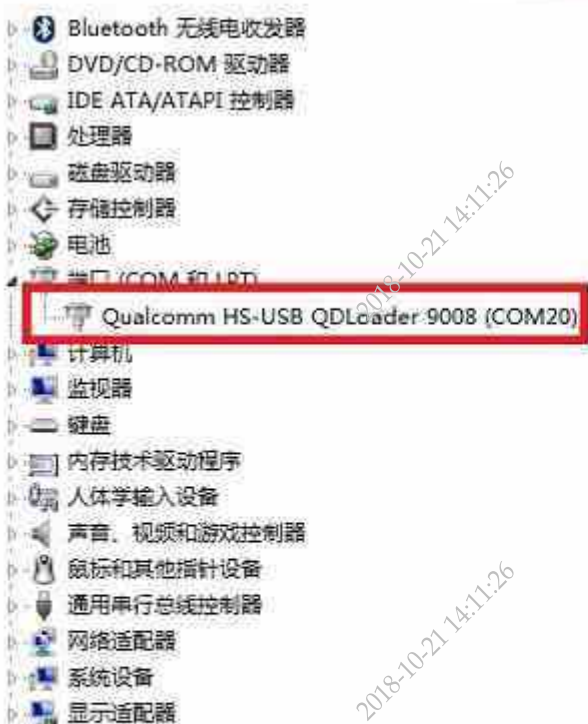

连接成功后，可在设备管理器中
查看到正确的端口

Millet Max

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then connect the two points in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



连接成功后，可以在设备管理器中查看到正确的端口

Redmi Note3 Netcom

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then connect the two points in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader 9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

Xiaomi mobile phone 5

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then connect the two points in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
 - Qualcomm HS-USB QDLoader 9008 (COM20)
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then connect the two points in the following figure with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



- Bluetooth 无线电收发器
- DVD/CD-ROM 驱动器
- IDE ATA/ATAPI 控制器
- 处理器
- 磁盘驱动器
- 存储控制器
- 电池
- 端口 (COM 和 LPT)
- Qualcomm HS-USB QDLoader.9008 (COM20)**
- 计算机
- 监视器
- 键盘
- 内存技术驱动程序
- 人体学输入设备
- 声音、视频和游戏控制器
- 鼠标和其他指针设备
- 通用串行总线控制器
- 网络适配器
- 系统设备
- 显示适配器

连接成功后，可以在设备管理器中查看到正确的端口

First, turn off the mobile phone, Take out the SIM Card, open the battery cover, open the back shell of the motherboard, then short-circuit the two points below the front camera with tweezers, and then connect to the computer through the data cable. On the computer side, you can see the port where the mobile phone enters the deep brushing mode in the computer-management-device manager. Finally, open the brushing tool and select the brushing package to brush the machine. The operation is as shown in the figure:



正确连接电脑后，可以在设备管理器中查看到正确的端口

Red rice mobile phone 2A

First, open the lcfash_all.bat script of the brushing package, then press and hold the mobile phone volume button in the shutdown state, and then connect the computer through USB cable. The mobile phone port can be seen in the computer device manager, and then the script automatically starts deep brushing, and Success appears after successful brushing. (Hint: This machine does not need brushing tools, and deep brushing is carried out by executing scripts.)

名称	修改日期	类型	大小
images	2015/4/16 19:44	文件夹	
Leadcore	2015/4/16 19:44	文件夹	
symbols	2015/4/16 19:44	文件夹	
flash_all	2015/4/16 7:34	Windows 批处理...	2 KB
flash_all.sh	2015/4/16 7:34	SH 文件	1 KB
flash_all_except_data_storage	2015/4/16 7:34	Windows 批处理...	2 KB
flash_all_except_data_storage.sh	2015/4/16 7:34	SH 文件	1 KB
lcfash_all	2015/4/16 7:34	Windows 批处理...	1 KB

打开刷机包双击此脚本，出现如下界面



```
C:\Windows\system32\cmd.exe

D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn>D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\Leadcore\lc-sml.exe -pks=D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\LC1860-EC02-LTE26007-USB_HS_20141230.pks D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\u-boot.bin,u-boot D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\fastboot-logo.bin,fastboot_logo D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\logo.bin,logo D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\modemarm.bin,modemarm D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\modemdsp0.bin,modemdsp D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\kernel,kernel D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\randisk.img,randisk D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\randisk-ant1.img,randisk_ant1 D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\randisk-ant3.img,randisk_ant3 D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\randisk-recovery.img,randisk_recovery D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\kernel,kernel_recovery D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\cache.img,cache D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\system.img,system D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\userdata.img,userdata
setupPKS: D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn\images\LC1860-EC02-LTE26007-USB_HS_20141230.pks
Please reset the target to start download...
Not Detected
8%/_
```



按住音量上键



按住手机音量键不放，用数



手机和电脑连接后在设备管理器可以看到端口

如果驱动存在感叹号，请在本文件2.2中下载联芯驱动进行安装，再重新连接手机。



```
C:\Windows\system32\cmd.exe
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
Sending data packet(s)...
Checking write data status ...
Sent unzip info (len:8 2d 00 ff ff 00 00 80 ad)
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
Sending data packet(s)...
Checking write data status ...
Sent unzip info (len:8 2d 00 ff ff 00 00 80 ad)
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
Sending data packet(s)...
Checking write data status ...
Sent unzip info (len:8 2d 00 ff ff 00 00 80 ad)
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
```

正在自动刷机



```
C:\Windows\system32\cmd.exe
Sent the data packet size
```

```

Sent the data packet size
Sending data packet(s)...
Checking write data status...
Sent unzip info (len:8 2d 00 ff ff 00 00 80 ad)
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
Sending data packet(s)...
Checking write data status ...
Sent unzip info (len:8 2d 00 ff ff 00 00 80 ad)
Sent program start address
Sent program end address
Sent the data packet size
Sent the data packet size
Sending data packet(s)...
100%/
Checking write data status ...
Success
100%
Success (00:02:41)
D:\刷机包\h2x\联芯版\lte26007_images_5.4.16_4.4_cn>pause
请按任意键继续. . .

```

刷机成功

Remi Note Series

First, turn off the top version of Xiaomi Note/Xiaomi Note mobile phone, take out the SIM card holder with tools, and then stick the easily scratched position with barrier friction objects such as transparent adhesive strips with the same width as the SIM card slot (Tip: After repair, be sure to tear off the pasted anti-friction objects and remove residual glue and other substances to ensure good appearance.), then insert the deep brushing tool, connect the computer with the data cable, and see the mobile phone port recognized by the computer in "My Computer"->"Management"->"Device Manager". At this time, take off the deep brushing tool, and then select the brushing package with MIFlash tool to carry out deep brushing, as shown in the following figure:





Redmi Mobile Phone 2, Redmi 2A High Edition

- Method 1

Press button: First, make the mobile phone turn off, press and hold the volume plus and minus at the same time, and then plug in the USB cable. At this time, the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" can be seen in the device manager of the computer, and the next step can be brushed



- Method 2

Short contact point: First, make the mobile phone in the shutdown state, disassemble the back shell according to the disassembly instruction, short-circuit two points on the motherboard with tweezers, then supply power to the mobile phone without loosening the short contact point, and then connect the mobile phone and the computer through USB cable. At this time, the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" can be seen in the device manager of the computer end, and the next step can be brushed



Redmi Note4G dual-card version only supports key-pressing to enter deep brush mode. The method is as above, which is the same as Redmi Mobile Phone 2.

Red Rice Cell Phone 3

- Method 1

Button: The method is the

same as that of red

- rice mobile phone 2.

Method 2

Short contact point: First, make the mobile phone in the shutdown state, disassemble the back shell according to the disassembly instruction, short-circuit two points on the motherboard with tweezers, then supply power to the mobile phone without loosening the short contact point, and then connect the mobile phone and the computer through USB cable. At this time, the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" can be seen in the device manager of the computer end, and the next step can be brushed



正确连接电脑后，可以在设备管理器中看到正确的端口

Redmi Note4G single card version

Keep the device to be turned off, install the battery, short-circuit two contacts near the SIM card with tweezers, and then connect the computer through USB data cable. At this time, the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" can be seen in the device manager at the computer end, and the next step can be brushed



Xiaomi mobile phone 4

Xiaomi Mobile Phone 4 needs to use a special Xiaomi Mobile Phone 4 deep brush SIM Cato to enter the deep brush mode. First, turn off the mobile phone, use the SIM Cato opening tool to disassemble the SIM Cato, and slowly insert the deep brush tool, paying attention not to insert the reverse direction, with MI LOGO facing up.

The following picture shows the operation demonstration for Xiaomi Mobile Phone 4 Unicom version to enter the deep brush mode




Connect the computer and mobile phone with USB cable, and check whether the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" appears in the device manager to judge whether the computer recognizes the mobile phone.

Note: After the computer successfully identifies the mobile phone, it is necessary to take out the special SIM Cato with the SIM Cato opening needle before brushing the phone. If it is not taken out, the later brushing machine will fail.

Redmi Mobile 1S Unicom/Telecom Edition

Remove the battery of the device to be brushed, short-circuit two contacts near the SIM card with tweezers, and then connect the computer through USB data cable. At this time, the port "Qualcomm HS-USB QDLoader 9008 (COM XX)" can be seen in the device manager at the computer end, and the next step can be brushed

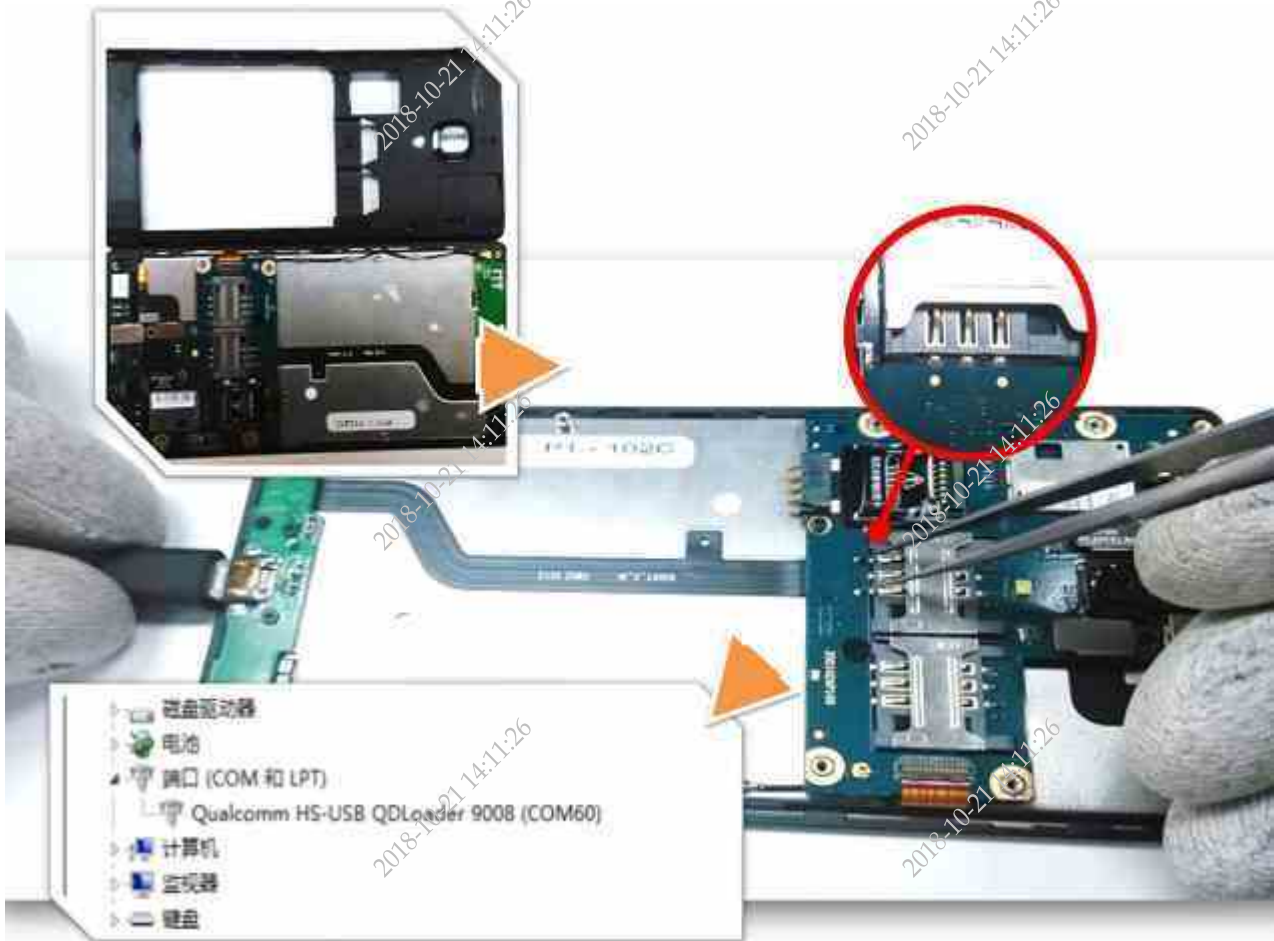

Xiaomi mobile phone 3

Xiaomi Mobile Phone 3 needs to use a special SIM card (there is no insulating material on the back of the special SIM card for Xiaomi Mobile Phone 3 mobile version, and there is insulating material on the back of the special SIM card for Xiaomi Mobile Phone 3 Unicom Telecom version). First, turn off the mobile phone, and then insert the special SIM card into the mobile phone



HS-USB QDLoader 9008 (COM60) appears in the device manager to judge whether the computer recognizes the mobile phone.

Note: After the computer successfully identifies the mobile phone, it is necessary to take out the special SIM Cato with the SIM Cato opening needle before brushing the phone. If it is not taken out, the later brushing machine will fail. The following picture shows the operation demonstration for Xiaomi Mobile Phone 3



Xiaomi mobile phone 2A

Remove the battery from the equipment to be brushed, connect the computer through USB data cable, use metal tools to turn on the two test points under SIM card and short-circuit with the negative electrode of battery holder, force the bottom drive of the chip to start, and identify the USB interface. To identify the correct driver, we first connect the forced boot point and then plug in the USB data cable



Xiaomi mobile phone 2/2 s

Remove the battery from the equipment to be brushed, connect the computer through US B data line, use metal tools to conduct the two contacts below SIM card and short-circuit with the negative electrode of the battery holder, force the bottom drive of the chip to start, and identify to the USB interface



In order to identify the correct drive, we first connect the forced boot point, and then plug in the USB data cable. In order to ensure smoothness, we give a demonstration of some actions, and fix the mobile phone with our right hand when connecting the test point. Be careful not to pull the battery holder when connecting the ground wire



Attention and reminder

1. Brushing the machine is risky, so the operation should be careful. Before brushing the machine, no matter whether you choose to keep the data or not, you must backup the data first to ensure the data security.
2. When downgrading the device (brushing a version earlier than the MIUI version currently used by the device), try to clear all data, otherwise the device may be unusable.
3. When the mobile phone is brushing, if an error is reported, it needs to re-enter Fastboot or deep brushing mode before brushing again, otherwise it may report an error and cannot continue brushing.
4. Deep brushing will erase all data, so pay attention to data backup.
5. Models released after Xiaomi mobile phone 4C are equipped with anti-brush lock (bootloader lock) and Xiaomi Note top when leaving the factory. After being updated to the new MIUI version, Xiaomi mobile phone 4C will also be equipped with anti-brush lock. The locked mobile phone cannot be brushed in Fastboot mode, and "device is locked" will be prompted when brushing, so it is necessary to use deep brushing method for brushing.