

Lenovo

Moto G9 Play



Lenovo Moto G9 Play Level 2 – Service and Repair Manual

REVISION HISTORY

<i>Revision</i>	<i>Date</i>	<i>Notes</i>
1	07/24/2020	Initial Release.
2	08/04/2020	Receiver Insulation Tape Inspection.

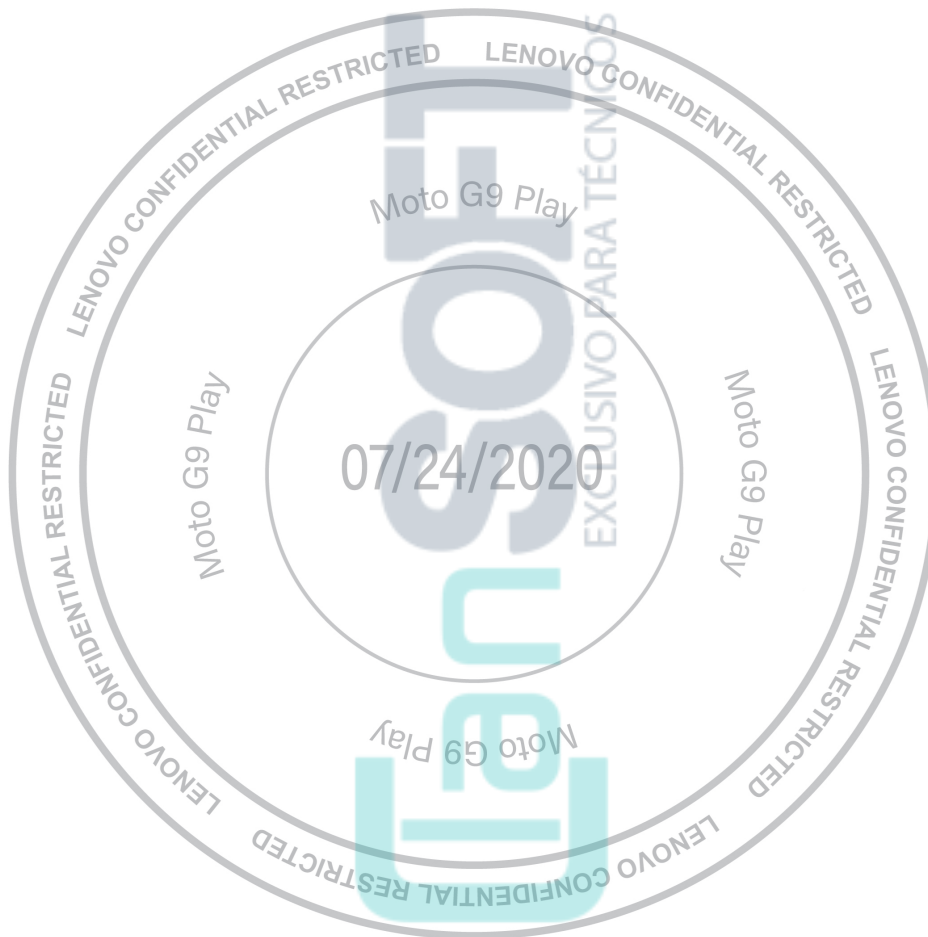


TABLE OF CONTENTS

Revision History	2
List of Tables	7
Table of Figures	7
Safety Information	8
Cautions and Warnings	8
Battery Safety Guidelines	8
Introduction	9
External Views	9
Main Exploded Views	11
Disassembly and Recovery	14
Disassembly and Recovery Map	14
Tools Required for Disassembly	15
SIM Tray Removal	17
Sim Tray Silicone Ring Removal	18
IMEI Label Removal	19
Water Detection Label Inspection	20
Battery Cover Removal	21
Screw Tampering Label Inspection	24
Rear-Housing Upper Waterproof Removal	25
Side Key FPC Waterproof Removal	26
Secondary MIC Dust Net Foam Removal	27
Top Bracket Upper Waterproof Film Removal	28
Top Bracket Removal	29
Water Detection Label Inspection	31
Primary MIC Dust Net Foam Removal	32
Speaker Dust Filter Removal	33
Speaker Box Waterproof Sticker 1 Removal	34
Speaker Box Waterproof Sticker 2 Removal	35
Speaker Box Removal	36
Water Detection Label Inspection	37
Main PCB Heat Spreader Removal	38
Fingerprint Sensor Flex Removal	39
2M Depth Rear-Facing Camera Removal	40
2M Rear-Facing Camera Conductive Sponge Removal	41
Front-Facing Camera Conductive Foam Removal	42
Front-Facing Camera Copper Foil Removal	43
Front-Facing Camera Removal	44

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

Main PCB Removal	45
Receiver Insulated Mylar Removal	48
Receiver Removal	49
2M Macro Rear-Facing Camera Removal	50
Rear-Facing Camera Conductive Adhesive Removal	51
48M Rear-Facing Camera Removal	52
Audio Jack Grommet Removal	53
Secondary MIC Waterproof Foam Removal	54
CPU Heat Spreader Removal	55
Thermal Silica Removal	56
Charger Thermal Silica Removal	57
Speaker Box Conductive Foam Removal	58
Sub Board Removal	59
USB Grommet Removal	60
Primary MIC Waterproof Foam Removal	61
Vibrator Removal	62
Coax Cable Removal	63
Battery Removal	64
Battery Foam Removal	66
Main FPC Removal	67
Rear-Facing Camera Lens Removal	68
Fingerprint Sensor Conductive Foam Removal	69
Side Key FPC Removal	70
Side Key Waterproof Foam Removal	71
Receiver Sealed Foam Net Removal	72
Silicon Light Guide Removal	73
Sub Board Adhesive Removal	74
Sim Tray Grommet Removal	75
Parts Refresh	76
Tools Required for Parts Refresh	76
Battery Inlay Cleaning	77
Front Housing Cleaning	78
Top Bracket Cleaning	79
Assembly	80
Assembly Map	80
Tools Required for Assembly	81
Sim Tray Hole Grommet Assembly	82
Side Key FPC Waterproof Foam Assembly	83
Side Key Assembly	84

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

Silicone Light Guide Assembly.....	85
Thermal Silica Assembly.....	86
Water Detection Label Assembly.....	87
Speaker Box Conductive Foam Assembly.....	88
Charger Thermal Silica Assembly.....	89
Vibrator Assembly	90
Water Detection Label Assembly.....	91
Receiver Sealed Foam Net Assembly	92
Receiver Assembly	93
Receiver Insulated Adhesive Assembly.....	94
Receiver Insulated Adhesive Inspection.....	95
CPU Heat Spreader Assembly.....	96
Audio Jack Assembly	97
Water Detection Label Assembly.....	98
Secondary MIC Waterproof Foam Assembly.....	99
48M Rear-Facing Camera Assembly.....	100
Main PCB Assembly	101
2M Depth Rear-Facing Camera Conductive Sponge Assembly.....	102
2M Depth Rear-Facing Camera Assembly.....	103
Rear-Facing Camera Conductive Adhesive Assembly.....	104
2M Macro Rear-Facing Camera Assembly.....	105
Primary MIC Waterproof Foam Assembly.....	106
USB Grommet Assembly	107
Sub Board Adhesive Assembly.....	108
Sub Board Assembly.....	109
Main FPC Assembly.....	110
Battery Foam Assembly.....	113
Coax Cable Assembly.....	114
Front-Facing Camera Assembly.....	116
Front-Facing Camera Copper Foil Assembly.....	117
Front-Facing Camera Conductive Foam Assembly.....	118
Battery Assembly	119
Fingerprint Sensor Assembly	122
Main PCB Heat Spreader Assembly.....	123
Rear-Facing Camera Lens Assembly.....	124
FPS Ground Conductive Cloth Assembly	125
Top Bracket Assembly	126
Screw Tampering Label Assembly.....	127
Secondary MIC Dust Net Foam Assembly	128

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual


Top Bracket Waterproof Film Assembly	129
Rear-Housing Upper Waterproof Assembly	130
Side Key FPC Waterproof Assembly	131
Speaker Box Assembly	132
Speaker Box Waterproof Sticker 1 Assembly	133
Speaker Box Waterproof Sticker 2 Assembly	134
Primary MIC Dust Net Foam Assembly	135
Speaker Dust Filter Assembly	136
Camera lens Adhesive Assembly	137
FPS Adhesive Assembly	138
Battery Inlay Assembly	139
IMEI Label Assembly	140
Sim Tray Silicone Ring Assembly	141
Sim Tray Assembly	142
Assembly Quality check	143
Battery Quality Check	143
Grommet and Connectors Quality Check	144
Screws Graphite Quality Check	145

LIST OF TABLES

Table 1. External Views Parts List.....	10
Table 2. Assembly Exploded View Parts List.....	11

TABLE OF FIGURES

Figure 1. External Views.....	9
Figure 2. Assembly Exploded View.....	11

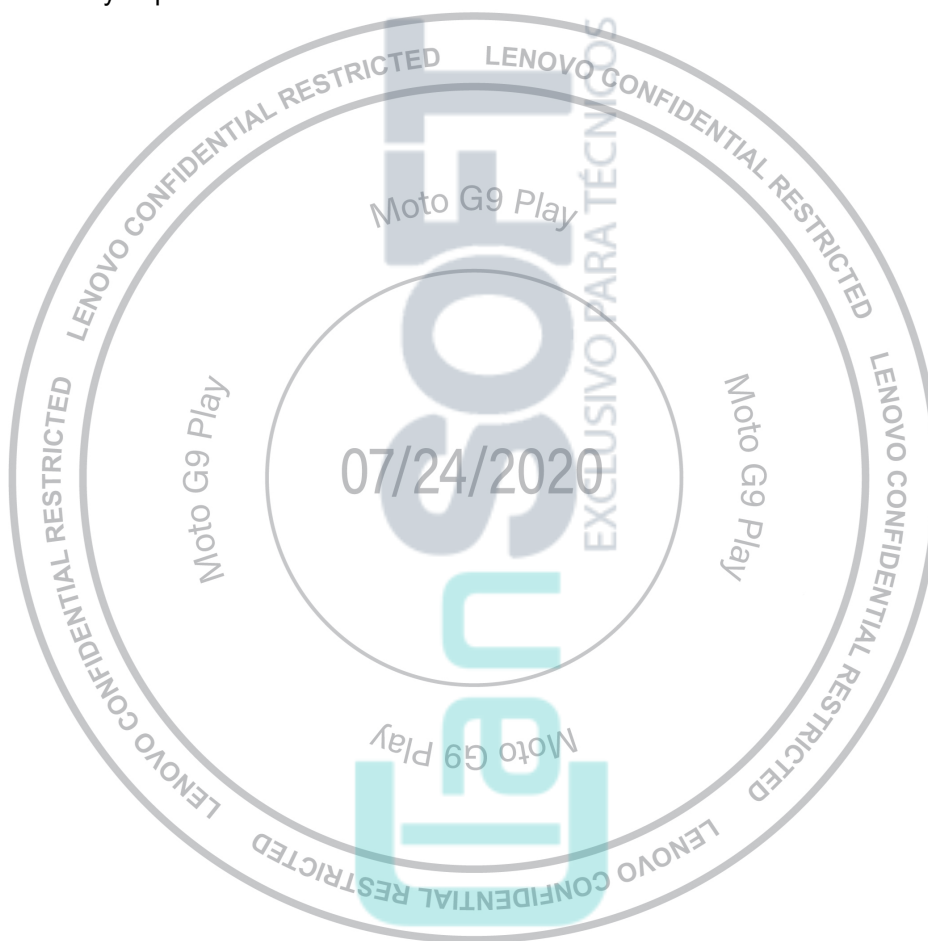

SAFETY INFORMATION

Cautions and Warnings

Electrostatic Discharge

The phone components may be damaged by electrostatic discharge (ESD). Always use an ESD mat and ground strap when working with internal components.

Battery Safety Guidelines

Handle Battery with care. Ensure Battery edges and surfaces are not dented or deformed. If the Battery Pack is dropped to the floor, it may be internally damaged and must be scrapped.

Ensure all surfaces, fixtures, and phone components contacting the Battery are smooth and clean.

Ensure Battery and its insulation are not damaged (e.g. scratched, dented, punctured) prior to and throughout assembly.

Prior to assembly, ensure Battery edges and surfaces are not dented or deformed, and that fixtures and parts that will contact the Battery are free of foreign material.

Ensure screws and screwdrivers do not contact the Battery.

Failure to adhere to Safety Critical Note(s) may increase risk of rupture, burning, or failure to function safely when used by the customer.

INTRODUCTION

External Views



Figure 1. External Views

Table 1. External Views Parts List

Reference #	Description
1	Front-Facing Camera
2	Google Key
3	Volume Key
4	Power Key
5	Camera Deco
6	Camera Lens
7	Flash Lens
8	FPS
9	FPS Bezel
10	Speaker Mesh
11	USB Port
12	MIC
13	Main Lens
14	Battery Cover
15	Front Ring
16	Sim Door
17	Receiver

Main Exploded Views

Figure 2. Assembly Exploded View

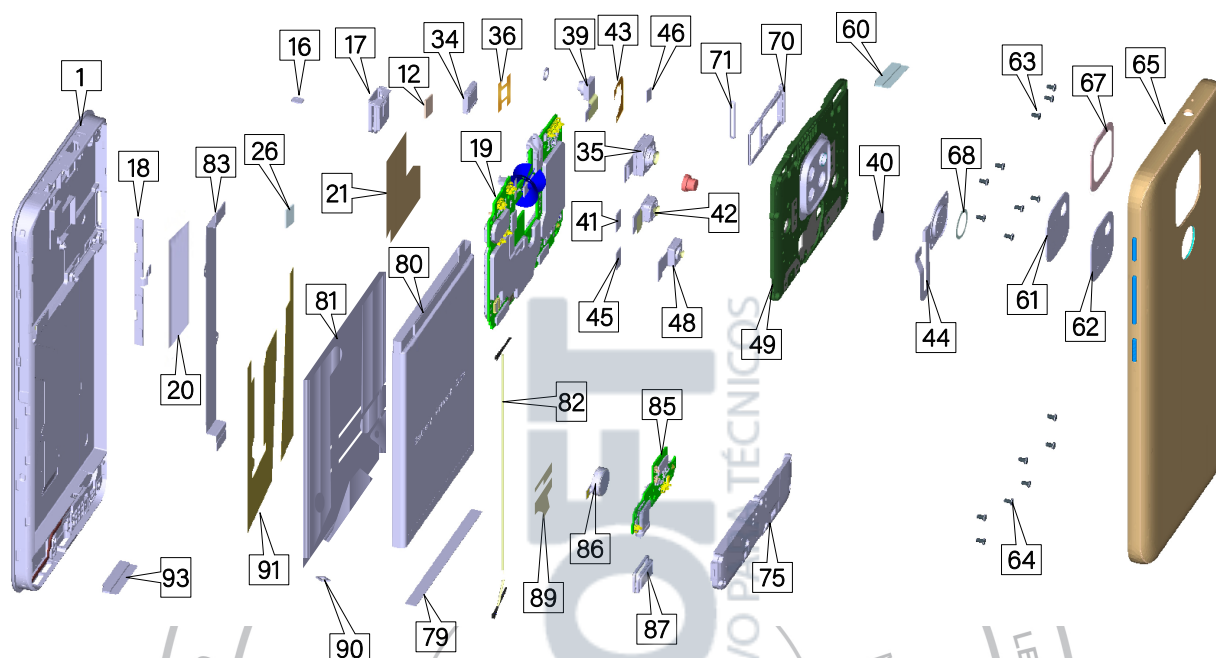


Table 2. Assembly Exploded View Parts List

Reference #	Description	Recovery Part
1	Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	Yes
12	TNM709-BQE001-010+sealed foam net	No
16	TNM709-BQE001-009+Main MIC dust net foam	No
17	TNM716-BQE001-000+silicone cover	Yes
18	TNN105-BQEB00-000+FPC_Sidekey_2_V0.2	No
19	XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	Yes
20	TNM701-BQE000-005+P270AE waterproof MEM	No
21	TNM721-BQF000-003+P370AEBBgraphite sheet	No
26	TNM716-BQF001-001+P370AE Thermal silica	No
34	TNN502-BQF000-010+shrapnel earpiece	Yes
35	MDL,CAMR,48M,after;LGM1AA0;O-FILM,AF:Gua	Yes
36	TNM701-BQE001-004+receiver insulated adh	No
39	MDL,CAMR,8M,FF,Titan20;8M;L4H7FP0;Ofilm	Yes

Lenovo Moto G9 Play
Level 2 – Service and Repair Manual

<i>Reference #</i>	<i>Description</i>	<i>Recovery Part</i>
40	TNM717-BQE001-000+ground conductive cloth	No
41	TNM709-BQF001-000+Posterior adhesive	No
42	MDL,CAMR,2M,Rear,Nairobi,tacoma;FOV;Ofil	Yes
43	TNM719-BQE001-001+ground copper foil	No
44	FINGERPRT SCANNER,GF3658,Dark Green,Kerr FINGERPRT SCANNER,ELEC blue,GF3658,krr FINGERPRT SCANNER,SPR pink,GF3658,kerr	Yes
45	TNM715-BQF001-002+conductive adhesive	No
46	TNM709-BQF001-004+proactive 8M foam	No
48	MDL,CAMR,2MAF,Guam/Borneo/Odessa,L02BA00	Yes
49	XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	Yes
60	TNM701-BQE001-002+waterproof film	No
61	TNM715-BQF001-000+lens adhesive	No
62	TNM205-BQF030-000+rear camera lens TNM205-BQF420-010+rear lens_LS TNM205-BQF100-000+P370AE rear lens+Flash	Yes
63	TNM501-211102-020+round head screw	No
64	TNM501-211103-011+round head screw	No
65	XT2083-1 Batt Cover_BE&S101-BQF422-000CS XT2083-1 Batt Cover_BG&S101-BQF032-000CS XT2083-1 Batt Cover_SP&S101-BQF102-000CS XT2083-3 Batt Cover_BE&S101-BQF423-000CS XT2083-3 Batt Cover_BG&S101-BQF033-000CS XT2083-3 Batt Cover_SP&S101-BQF103-000CS XT2083-4 Batt Cover_EB&S101-BQF426-000CS Guam+ Etch COV_EB_BR&S101-BQF425-000CS Guam+ Etch COV_EG_BR&S101-BQF036-000CS Guam+ Etch COV_SP_BR&S101-BQF106-000CS	Yes
67	TNM715-BQE001-012+rear camera sealant	No
68	TNM715-BQE000-018+ADH_D15.1xD12.7x0.15	No
70	TNEI30-BQE030-000+sim Cato TNEI30-BQE420-000+SIM TRAY_HXD TNEI30-BQE100-000+P270AE_sim card tray TNEI30-BQE033-000+P270AE_sim Cato TNEI30-BQE421-000+SIM TRAY_HXD Guam+ SIM Tray SP SS&EI30-BQE101-000CS	Yes
71	TNM716-BQE001-007+P270AE silicone ring	Yes


Lenovo Moto G9 Play
Level 2 – Service and Repair Manual

<i>Reference #</i>	<i>Description</i>	<i>Recovery Part</i>
75	Guam+ Speaker BOX&N506-BQF001-000CS	Yes
79	TNM709-BQE001-032+Battery buffer foam	No
80	ACCY,BAT,5000mAh,JK50,ATL486585,ATL,BIS	Yes
81	TNP237-BQE003-010+battery protectionfilm	No
82	TNEI06-320813-000+RF coaxial cable	Yes
83	TNN800-BQE000-000+MAINFPC_V0.2	No
85	XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	Yes
86	TNN901-BQF000-010+Coin Vibrator_JX	No
87	TNM716-BQF001-000+sealed silicone sleeve	Yes
89	TNM715-BQF000-003+fixed adhesive	No
90	TNM709-BQE000-027+waterproof foam	No
91	TNM715-BQE001-005+battery adhesive	No
93	TNM711-BQE000-100+speaker dust filter	No
-	TNM501-211105-004+round head screw	No
-	TNM721-BQF001-002+P370AE graphite sheet	No
-	TNP316-096000-100+Water label	No
-	TNM709-BQE000-001 + conductive sponge	No
-	TNM709-BQE000-028+Waterproof foam	No
-	TNM716-BQE002-006+CHARGEThermal silica	No
-	TNM701-BQF000-001+waterproof sticker	No
-	TNM701-BQF000-002+WAT STI 1 (33x3.4x0.05	No
-	TNM701-BQF000-003+STI 2_22.6x12.7x0.05	No
-	TNM716-BQE000-002+silicone light guide	Yes
-	TNM716-BQE001-003+silicone sheet	No
-	TNM715-BQE001-010+silicone adhesive	No
-	TNP316-000000-100+label	No
-	TNM501-211105-006+round head screw_LJT	No

DISASSEMBLY AND RECOVERY




Disassembly and Recovery Map

*Shaded parts may be eligible for parts recovery.

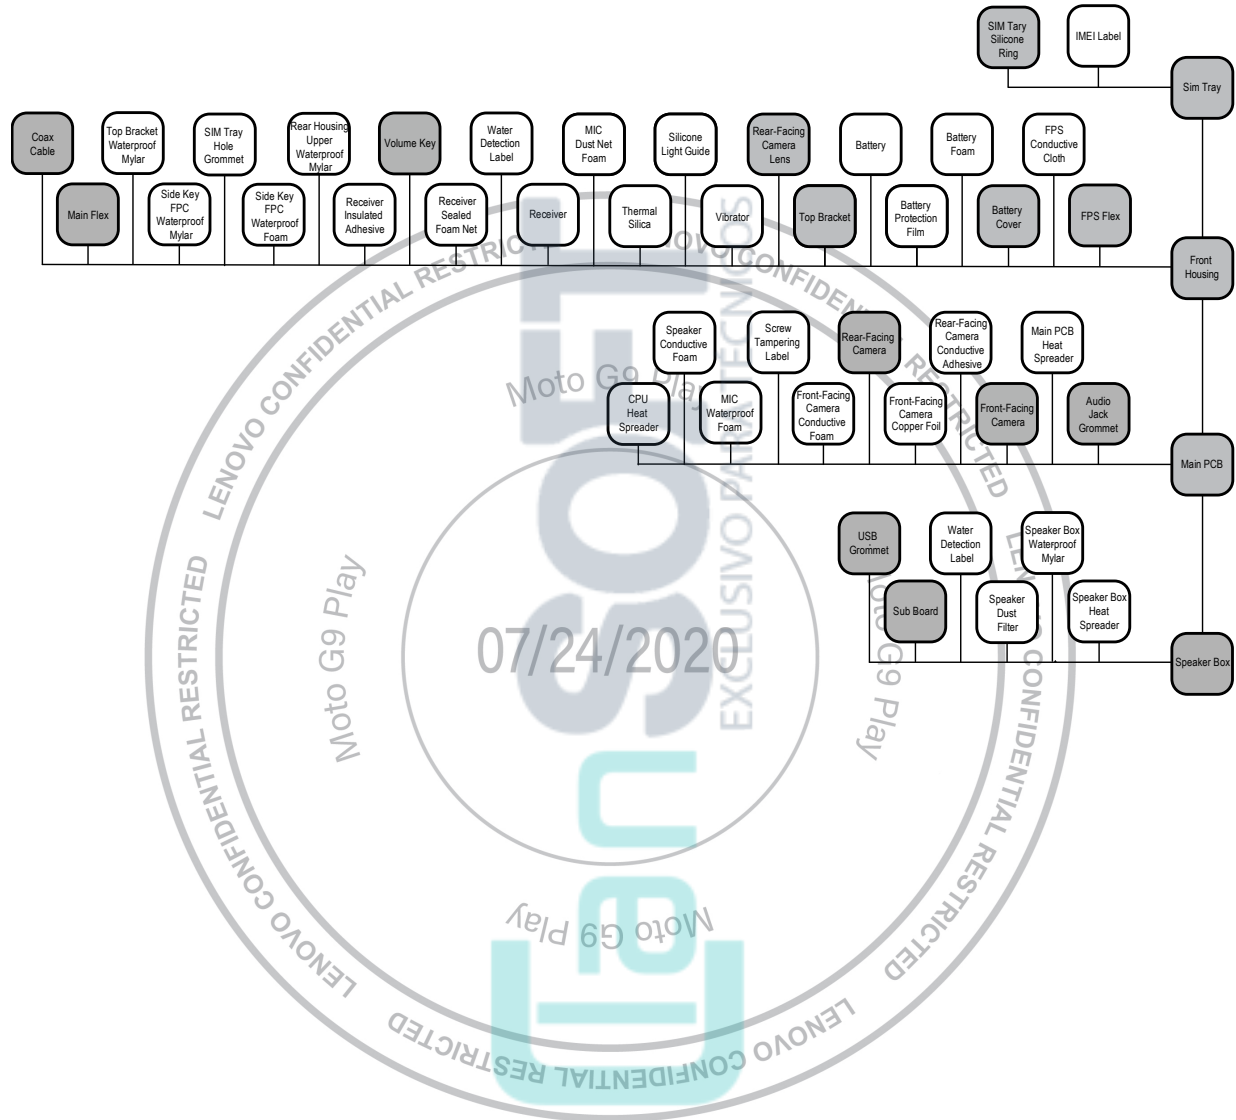


Tools Required for Disassembly

The following tools are required to disassemble the Moto G9 Play phone.
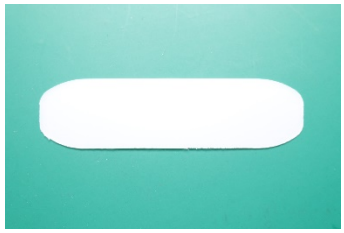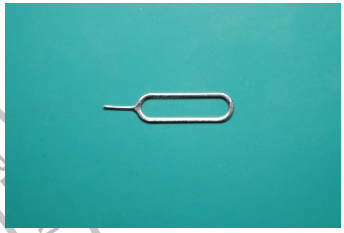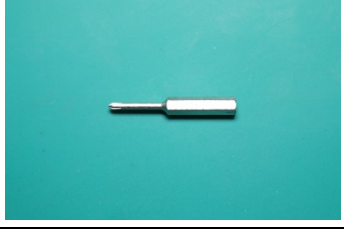
<i>Description</i>	<i>Part #</i>	<i>Picture/Drawing</i>
Thin Plastic Spudger	0-00-00-40826	
SIM/SD Tray Removal Tool	--	
Black Stick	--	
Torque Driver	--	
Shim	4-00-5L-10000	
PH00 Bit	--	
Plastic Tweezers	--	--
ESD Mat	--	--

Lenovo Moto G9 Play
Level 2 – Service and Repair Manual

<i>Description</i>	<i>Part #</i>	<i>Picture/Drawing</i>
Wrist Strap	--	--
Gloves	--	--

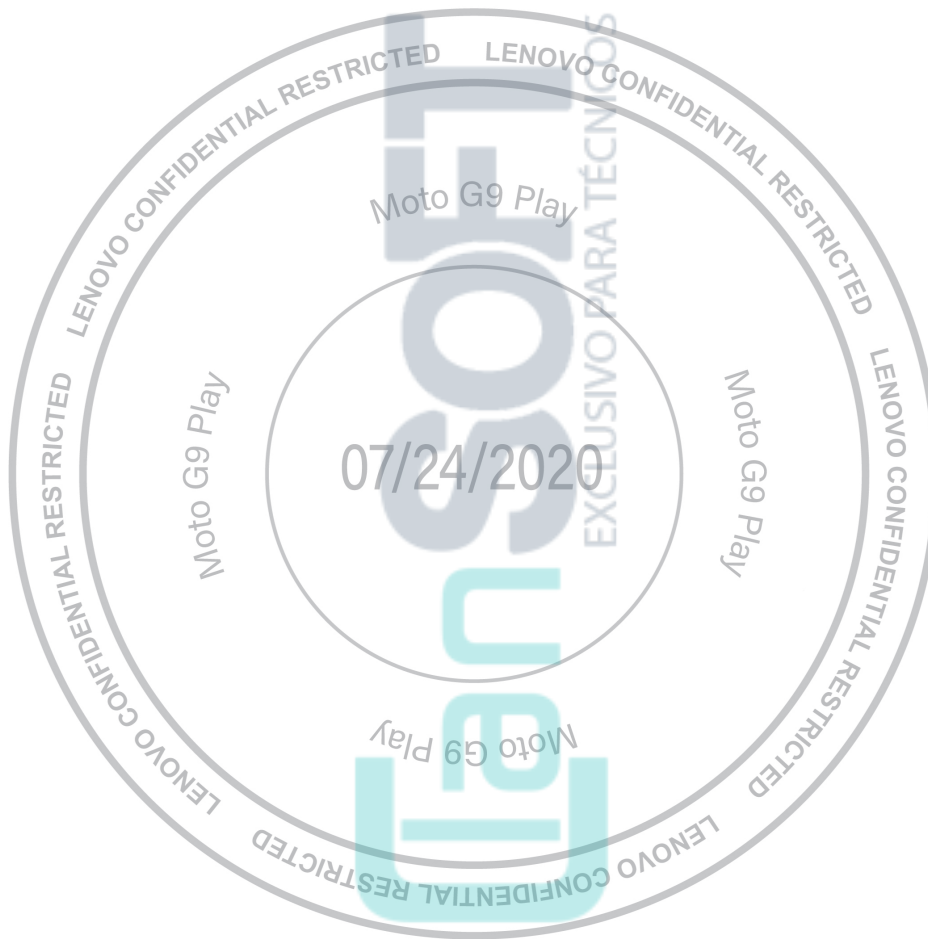

SIM Tray Removal

NOTE

The SIM Tray can be recovered and reused after removal.



1. Power off the device before beginning with the procedure. Use the SIM Tray Removal pin to push into the SIM Tray hole.
2. Press the SIM Tray removal tool to make it pop out as shown.
3. Use fingers to take out the SIM Tray.





Sim Tray Silicone Ring Removal

NOTE

The Sim Tray Silicone Ring can be recovered and reused after removal.



Use the Plastic Tweezer to remove the Sim Tray Silicone Ring from the SIM tray.

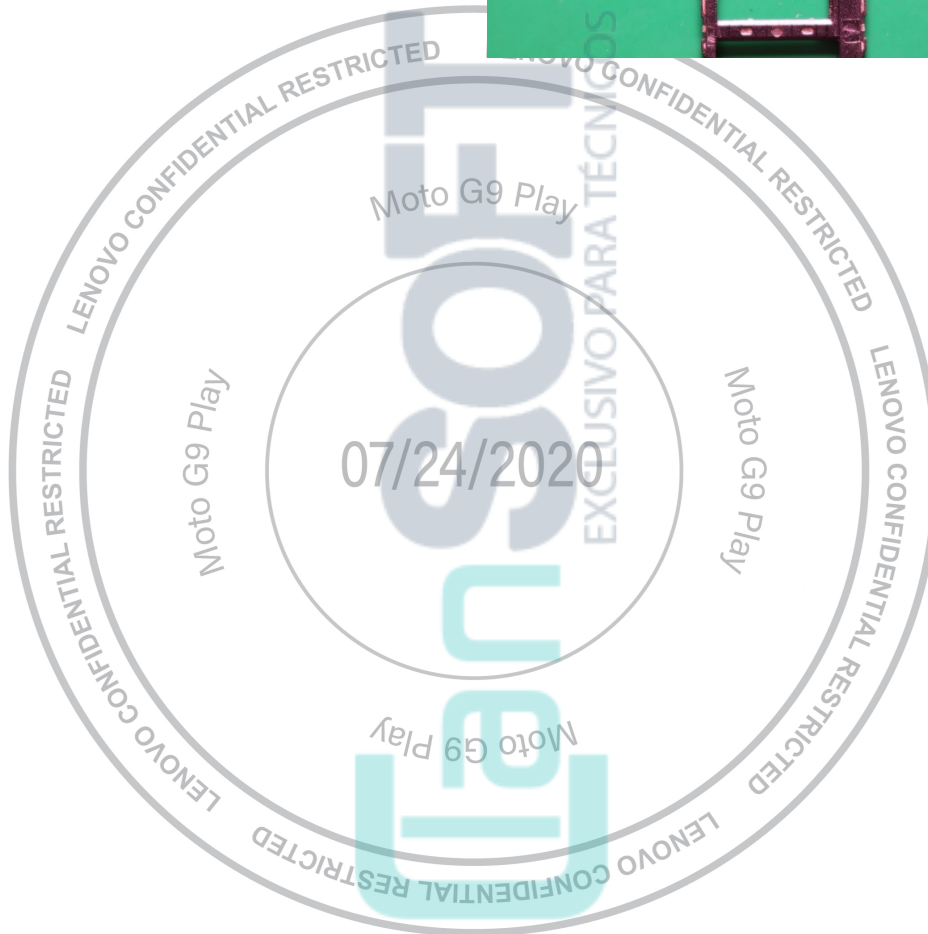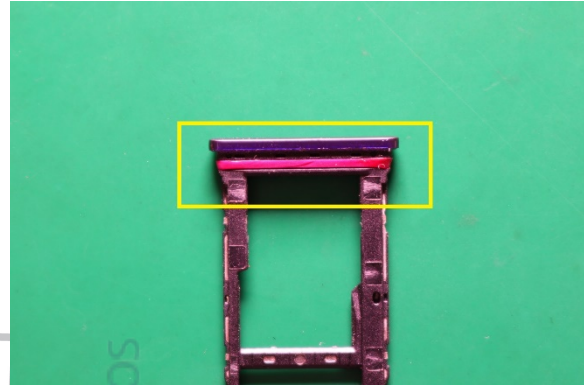



IMEI Label Removal

NOTE

Remove the IMEI Label only if necessary. After you remove it, you cannot reuse it.



Use the Plastic Tweezer to remove the IMEI Label from the SIM tray.

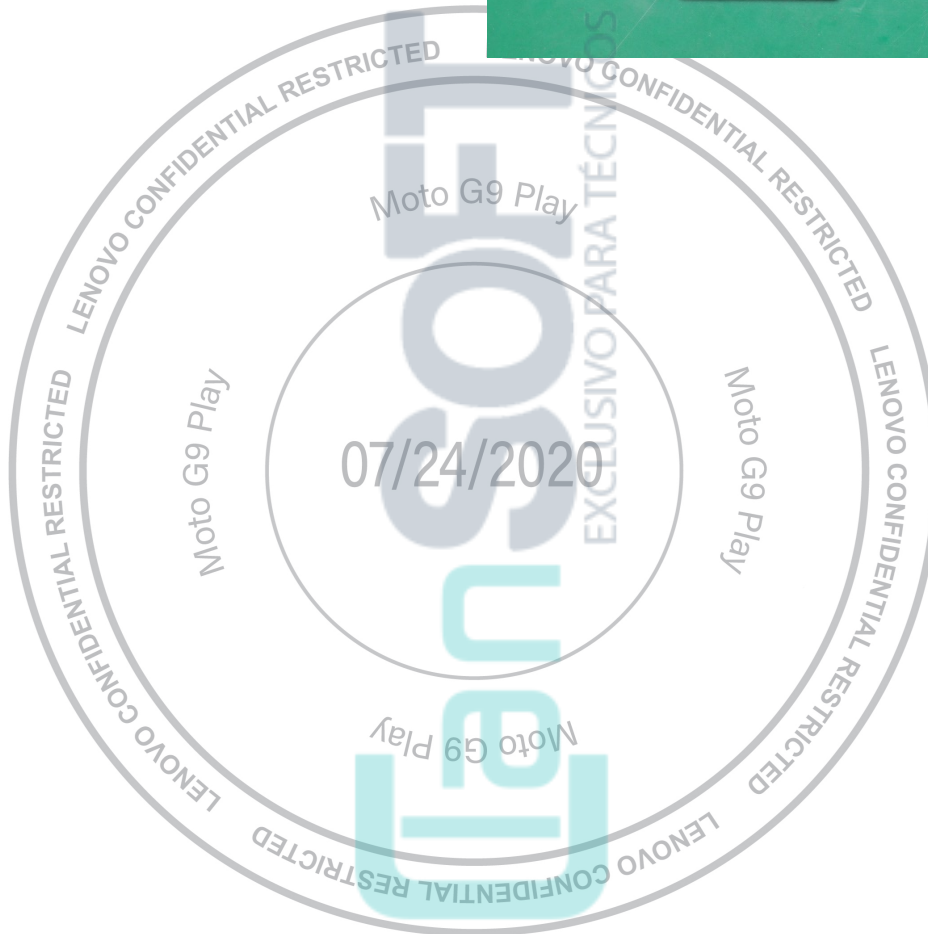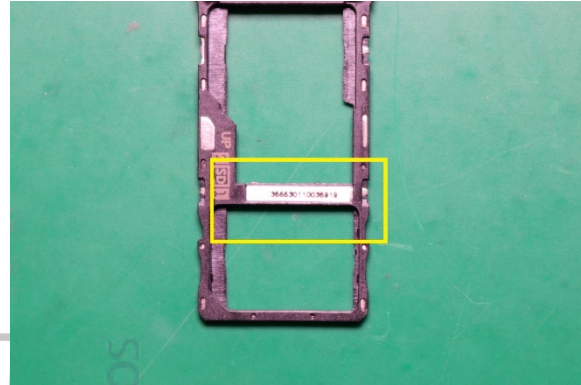


Water Detection Label Inspection

NOTE

If the Water Detection Label (WDL) has been activated, the phone's warranty no longer applies.

Inspect the WDL inside the SIM Tray Slot for signs of activation. Use external light if needed.

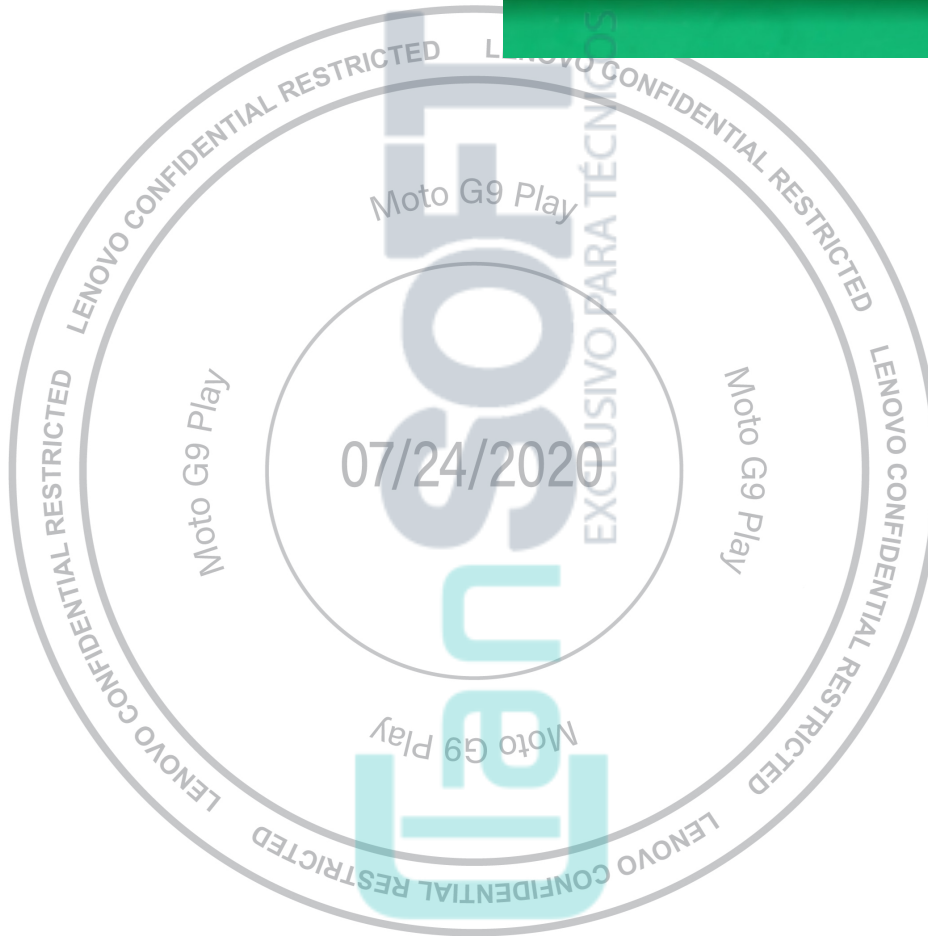

Battery Cover Removal

NOTE

The Battery Cover can be recovered and reused after removal if it is undamaged.





1. Use the Shim to create a gap between the Battery Cover and the Front-Housing.

NOTE

Make sure to start at the Side Key position as shown.

2. Use the Shim to create a gap between the Battery Cover and the Front-Housing.

3. Use the Shim to create a gap between the Battery Cover and the Front-Housing.

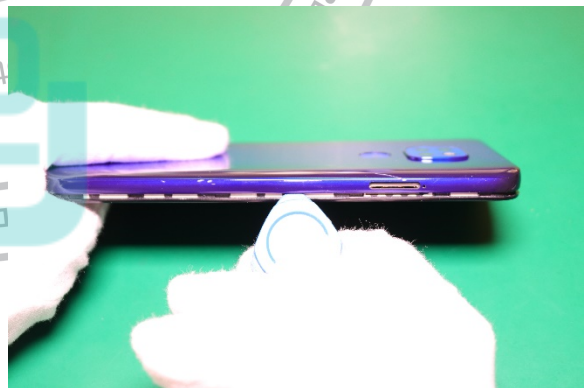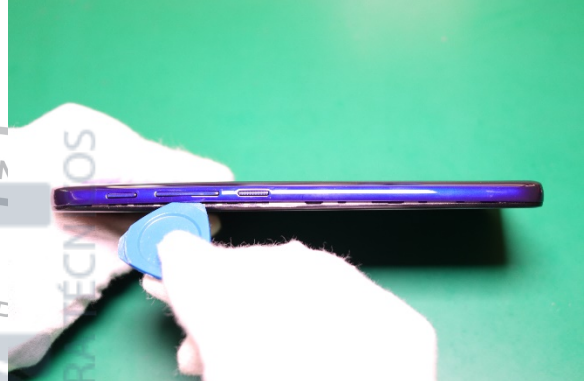

4. Use the Shim to create a gap between the Battery Cover and the Front-Housing.



5. The highlighted frame is a forbidden area. Do not disassemble at this location.

NOTE

Care not to slide the Shim to avoid damaging the Front-Housing.

NOTE

Care while removing the Battery Cover with Shim do not scratch the Battery Cover and Front rim.

NOTE


Care not to break the MIC1 Grommet on the bottom side and MIC2 Grommet on the top side.



6. Use fingers to push out the Fingerprint Sensor from the location as shown.

/// WARNING ///


Use care not to disconnect the Fingerprint Sensor (FPS) Flex from the Battery Cover when removing the Front Housing.

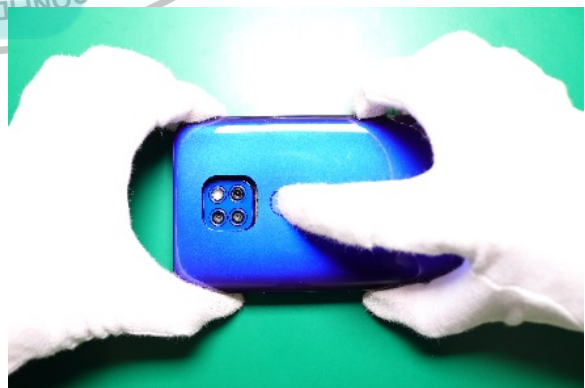

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

7. Care need strong force to pull to disengage Battery Cover from the adhesive as shown.

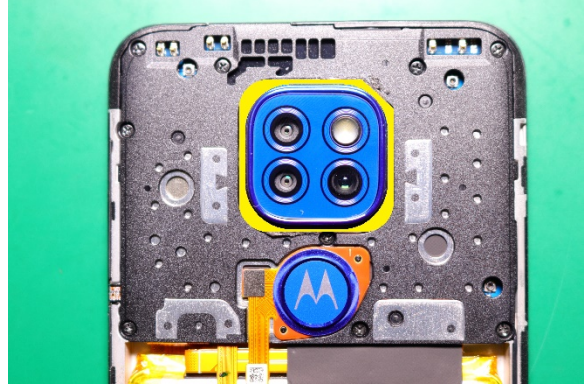

8. Split the Battery Cover from the Front-Housing as shown.





Screw Tampering Label Inspection

NOTE

If a Screw Tampering Label is damaged, the phone's warranty no longer applies.

Inspect the Screw Tampering Labels located on the Top Bracket as shown. Verify they are correctly placed and examine them for signs of tampering.

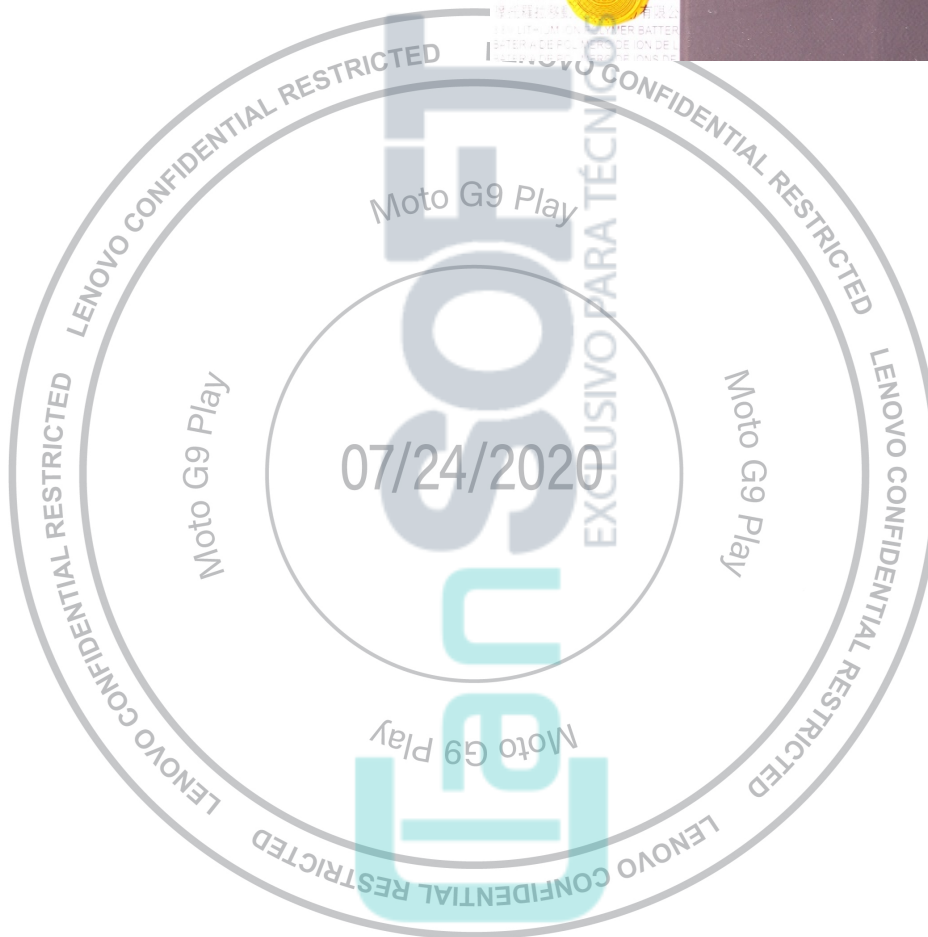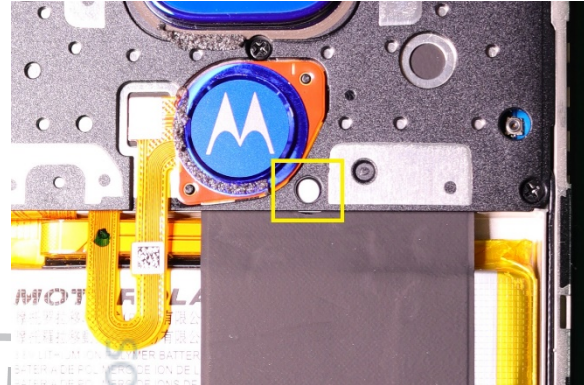



Rear-Housing Upper Waterproof Removal

NOTE

After you remove the Rear-Housing Upper Waterproof, you cannot reuse it.



Use the Plastic Tweezer to remove the Rear-Housing Upper Waterproof from the location as shown.

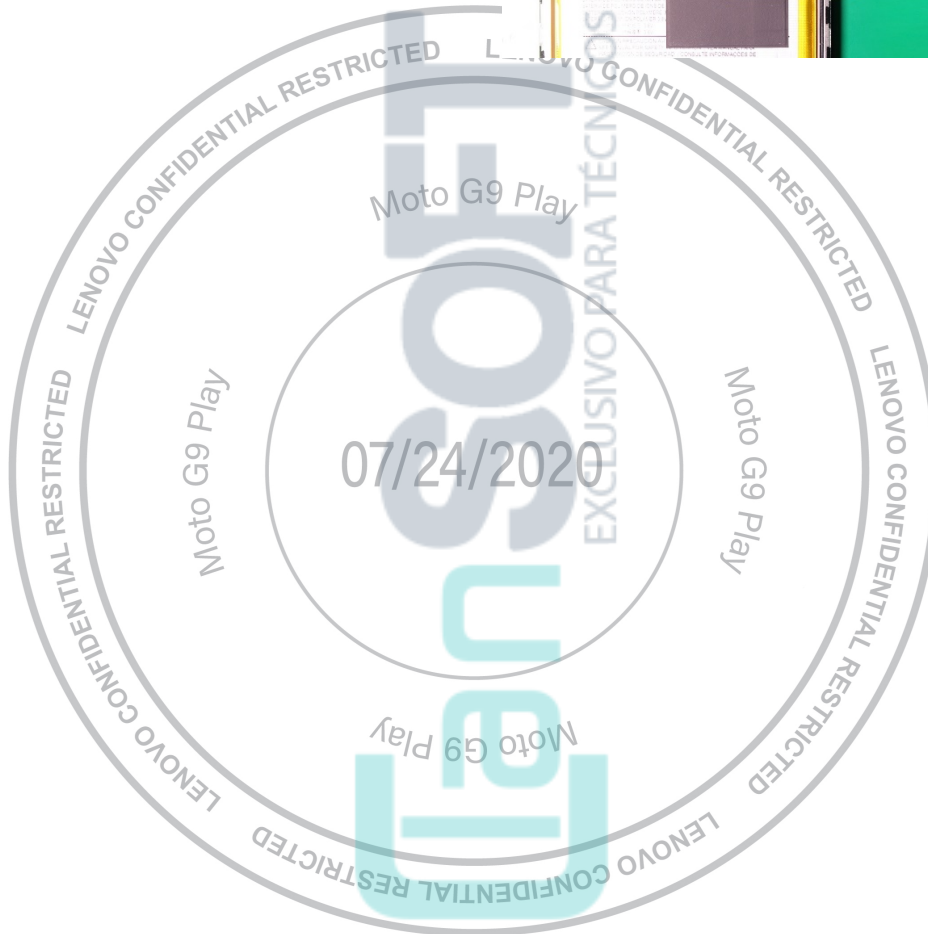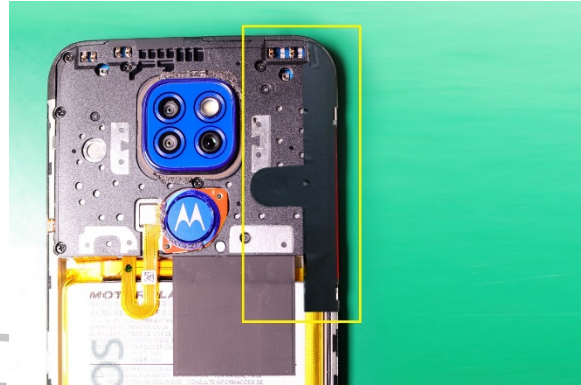



Side Key FPC Waterproof Removal

NOTE

After you remove the Side Key FPC Waterproof, you cannot reuse it.



Use the Plastic Tweezer to remove the Side Key FPC Waterproof from the location as shown.

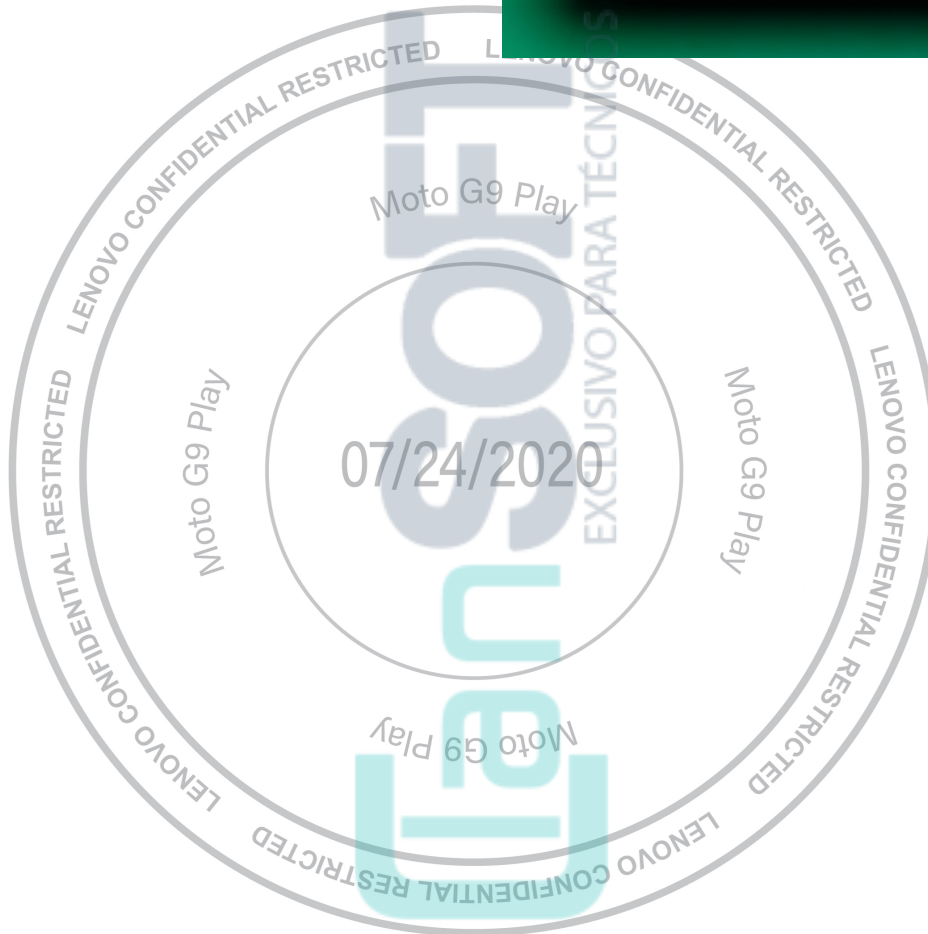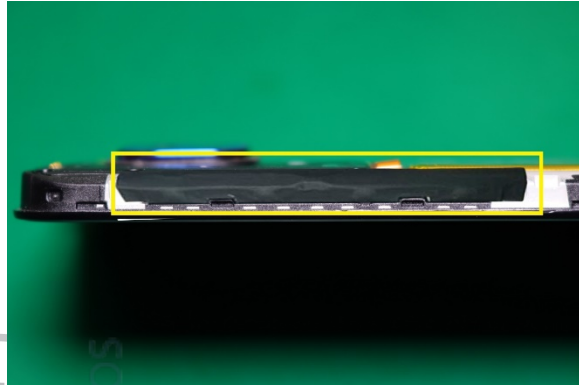


Secondary MIC Dust Net Foam Removal

NOTE

After you remove the Secondary MIC Dust Net Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Secondary MIC Dust Net Foam from the location as shown.

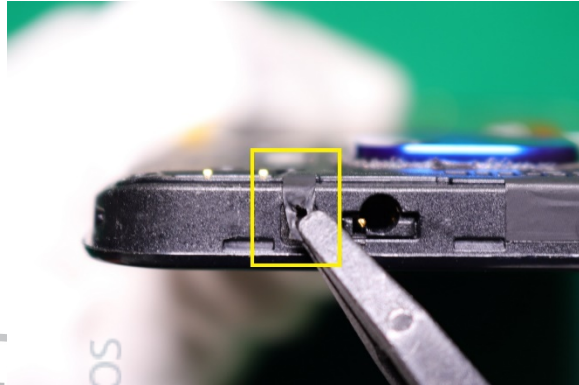


Top Bracket Upper Waterproof Film Removal

NOTE

After you remove the Top Bracket Upper Waterproof Film, you cannot reuse it.



Use the Plastic Tweezer to remove the Top Bracket Upper Waterproof Film from the location as shown.

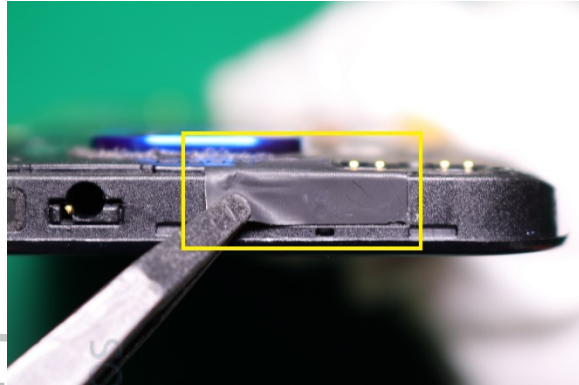


Top Bracket Removal

NOTE


The Top Bracket can be recovered and reused after removal.



1. Use the flat end of the Black Stick to disengage Fingerprint Sensor from the location as shown.

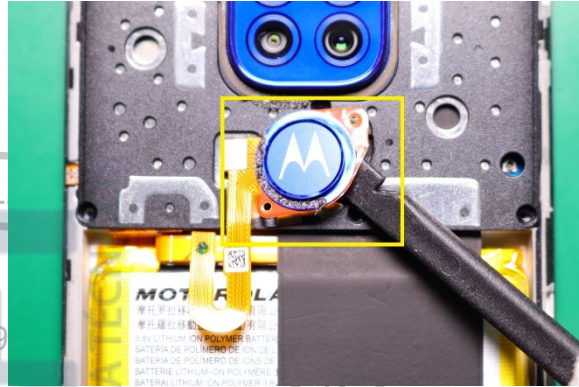


2. Use the Plastic Tweezer to remove the Fingerprint Sensor from the location as shown.

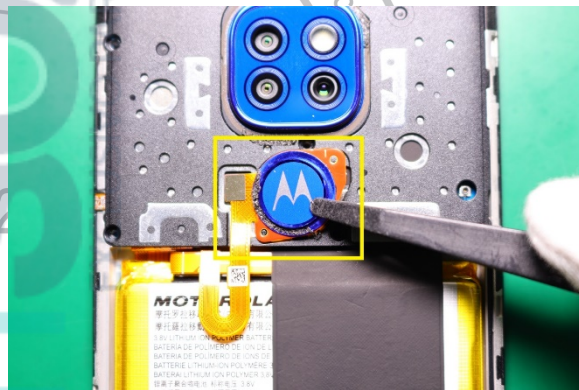

3. Use the Torque Driver with PH00 Bit to remove the nine screws as shown.

/// WARNING ///



The screws cannot be reused after removal.

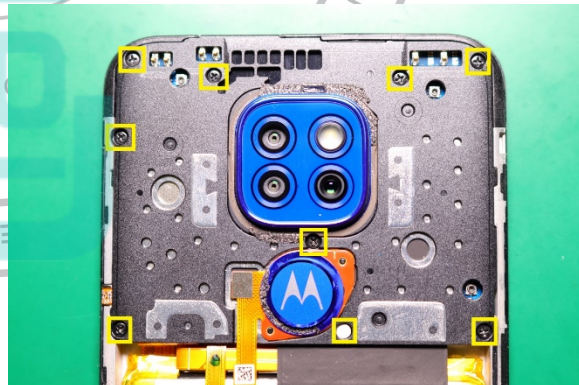

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

4. Use the flat end of the Black Stick to lift the Top Bracket from the location as shown.

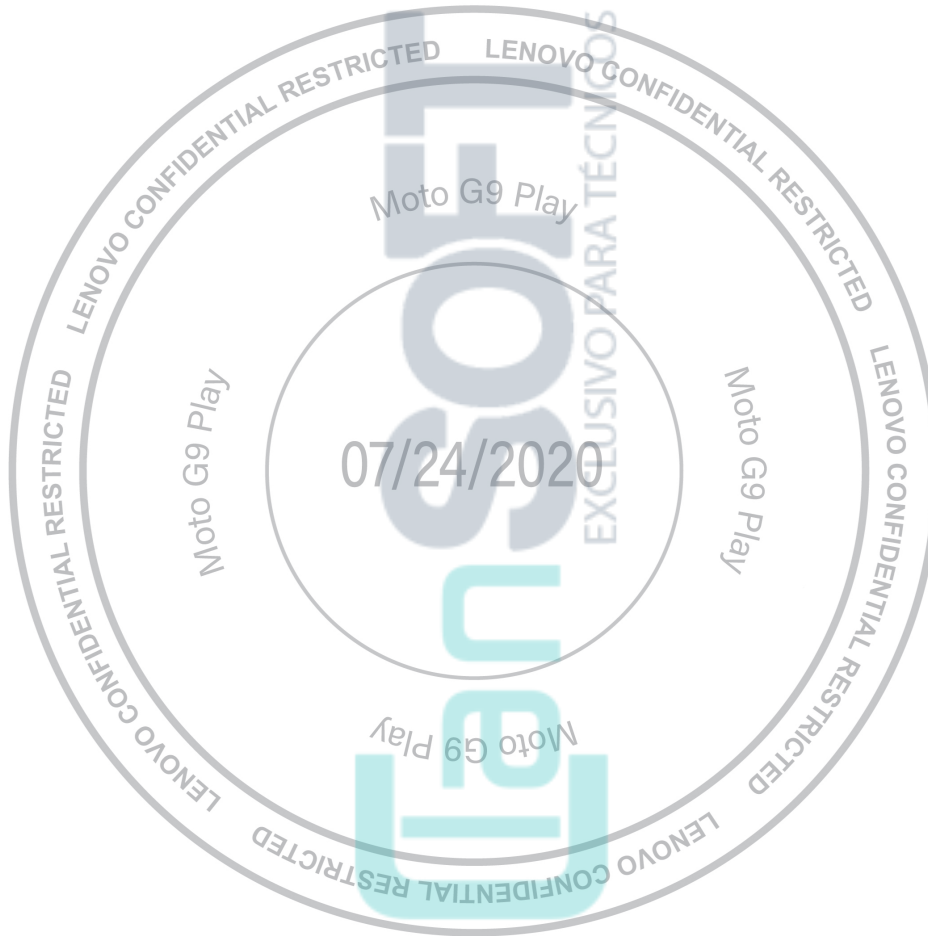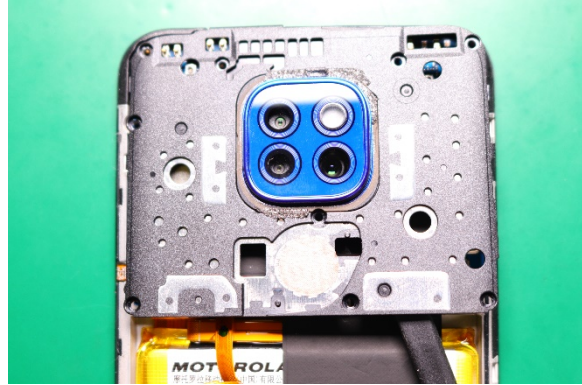


Water Detection Label Inspection

NOTE

If the Water Detection Label (WDL) has been activated, the phone's warranty no longer applies.

Inspect the WDL, which is visible on the Main PCB. Examine it for signs of activation.

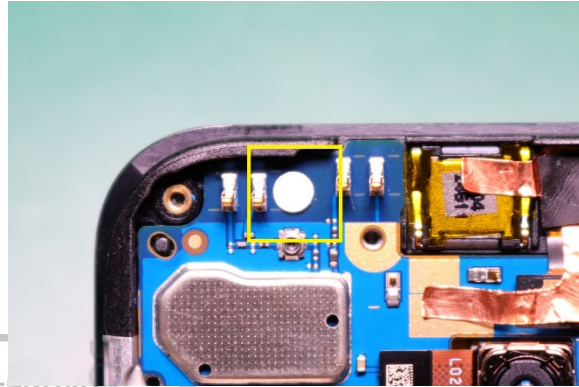


Primary MIC Dust Net Foam Removal

NOTE

After you remove the Primary MIC Dust Net Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Primary MIC Dust Net Foam from the location as shown.

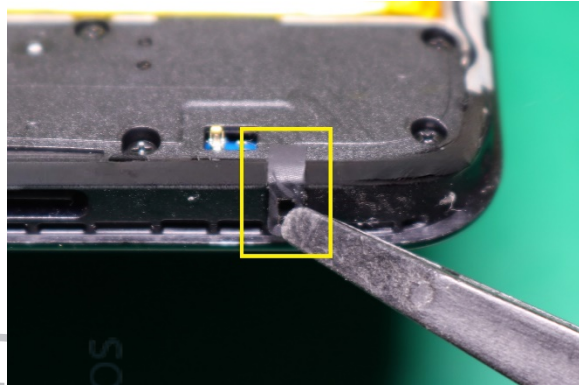



Speaker Dust Filter Removal

NOTE

After you remove the Speaker Dust Filter, you cannot reuse it.



Use the Plastic Tweezer to remove the Speaker Dust Filter from the location as shown.

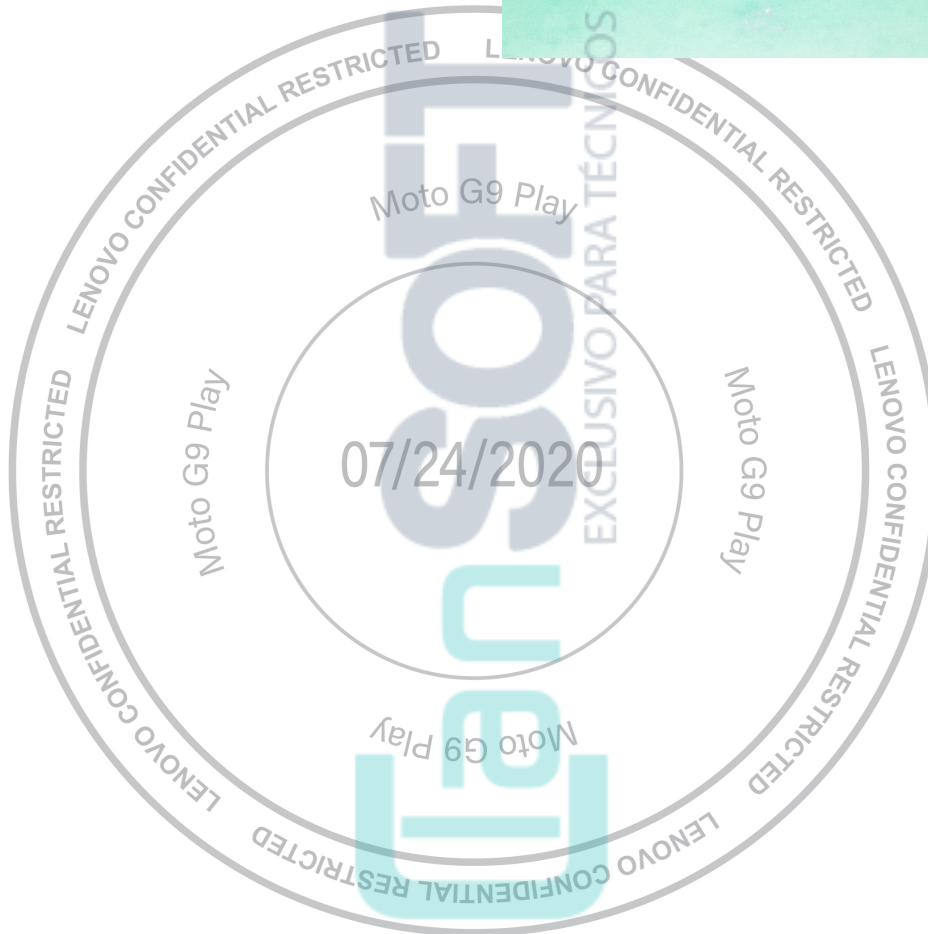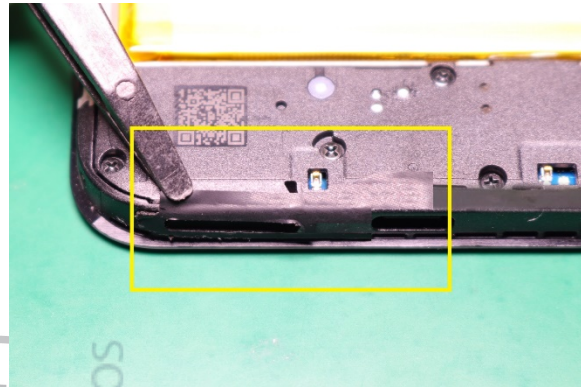



Speaker Box Waterproof Sticker 1 Removal

NOTE

After you remove the Speaker Box Waterproof Sticker 1, you cannot reuse it.



Use the Plastic Tweezer to remove the Speaker Box Waterproof Sticker 1 from the location as shown.

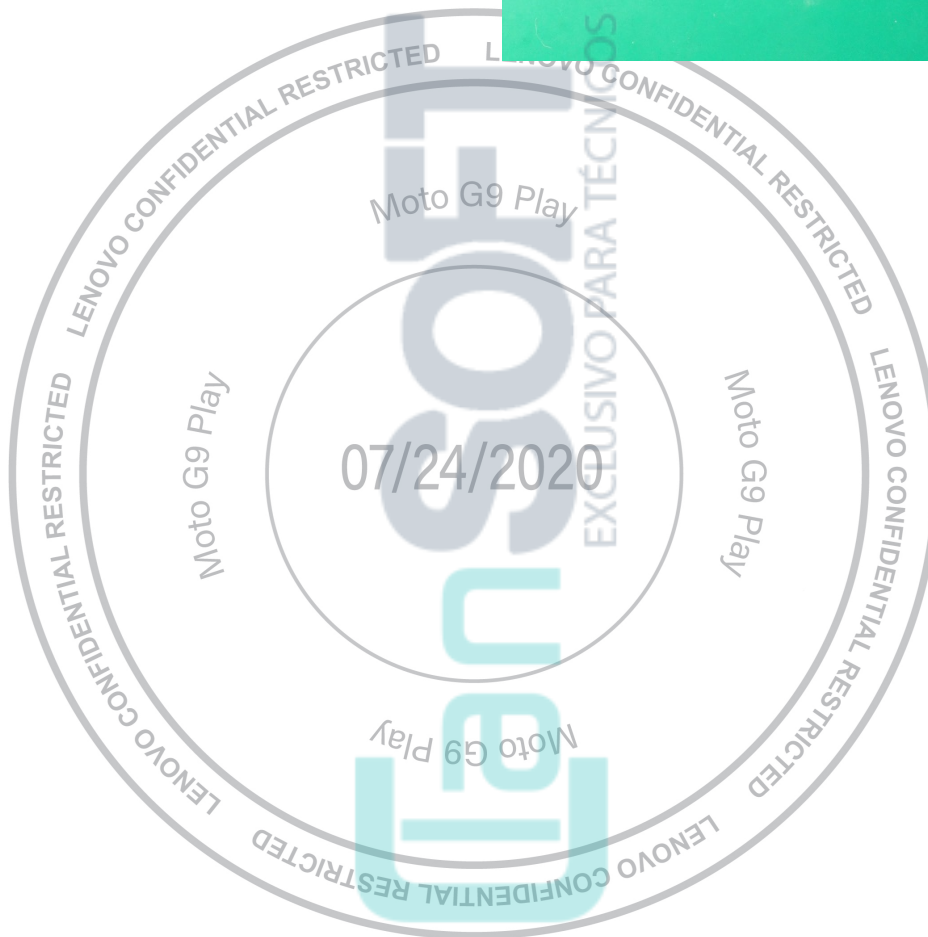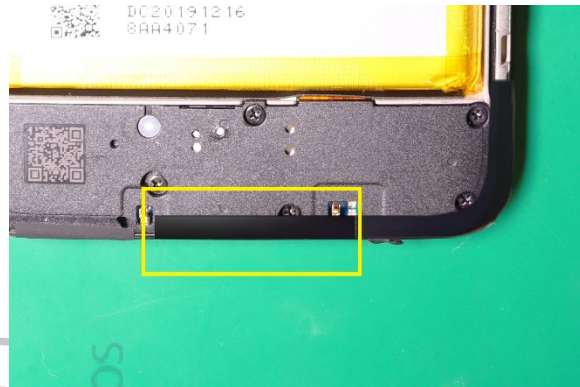


Speaker Box Waterproof Sticker 2 Removal

NOTE

After you remove the Speaker Box Waterproof Sticker 2, you cannot reuse it.



Use the Plastic Tweezer to remove the Speaker Box Waterproof Sticker 2 from the location as shown.

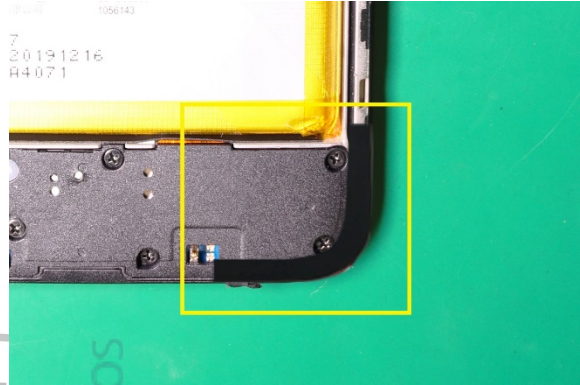

Speaker Box Removal

NOTE

The Speaker Box can be recovered and reused after removal.




1. Use the Torque Driver with PH00 Bit to remove the seven screws as shown.

/// WARNING ///

The screws cannot be reused after removal.

2. Use the flat end of the Black Stick to lift the Speaker Box as shown.


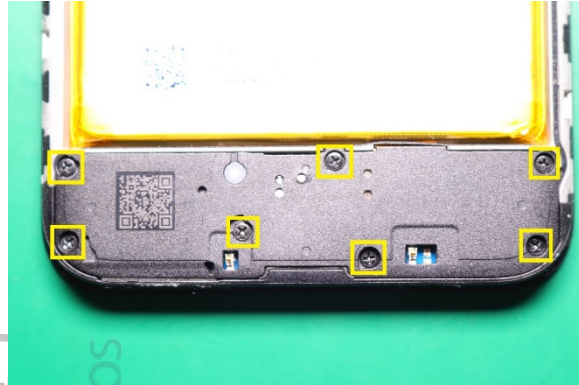


Water Detection Label Inspection

NOTE

If the Water Detection Label (WDL) has been activated, the phone's warranty no longer applies.

Inspect the WDL, which is visible on the Sub Board. Examine it for signs of activation.

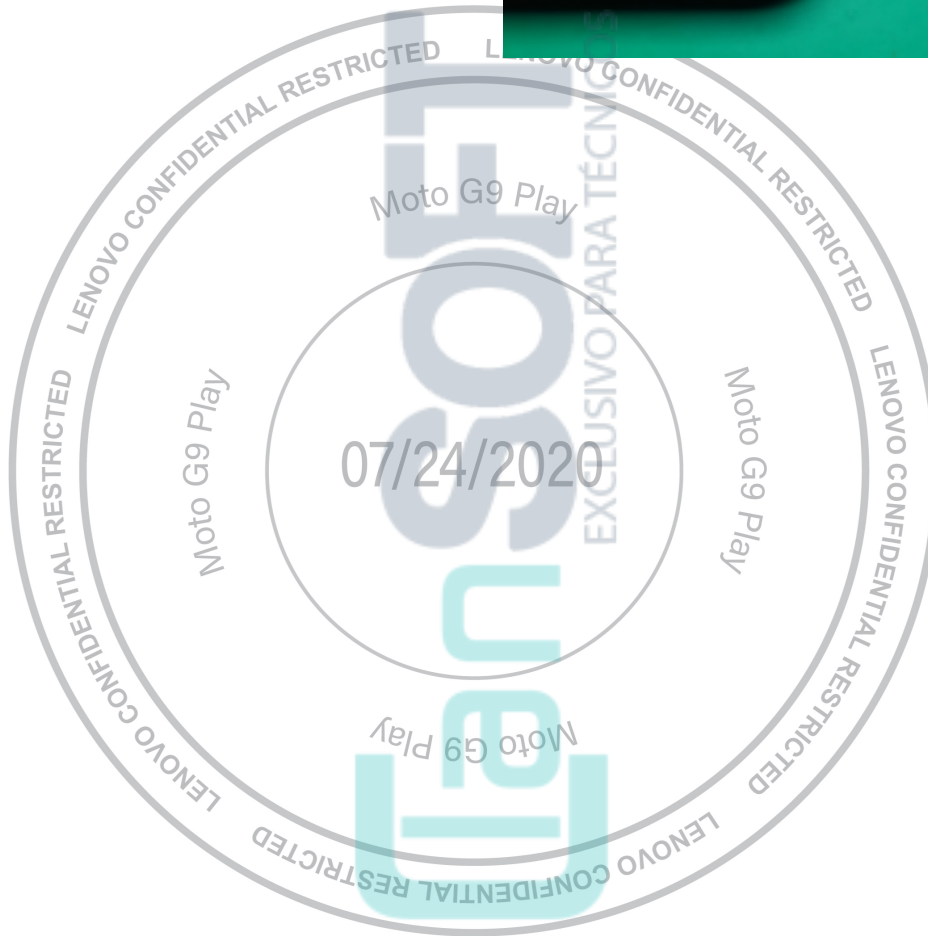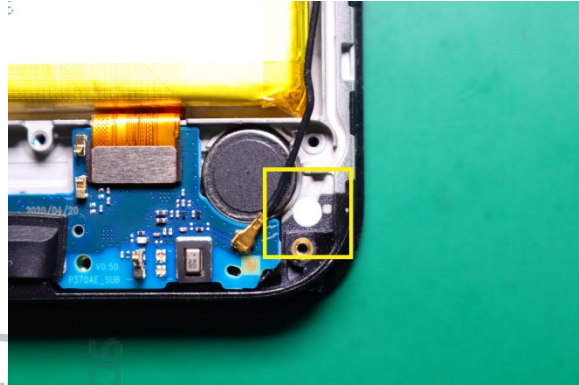


Main PCB Heat Spreader Removal

NOTE

After you remove the Main PCB Heat Spreader, you cannot reuse it.



Use the Plastic Tweezer to remove the Main PCB Heat Spreader from the Main PCB as shown.

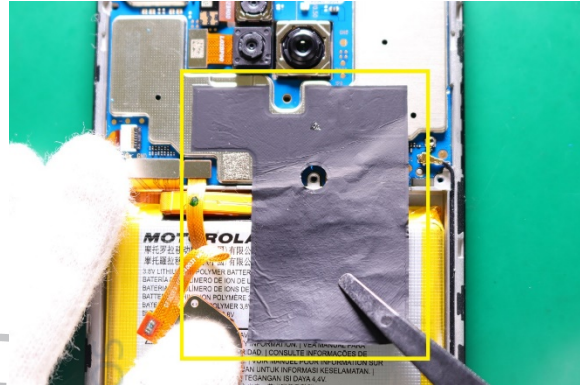


Fingerprint Sensor Flex Removal

NOTE

The Fingerprint Sensor Flex can be recovered and reused after removal.



Use fingers to remove the Fingerprint Sensor Flex from the location as shown.

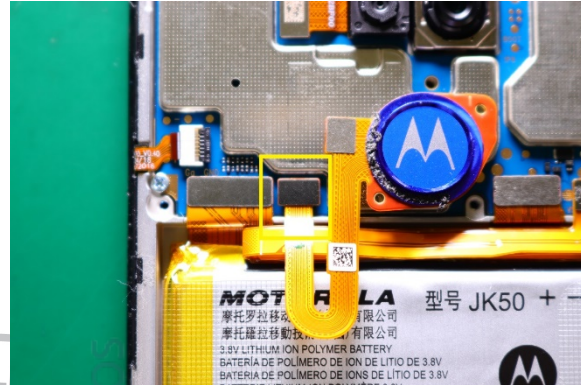



2M Depth Rear-Facing Camera Removal

NOTE

The 2M Depth Rear-Facing Camera can be recovered and reused after removal.



Use fingers to remove the 2M Depth Rear-Facing Camera from the location as shown.

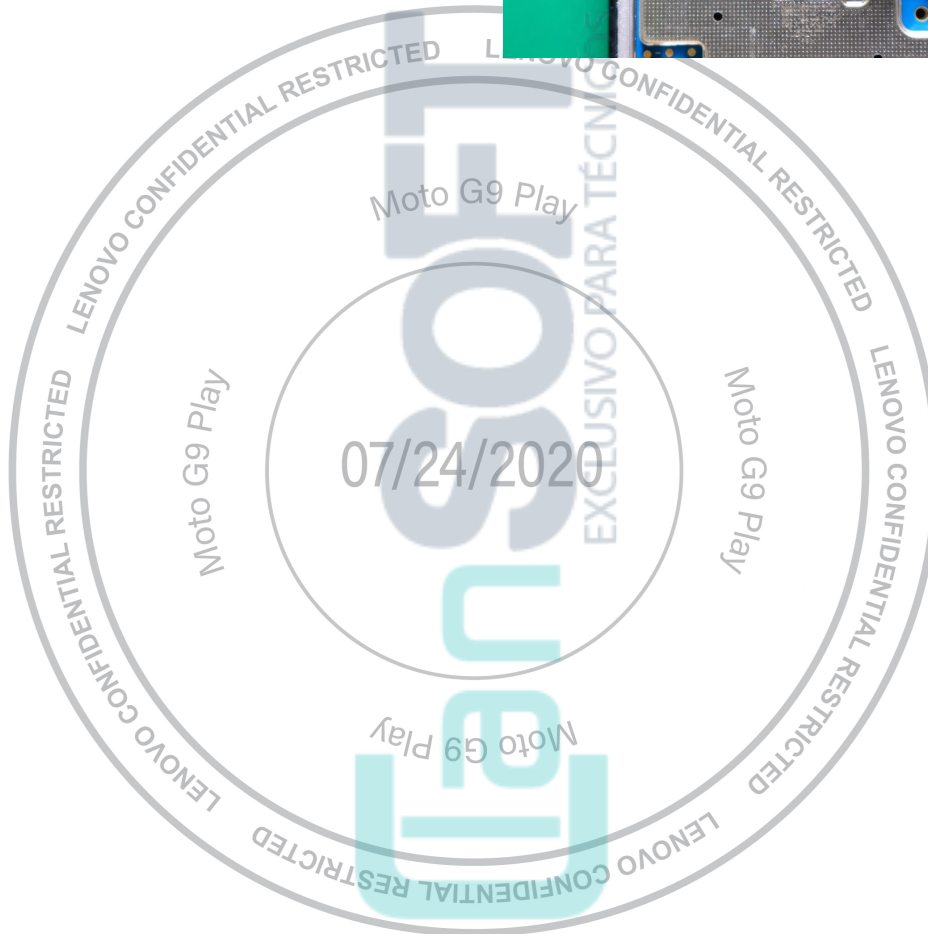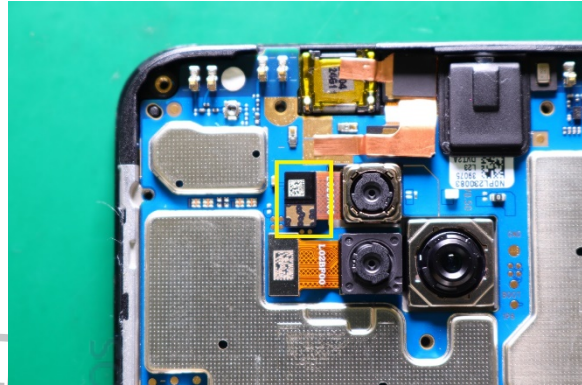


2M Rear-Facing Camera Conductive Sponge Removal

NOTE

After you remove the 2M Rear-Facing Camera Conductive Sponge, you cannot reuse it.



Use fingers to remove 2M Rear-Facing Camera Conductive Sponge from the location as shown.

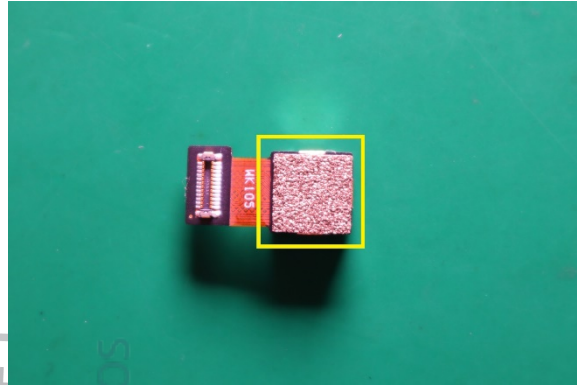


Front-Facing Camera Conductive Foam Removal

NOTE

After you remove the Front-Facing Camera Conductive Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Front-Facing Camera Conductive Foam from the location as shown.

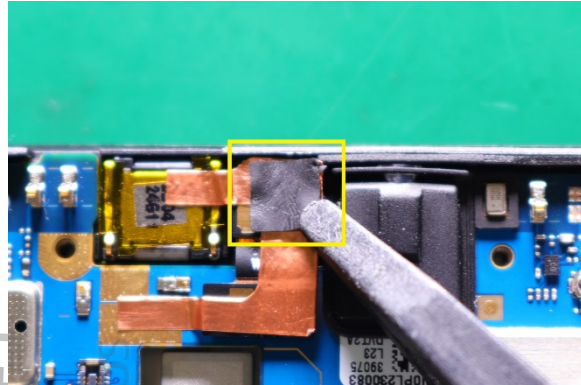


Front-Facing Camera Copper Foil Removal

NOTE

After you remove the Front-Facing Camera Copper Foil, you cannot reuse it.



Use the Plastic Tweezer to remove the Front-Facing Camera Copper Foil from the location as shown.

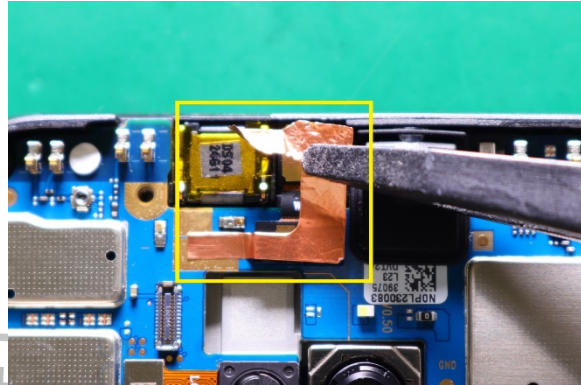



Front-Facing Camera Removal

NOTE

The Front-Facing Camera can be recovered and reused after removal.



Use fingers to remove the Front-Facing Camera from the Main PCB as shown.

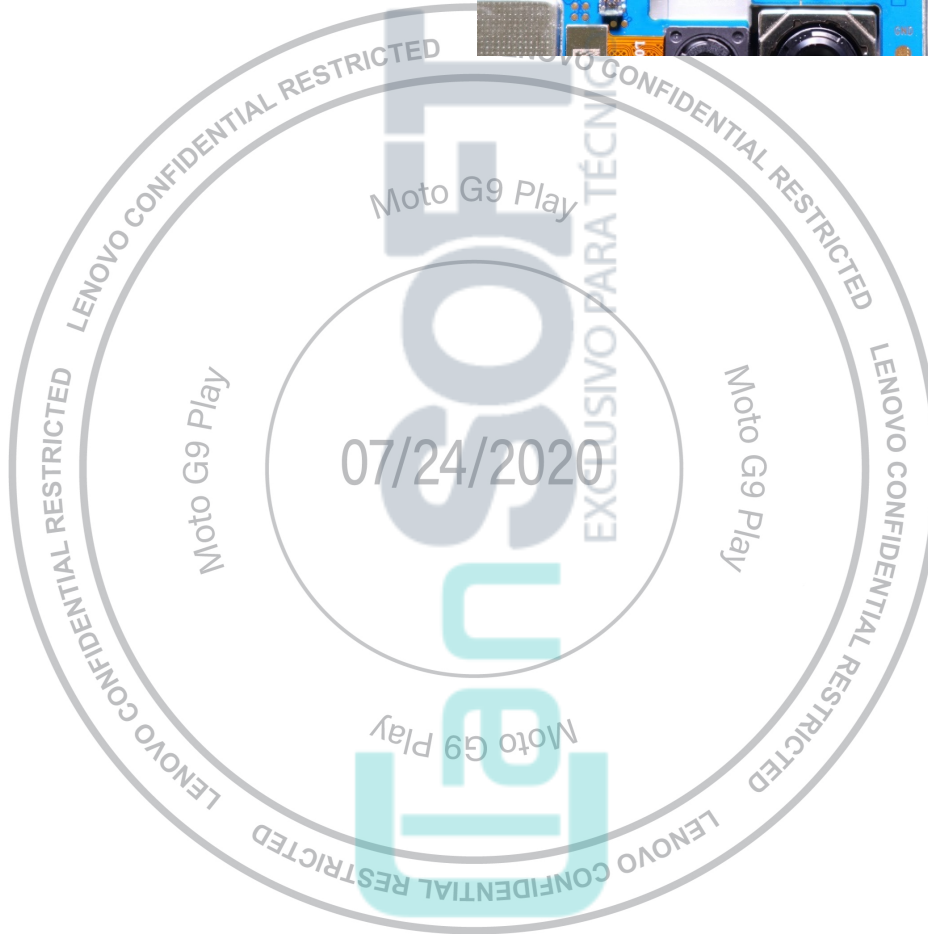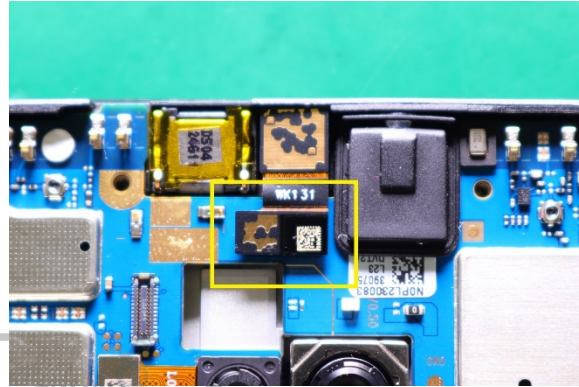


Main PCB Removal

NOTE


The Main PCB can be recovered and reused after removal.




1. Use the Plastic Tweezer to remove the Coax Cable from the location as shown.

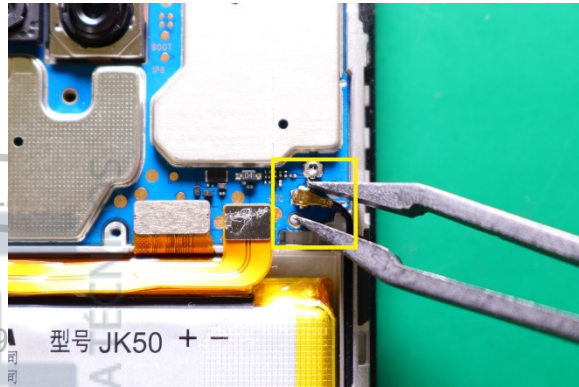

2. Use fingers to disengage Battery BtB Connector from the location as shown.

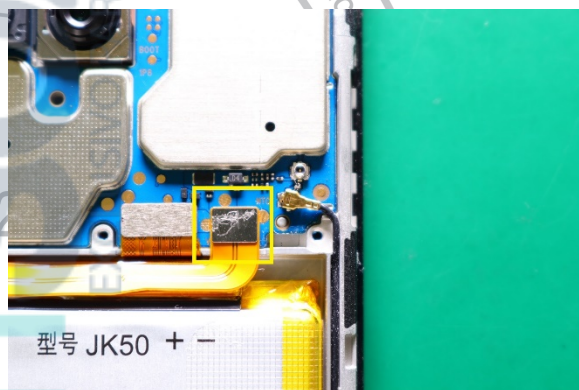


3. Use fingers to disengage Main Flex BtB Connector from the location as shown.

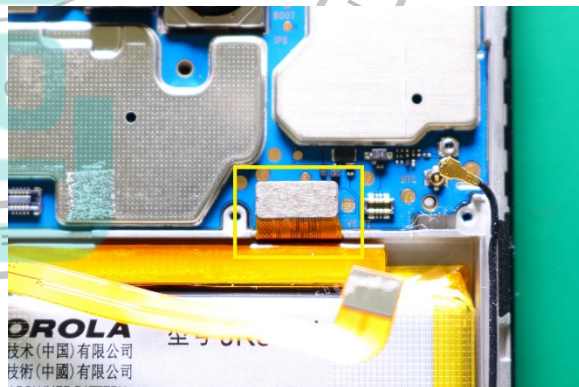


Lenovo Moto G9 Play Level 2 – Service and Repair Manual


4. Use fingers to disengage Display BtB Connector from the location as shown.

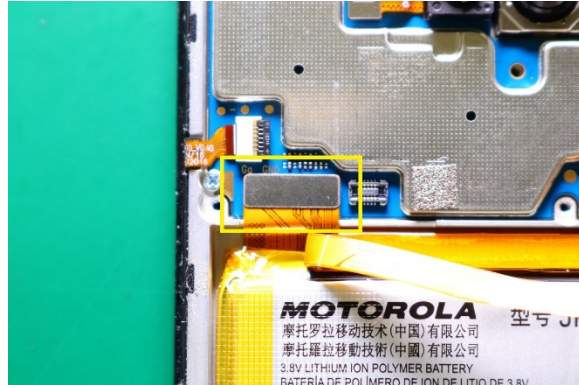

5. Use the flat end of the Black Stick to disengage the Side Key Flex from the location as shown.

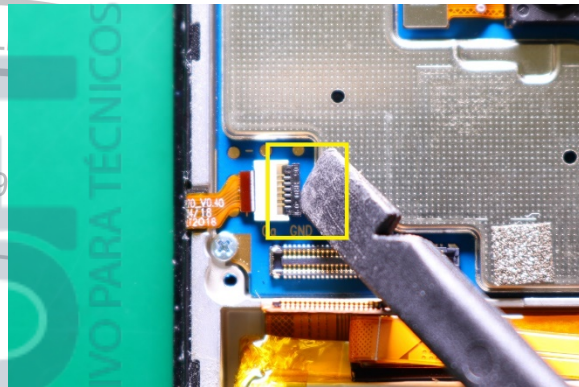


6. Use fingers to remove the Side Key from the location as shown.

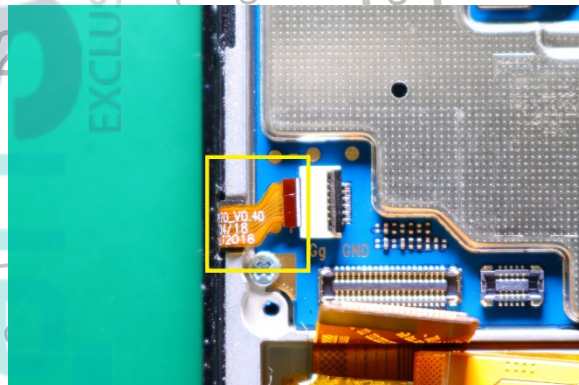

7. Use the Torque Driver with PH00 Bit to remove the two screws as shown.

/// WARNING ///


The screw cannot be reused after removal.

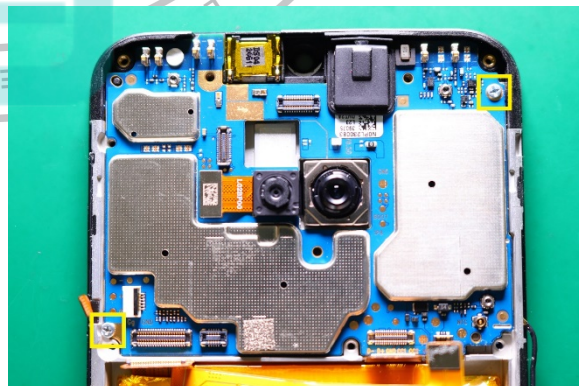

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

8. Use the pointed end of the Black Stick to lift the Main PCB from the location as shown.

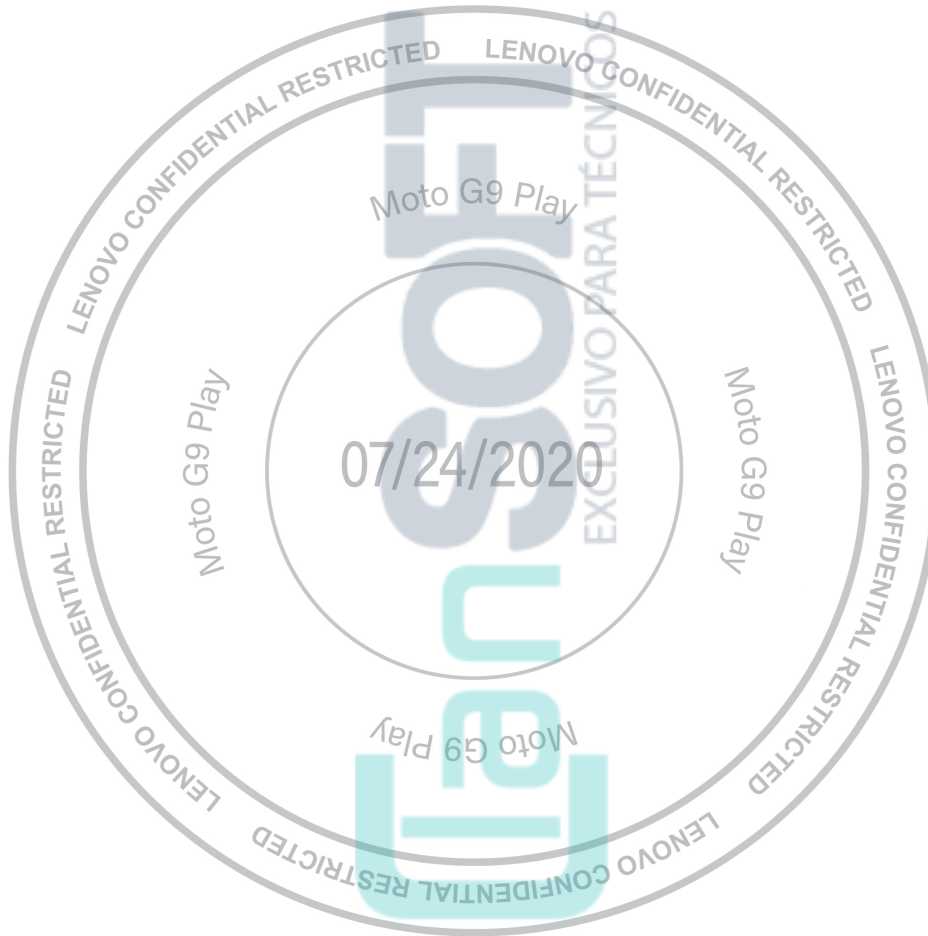


Receiver Insulated Mylar Removal

NOTE

After you remove the Receiver Insulated Mylar, you cannot reuse it.



Use the Plastic Tweezer to remove the Receiver Insulated Mylar from the location as shown.

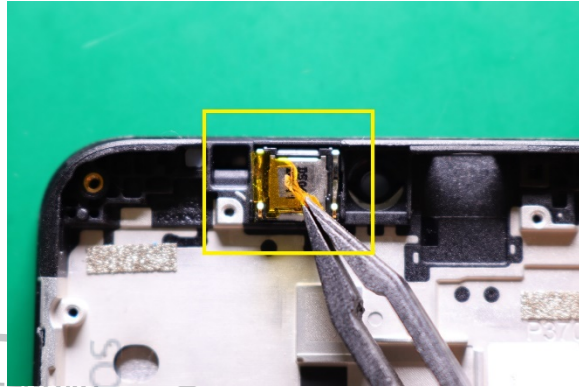


Receiver Removal

NOTE

The Receiver can be recovered and reused after removal.




1. Use the flat end of the Black Stick to lift the Receiver from the location as shown.

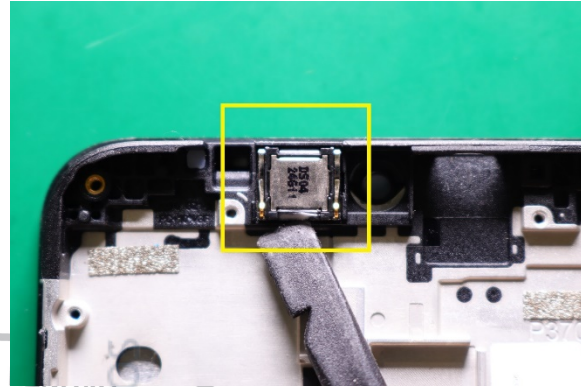

2. Remove the Receiver from the phone.

3. Inspect if the Receiver is undamaged.

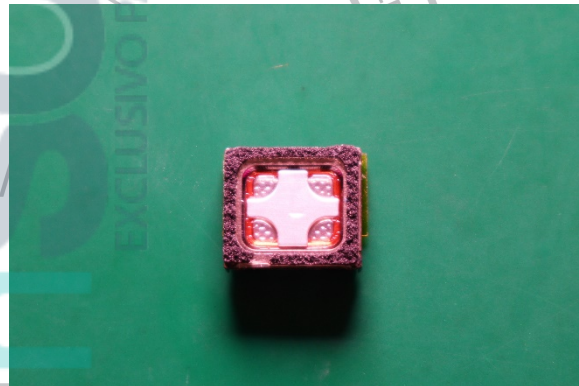


2M Macro Rear-Facing Camera Removal

NOTE

The 2M Macro Rear-Facing Camera can be recovered and reused after removal.




1. Use fingers to remove the 2M Macro Rear-Facing Camera from the location as shown.

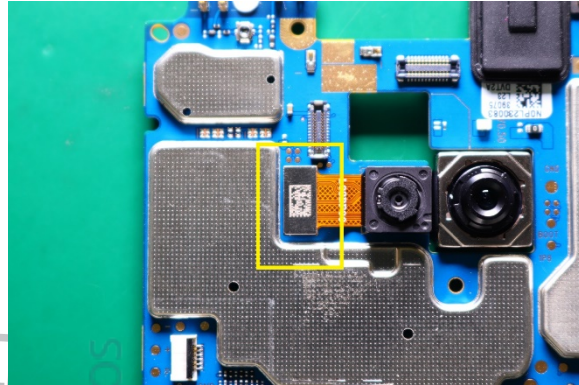

2. Use flat end of the Black Stick to remove the 2M Macro Rear-Facing Camera from the Main PCB as shown.

NOTE

Care the camera has back conductive adhesive.

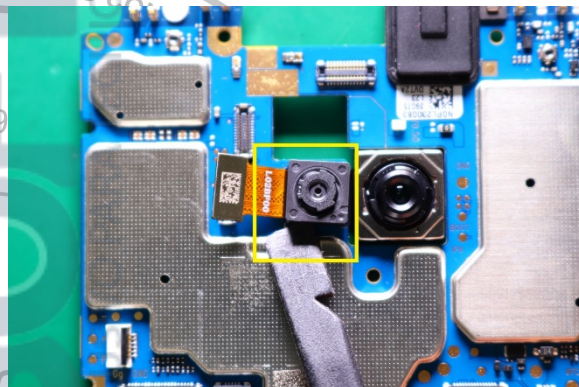



Rear-Facing Camera Conductive Adhesive Removal

NOTE

After you remove the Rear-Facing Camera Conductive Adhesive, you cannot reuse it.



Use fingers to remove the Rear-Facing Camera Conductive Adhesive from the location as shown.

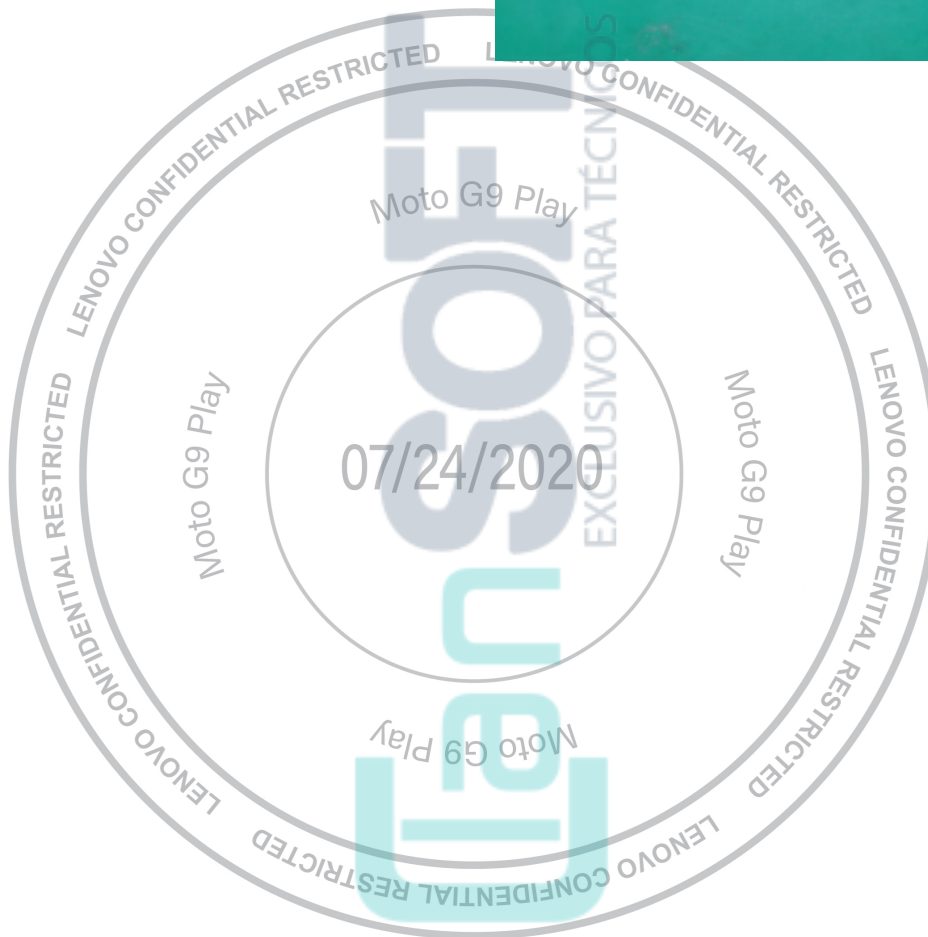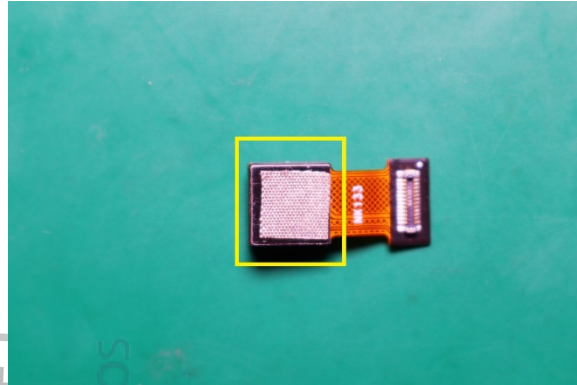


48M Rear-Facing Camera Removal

NOTE

The 48M Rear-Facing Camera can be recovered and reused after removal.



Use fingers to remove the 48M Rear-Facing Camera from the location as shown.

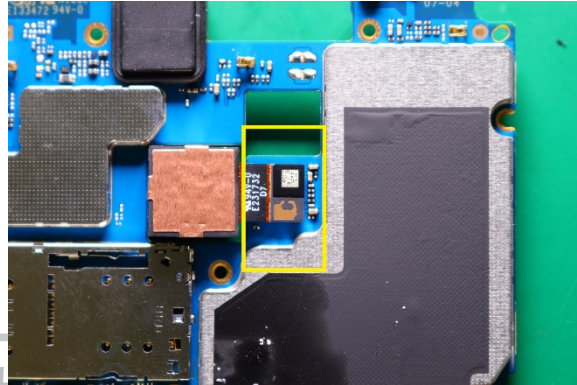


Audio Jack Grommet Removal

NOTE

The Audio Jack Grommet can be recovered and reused after removal.



Use the Plastic Tweezer to remove the Audio Jack Grommet from the location as shown.

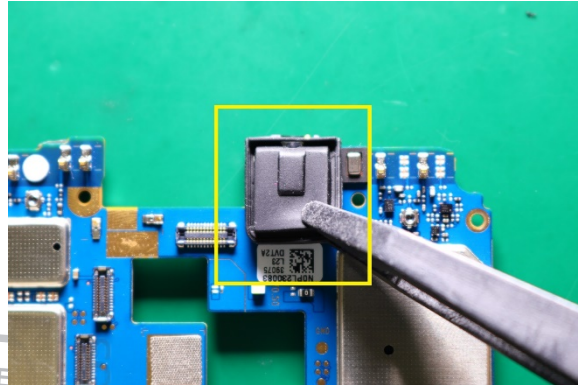


Secondary MIC Waterproof Foam Removal

NOTE

After you remove the Secondary MIC Waterproof Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Secondary MIC Waterproof Foam from the location as shown.

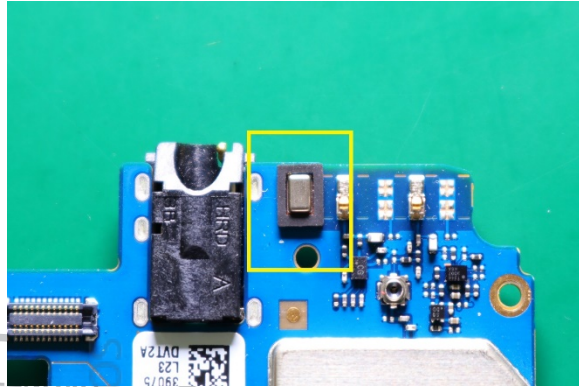



CPU Heat Spreader Removal

NOTE

After you remove the CPU Heat Spreader, you cannot reuse it.



Use the Plastic Tweezer to remove the CPU Heat Spreader from the Main PCB as shown.

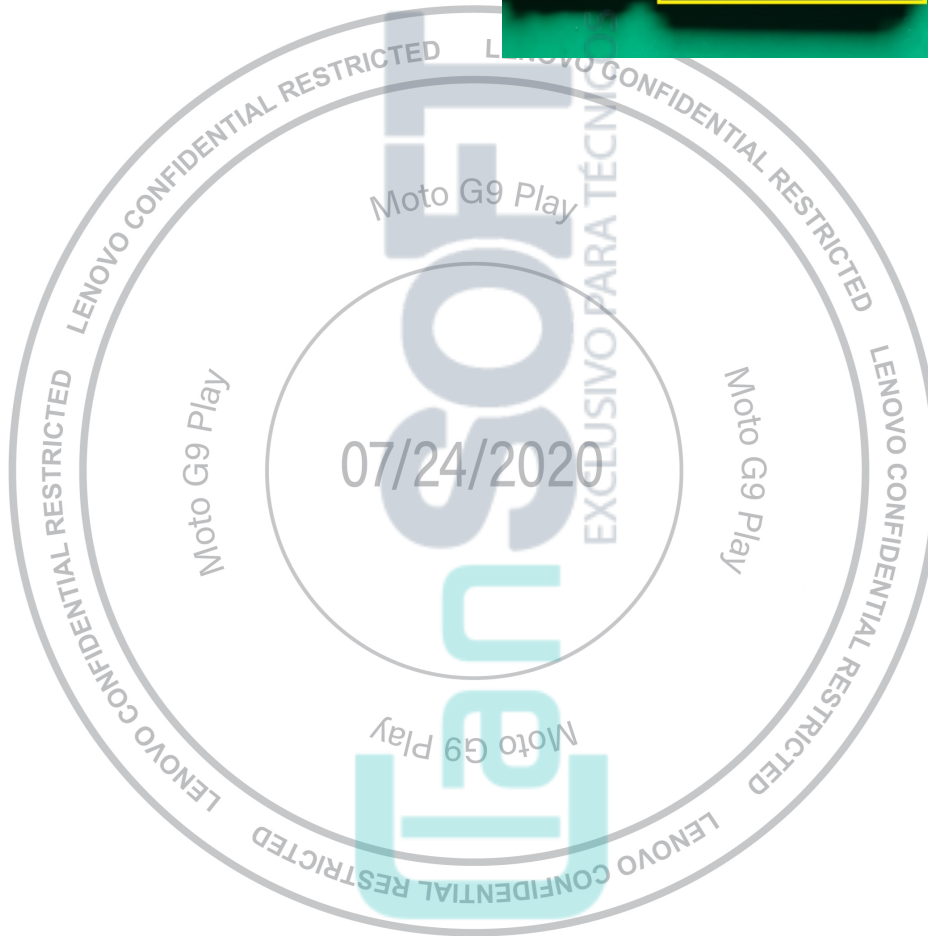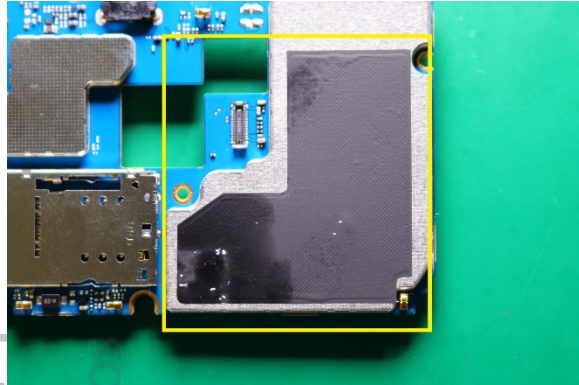


Thermal Silica Removal

NOTE

After you remove the Thermal Silica, you cannot reuse it.



Use the Plastic Tweezer to remove the Thermal Silica from the location as shown.

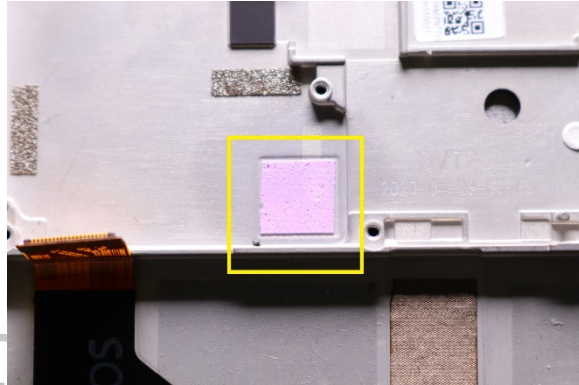



Charger Thermal Silica Removal

NOTE

After you remove the Charger Thermal Silica, you cannot reuse it.



Use the Plastic Tweezer to remove the Charger Thermal Silica from the location as shown.

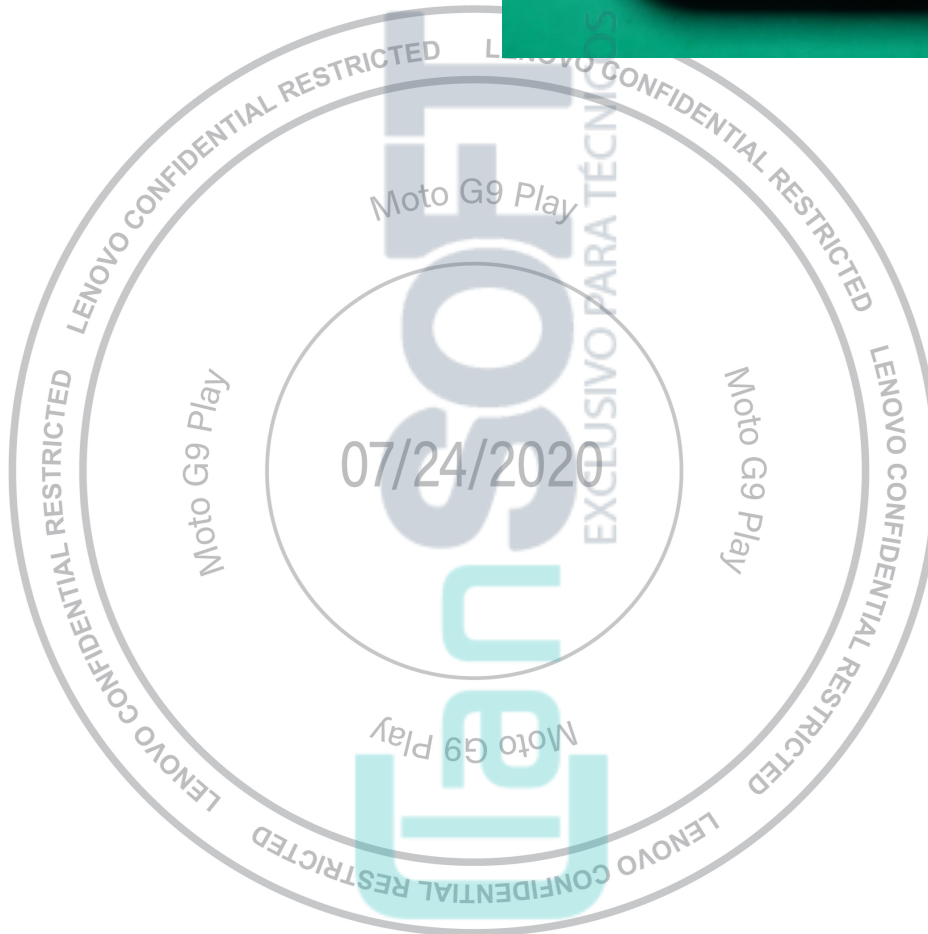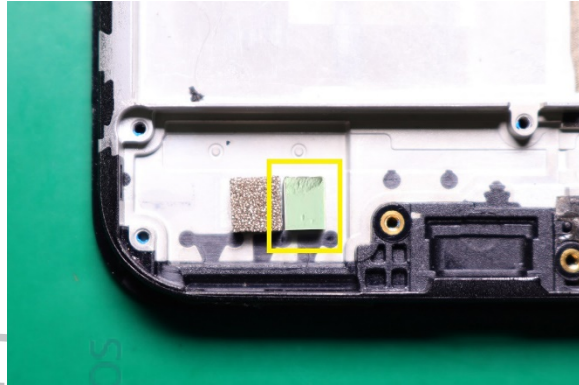



Speaker Box Conductive Foam Removal

NOTE

After you remove the Speaker Box Conductive Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Speaker Box Conductive Foam from the location as shown.

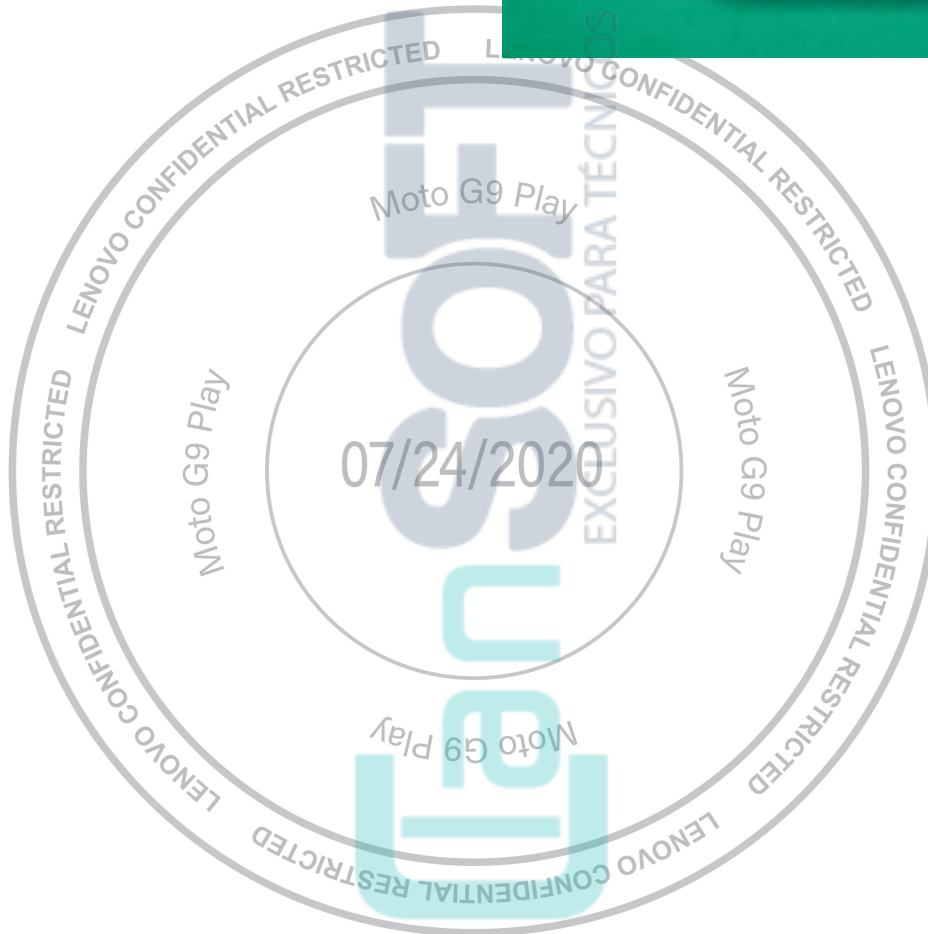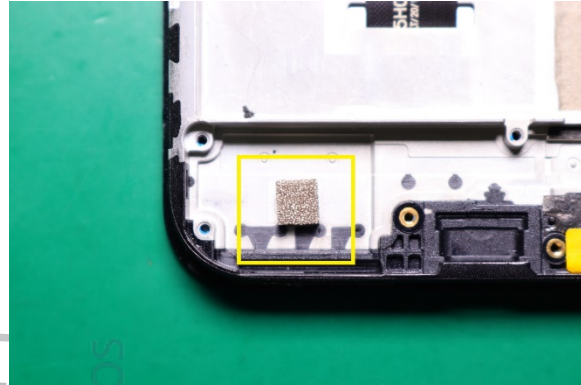


Sub Board Removal

NOTE


The Sub Board can be recovered and reused after removal.




1. Use the Plastic Tweezer to remove the Coax Cables as shown.

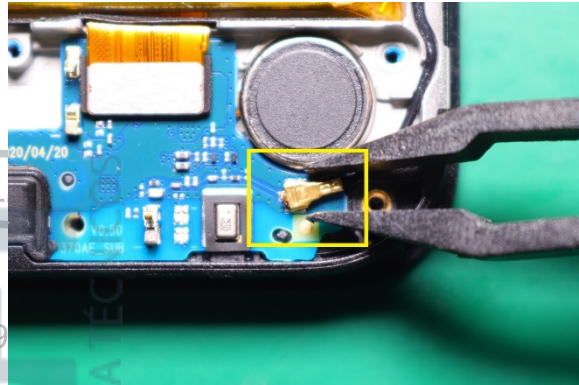

2. Use fingers to carefully disengage the Main Flex BtB Connector from the location on the Sub Board as shown.

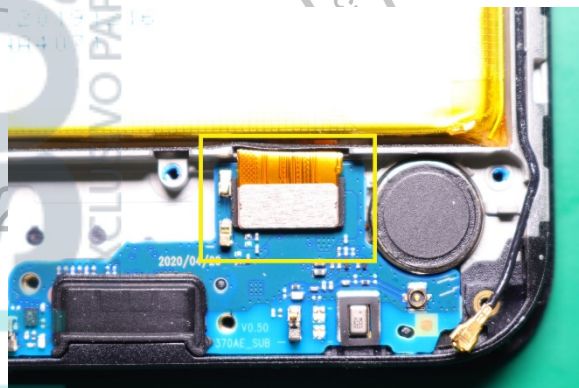

3. Use the flat end of the Black Stick to gently lift the Sub Board from the location as shown.

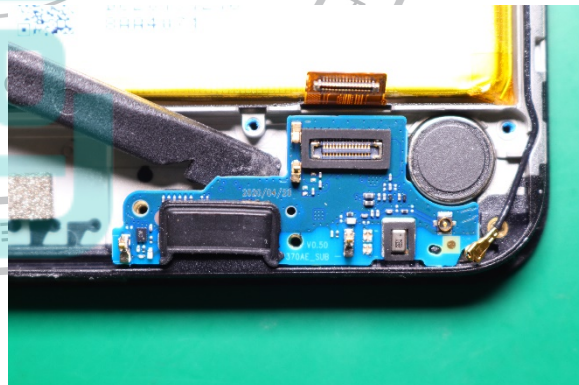



USB Grommet Removal

NOTE

The USB Grommet can be recovered and reused after removal.



Use the Plastic Tweezer to remove the USB Grommet from the Sub Board as shown.

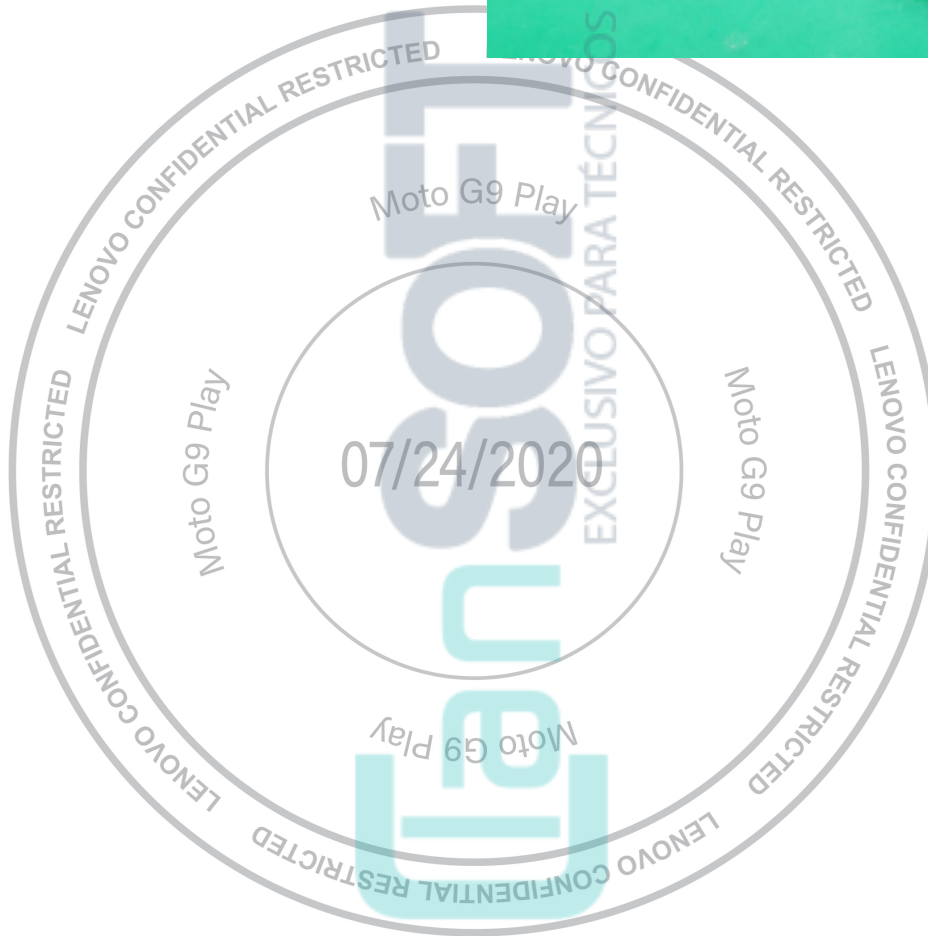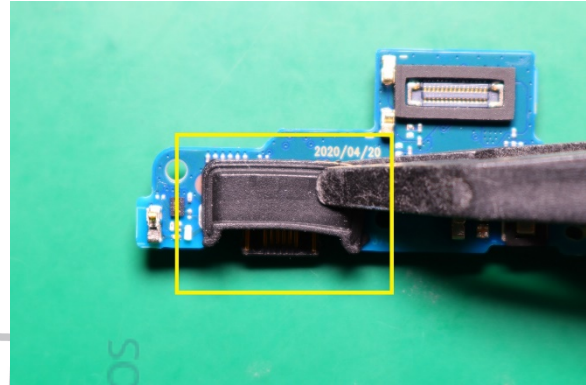



Primary MIC Waterproof Foam Removal

NOTE

After you remove the Primary MIC Waterproof Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Primary MIC Waterproof Foam from the location as shown.

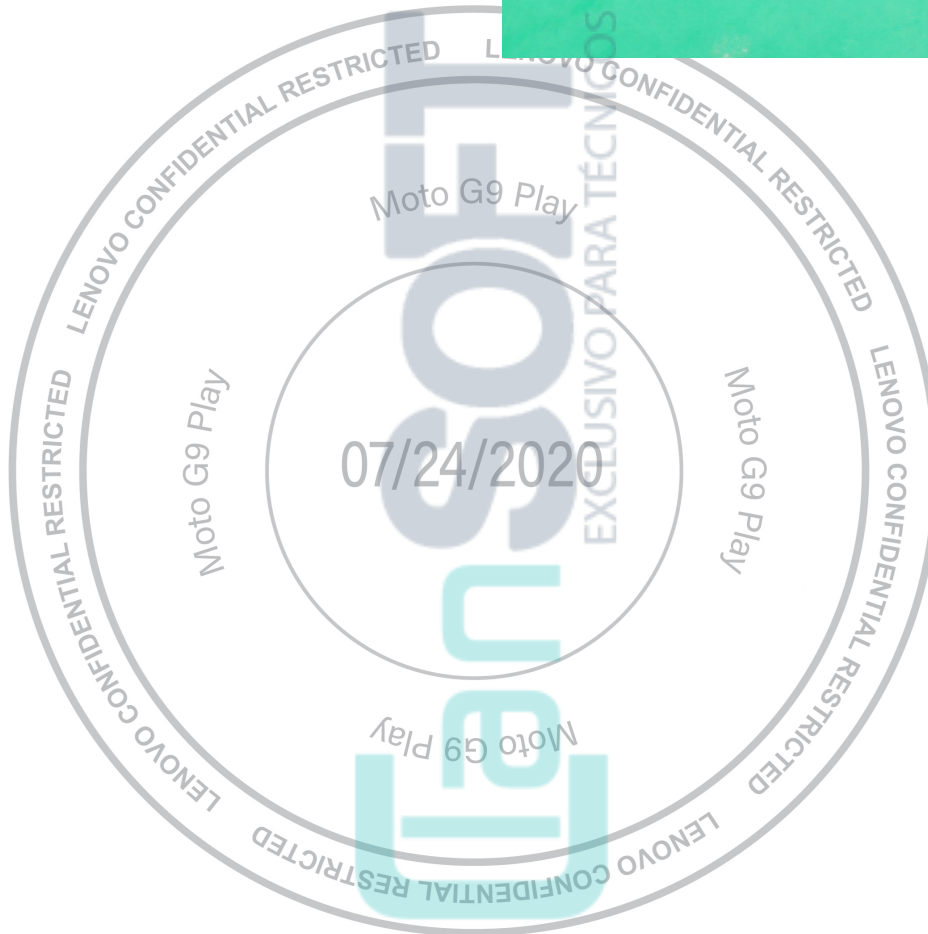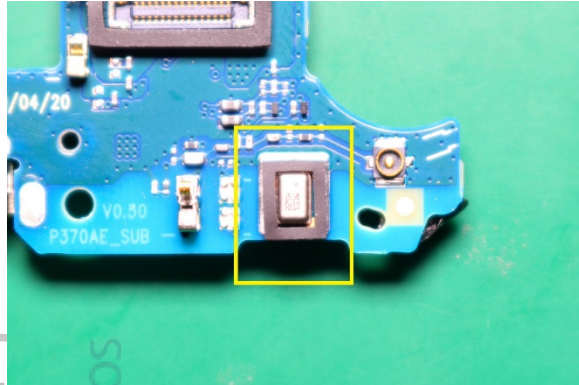


Vibrator Removal

NOTE

The Vibrator can be recovered and reused after removal.



Use the flat end of the Black Stick to gently disengage the Vibrator from the location as shown.

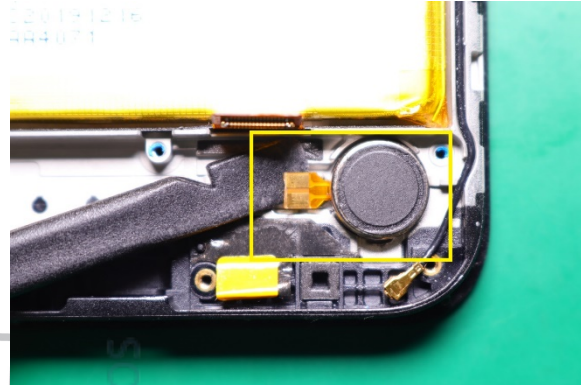


Coax Cable Removal

NOTE

The Coax Cables can be recovered and reused after removal.



Use the Plastic Tweezer to remove the Coax Cable from the location as shown.

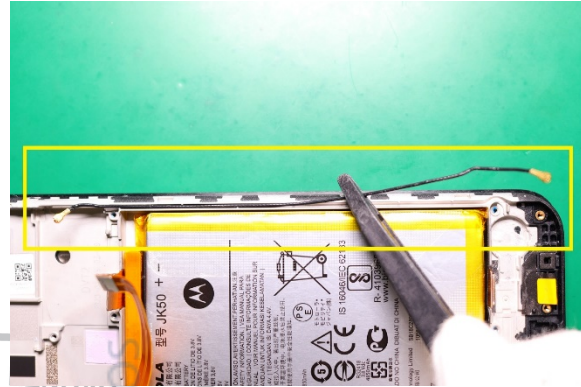

Battery Removal

/// WARNING ///

Failure to adhere to Safety Critical Note(s) may increase risk of rupture, burning, or failure to function safely when used by the customer. Refer to the Battery Safety Guidelines.

NOTE

The Battery can be recovered and reused after removal.



// CAUTION //

Handle the Battery Pack with care. If dropped on the floor, it may be internally damaged and must be scrapped.

Ensure Battery and its insulation are not damaged (e.g. scratched, dented, punctured) prior to and through assembly.

Prior to assembly, ensure Battery edges and surfaces are not dented or deformed, and that fixtures and parts that will contact the Battery are free of foreign material.

Ensure screws and screwdrivers do not contact the Battery.

1. Use the thin Plastic Spudger to cut adhesive from the top of the Battery.




2. Use the thin Plastic Spudger to cut adhesive from the sides of the Battery.




Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

3. Use fingers to pull out the Battery protection film and remove the Battery as shown.

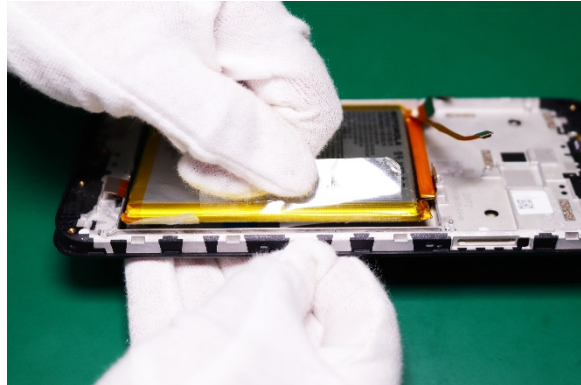

4. Inspect the battery is not deformed and can be reused.

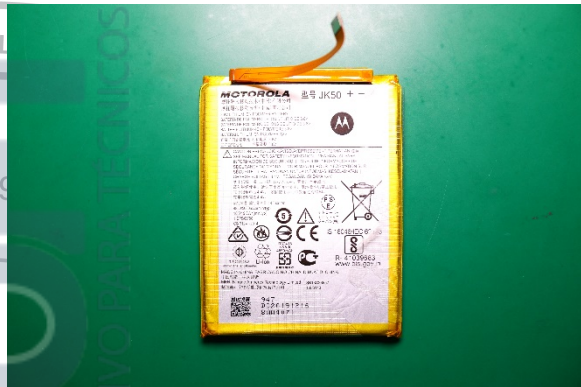


Battery Foam Removal

NOTE

After you remove the Battery Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Battery Foam from the location as shown.

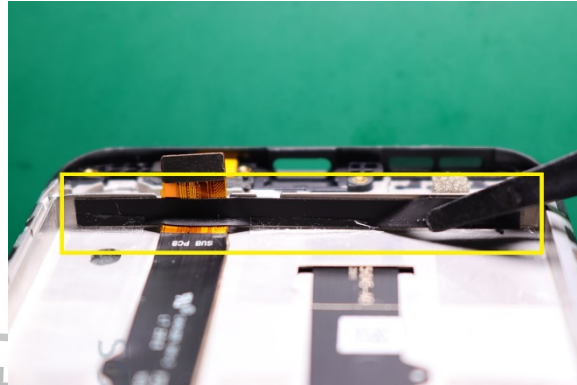


Main FPC Removal

NOTE

After you remove the Main Flex you cannot reuse it.



Use fingers to gently peel off the Main Flex as shown.

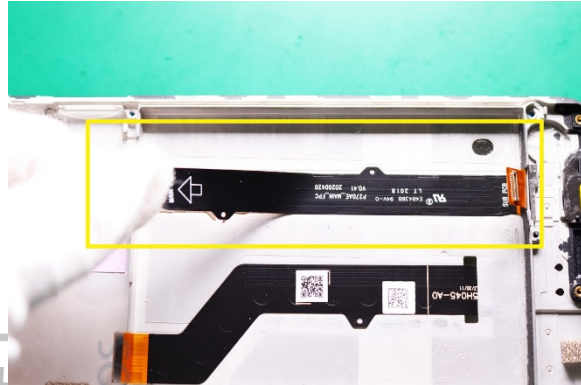


Rear-Facing Camera Lens Removal

NOTE

Remove the Rear-Facing Camera Lens only if it is defective or damaged.



Use the pointed end of the Black Stick to carefully disengage and push out the Rear-Facing Camera Lens from the location as shown.

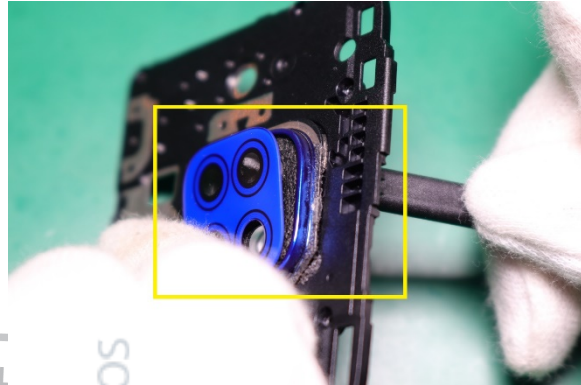



Fingerprint Sensor Conductive Foam Removal

NOTE

After you remove the Fingerprint Sensor Conductive Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Fingerprint Sensor Conductive Foam from the location as shown.

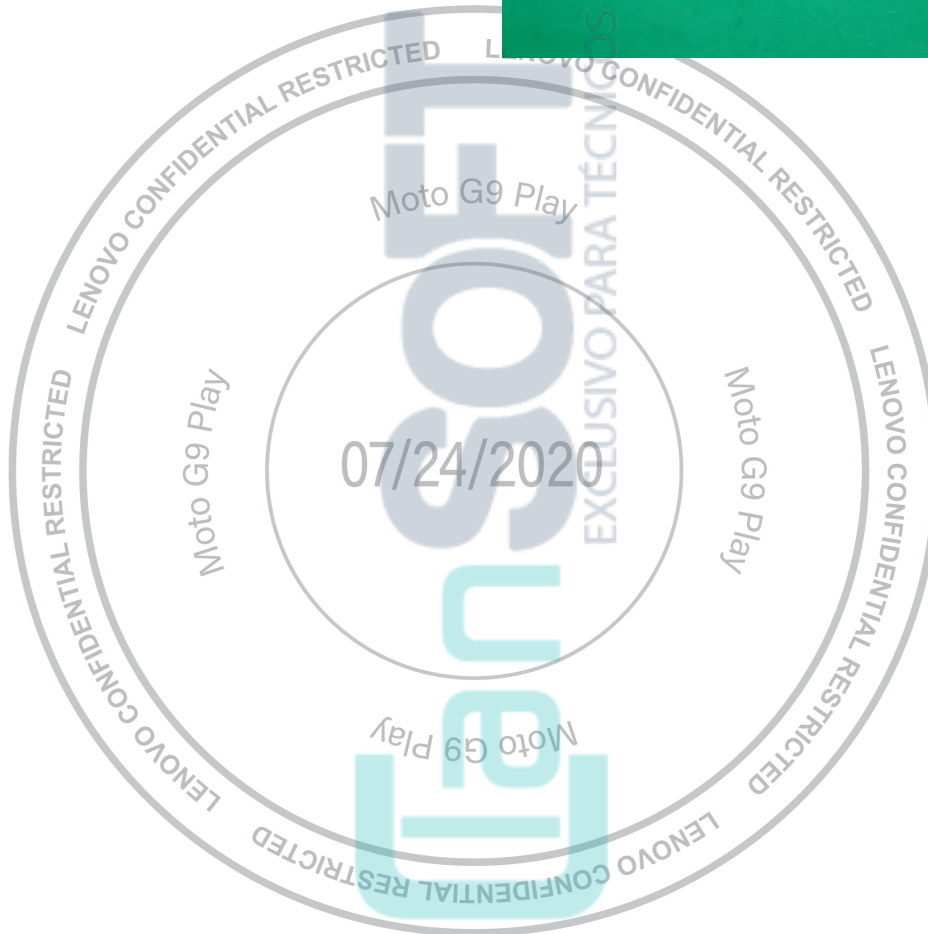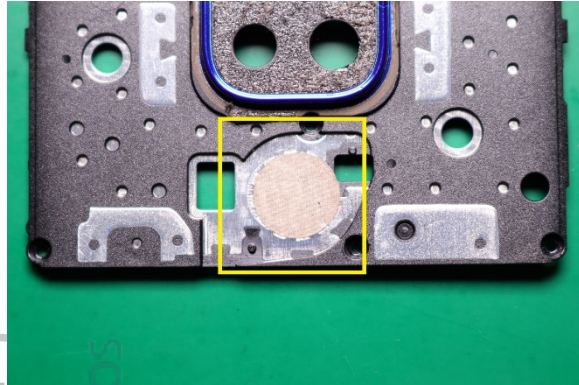


Side Key FPC Removal

NOTE

After you remove the Side Key FPC, you cannot reuse it.



Use the Plastic Tweezer to remove the Side Key FPC from the location as shown.

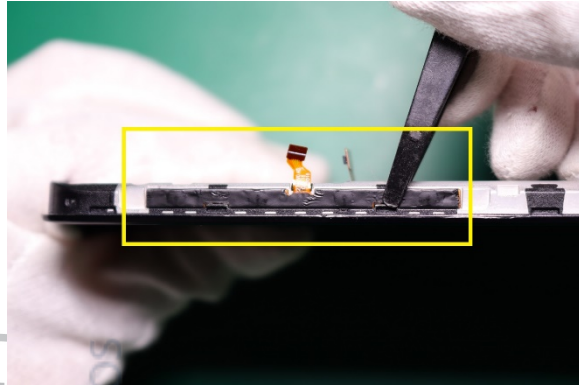


Side Key Waterproof Foam Removal

NOTE

After you remove the Side Key Waterproof Foam, you cannot reuse it.



Use the Plastic Tweezer to remove the Side Key Waterproof Foam from the location as shown.

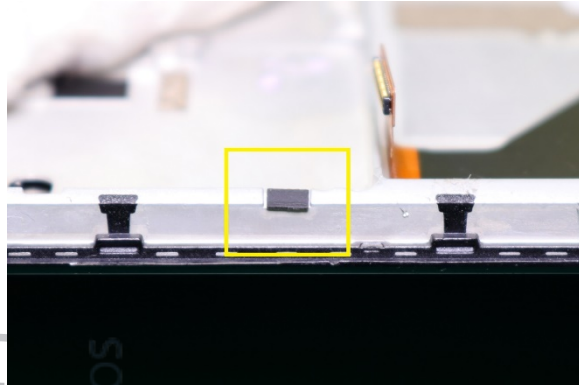


Receiver Sealed Foam Net Removal

NOTE

After you remove the Receiver Sealed Foam Net, you cannot reuse it.



Use the Plastic Tweezer to remove the Receiver Sealed Foam Net from the location as shown.

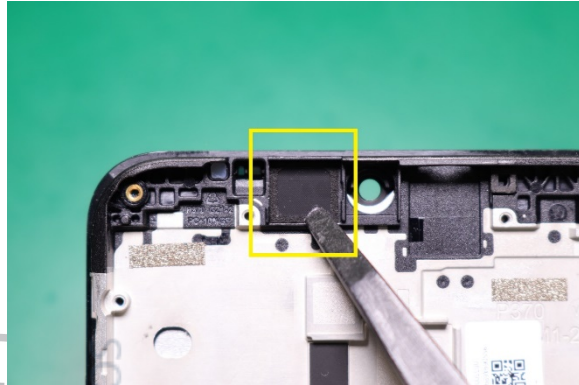


Silicon Light Guide Removal

NOTE

The Silicon Light Guide can be recovered and reused after removal.



Use the Plastic Tweezer to remove the Silicon Light Guide from the location as shown.

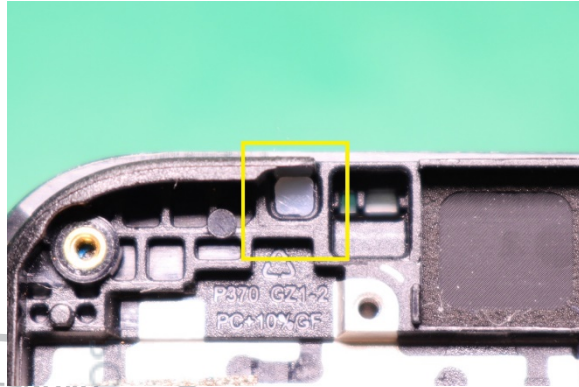



Sub Board Adhesive Removal

NOTE

After you remove the Sub Board Adhesive, you cannot reuse it.



Use the Plastic Tweezer to remove the Sub Board Adhesive from the location as shown.

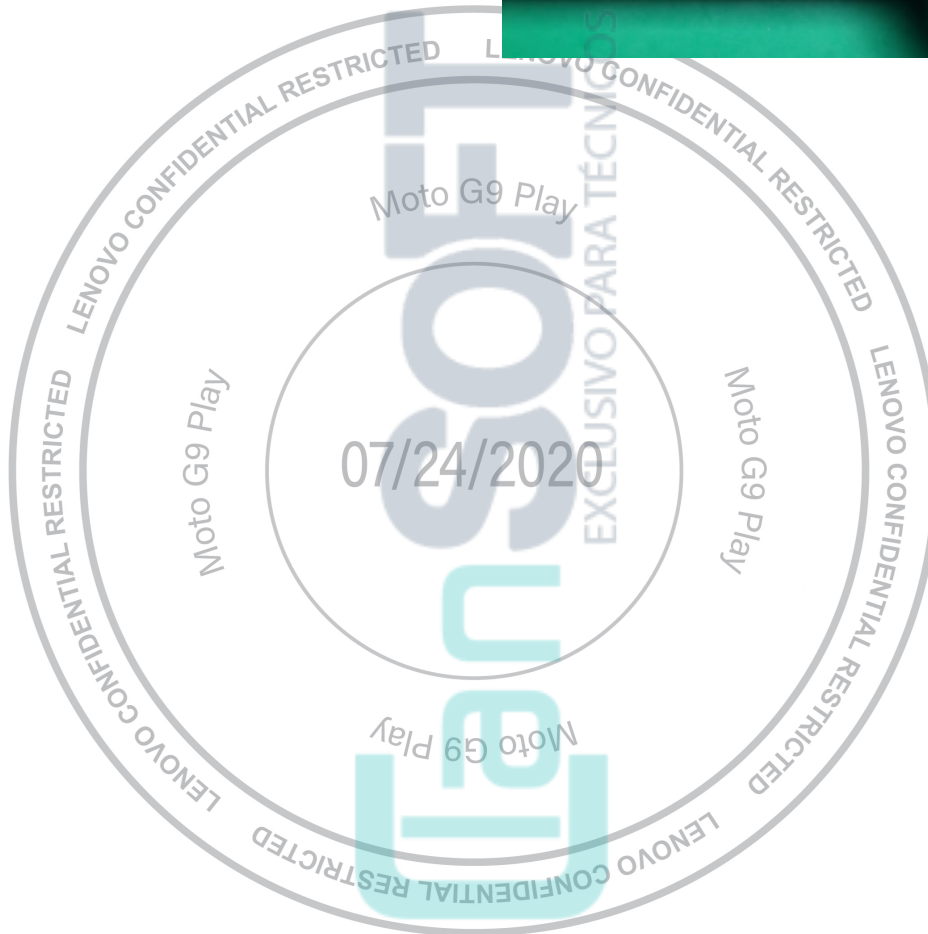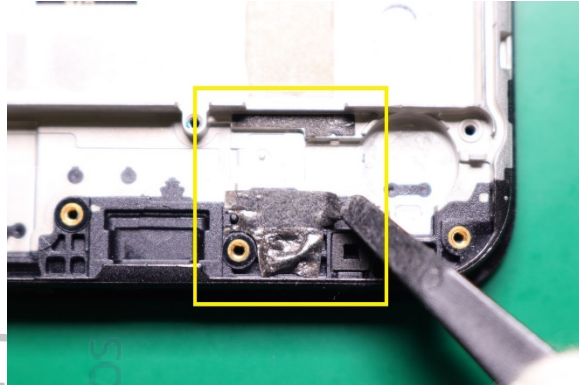


Sim Tray Grommet Removal

NOTE

After you remove the Sim Tray Grommet, you cannot reuse it.




Use the Plastic Tweezer to remove the Sim Tray Grommet from the location as shown.

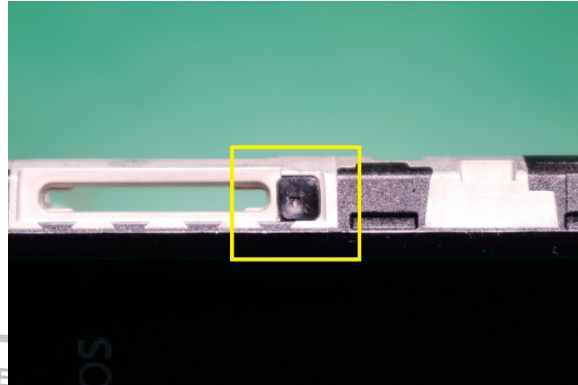

PARTS REFRESH

Tools Required for Parts Refresh

The following tools are required for parts refresh of the Moto G9 Play phone.


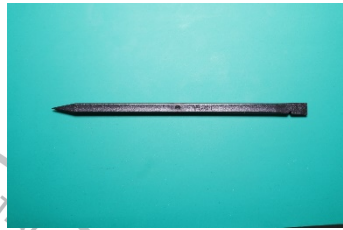
<i>Description</i>	<i>Part #</i>	<i>Image</i>
Plastic Tweezers	--	--
Black Stick	--	
ESD Mat	--	--
Wrist Strap	--	--
Isopropyl (ISP) Alcohol	--	--
Cotton Swabs	--	--
Cleaning Pads	--	--
Gloves or Finger Collets	--	--

Battery Inlay Cleaning

Use the ISP Alcohol and Cotton Swabs to remove all the adhesives on the Battery Inlay as shown.



/// CAUTION ///

Remove the adhesive carefully to avoid damage to the Battery Inlay.

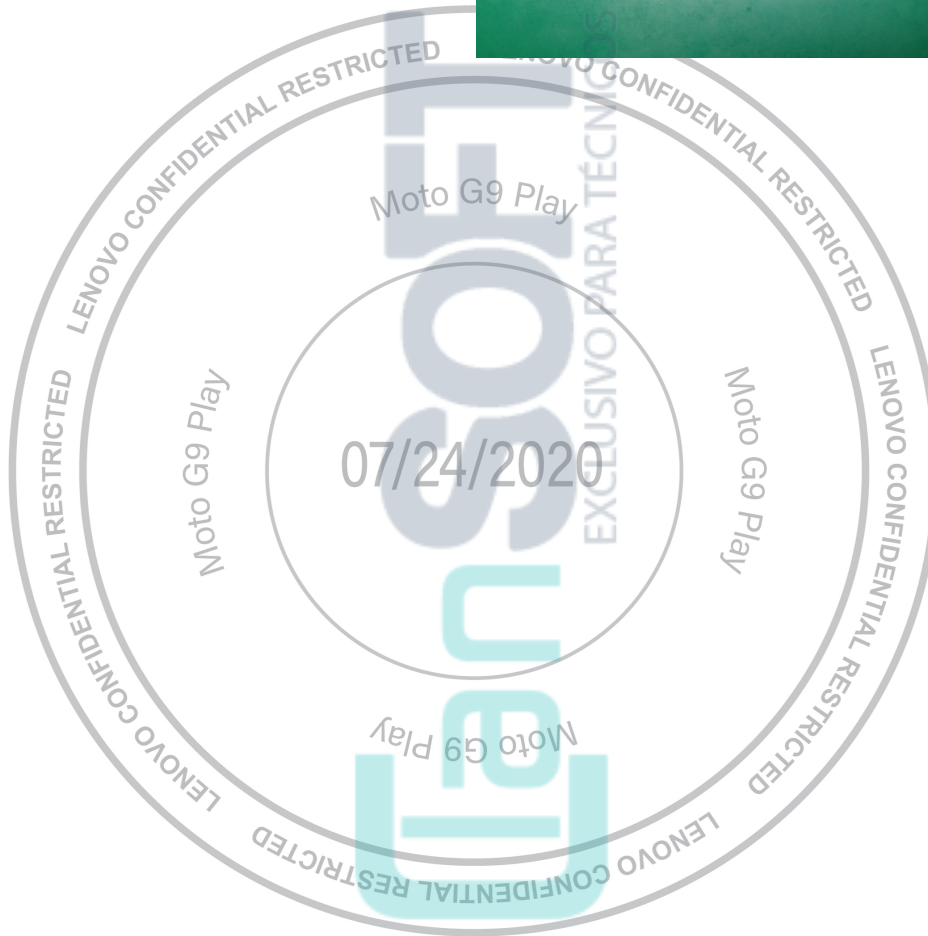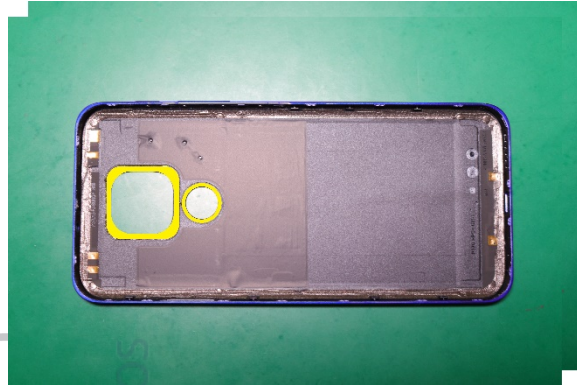


Front Housing Cleaning

Use the Cotton Swabs with ISP Alcohol to remove all the adhesives from the location as shown.

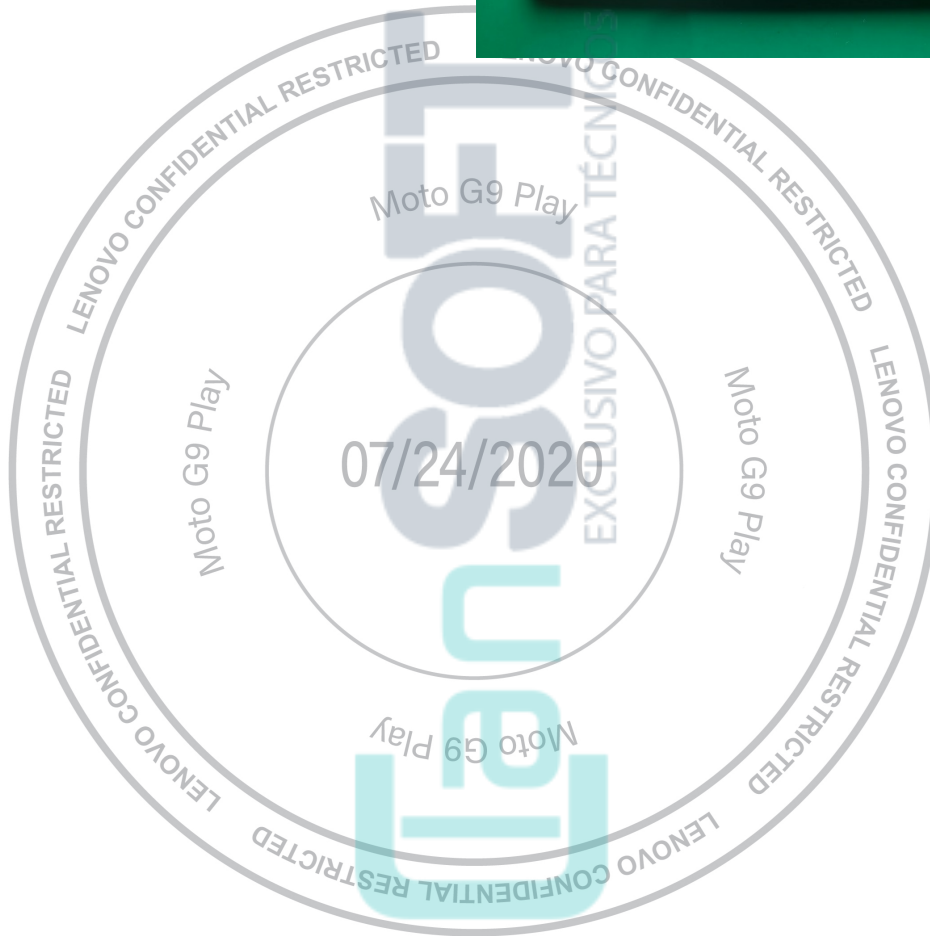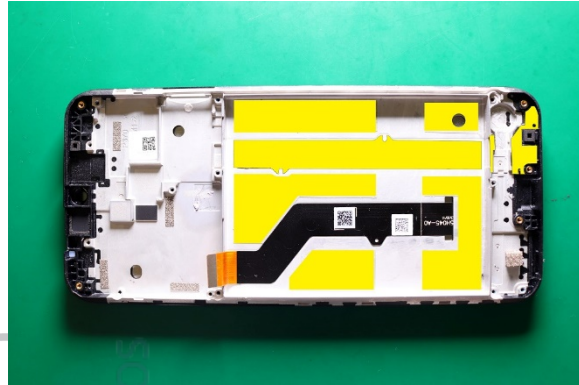


Top Bracket Cleaning

Use the Cotton Swabs with ISP Alcohol to remove all the adhesives from the location as shown.

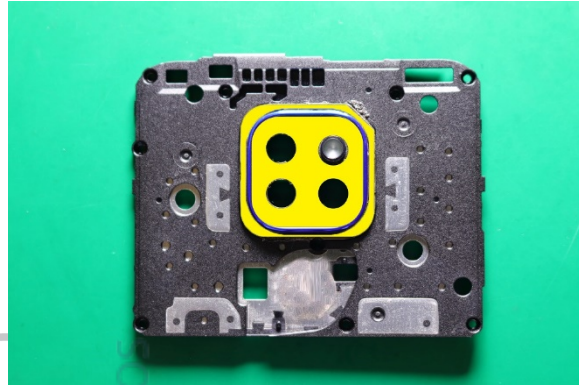




ASSEMBLY

Assembly Map

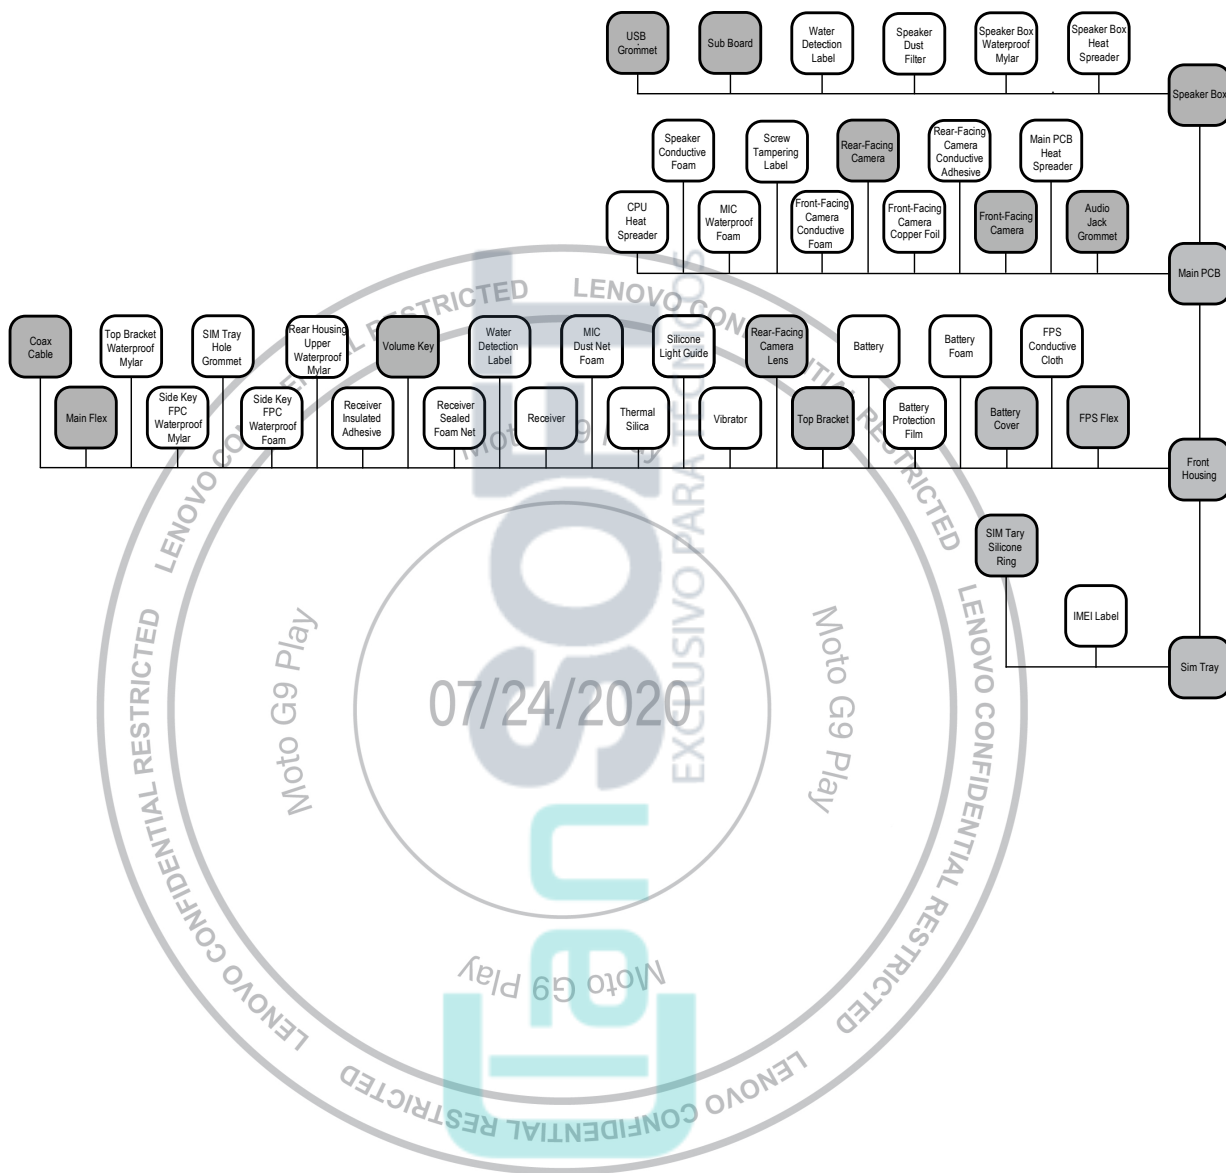

Tools Required for Assembly


The following tools are required to assemble the Moto G9 Play phone.
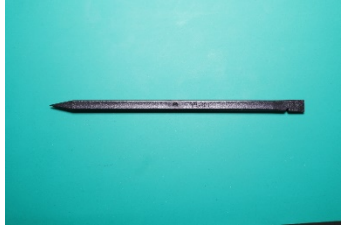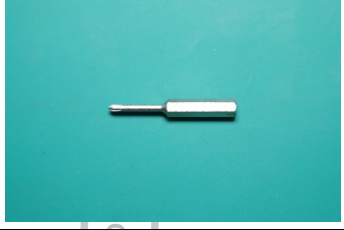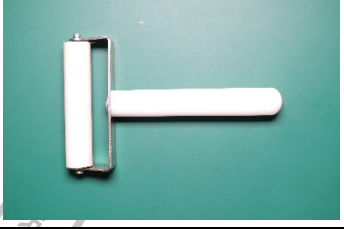
<i>Description</i>	<i>Part #</i>	<i>Picture/Drawing</i>
Black Stick	--	
Torque Driver	--	
PH00 Bit	--	
Manual Roller	--	
Plastic Tweezers	--	
Tweezers	--	
Gloves or Finger Collets	--	


Sim Tray Hole Grommet Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM716-BQE001-003+silicone sheet	-
TNM715-BQE001-010+silicone adhesive	-

1. Use Plastic Tweezer to place the Sim Tray Hole Grommet adhesive on the Front Housing as shown and peel off the liner.

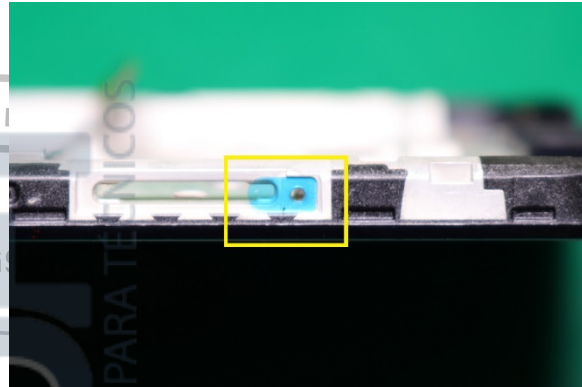


2. Use Plastic Tweezer to place the Sim Tray Hole Grommet on the Front Housing as shown.

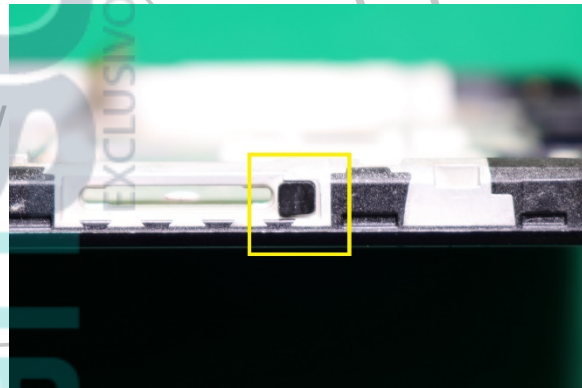

Side Key FPC Waterproof Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE000-028+Waterproof foam	-


Use the Plastic Tweezer to place the Side Key FPC Waterproof Foam on the location as shown.

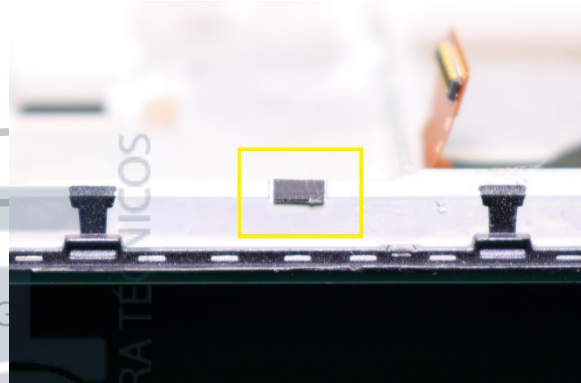

Side Key Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNN105-BQEB00-000+FPC_Sidekey_2_V0.2	18


Use the Plastic Tweezer to place the Side Key on the location as shown.

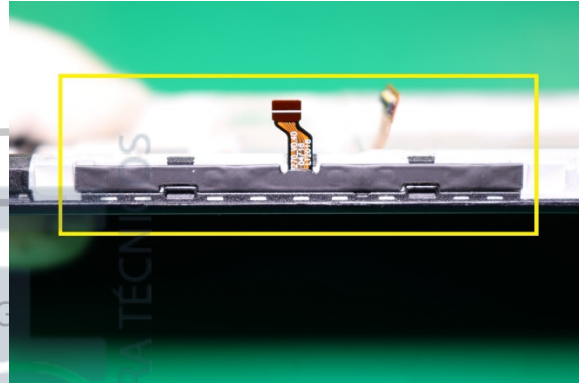

Silicone Light Guide Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM716-BQE000-002+silicone light guide	-


1. Use new Silicone Light Guide as shown.

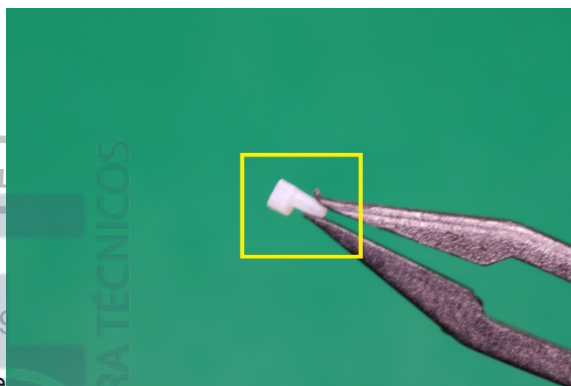

2. Use the Plastic Tweezer to place the Silicone Light Guide on the location as shown.

NOTE


The Silicone Light Guide is installed with the wide end facing down.

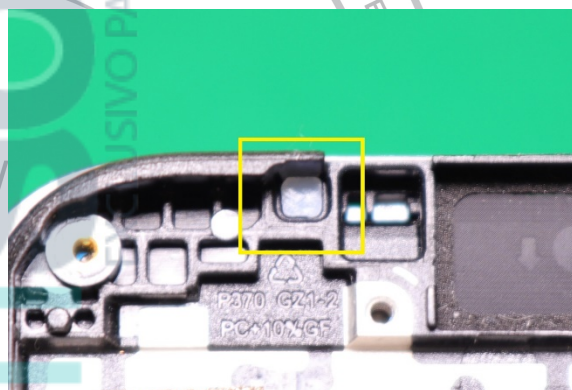

Thermal Silica Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM716-BQF001-001+P370AE Thermal silica	26


Use the Plastic Tweezer to place the Thermal Silica on the location as shown.

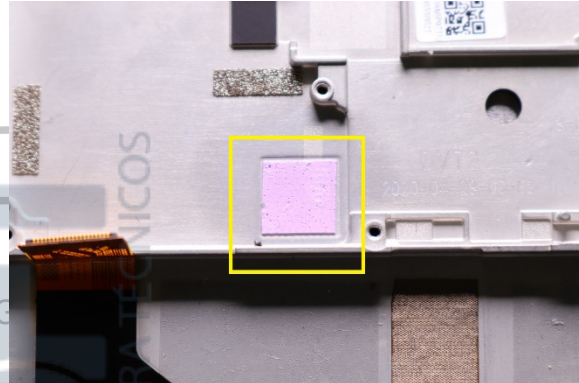

Water Detection Label Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNP316-096000-100+Water label	-


Use the Plastic Tweezer to place the Water Detection Label (WDL) on the Front-Housing as shown.

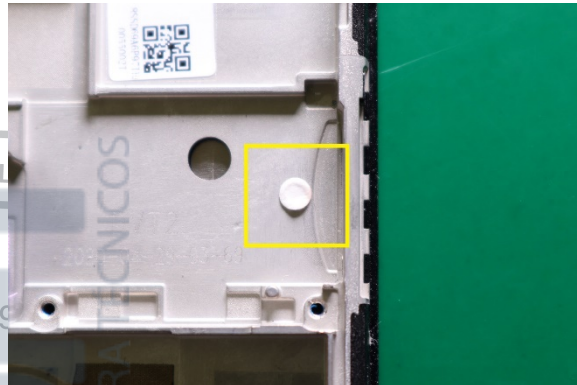

Speaker Box Conductive Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE000-001 + conductive sponge	-


Use the Plastic Tweezer to place the Speaker Box Conductive Foam on the location as shown.

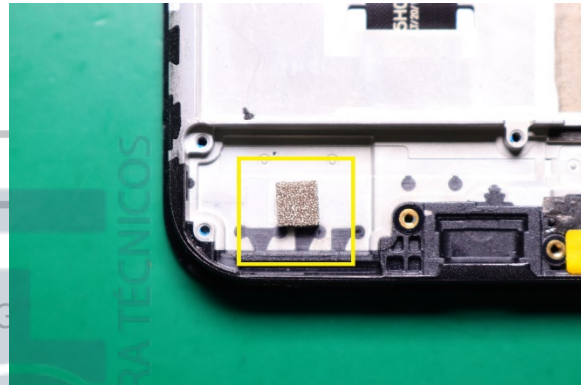

Charger Thermal Silica Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM716-BQE002-006+CHARGEThermal silica	-


Use the Plastic Tweezer to place the Charger Thermal Silica on the location as shown.

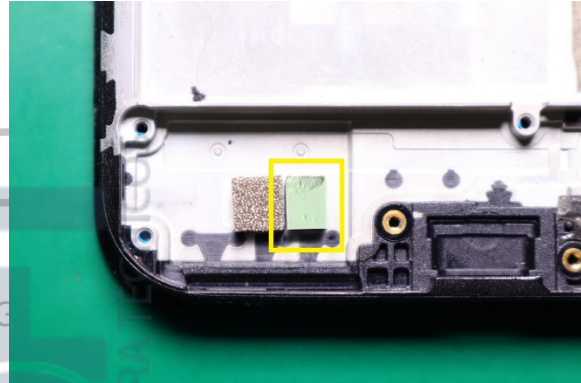

Vibrator Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNN901-BQF000-010+Coin Vibrator_JX	86


Use the Plastic Tweezer to place and secure the Vibrator on the location as shown.

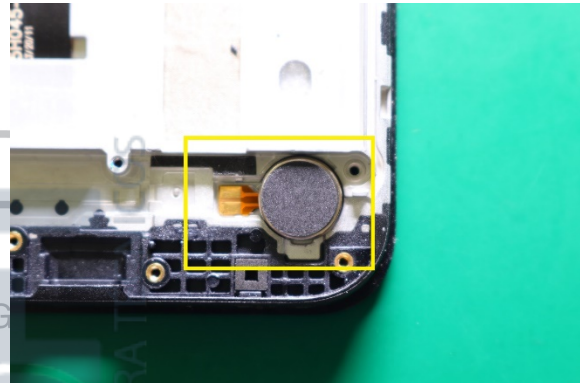

Water Detection Label Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNP316-096000-100+Water label	-


Use the Plastic Tweezer to place the Water Detection Label (WDL) on the Front-Housing as shown.

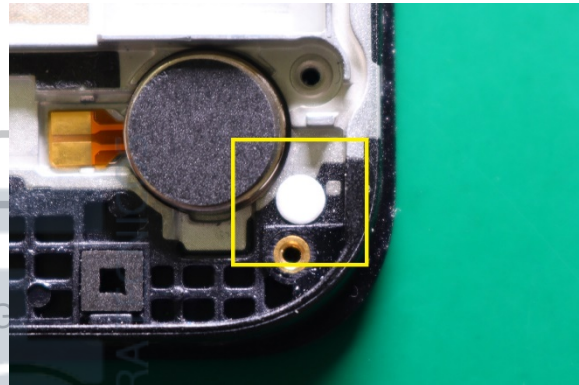

Receiver Sealed Foam Net Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE001-010+sealed foam net	12


Use the Plastic Tweezer to place the Receiver Sealed Foam Net on the location as shown and peel off the liner.

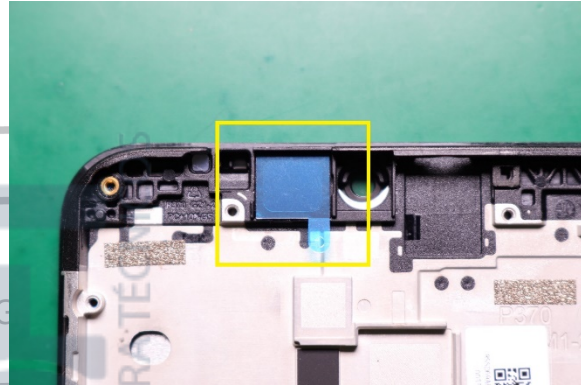

Receiver Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNN502-BQF000-010+shrapnel earpiece	34


Use the Plastic Tweezer to place the Receiver on the location aligning with the pins as shown.

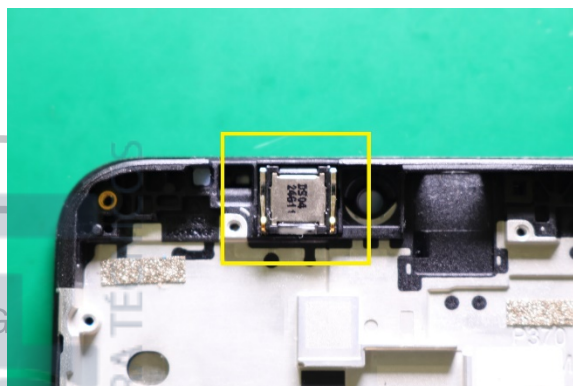

Receiver Insulated Adhesive Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNN502-BQF000-010+shrapnel earpiece	34
TNM701-BQE001-004+receiver insulated adh	36

Use the Plastic Tweezer to place the Receiver Insulated adhesive on the location as shown.

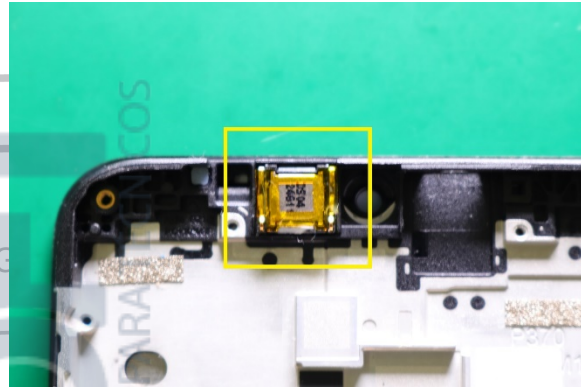

Receiver Insulated Adhesive Inspection

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNN502-BQF000-010+shrapnel earpiece	34
TNM701-BQE001-004+receiver insulated adh	36


Inspect the insulating tape is assembled to the appropriate position.

NOTE

Make sure that insulating tape is completely covered on the both sides of the receiver as marked in yellow.

NOTE


Make sure that insulating tape does not cover the metal part as marked in red.

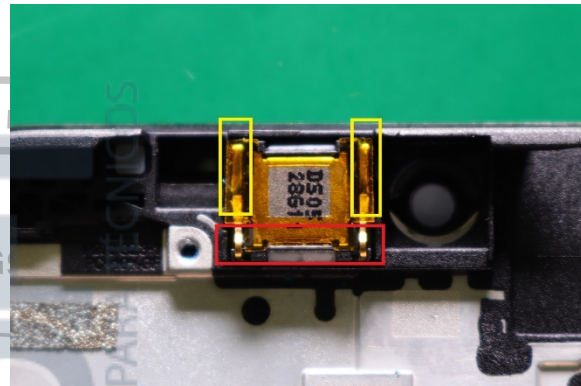

CPU Heat Spreader Assembly

Description	Reference #
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM721-BQF000-003+P370AEBBgraphite sheet	21


Use the Plastic Tweezer to place and secure the CPU Heat Spreader on the Main PCB as shown.

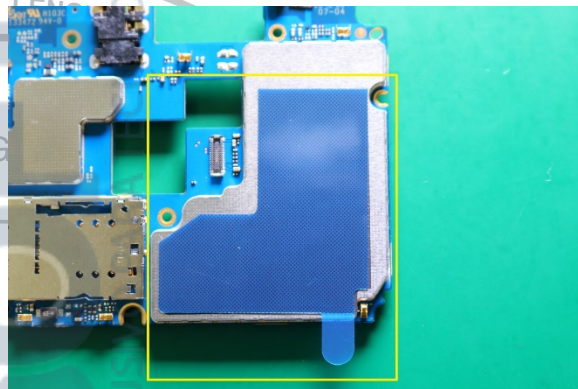

Audio Jack Assembly

Description	Reference #
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM716-BQE001-000+silicone cover	17


Use the Plastic Tweezer to place the Audio Jack on the location as shown.

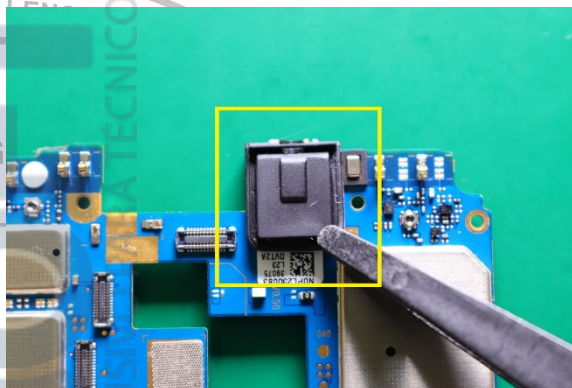

Water Detection Label Assembly

Description	Reference #
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNP316-096000-100+Water label	-


Use the Plastic Tweezer to place the Water Detection Label (WDL) on the Main PCB as shown.

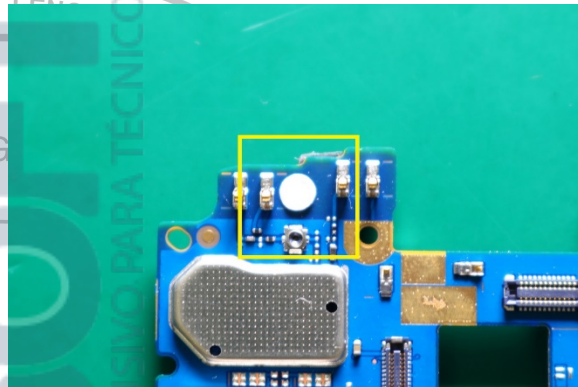

Secondary MIC Waterproof Foam Assembly

Description	Reference #
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM709-BQE000-027+waterproof foam	90


Use the Plastic Tweezer to place and secure the Secondary MIC Waterproof Foam on the location as shown.

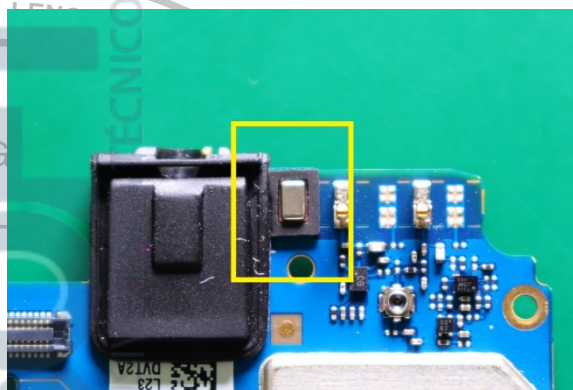

48M Rear-Facing Camera Assembly

Description	Reference #
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
MDL,CAMR,48M,after;LGM1AA0;O-FILM,AF:Gua	35


Use fingers to place and secure the 48M Rear-Facing Camera on the Main PCB as shown.

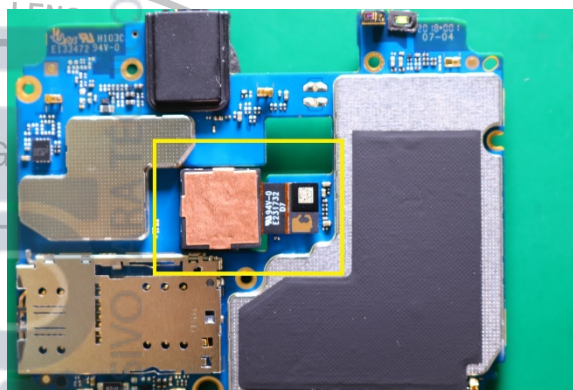

Main PCB Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19


Use fingers to place the Main PCB on the location as shown.

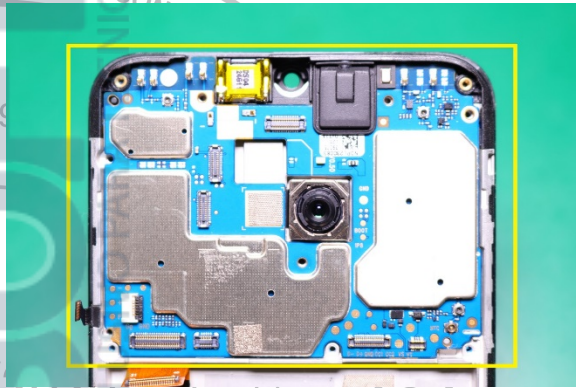

2M Depth Rear-Facing Camera Conductive Sponge Assembly

<i>Description</i>	<i>Reference #</i>
MDL,CAMR,2M,Rear,Nairobi;tacoma;FOV;Ofil	42
TNM709-BQF001-000+Posterior adhesive	41


Use fingers to place and secure the 2M Depth Rear-Facing Camera Conductive Sponge on the location as shown.

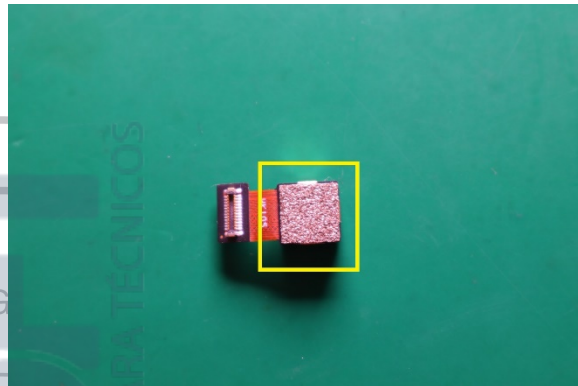


2M Depth Rear-Facing Camera Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
MDL,CAMR,2M,Rear,Nairobi,tacoma;FOV;Ofil	42
TNM501-211103-011+round head screw	64

1. Use fingers to place the 2M Depth Rear-Facing Camera on the Main PCB as shown.

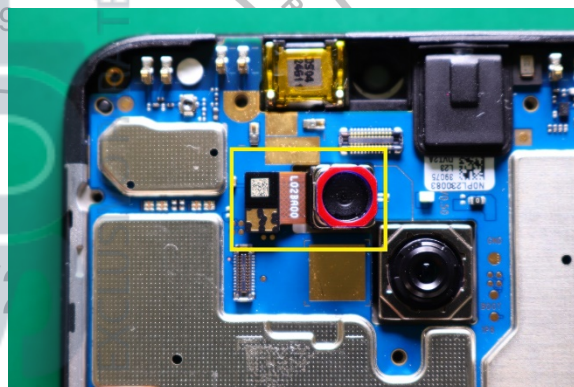


2. Use Torque Driver with PH00 Bit to tighten the two screws as shown.

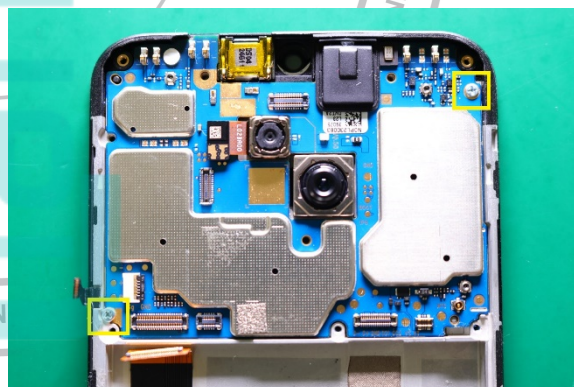

Rear-Facing Camera Conductive Adhesive Assembly

Description	Reference #
MDL,CAMR,2M,Rear,Nairobi;tacoma;FOV;Ofil	42
TNM715-BQF001-002+conductive adhesive	45


Use fingers to place and secure the Rear-Facing Camera Conductive Adhesive on the location as shown and peel off the liner.

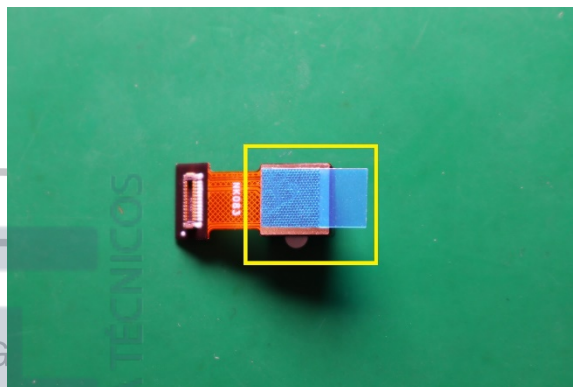

2M Macro Rear-Facing Camera Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM715-BQF001-002+conductive adhesive	45
MDL,CAMR,2MAF,Guam/Borneo/Odessa,L02BA00	48


Use fingers to place and secure the 2M Macro
Rear-Facing Camera on the Main PCB as shown.

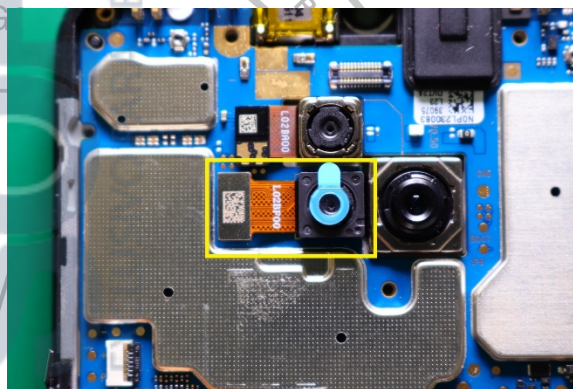

Primary MIC Waterproof Foam Assembly

Description	Reference #
XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	85
TNM709-BQE000-027+waterproof foam	90


Use the Plastic Tweezer to place the Primary
MIC Waterproof Foam on the location as shown.

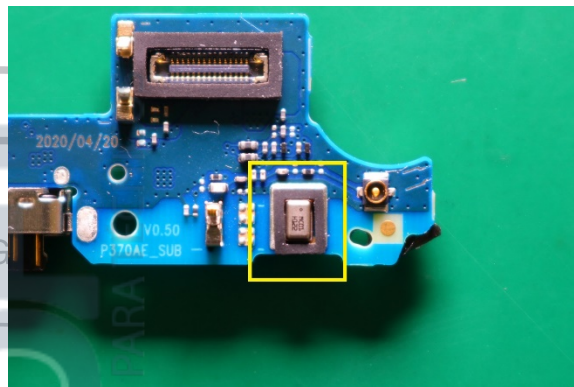

USB Grommet Assembly

Description	Reference #
XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	85
TNM716-BQF001-000+sealed silicone sleeve	87


Use the Plastic Tweezer to place and secure the USB Grommet on the Sub Board as shown.

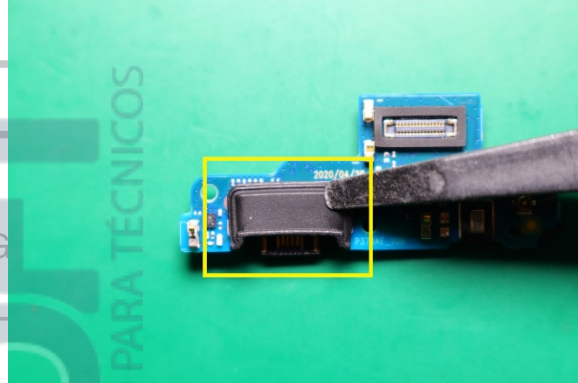

Sub Board Adhesive Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM715-BQF000-003+fixed adhesive	89


Use the Plastic Tweezer to place and secure the Sub Board Adhesive on the location as shown and peel off the liner.

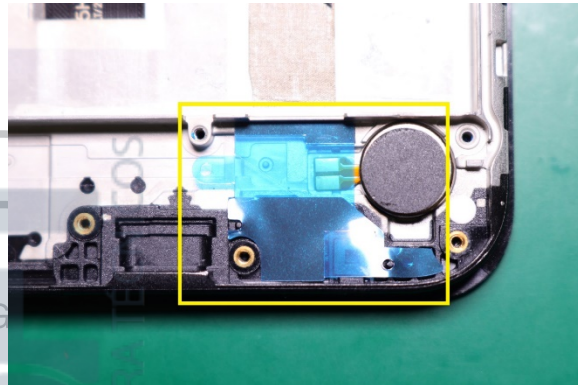

Sub Board Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	85


Use fingers to place the Sub Board on the location as shown.

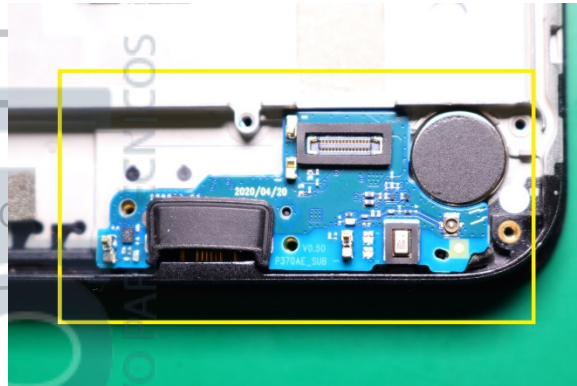


Main FPC Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNN800-BQE000-000+MAINFPC_V0.2	83
XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	85

1. Use fingers to place and secure the Main Flex BtB Connector on the Sub Board as shown.

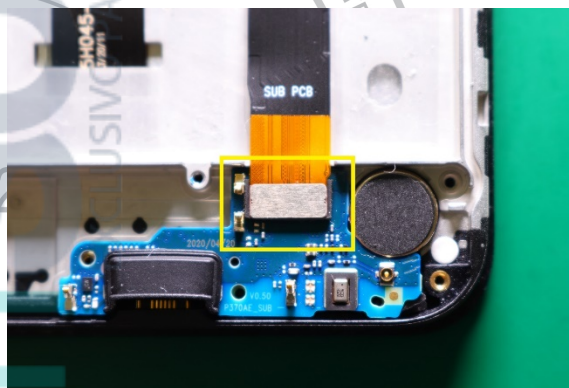


2. Use the Plastic Tweezer to peel off the liner from the bottom of the Main FPC as shown.

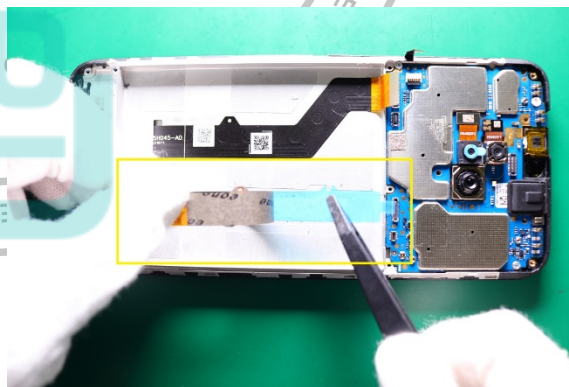

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual


3. Use fingers to place and secure the Main Flex BtB Connector on the Main PCB as shown.

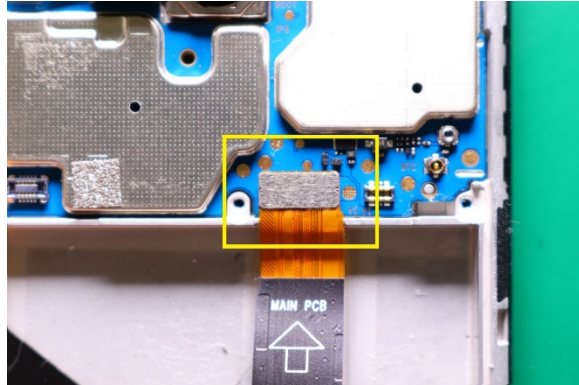


4. Use fingers to carefully place the Main Flex on the phone as shown, sticky side down.

NOTE


Be sure the printing on the Main Flex is oriented in relation to the Front Housing as shown.

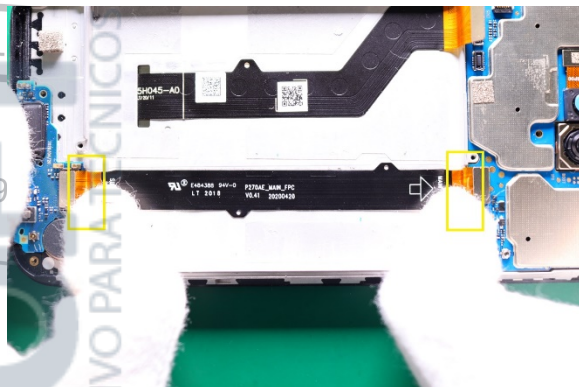

5. Use fingers to place the Display BtB Connector on the Main PCB as shown.

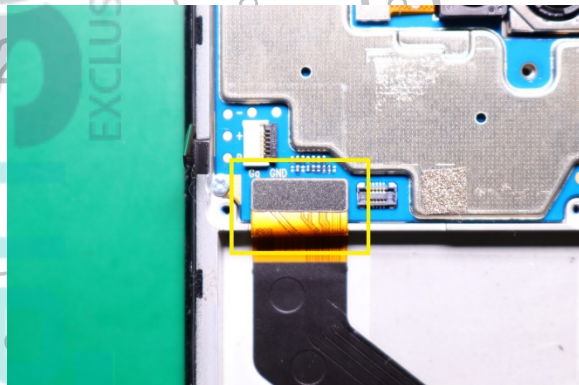



6. Use the Plastic Tweezer to place the Side Key BtB Connector on the Main PCB as shown.

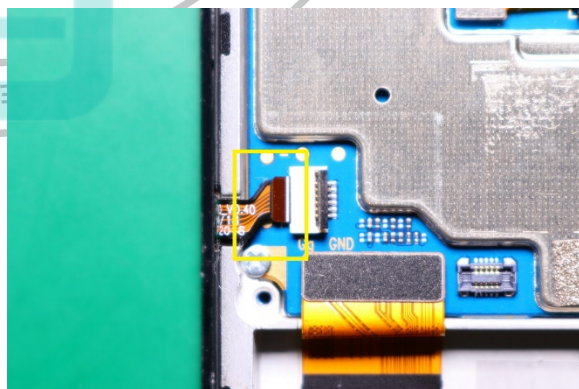

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual


7. Use fingers to press and secure the Side Key FPC lock as shown.

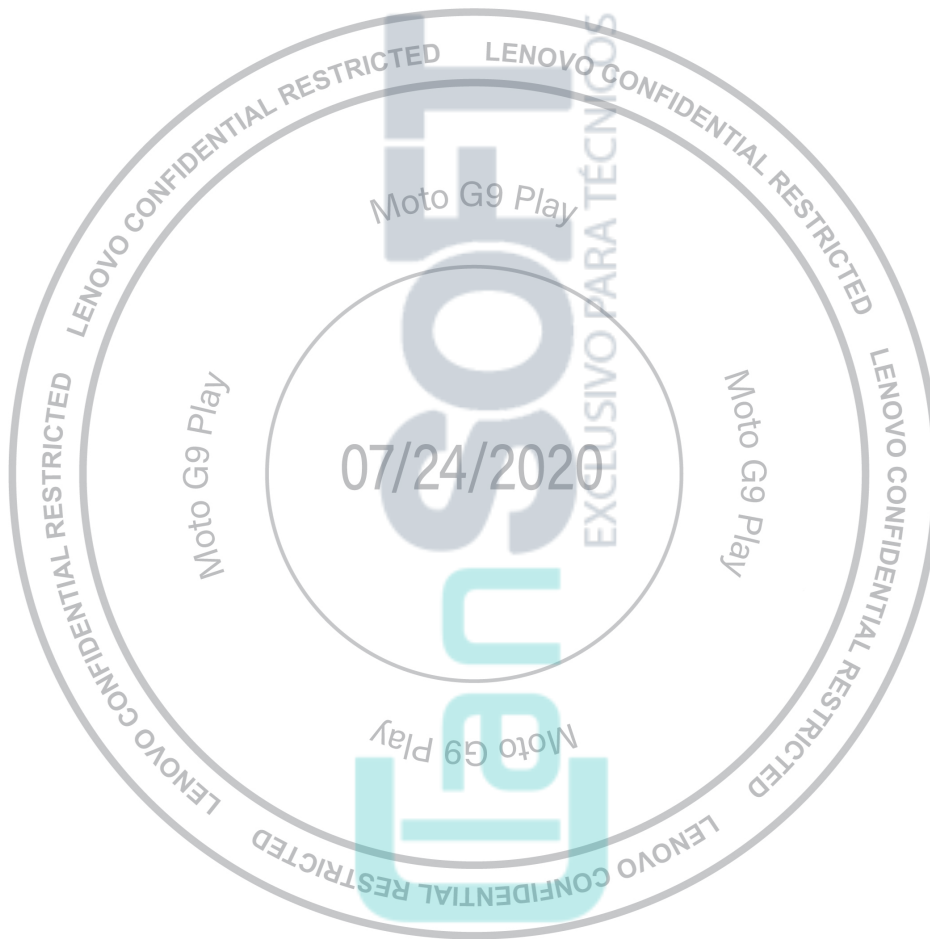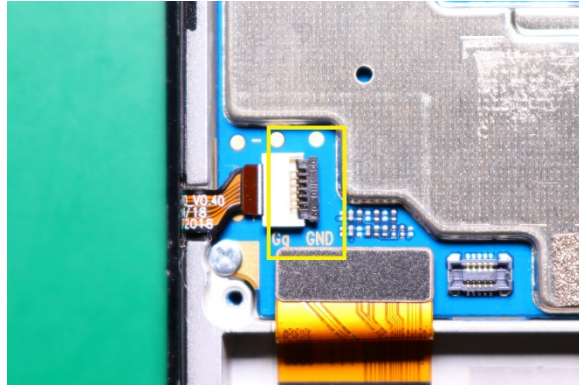

Battery Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE001-032+Battery buffer foam	79

Use the Plastic Tweezer to place and secure the Battery Foam on the location as shown.

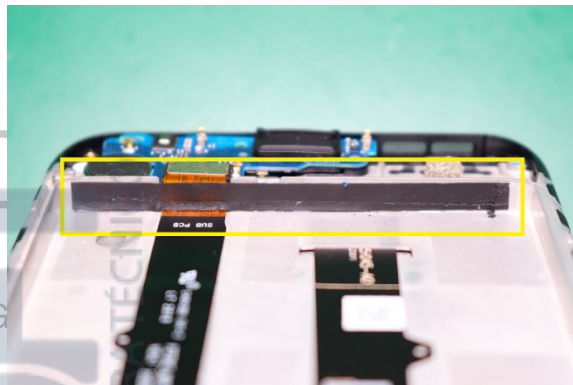


Coax Cable Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNEI06-320813-000+RF coaxial cable	82
XT2083-1 Sub Board&S102-BQF000-000CS XT2083-3 Sub Board&S102-BQF001-000CS ASSY,DTR BRD,Guam+20 4+64 DS BR XT2083-4 sub board&S102-BQF002-000CS	85

1. Use the Plastic Tweezer to place the Coax Cable on the Main PCB as shown.




2. Use the Plastic Tweezer to place the Coax Cable on the Sub Board as shown.

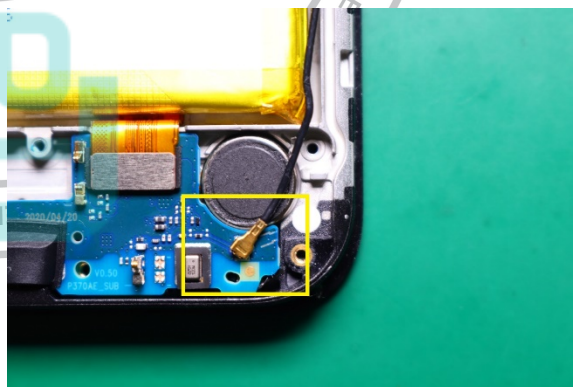


Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

3. Use fingers to place and secure the Coax Cable in the pocket on the recess of the phone.

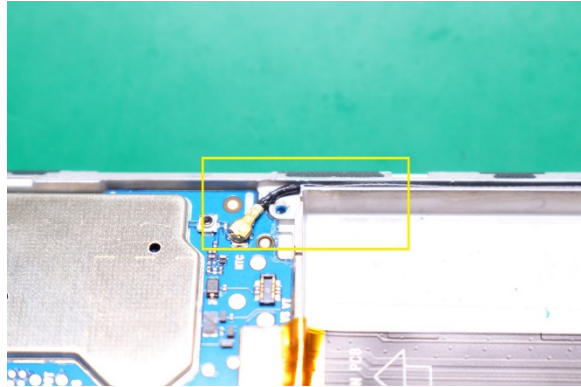


4. Use fingers to place and secure the Coax Cable in the pocket on the recess of the phone.

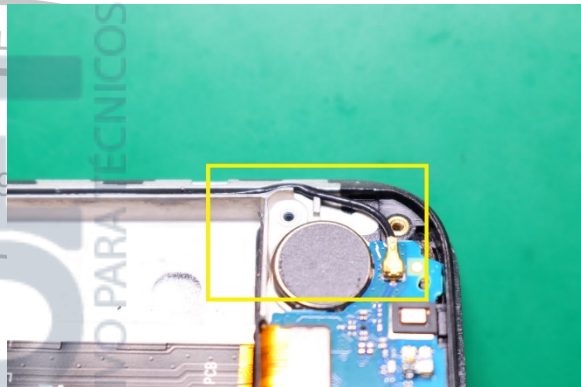

Front-Facing Camera Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
MDL,CAMR,8M,FF,Titan20;8M;L4H7FP0;Ofilm	39

Use fingers to place and secure the Front-Facing Camera on the Main PCB as shown.

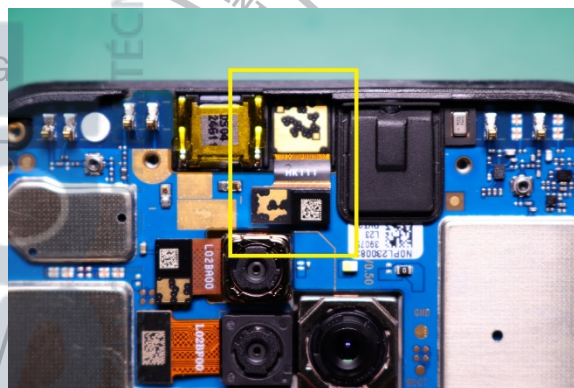

Front-Facing Camera Copper Foil Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM719-BQE001-001+ground copper foil	43

Use the Plastic Tweezer to place and secure the Front-Facing Camera Copper Foil on the location as shown.

NOTE


Note that the upper part of Front-Facing Camera Foil is attached to the opening position of the insulating tape on the receiver and the lower part should be assembled aligning with PCBA line.



Front-Facing Camera Conductive Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM709-BQF001-004+proactive 8M foam	46

Use the Plastic Tweezer to place and secure the Front-Facing Camera Conductive Foam on the location as shown.

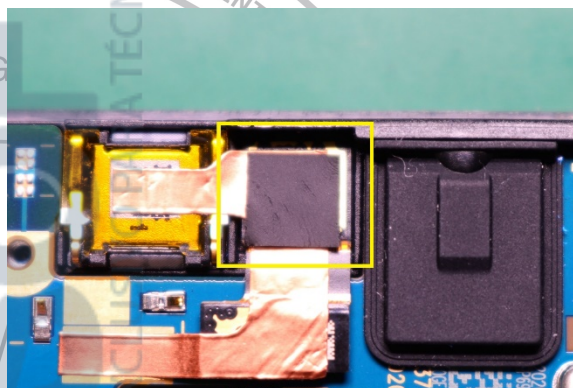

Battery Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
ACCY,BAT,5000mAh,JK50,ATL486585,ATL,BIS	80
TNM715-BQE001-005+battery adhesive	91
TNP237-BQE003-010+battery protectionfilm	81

/// WARNING ///

Failure to adhere to Safety Critical Note(s) may increase risk of rupture, burning, or failure to function safely when used by the customer. Refer to the Battery Safety Guidelines.

// CAUTION //


Handle the Battery Pack with care. If dropped to the floor, it may be internally damaged and must be scrapped.

Ensure Battery and its insulation are not damaged (e.g. scratched, dented, punctured) prior to and throughout assembly.

Prior to assembly, ensure Battery edges and surfaces are not dented or deformed, and that fixtures and parts that will contact the Battery are free of foreign material.

Ensure screws and screwdrivers do not contact the Battery.

1. Use new set of Battery protection film set for Battery.

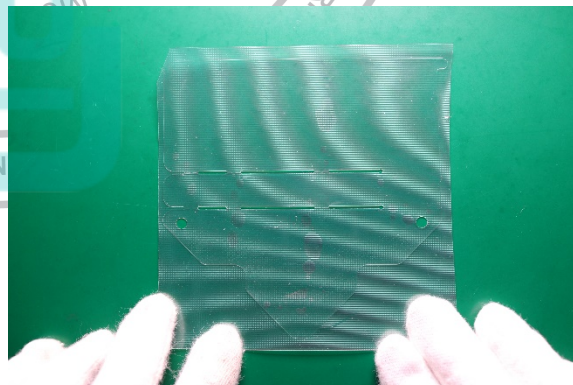

Lenovo Moto G9 Play Level 2 – Service and Repair Manual


2. Place the Battery on the Battery protection film set as shown.




3. Use fingers to wrap the Battery protection film on the front of the Battery as shown.



4. Place the Battery Adhesive on the location as shown and peel off the liner.

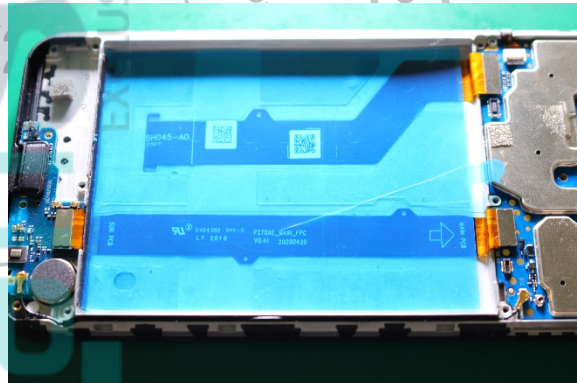


5. Use fingers to place the Battery on the Front Housing as shown.

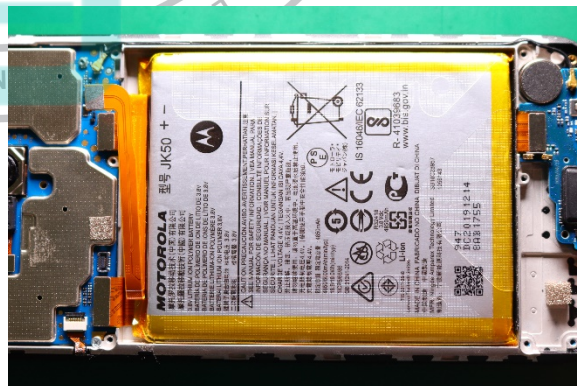

Lenovo Moto G9 Play

Level 2 – Service and Repair Manual

6. Use fingers to press and secure the Battery BtB Connector as shown.

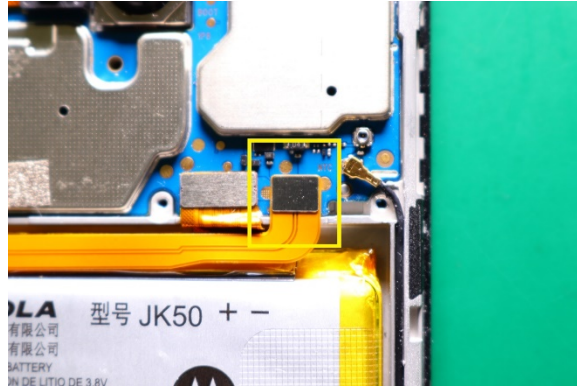


7. Use the Manual Roller to roll over the Battery for 10 cycles to secure the Battery as shown.

NOTE

For each cycle roll the Manual Roller from top to bottom of the Battery and vice versa.

NOTE


Each cycle should last for 3 seconds.

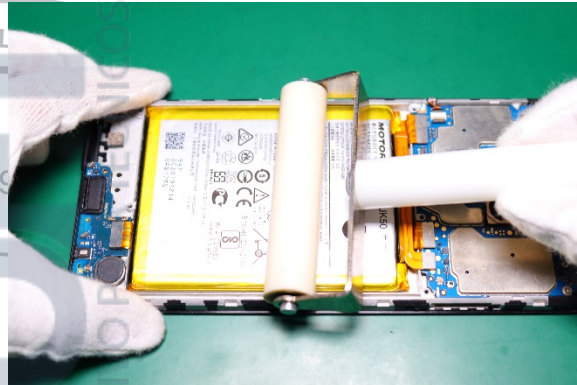

Fingerprint Sensor Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
FINGERPRT SCANNER,GF3658,Dark Green,Kerr FINGERPRT SCANNER,ELEC blue,GF3658,krr FINGERPRT SCANNER,SPR pink,GF3658,kerr	44


Use fingers to place and secure the Fingerprint sensor on the location as shown.

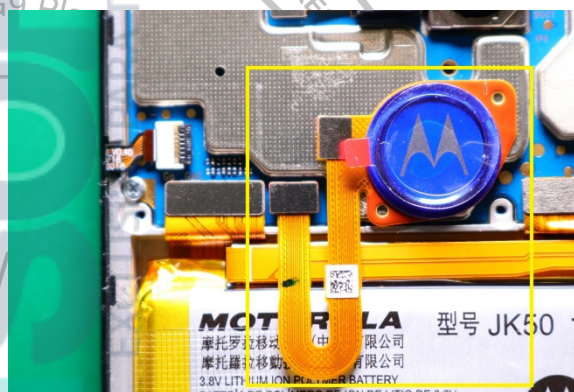

Main PCB Heat Spreader Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 MB 4+64G DS&F00BQF3-000-000CS XT2083-1 MB 4+64G SS&F00BQF3-000-300CS XT2083-3 MB 4+64G DS&F00BQF3-000-100CS XT2083-4 MB 4+64G DS&F00BQF3-000-200CS XT2083-1 MB 4+64G AR&F00BQF3-000-600CS XT2083-3 MB 4+64G IN&F00BQF3-000-700CS ASSY,BD KIT,Guam+20 4+64 DS BR	19
TNM721-BQF001-002+P370AE graphite sheet	-

Use the Plastic Tweezer to place and secure the Main PCB Heat Spreader on the Main PCB as shown.

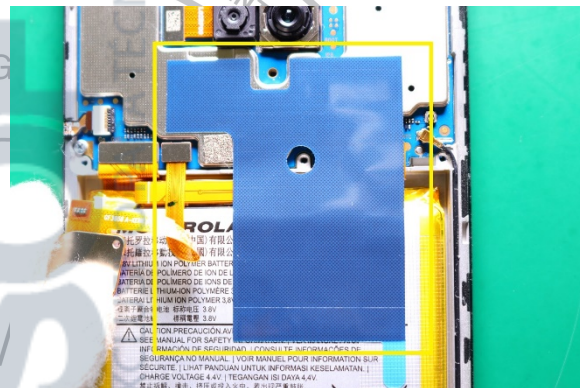


Rear-Facing Camera Lens Assembly

Description	Reference #
XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	49
TNM715-BQF001-000+lens adhesive	61
TNM205-BQF030-000+rear camera lens TNM205-BQF420-010+rearlens_LS TNM205-BQF100-000+P370AE rear lens+Flash	62

1. Use the Plastic Tweezer to place the Rear-Facing Camera Lens adhesive on the location as shown and peel off the liner.




2. Use the Plastic Tweezer to place the Rear-Facing Camera Lens on the location as shown.

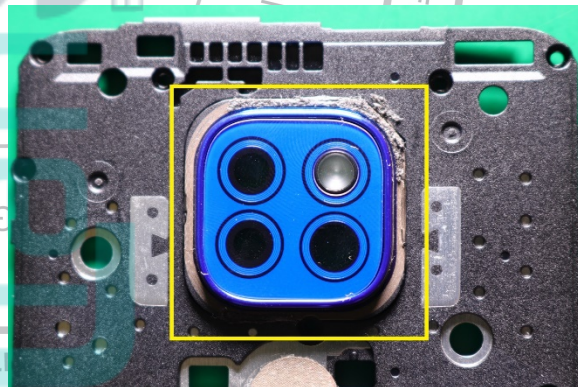

FPS Ground Conductive Cloth Assembly

Description	Reference #
XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	49
TNM717-BQE001-000+ground conductivecloth	40


Use the Plastic Tweezer to place and secure the FPS Ground Conductive Cloth on the location as shown.

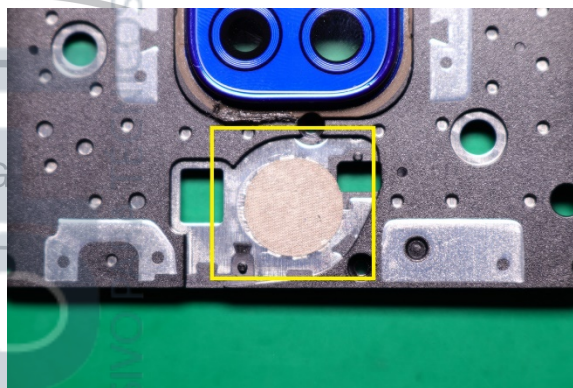

Top Bracket Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	49
TNM501-211103-011+round head screw	64
TNM501-211105-006+round head screw_LJT	-

1. Use fingers to place the Top Bracket on the location as shown.

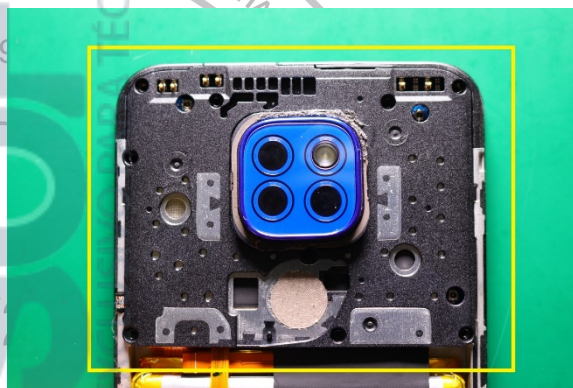


2. Use fingers to place the FPS on the Top Bracket aligning with the pins as shown.



3. Use the Torque Driver with PH00 Bit to tighten the nine screws as shown.

NOTE


The screw used at this position would have two different types as shown. Black screws are marked in yellow and silver in red. Be careful to use the same color screw while repairing the phones.

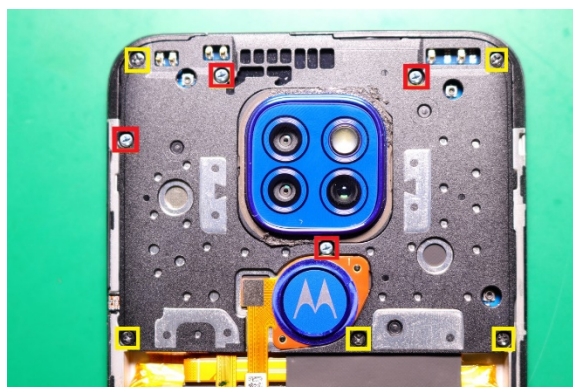

Screw Tampering Label Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	49
TNP316-000000-100+label	-


Use the Plastic Tweezer to place and secure the Screw Tampering Label on the location as shown.

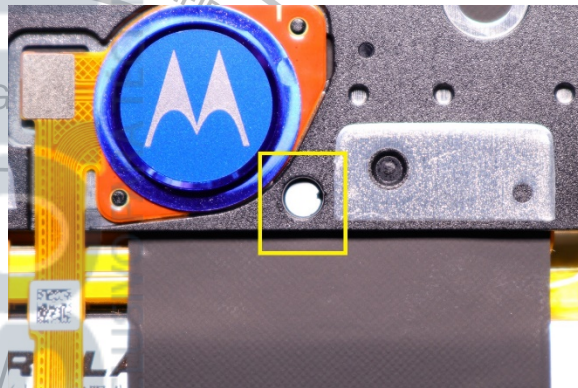

Secondary MIC Dust Net Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE001-009+Main MIC dust net foam	16


Use the Plastic Tweezer to place and secure the Secondary MIC Dust Net Foam on the location as shown.

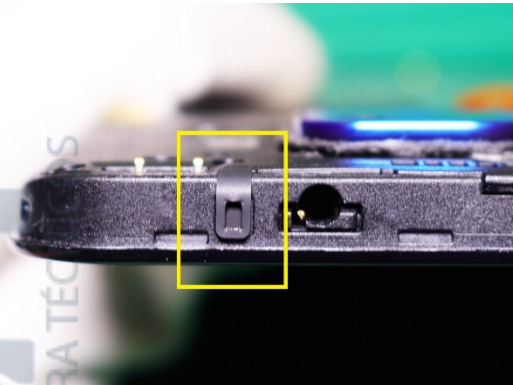

Top Bracket Waterproof Film Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM701-BQE001-002+waterproof film	60


Use the Plastic Tweezer to place and secure the Top Bracket Waterproof Film on the location as shown.

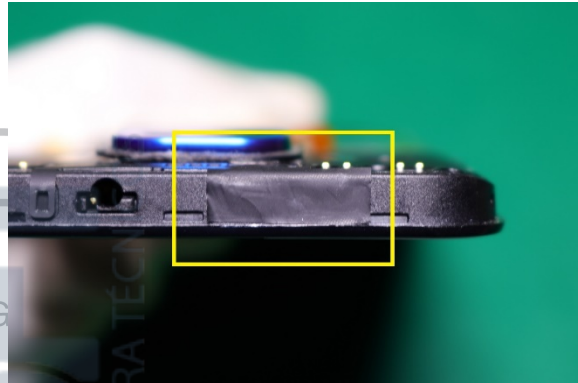

Rear-Housing Upper Waterproof Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Rear Cover_BG&S101-BQF030-000CS XT2083-1 Rear Cover_BE&S101-BQF420-000CS XT2083-1 Rear Cover_SP&S101-BQF104-000CS XT2083-3 Rear Cover_BG&S101-BQF034-000CS XT2083-3 Rear Cover_BE&S101-BQF421-000CS XT2083-3 Rear Cover_SP&S101-BQF100-000CS	49
TNM701-BQF000-001+waterproof sticker	-


Use the Plastic Tweezer to place and secure the Rear-Housing Upper Waterproof on the location as shown.

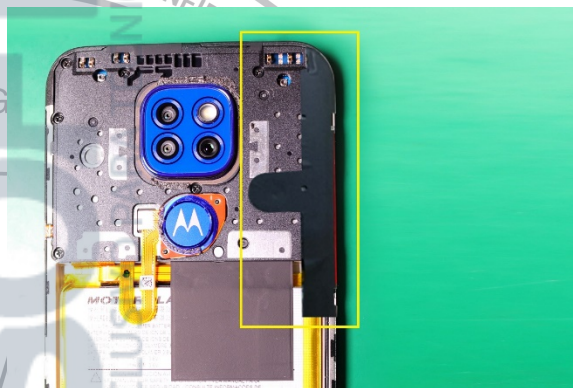

Side Key FPC Waterproof Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM701-BQE000-005+P270AE waterproof MEM	20


Use the Plastic Tweezer to place and secure the Side Key FPC Waterproof on the location as shown.

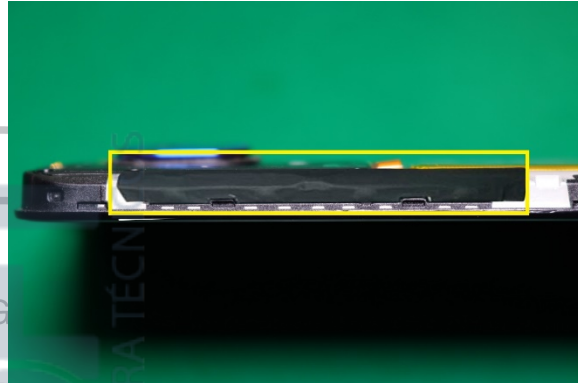

Speaker Box Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM501-211102-020+round head screw	63
Guam+ Speaker BOX&N506-BQF001-000CS	75

1. Use fingers to place the Speaker Box on the location as shown.

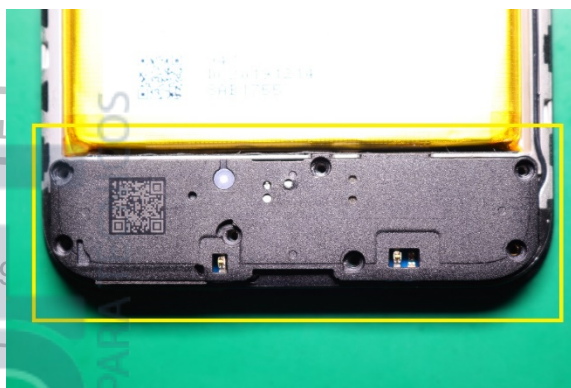


2. Use Torque Driver with PH00 Bit to tighten the seven screws as shown.



Speaker Box Waterproof Sticker 1 Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
Guam+ Speaker BOX&N506-BQF001-000CS	71
TNM701-BQF000-002+WAT STI 1 (33x3.4x0.05	-


Use the Plastic Tweezer to place and secure the Speaker Box Waterproof Sticker 1 on the location as shown.

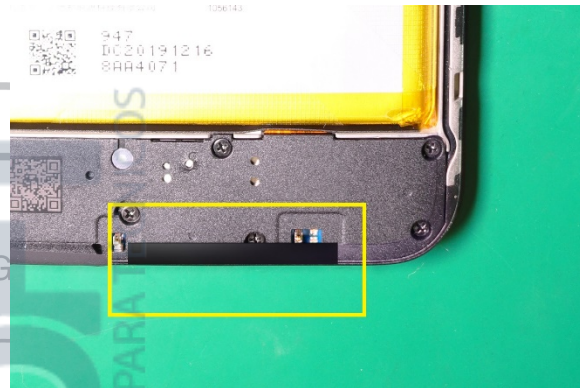

Speaker Box Waterproof Sticker 2 Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
Guam+ Speaker BOX&N506-BQF001-000CS	71
TNM701-BQF000-003+STI 2_22.6x12.7x0.05	-


Use the Plastic Tweezer to place and secure the Speaker Box Waterproof Sticker 2 on the location as shown.

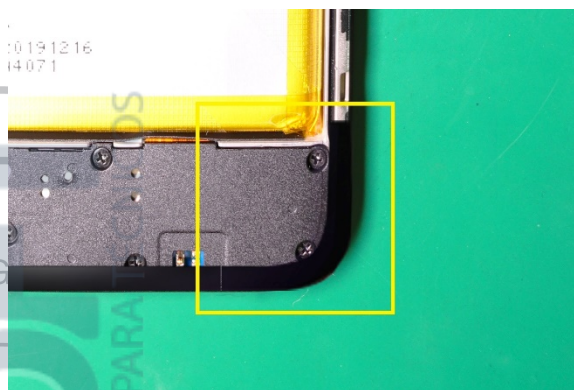

Primary MIC Dust Net Foam Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM709-BQE001-009+Main MIC dust net foam	16


Use the Plastic Tweezer to place and secure the Primary MIC Dust Net Foam on the location as shown.

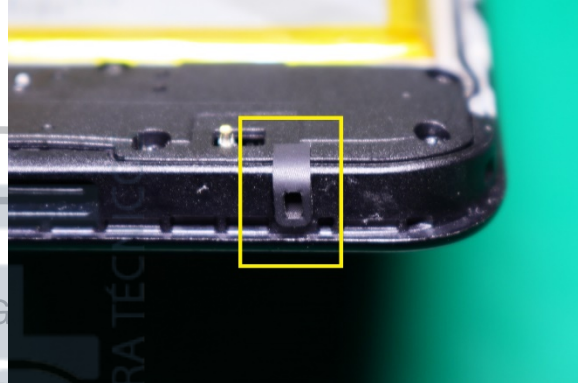

Speaker Dust Filter Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
TNM711-BQE000-100+speaker dust filter	93


Use the Plastic Tweezer to place and secure the Speaker Dust Filter on the location as shown.

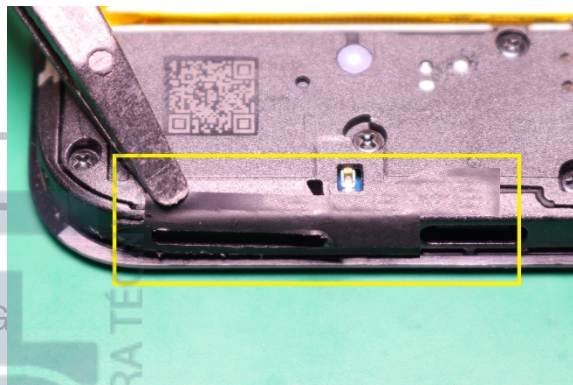

Camera lens Adhesive Assembly

Description	Reference #
XT2083-1 Batt Cover_BE&S101-BQF422-000CS XT2083-1 Batt Cover_BG&S101-BQF032-000CS XT2083-1 Batt Cover_SP&S101-BQF102-000CS XT2083-3 Batt Cover_BE&S101-BQF423-000CS XT2083-3 Batt Cover_BG&S101-BQF033-000CS XT2083-3 Batt Cover_SP&S101-BQF103-000CS XT2083-4 Batt Cover_EB&S101-BQF426-000CS Guam+ Etch COV_EB_BR&S101-BQF425-000CS Guam+ Etch COV_EG_BR&S101-BQF036-000CS Guam+ Etch COV_SP_BR&S101-BQF106-000CS	65
TNM715-BQE001-012+rear camera sealant	67


Use the Plastic Tweezer to place and secure the Camera Lens adhesive on the location as shown and peel off the liner.

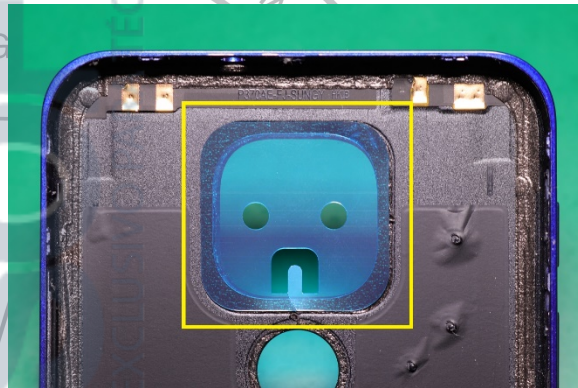

FPS Adhesive Assembly

Description	Reference #
XT2083-1 Batt Cover_BE&S101-BQF422-000CS XT2083-1 Batt Cover_BG&S101-BQF032-000CS XT2083-1 Batt Cover_SP&S101-BQF102-000CS XT2083-3 Batt Cover_BE&S101-BQF423-000CS XT2083-3 Batt Cover_BG&S101-BQF033-000CS XT2083-3 Batt Cover_SP&S101-BQF103-000CS XT2083-4 Batt Cover_EB&S101-BQF426-000CS Guam+ Etch COV_EB_BR&S101-BQF425-000CS Guam+ Etch COV_EG_BR&S101-BQF036-000CS Guam+ Etch COV_SP_BR&S101-BQF106-000CS	65
TNM715-BQE000-018+ADH_D15.1xD12.7x0.15	68

Use the Plastic Tweezer to place and secure the FPS adhesive on the location as shown and peel off the liner.

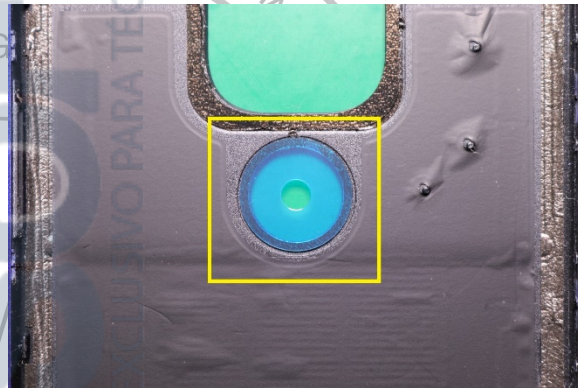

Battery Inlay Assembly

<i>Description</i>	<i>Reference #</i>
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Batt Cover_BE&S101-BQF422-000CS XT2083-1 Batt Cover_BG&S101-BQF032-000CS XT2083-1 Batt Cover_SP&S101-BQF102-000CS XT2083-3 Batt Cover_BE&S101-BQF423-000CS XT2083-3 Batt Cover_BG&S101-BQF033-000CS XT2083-3 Batt Cover_SP&S101-BQF103-000CS XT2083-4 Batt Cover_EB&S101-BQF426-000CS Guam+ Etch COV_EB_BR&S101-BQF425-000CS Guam+ Etch COV_EG_BR&S101-BQF036-000CS Guam+ Etch COV_SP_BR&S101-BQF106-000CS	65

Use fingers to place the Battery Cover on the Front Housing and press it on all side to secure it as shown.



IMEI Label Assembly

Description	Reference #
TNEI30-BQE030-000+sim Cato TNEI30-BQE420-000+SIM TRAY_HXD TNEI30-BQE100-000+P270AE_sim card tray TNEI30-BQE033-000+P270AE_sim Cato TNEI30-BQE421-000+SIM TRAY_HXD Guam+ SIM Tray SP SS&EI30-BQE101-000CS	70
TNP316-000000-100+label	-

Use the Plastic Tweezer to place and secure the IMEI Label on the location as shown.



Sim Tray Silicone Ring Assembly

Description	Reference #
TNEI30-BQE030-000+sim Cato TNEI30-BQE420-000+SIM TRAY_HXD TNEI30-BQE100-000+P270AE_sim card tray TNEI30-BQE033-000+P270AE_sim Cato TNEI30-BQE421-000+SIM TRAY_HXD Guam+ SIM Tray SP SS&EI30-BQE101-000CS	70
TNM716-BQE001-007+P270AE silicone ring	71

Use the Plastic Tweezer to place and secure the Sim Tray Silicone Ring on the location as shown.

Note

Make the Silicone Ring is fully assembled onto the Sim Tray groove.

Note

Make sure the Silicone Ring is assembled in correct direction, the larger diameter out and small diameter in.



Sim Tray Assembly

Description	Reference #
Guam+ TP LCM ASSY&S101-BQF130-000CS Guam+ TP LCM_IN&S101-BQF131-000CS	1
XT2083-1 Batt Cover_BE&S101-BQF422-000CS XT2083-1 Batt Cover_BG&S101-BQF032-000CS XT2083-1 Batt Cover_SP&S101-BQF102-000CS XT2083-3 Batt Cover_BE&S101-BQF423-000CS XT2083-3 Batt Cover_BG&S101-BQF033-000CS XT2083-3 Batt Cover_SP&S101-BQF103-000CS XT2083-4 Batt Cover_EB&S101-BQF426-000CS Guam+ Etch COV_EB_BR&S101-BQF425-000CS Guam+ Etch COV_EG_BR&S101-BQF036-000CS Guam+ Etch COV_SP_BR&S101-BQF106-000CS	65
TNEI30-BQE030-000+sim Cato TNEI30-BQE420-000+SIM TRAY_HXD TNEI30-BQE100-000+P270AE_sim card tray TNEI30-BQE033-000+P270AE_sim Cato TNEI30-BQE421-000+SIM TRAY_HXD Guam+ SIM Tray SP SS&EI30-BQE101-000CS	70

1. Insert the SIM Tray in the transceiver as shown.



2. Use finger to press the SIM Tray until it secures into the transceiver.


ASSEMBLY QUALITY CHECK

Battery Quality Check



Check the quality of battery make sure
no deform or defect on it

Grommet and Connectors Quality Check

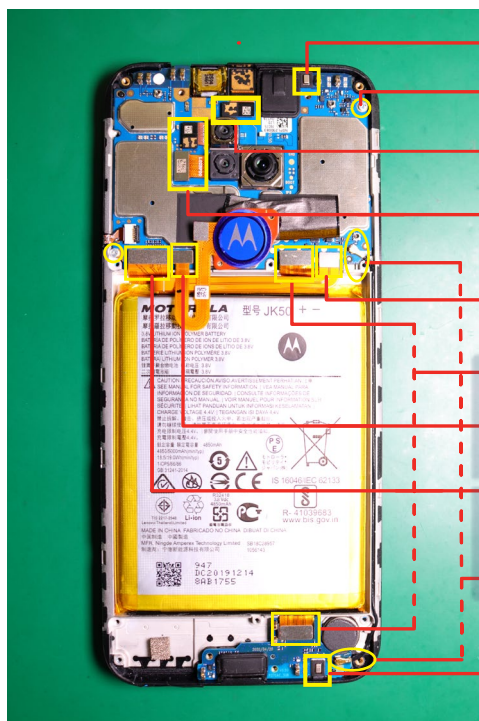

Check if the secondary mic waterproof foam is well-seated and there's no sign of damage.

Check if any missing/unseated screws.

Check if the front facing camera connector is well-seated and there's no sign of damage.

Check if the rear facing camera connector is well-seated and there's no sign of damage.

Check if the battery connector is well-seated and there's no sign of damage.

Check if the main flex connector is well-seated and there's no sign of damage.


Check if the FPS connector is well-seated and there's no sign of damage.

Check if the display flex connector is well-seated and there's no sign of damage.

Check if the coax cable connector is well-seated and there's no sign of damage.

Check if the primary mic grommet is well-seated and there's no sign of damage.

Screws Graphite Quality Check

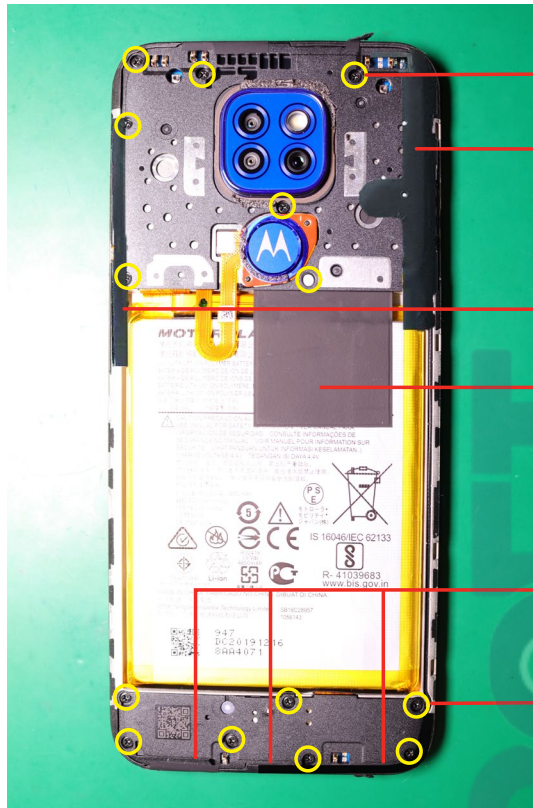

Check if any missing/unseated screws.

Check if any missing/misaligned waterproof.

Check if any missing/misaligned waterproof.

Check if any missing/misaligned graphite tape.

Check if any missing/misaligned waterproof.

Check if any missing/unseated screws.