SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

SM-A736B_SVC

Sheet01 : GSM / WCDMA / LTE / NR(N41) RF
Sheet02 : TRANSCEIVER, SUB ANT
Sheet03 : CONNECTIVITY(BT/WIFI), NFC
Sheet04 : AP(SM7325-INTERFACE,GPIO)
Sheet05 : AP(POWER), MEM(uMCP)
Sheet06 : PMIC(PM7325,PM7350C), IF PMIC
Sheet07 : SENSOR, SIM, SD
Sheet08 : CAMERA
Sheet09 : DISPLAY PMIC, C2C

Engineer:					
Drawn by:					
R&D CHK:	TITLE:				Size:
DOC CTRL CHK:	A52				
MFG ENGR CHK:					
Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number: Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

RF PART 1

MAIN ANT1

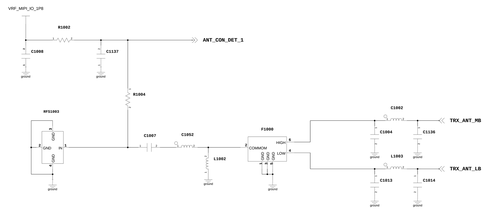

MAIN ANT2

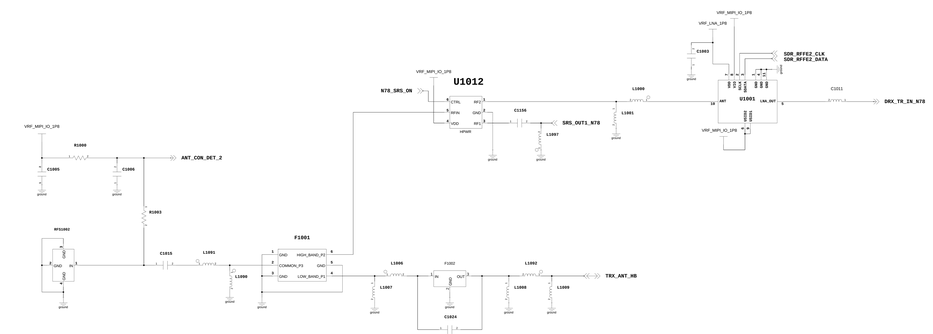

SUB ANT1

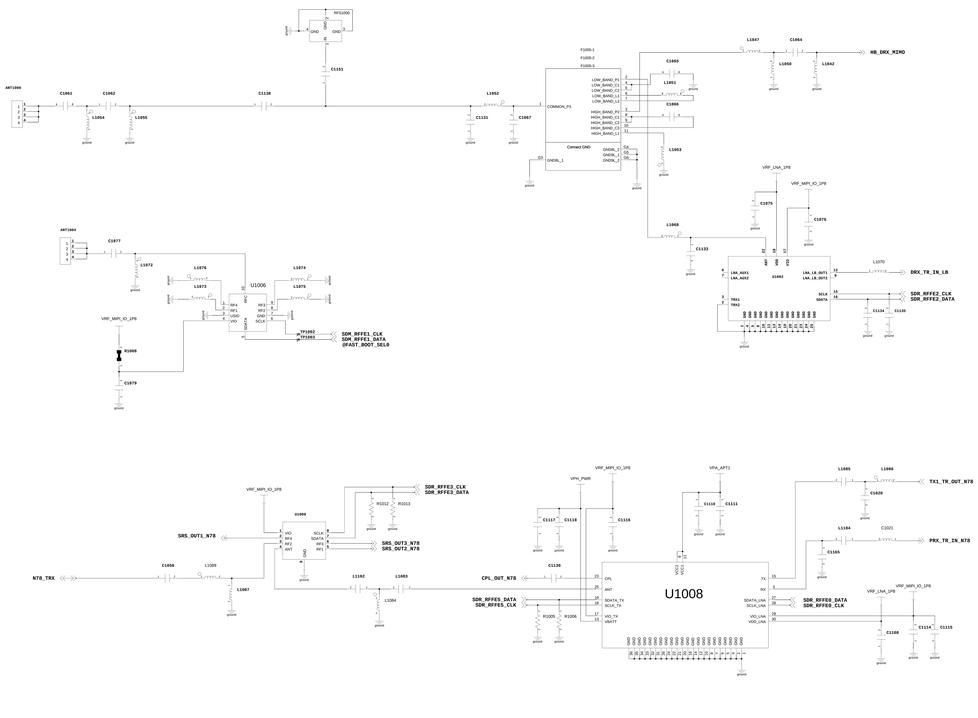

SUB ANT2

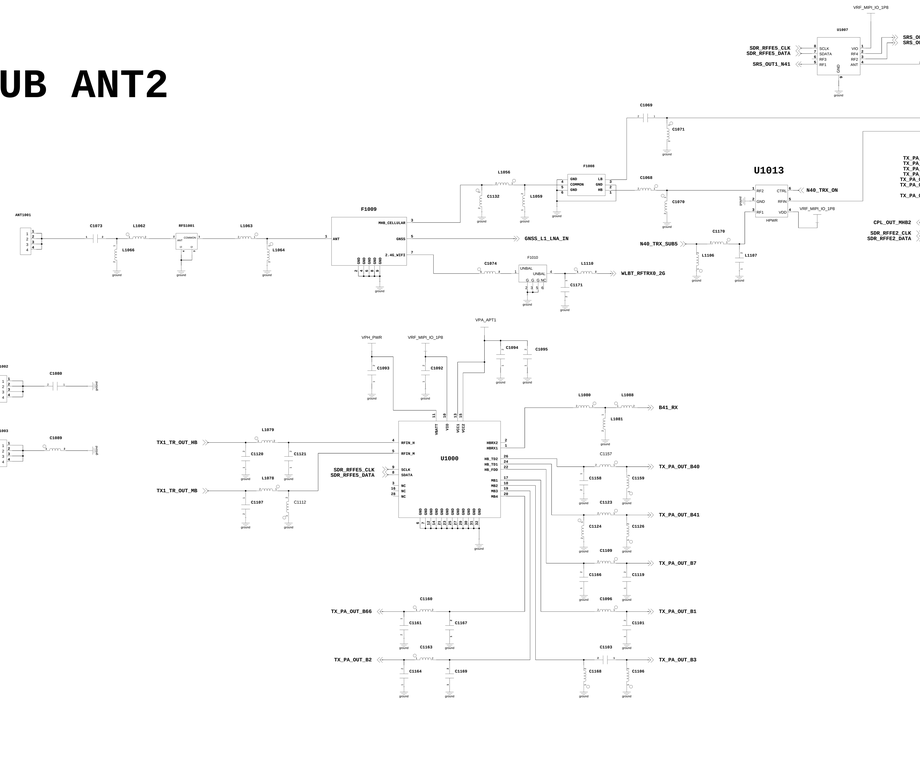

Engineer:	SM-A736B
Drawn by:	
R&D CHK:	TITLE: RF PAM/FEM
DOC CTRL CHK:	Size:
MFG ENGR CHK:	
QA CHK:	REV: Drawing Number:

Changed by:	Date Changed:	Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

TRANSCEIVER

U2000

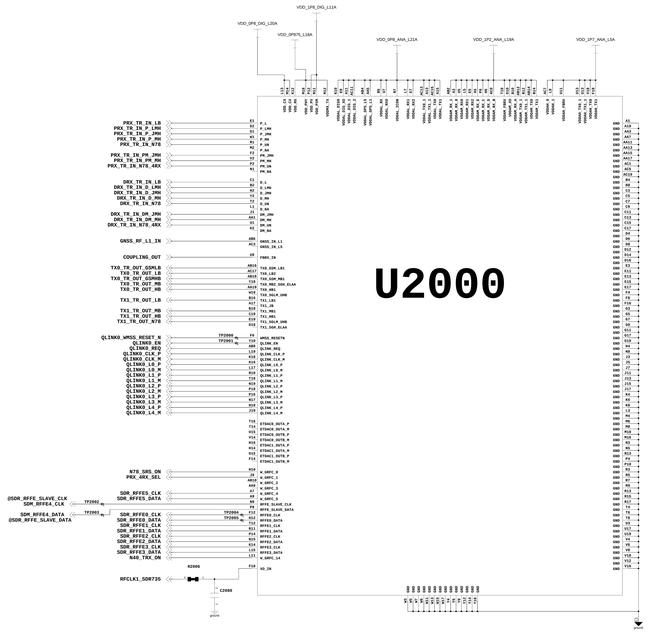

APT0



APT1



Coupling SW

SUB ANT4

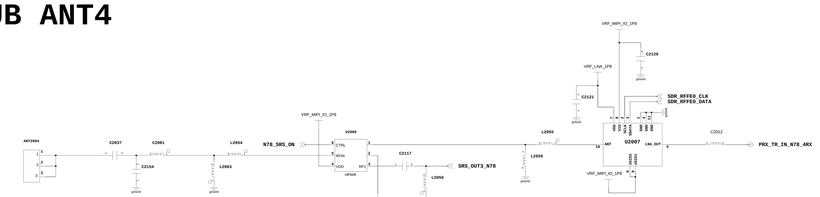

SUB ANT5

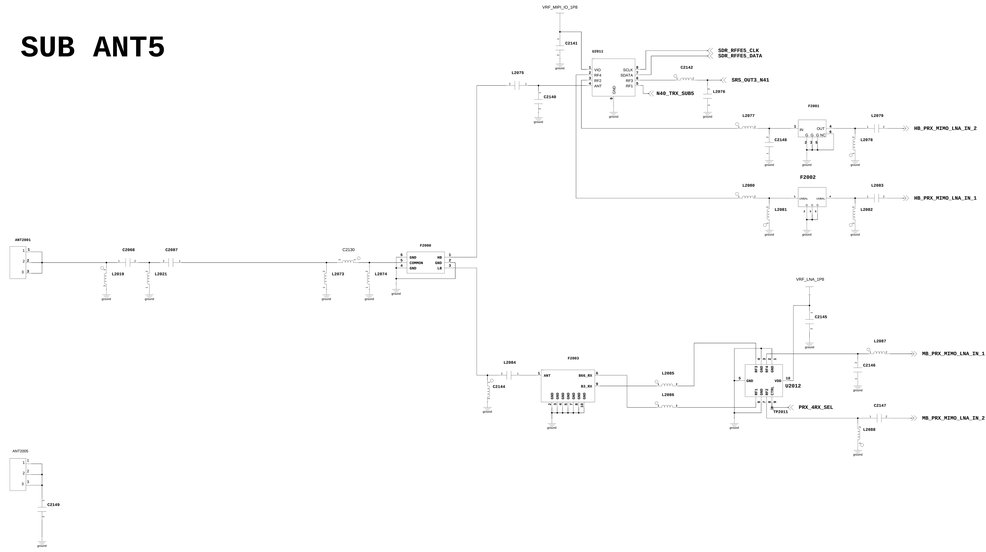

SUB ANT6

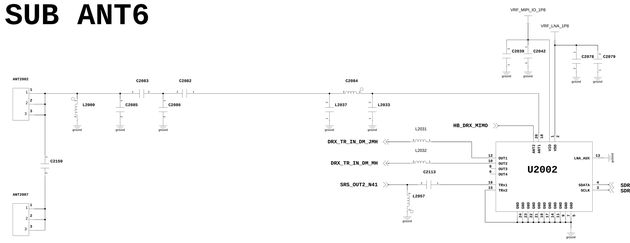

SUB ANT7

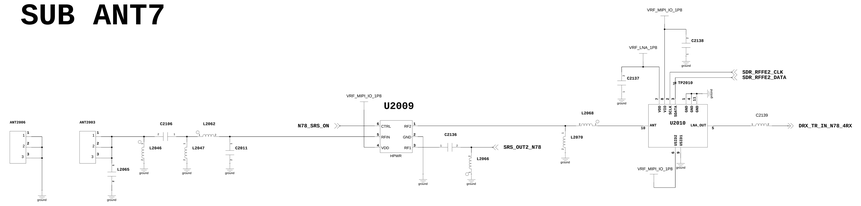

Engineer:	SM-A736B
Drawn by:	
R&D CHK:	TITLE: RF TRCV/PAM/APT
DOC CTRL CHK:	Size:
MFG ENGR CHK:	
Changed by: / Date Changed: / Time Changed: / QA CHK:	REV: / Drawing Number:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

WIFI/BT/FM

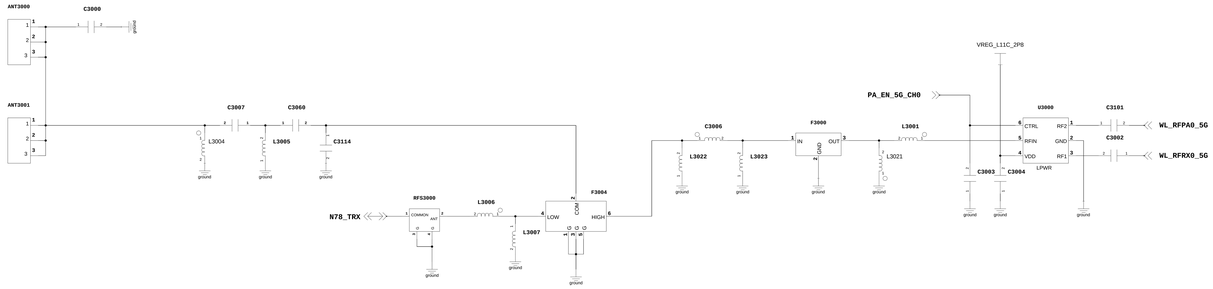

SUB ANT3

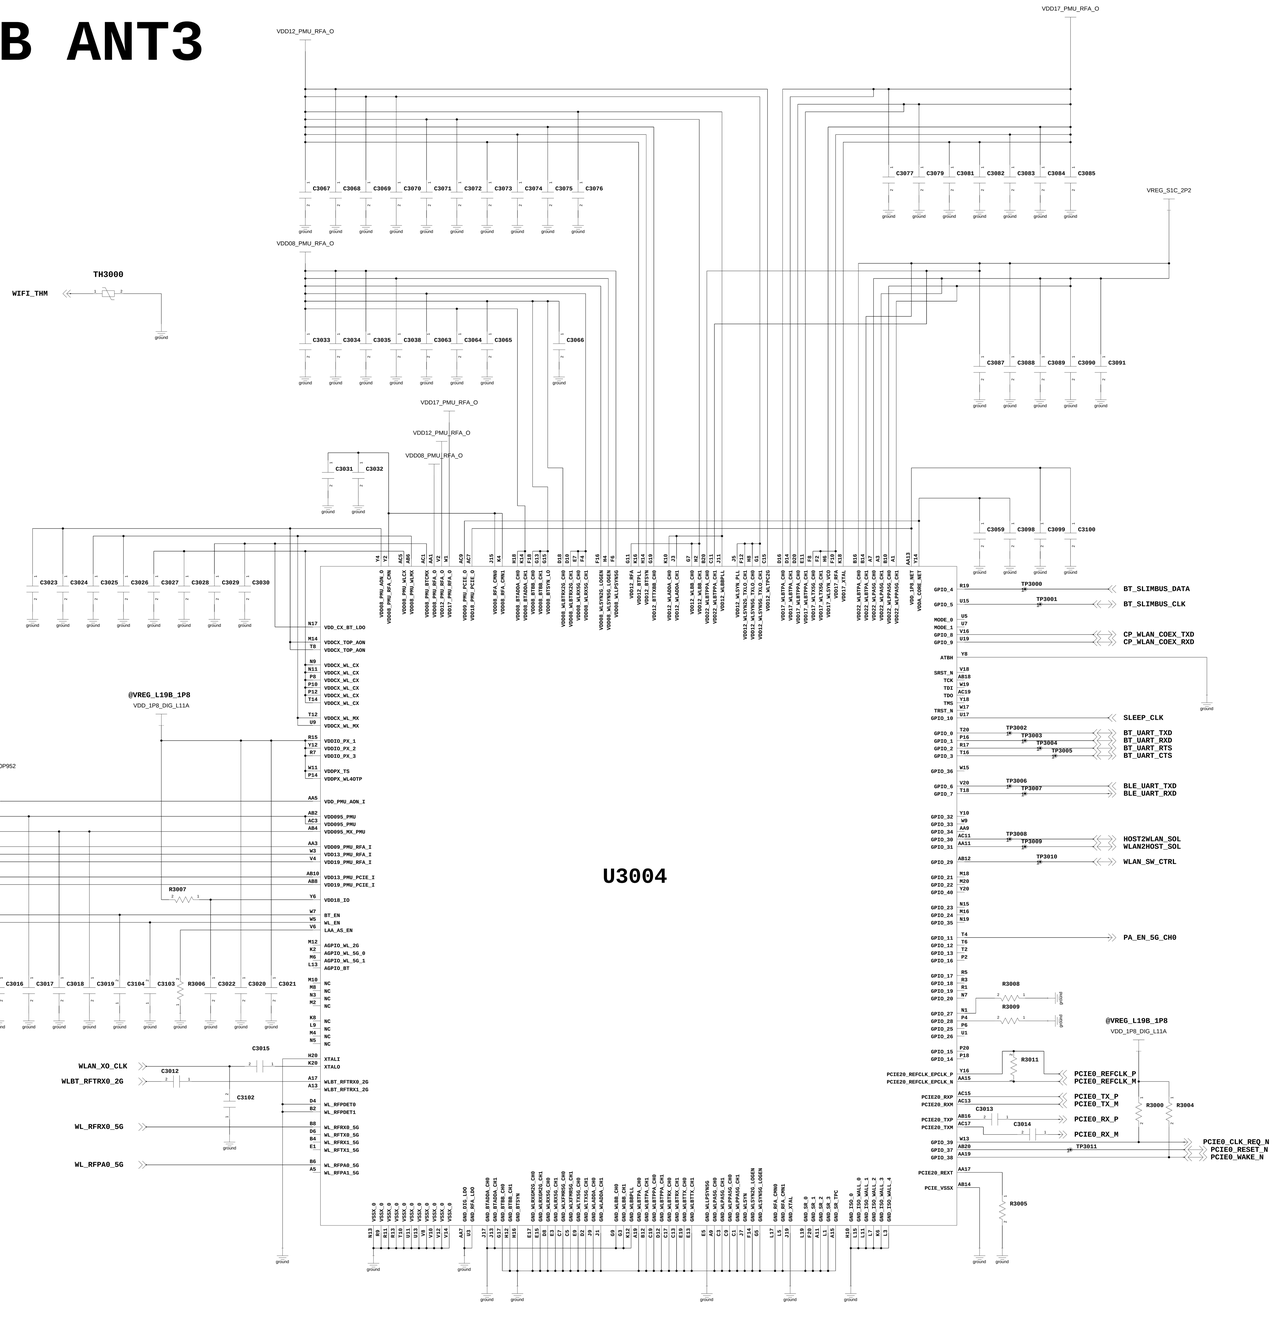

GPS L1 / GNSS / BEIDOU

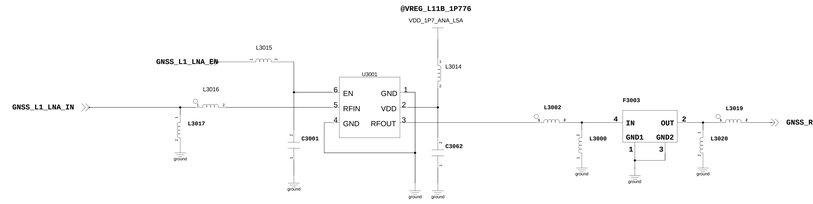

GND CCP

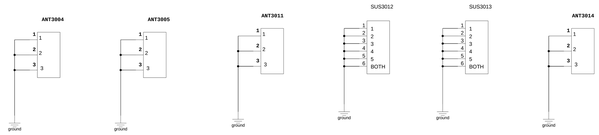

NFC

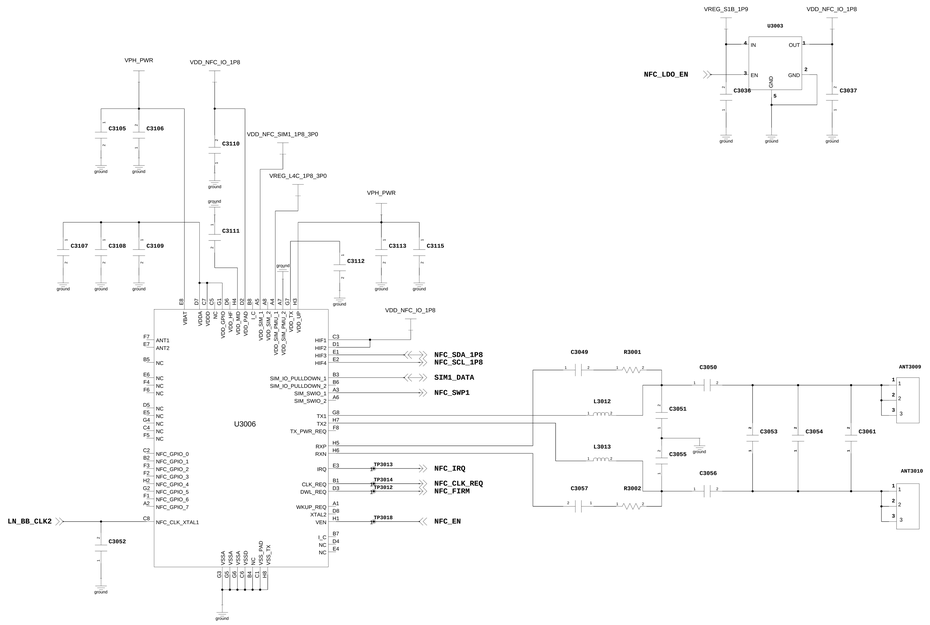

Engineer:		SM-A736B	
Drawn by:			
R&D CHK:		TITLE: WIFI/NFC/MST/GPS	Size:
DOC CTRL CHK:			
MFG ENGR CHK:			
Changed by:	Date Changed:	Time Changed:	QA CHK:
REV:	Drawing Number:		Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

AP

UCP4000

[1/4]

I2C PULL UP

CAM_VDDIO_1P8
R4001 CAM_AF_EEP_I2C_SCL_1P8
R4003 CAM_AF_EEP_I2C_SDA_1P8

VDD_NFC_IO_1P8
R4000 NFC_SCL_1P8
R4002 NFC_SDA_1P8

CAM_VDDIO_1P8
R4006 RCAM1_SENSOR_I2C_SCL_1P8
R4007 RCAM1_SENSOR_I2C_SDA_1P8

@VREG_L18B_1P8
VDD_AMP_1P8
R4004 GRIP2_SCL_1P8
R4005 GRIP2_SDA_1P8
R4039 GRIP_INT2

VDD_OIS_MCU_1P8
R4010 AP_MCU_SCL_1P8
R4011 AP_MCU_SDA_1P8

VREG_L12C_1P8
R4008 PROXY_LIGHT_SCL_1P8
R4009 PROXY_LIGHT_SDA_1P8

CAM_VDDIO_1P8
R4055 FCAM_SENSOR_I2C_SCL_1P8
R4056 FCAM_SENSOR_I2C_SDA_1P8

VREG_L12C_1P8
R4012 MAGNETIC_SCL_1P8
R4014 MAGNETIC_SDA_1P8

CAM_VDDIO_1P8
R4015 RCAM2_RCAM3_RCAM4_SENSOR_I2C_SCL_1P8
R4016 RCAM2_RCAM3_RCAM4_SENSOR_I2C_SDA_1P8

VREG_L12C_1P8
R4050 6AXIS_I3C_SCL_1P8
R4051 6AXIS_I3C_SDA_1P8

VDD_TSP_1P8
R4019 TSP_SCL_1P8
R4021 TSP_SDA_1P8

@VREG_L18B_1P8
VDD_AMP_1P8
R4017 SPK_AMP_SCL_1P8
R4018 SPK_AMP_SDA_1P8

@VREG_L18B_1P8
VDD_AMP_1P8
R4052 CAM_PMIC_I2C_SCL_1P8
R4053 CAM_PMIC_I2C_SDA_1P8

TP4000 SM_RESOUT_N

C4007

LN_BB_CLK1 SLEEP_CLK SM_RESIN_N SM_RESOUT_N

PS_HOLD TP4001

JTAG_RST_N JTAG_TCK JTAG_TDI JTAG_TMS JTAG_TRST_N

UFS_RESET_N UFS_REFCLK

UFS_RX_D0_P UFS_RX_D0_M UFS_TX_D0_P UFS_TX_D0_M UFS_RX_D1_P UFS_RX_D1_M UFS_TX_D1_P UFS_TX_D1_M

R4060 R4059

SDC2_CLK R4035

SDC2_CMD SDC2_D0 SDC2_D1 SDC2_D2 SDC2_D3 SDC2_CARD_DET_N

USB_AP_DP USB_AP_DM

C4005 C4006

SPMI_CLK SPMI_DATA

TH4000 AP_THM

R4054 OCTA_ESD_DET EL_ON1 C4009

EBI0_CLK_M EBI0_CLK_P
EBI0_CKE_0 EBI0_CKE_1
EBI0_DMI_0 EBI0_DMI_1
EBI0_DQS_1_M EBI0_DQS_1_P
EBI0_DQS_0_M EBI0_DQS_0_P
EBI0_CA_0 EBI0_CA_1 EBI0_CS_0 EBI0_CA_2 EBI0_CA_3 EBI0_CA_4 EBI0_CA_5
EBI0_CS_1
EBI0_DQ[8] EBI0_DQ[9] EBI0_DQ[10] EBI0_DQ[11] EBI0_DQ[12] EBI0_DQ[13] EBI0_DQ[14] EBI0_DQ[15]
EBI0_DQ[0] EBI0_DQ[1] EBI0_DQ[2] EBI0_DQ[3] EBI0_DQ[4] EBI0_DQ[5] EBI0_DQ[6] EBI0_DQ[7]

EBI1_CA_2
EBI1_CLK_M EBI1_CLK_P
EBI1_CKE_0 EBI1_CKE_1
EBI1_DMI_0 EBI1_DMI_1
EBI1_DQS_0_M EBI1_DQS_0_P
EBI1_DQS_1_M EBI1_DQS_1_P
EBI1_CA_5 EBI1_CA_4 EBI1_CA_3 EBI1_CS_1 EBI1_CS_0 EBI1_CA_1 EBI1_CA_0
EBI01_CAL

DDR_RESET_N
EBI1_DQ[0] EBI1_DQ[1] EBI1_DQ[2] EBI1_DQ[3] EBI1_DQ[4] EBI1_DQ[5] EBI1_DQ[6] EBI1_DQ[7] EBI1_DQ[8] EBI1_DQ[9] EBI1_DQ[10] EBI1_DQ[11] EBI1_DQ[12] EBI1_DQ[13] EBI1_DQ[14] EBI1_DQ[15]

MIPI_RCAM1_A0 MIPI_RCAM1_B0 MIPI_RCAM1_C0 MIPI_RCAM1_A1 MIPI_RCAM1_B1 MIPI_RCAM1_C1 MIPI_RCAM1_A2 MIPI_RCAM1_B2 MIPI_RCAM1_C2
MIPI_RCAM2_CLK_P MIPI_RCAM2_CLK_N MIPI_RCAM2_D0_P MIPI_RCAM2_D0_N MIPI_RCAM2_D1_P MIPI_RCAM2_D1_N
MIPI_RCAM3_CLK_P MIPI_RCAM3_CLK_N MIPI_RCAM3_D0_P MIPI_RCAM3_D0_N MIPI_RCAM3_D1_P MIPI_RCAM3_D1_N MIPI_RCAM3_D2_P MIPI_RCAM3_D2_N MIPI_RCAM3_D3_P MIPI_RCAM3_D3_N
MIPI_RCAM4_CLK_P MIPI_RCAM4_CLK_N MIPI_RCAM4_D0_P MIPI_RCAM4_D0_N MIPI_RCAM4_D1_P MIPI_RCAM4_D1_N
MIPI_FCAM_CLK_P MIPI_FCAM_CLK_N MIPI_FCAM_D0_P MIPI_FCAM_D0_N MIPI_FCAM_D1_P MIPI_FCAM_D1_N MIPI_FCAM_D2_P MIPI_FCAM_D2_N MIPI_FCAM_D3_P MIPI_FCAM_D3_N
OCTA_MIPI_CLK_P OCTA_MIPI_CLK_N OCTA_MIPI_D0_P OCTA_MIPI_D0_N OCTA_MIPI_D1_P OCTA_MIPI_D1_N OCTA_MIPI_D2_P OCTA_MIPI_D2_N OCTA_MIPI_D3_P OCTA_MIPI_D3_N

VREG_L3B_0P6 R4013

QLINK0_CLK_P QLINK0_CLK_M QLINK0_LN_P QLINK0_LN_M QLINK0_L1_P QLINK0_L1_M QLINK0_L2_P QLINK0_L2_M QLINK0_L4_P QLINK0_L4_M QLINK0_L3_P QLINK0_L3_M

PCIE0_REFCLK_P PCIE0_REFCLK_M R4031

PCIE0_RX_P PCIE0_RX_M

C4008 PCIE0_TX_M
C4002 PCIE0_TX_P

GPIO_0 AG7 CAM_PMIC_I2C_SDA_1P8
GPIO_1 AF6 CAM_PMIC_I2C_SCL_1P8
GPIO_2 AE5
GPIO_3 AE7 OCTA_ESD_DET
GPIO_4 AF2 SPK_AMP_SDA_1P8
GPIO_5 AH3 SPK_AMP_SCL_1P8
GPIO_6 AN1
GPIO_7 AH2 GRIP_INT2
GPIO_8 BK4 GRIP2_SDA_1P8
GPIO_9 BK2 GRIP2_SCL_1P8
GPIO_10 BJ3 GNSS_L1_LNA_EN
GPIO_11 BJ1 RCAM1_LDO_EN
GPIO_12 H2 IF_PMIC_SDA_1P8
GPIO_13 H4 IF_PMIC_SCL_1P8
GPIO_14 L3 RCAM2_RCAM4_LDO_EN
GPIO_15 L1 RCAM3_LDO_EN
GPIO_16 F4 AP_MCU_SDA_1P8
GPIO_17 H5 AP_MCU_SCL_1P8
GPIO_18 T1 ANT_CON_DET_1
GPIO_19 R3 ANT_CON_DET_2
GPIO_20 BD5 RCAM1_RST_N
GPIO_21 BG3 RCAM2_RST_N
GPIO_22 BF6 AP_UART_TXD
GPIO_23 BF4 AP_UART_RXD
GPIO_24 BF2
GPIO_25 BE1
GPIO_26 BE3
GPIO_27 BD2 HOST2WLAN_SOL
GPIO_28 BE5 WLAN2HOST_SOL
GPIO_29 BD6 BT_UART_CTS
GPIO_30 BD4 BT_UART_RTS
GPIO_31 BC5 BT_UART_TXD
GPIO_32 AW3 BT_UART_RXD
GPIO_33 AW1 FG_SDA_1P8
GPIO_34 AY42 FG_SCL_1P8
GPIO_35 BA3 HALL_INT
GPIO_36 BF42 BTP_RST_N
GPIO_37 BG43 NFC_SDA_1P8
GPIO_38 BH46 NFC_SCL_1P8
GPIO_39 BH44 NFC_EN
GPIO_40 AY46 NFC_CLK_REQ
GPIO_41 AY44 NFC_FIRM
GPIO_42 BA45 NFC_IRQ
GPIO_43 BA46 NFC_LDO_EN
GPIO_44 BA41 FG_ERR
GPIO_45 BB42 OCTA_RST_N
GPIO_46 BC41 MCU_NRST
GPIO_47 BC43 MCU_BOOT0_SWCLK
GPIO_48 BB44 OCTA_CON_DET
GPIO_49 BC47
GPIO_50 BC45
GPIO_51 BD46
GPIO_52 BD44 TSP_SDA_1P8
GPIO_53 BE45 TSP_SCL_1P8
GPIO_54 BD42 IF_PMIC_INTB
GPIO_55 BE43 SPK_AMP_INT
GPIO_56 BF46 BTP_SPI_MISO
GPIO_57 BF44 BTP_SPI_MOSI
GPIO_58 BG47 BTP_SPI_CLK
GPIO_59 BG45 BTP_SPI_CS_N
GPIO_60 BH42 FG_ALERT_N
GPIO_61 BJ43 RCV_AMP_EN
GPIO_62 BJ45 MOT_EN
GPIO_63 BH46 SPK_AMP_EN
GPIO_64 AA1 RCAM1_MCLK
GPIO_65 Y2 RCAM2_MCLK
GPIO_66 AA3 RCAM3_MCLK
GPIO_67 Y1 RCAM4_MCLK
GPIO_68 P2 FCAM_MCLK
GPIO_69 BC3 RCAM1_SENSOR_I2C_SDA_1P8
GPIO_70 BB2 RCAM1_SENSOR_I2C_SCL_1P8
GPIO_71 BB4 FCAM_SENSOR_I2C_SDA_1P8
GPIO_72 BB6 FCAM_SENSOR_I2C_SCL_1P8
GPIO_73 BA1 RCAM2_RCAM3_RCAM4_SENSOR_I2C_SDA_1P8
GPIO_74 BA3 RCAM2_RCAM3_RCAM4_SENSOR_I2C_SCL_1P8
GPIO_75 BA5 CAM_AF_EEP_I2C_SDA_1P8
GPIO_76 BA7 CAM_AF_EEP_I2C_SCL_1P8
GPIO_77 BH4 RCAM3_RST_N
GPIO_78 BH2 RCAM4_RST_N
GPIO_79 BH6 FCAM_RST_N
GPIO_80 AG47 DISP_TE
GPIO_81 AG45 TSP_INT
GPIO_82 BK44 AP_USB_BOOT
GPIO_83 K2 IF_PMIC_IRQB
GPIO_84 BR11 WLAN_EN
GPIO_85 BP10 BT_EN
GPIO_86 BN9 WLAN_SW_CTRL
GPIO_87 BL9 PCIE0_RESET_N
GPIO_88 BJ9 PCIE0_CLK_REQ_N
GPIO_89 BP8 PCIE0_WAKE_N
GPIO_90 K4
GPIO_91 L5 SIM_DET @T_FLASH_DET
GPIO_92 V45
GPIO_93 Y46 BT_SLIMBUS_CLK
GPIO_94 AA45 BT_SLIMBUS_DATA
GPIO_95 AA47 CAM_FLASH_EN
GPIO_96 AB44 CAM_TORCH_EN
GPIO_97 AB46
GPIO_98 AD46
GPIO_99 AD45
GPIO_100 AY46 HALL_INT2
GPIO_101 AY44 6AXIS_INT2
GPIO_102 AW44 6AXIS_INT1
GPIO_103 AW47 GRIP_LDO_EN
GPIO_104 AW45
GPIO_105 AG43 TSP_DVDD_EN
GPIO_106 AG41
GPIO_107 AY42
GPIO_108 BL47 SIM2_DATA
GPIO_109 BN48 SIM2_CLK
GPIO_110 BP46 SIM2_RST
GPIO_111 BN45
GPIO_112 BN45
GPIO_113 BN43 SIM1_DATA
GPIO_114 BN42 SIM1_CLK
GPIO_115 BP42 SIM1_RST
GPIO_116 BN44 SIM_DET
GPIO_117 BP6 SDM_RFFE0_CLK
GPIO_118 BM6 SDM_RFFE0_DATA
GPIO_119 BK6 SDM_RFFE1_CLK
GPIO_120 BL5
GPIO_121 BM5 SDM_RFFE1_DATA
GPIO_122 BN4 @FAST_BOOT_SEL0
GPIO_123 BP4 FAST_BOOT_SEL1
GPIO_124 BL3
GPIO_125 BL7 FAST_BOOT_SEL2
GPIO_126 BL7 SDM_RFFE4_CLK
GPIO_127 BM8 SDM_RFFE4_DATA
GPIO_128 BK8 CP_WLAN_COEX_RXD
GPIO_129 BP14 CP_WLAN_COEX_TXD
GPIO_130 BM13
GPIO_131 BJ5 SDM_RFFE4_DATA
GPIO_132 BM5 SDM_RFFE4_CLK
GPIO_133 BP12 @SDR_RFFE_SLAVE_DATA
GPIO_134 BM15 SDM_RFFE4_CLK
GPIO_135 BP16 @SDR_RFFE_SLAVE_CLK
GPIO_136 BM17 QLINK0_REQ
GPIO_137 BN17 QLINK0_EN
GPIO_138 BP18 QLINK0_WMSS_RESET_N
GPIO_139 BM19
GPIO_140 BN17 BAT_ID1
GPIO_141 BM7 BAT_ID2 TP4004
GPIO_142 BK42
GPIO_143 BL45 PROXY_INT
GPIO_144 N45 SPK_I2S3_BCLK
GPIO_145 P46 SPK_I2S3_WS
GPIO_146 P44 SPK_I2S3_DO
GPIO_147 N47 SPK_I2S3_DI
GPIO_148 T46
GPIO_149 R46
GPIO_150 T42
GPIO_151 R43 MAIN_MIC_DATA R4029 MAIN_MIC_CLK
GPIO_152 T44 R4032
GPIO_153 U43 SUB_MIC_DATA SUB_MIC_CLK
GPIO_154 T46 C4004 C4001
GPIO_155 U47
GPIO_156 U45
GPIO_157 V46
GPIO_158 V45
GPIO_159 T46 6AXIS_I3C_SDA_1P8
GPIO_160 U47 6AXIS_I3C_SCL_1P8
GPIO_161 C45 PROXY_LIGHT_SDA_1P8
GPIO_162 H46 PROXY_LIGHT_SCL_1P8
GPIO_163 J47 MAGNETIC_SDA_1P8
GPIO_164 J45 MAGNETIC_SCL_1P8
GPIO_165 K46
GPIO_166 L47
GPIO_171 C45 BLE_UART_TXD
GPIO_172 D46 BLE_UART_RXD
GPIO_173 E47
GPIO_174 E45 PROXY_LDO_EN

@FAST_BOOT_SEL0 SDM_RFFE1_DATA R4040 FAST_BOOT_SEL1 R4042 FAST_BOOT_SEL2 R4041

@VREG_L18B_1P8 VDD_AMP_1P8 C4011

JTAG_TRST_N JTAG_TMS JTAG_RST_OUT_N TP_JTAG_TRST TP_JTAG_TMS TP_JTAG_TDI TP_JTAG_TCK TP_JTAG_TDO TP_AP_UART_TXD TP_AP_UART_RXD JTAG_TDI JTAG_TCK JTAG_TDO AP_UART_TXD AP_UART_RXD
TP_RST_OUT_N C4012 C4000

@JTAG_VBUS_OVP VBUS_OVP U3 USB_P USB_N ID BOOT0 U2
JTAG_MUIC_D_P JTAG_MUIC_D_N JTAG_USB_ID AP_USB_BOOT R4028 JP TP_UB0

@VREG_L18B_1P8 VDD_AMP_1P8 TP_UB4000

JTAG4000 VBUS_IF_5P0_JTAG_B GND_B JTAG_MUIC_D_P_B JTAG_MUIC_D_N_B JTAG_ID_B VBUS_IF_5P0_JTAG_A GND_A JTAG_MUIC_D_P_A JTAG_MUIC_D_N_A JTAG_ID_A
JTAG4001 VBUS_IF_5P0_JTAG_A GND_A JTAG_MUIC_D_P_A JTAG_MUIC_D_N_A JTAG_ID_A AP_USB_BOOT_A
JTAG4002 VBUS_IF_5P0_JTAG_B GND_B JTAG_MUIC_D_P_B JTAG_MUIC_D_N_B AP_USB_BOOT_B JTAG_MUIC_D_P_A JTAG_MUIC_D_N_A AP_USB_BOOT_A JTAG_ID_A

CON4002 CON4001 2D BARCODE SMD NC

JTAG CON

PCB array JTAG

Engineer		SM-A736B	
Drawn by:			
R&D CHK:		TITLE: AP/CP	Size:
DOC CTRL CHK:			
MFG ENGR CHK:			
Changed by:	Date Changed:	Time Changed:	QA CHK:	Drawing Number

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

AP

UCP4000

[2/4]

UCP4000

[3/4]

UCP4000

[4/4]

UME5000

uMCP

MEMORY

6GB/128GB

8GB/128GB

8GB/256GB

Engineer:	SM-A736B
Draw by:	
R&D CHK:	TITLE: AP/CP/uMCP
DOC CTRL CHK:	Size:
MTD DRAM CHK:	
	Changed by: / Date Changed: / Time Changed: / QA CHK: / REV: / Drawing Number:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

PMIC

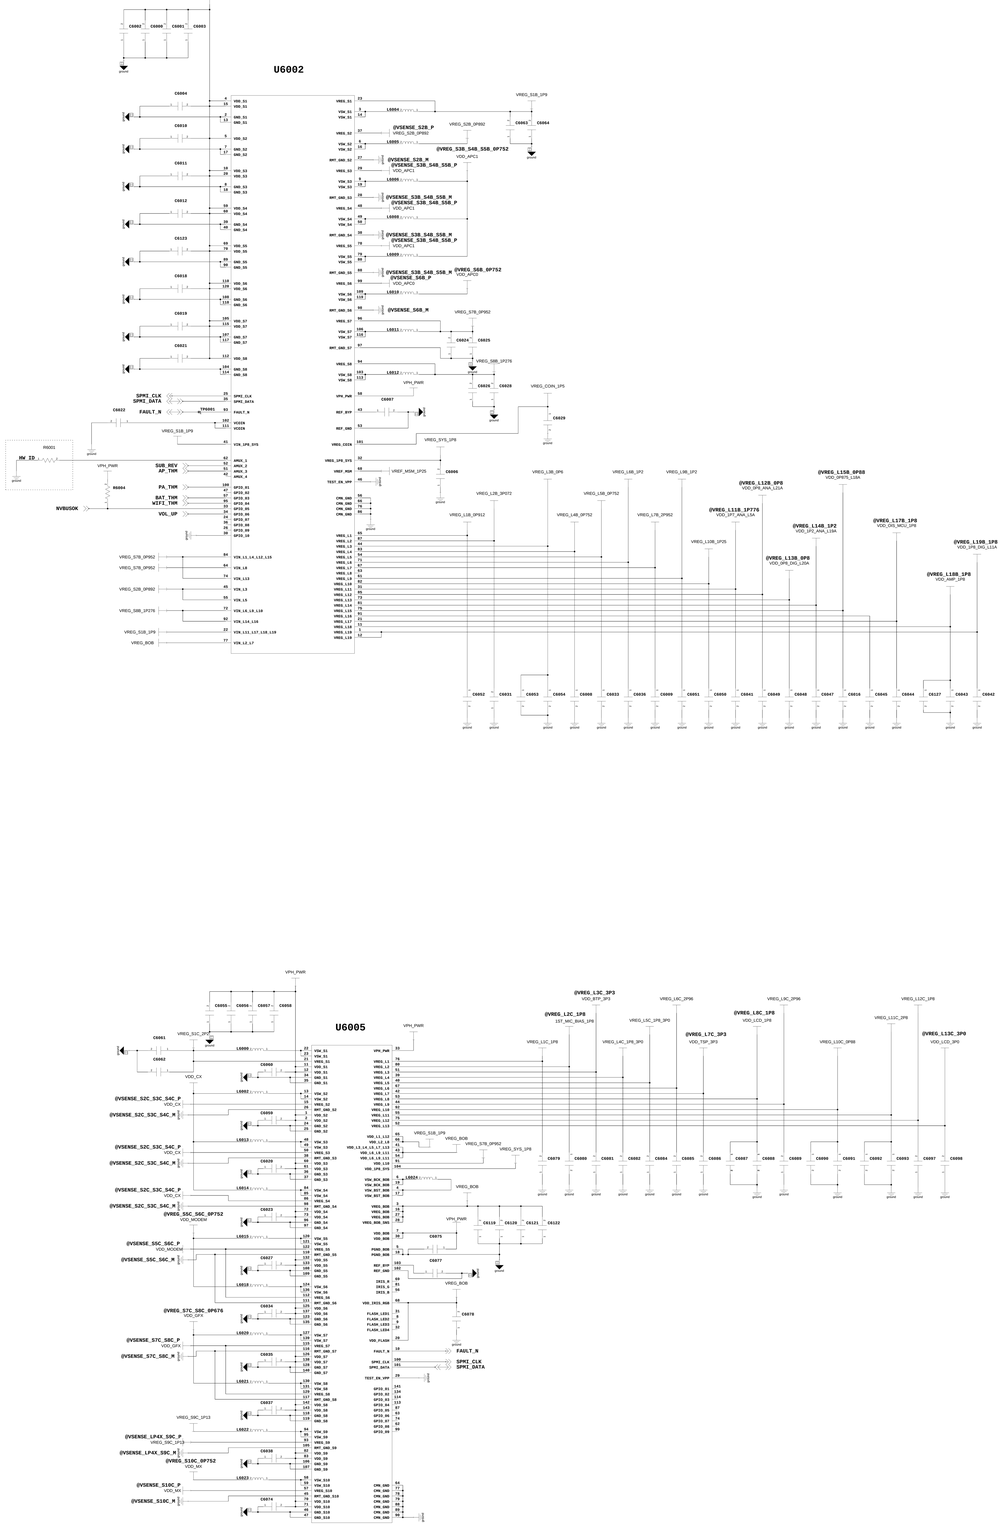

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

AUDIO & SENSOR PART

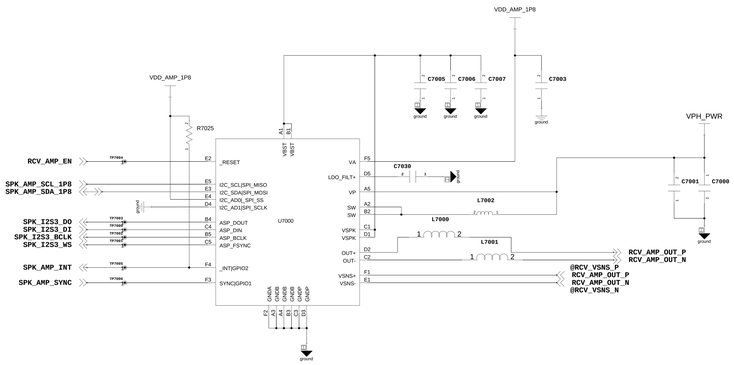

RCV AMP

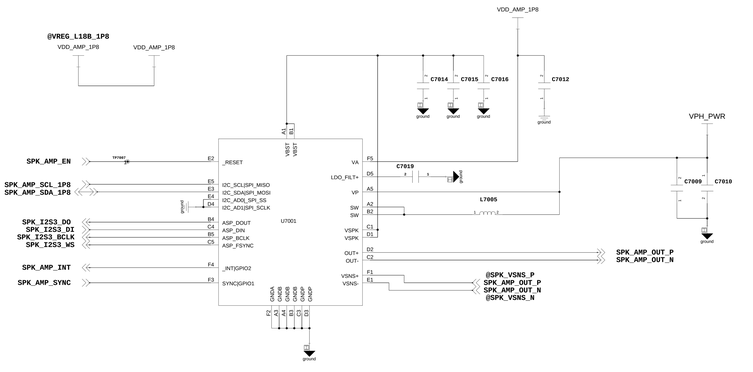

SPK AMP

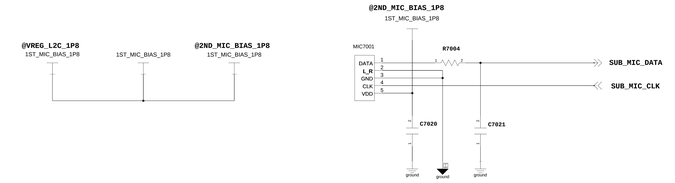

2nd MIC



RCV CONTACT

DUAL SIM / T-FLASH (3in2)

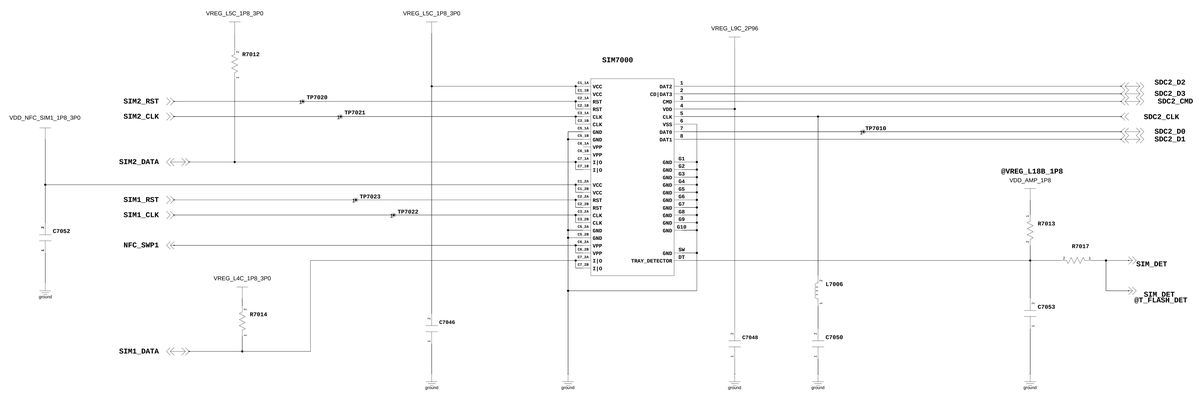

SENSOR

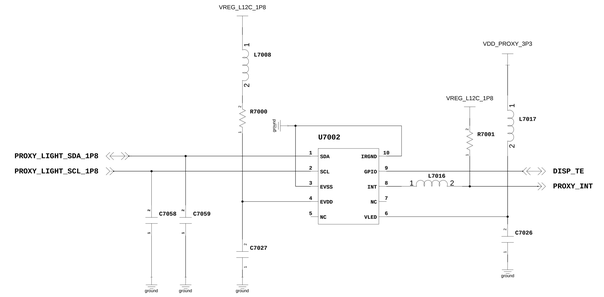

AMBIENT SENSOR





HALL SENSOR

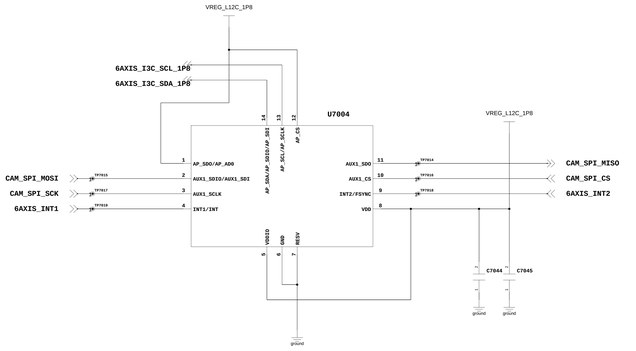

ACC&GYRO SENSOR



MAGNETIC SENSOR

Engineer:		SM-A736B			
Drawn by:					
R&D CHK:		TITLE: AUDIO / SENSOR			Size:
DOC CTRL CHK:					
MFG ENGR CHK:					
Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number: Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

CAMERA

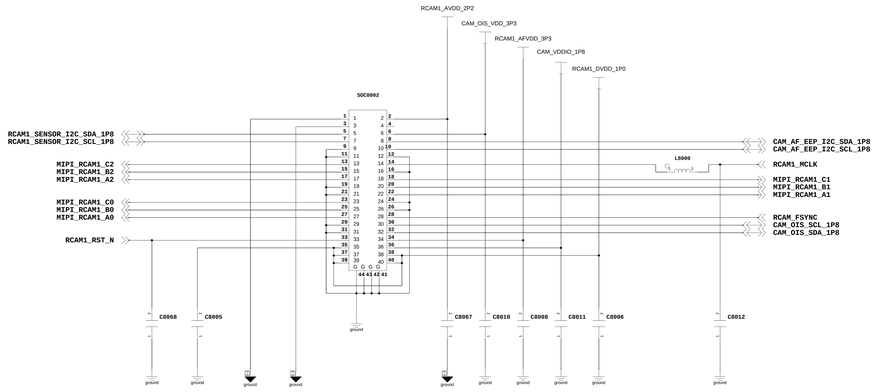

RCAM1_108M OIS(40PIN)

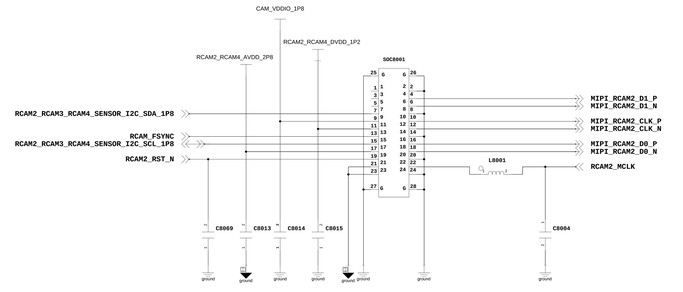

RCAM2_5M_BOKEH_CAMERA(24PIN)

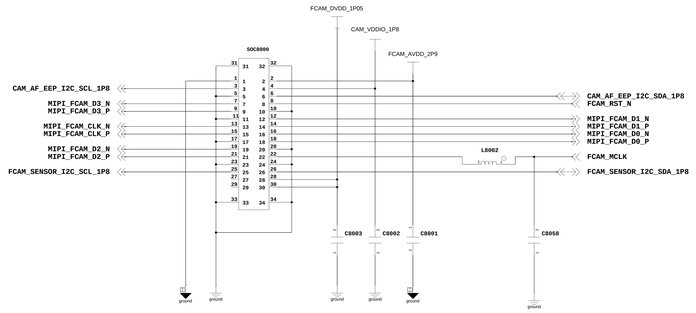

FRONT_32M CAMERA (30PIN)

RCAM3_SUPER WIDE_12M CAMERA(30pin)

RCAM4_5M_MACRO_CAMERA(24PIN)

CAM PMIC

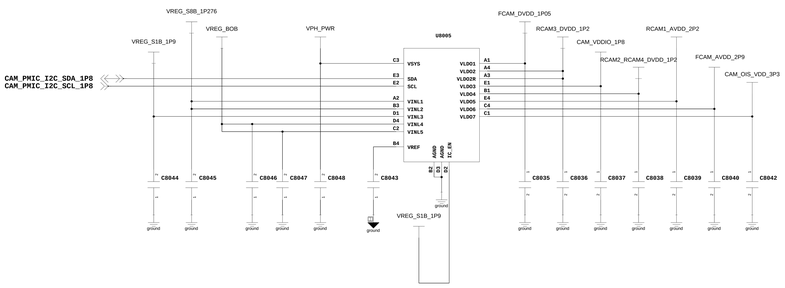

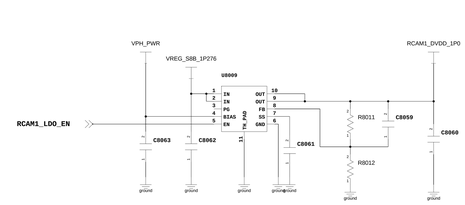

RCAM1_DVDD

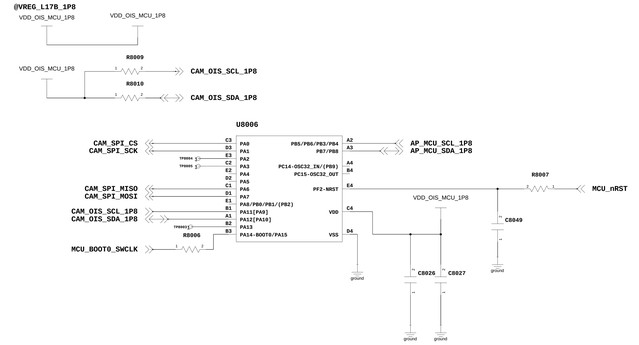

CAM MCU





RCAM1_AF



RCAM2_RCAM4_AVDD



RCAM3_AVDD

Engineer:					SM-A426B
Drawn by:					
R&D CHK:				TITLE:	Size:
DOC CTRL CHK:				CAMERA	
MFG ENGR CHK:					
Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number: Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

C2C (Conn to Conn FPCB)

@VREG_L7C_3P3
VDD_TSP_3P3 — VDD_TSP_3P3

@VREG_L13C_3P0
VDD_LCD_3P0 — VDD_LCD_3P0

@VREG_L3C_3P3
VDD_BTP_3P3 — VDD_BTP_3P3

@VREG_L8C_1P8
VDD_LCD_1P8 — VDD_LCD_1P8



GRIP SENSOR2

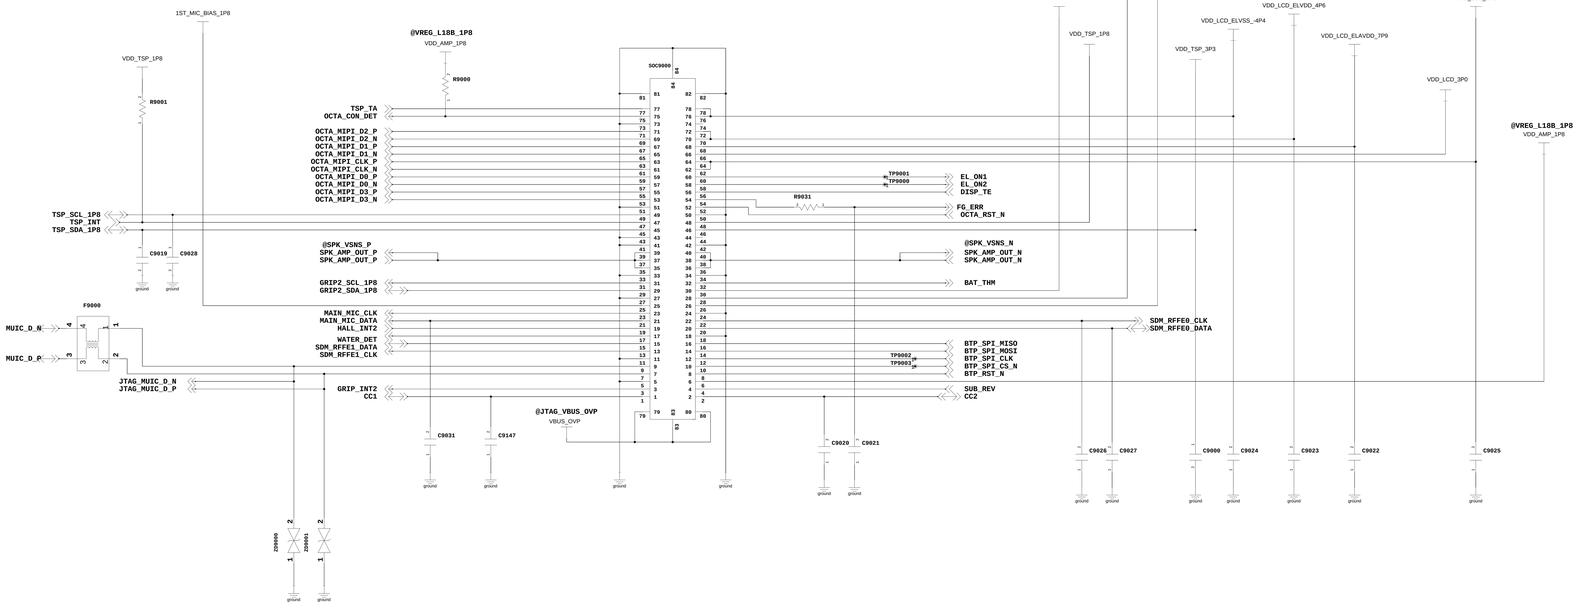

SHIELD CAN/BOTH HOLE

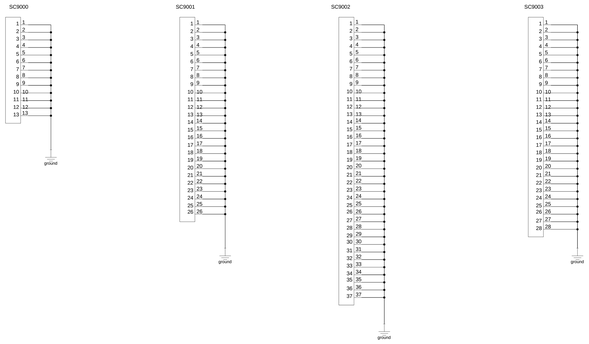

DISPLAY

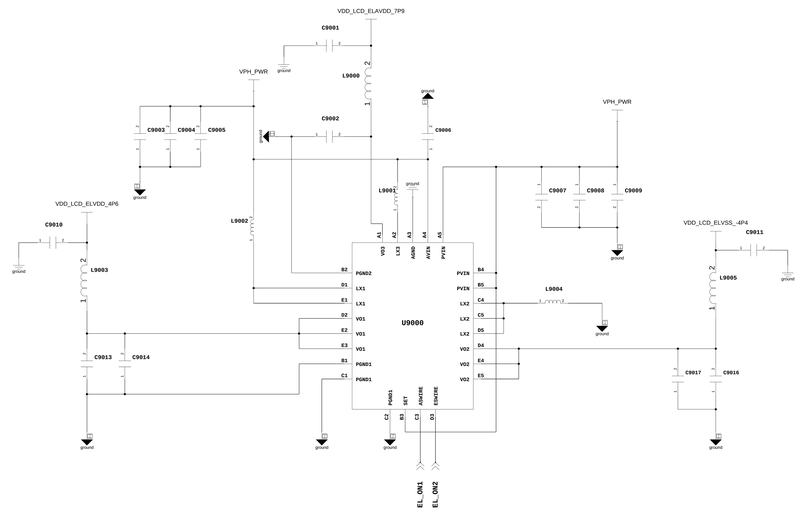

DISPLAY PMIC



Engineer:	SM-A736B
Drawn by:	
R&D CHK:	TITLE: DISPLAY — Size:
DOC CTRL CHK:	
MFG ENGR CHK:	
Changed by: / Date Changed: / Time Changed: / QA CHK:	REV: / Drawing Number: / Page:

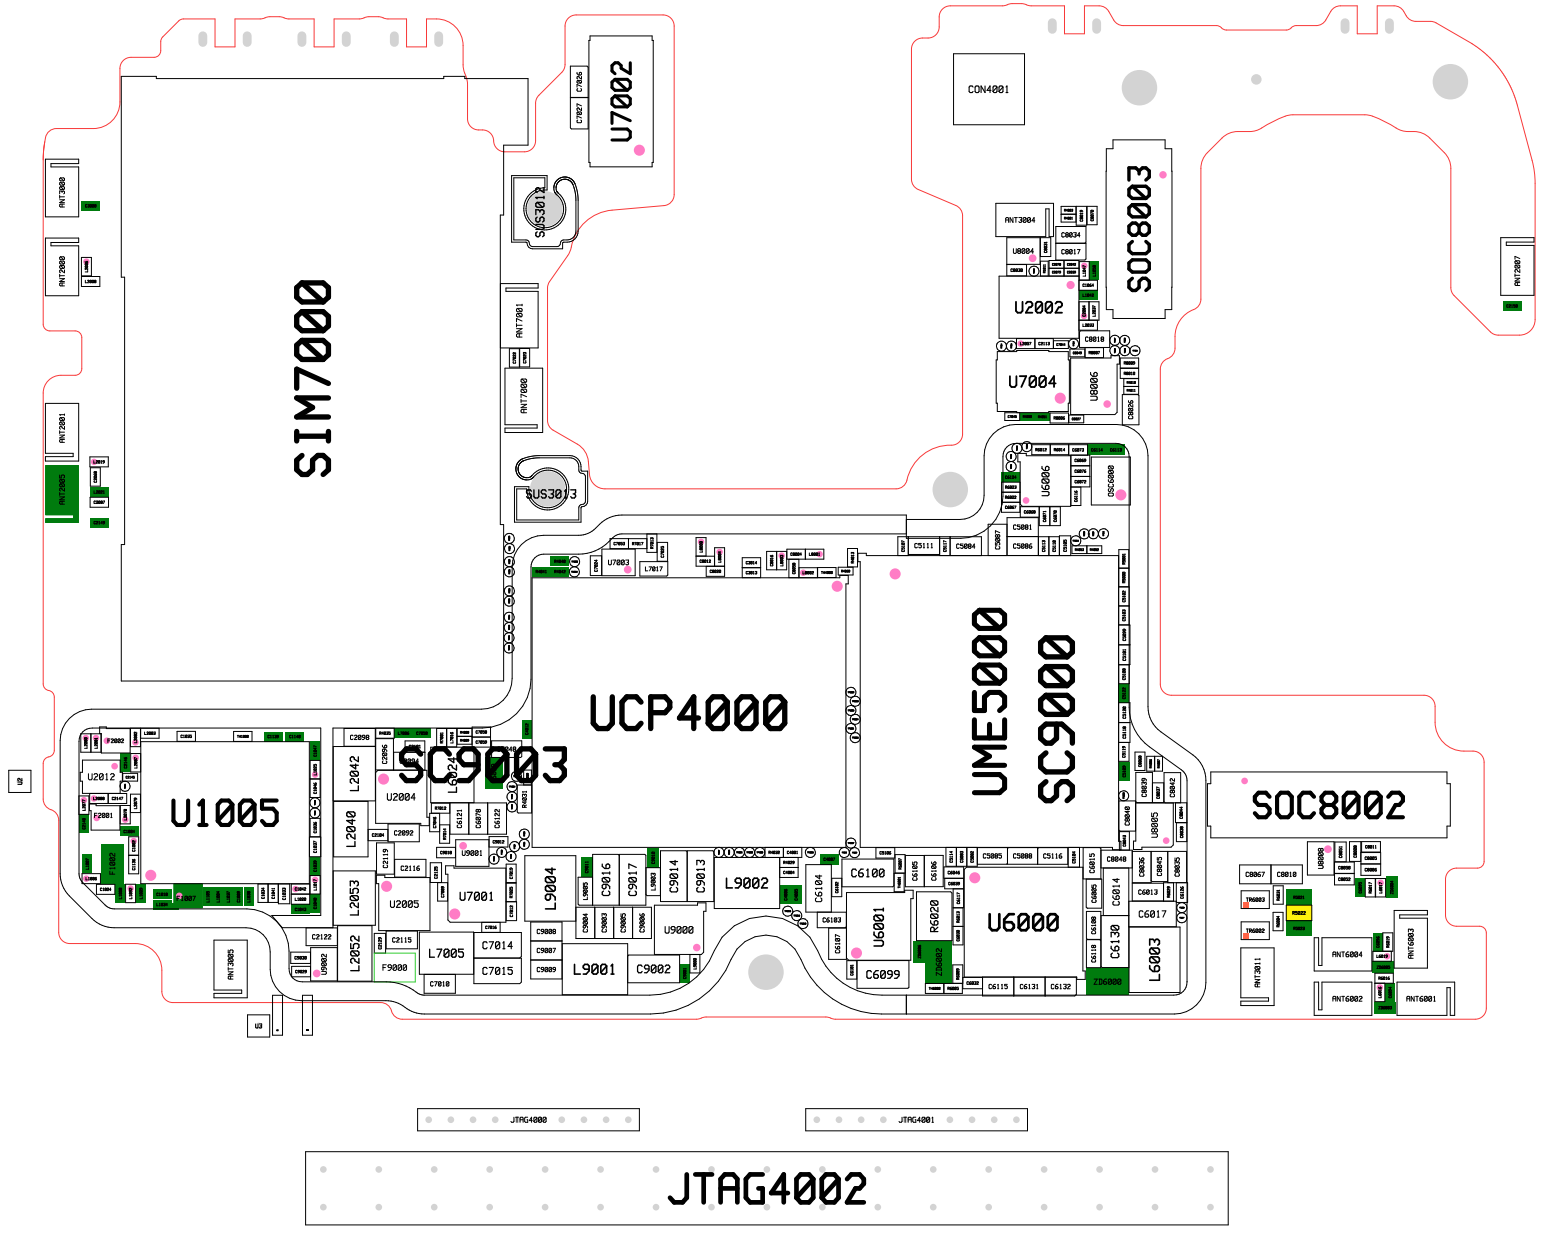
SIM7000
U7002
SUS3011
SUS3013
ANT7001
ANT7000
CON4001
SOC8003
U2002
U7004
U8006
ANT3004
ANT3000
ANT3001
ANT3005
ANT2001
ANT2005
ANT2007
UCP4000
SC9003
UME5000
SC9000
SOC8002
U1005
U2012
L2042
L2040
L2053
L2052
U2004
U2005
U7001
L7005
C7014
C7015
F9000
L9004
C9016
C9017
C9014
C9013
L9002
U9000
L9001
C9002
C6100
C6104
U6001
C6099
R6020
U6000
C6130
L6003
U6005
U8005
U8008
ANT6004
ANT6002
ANT6003
ANT6001
ANT3011
U3
JTAG4000
JTAG4001
JTAG4002

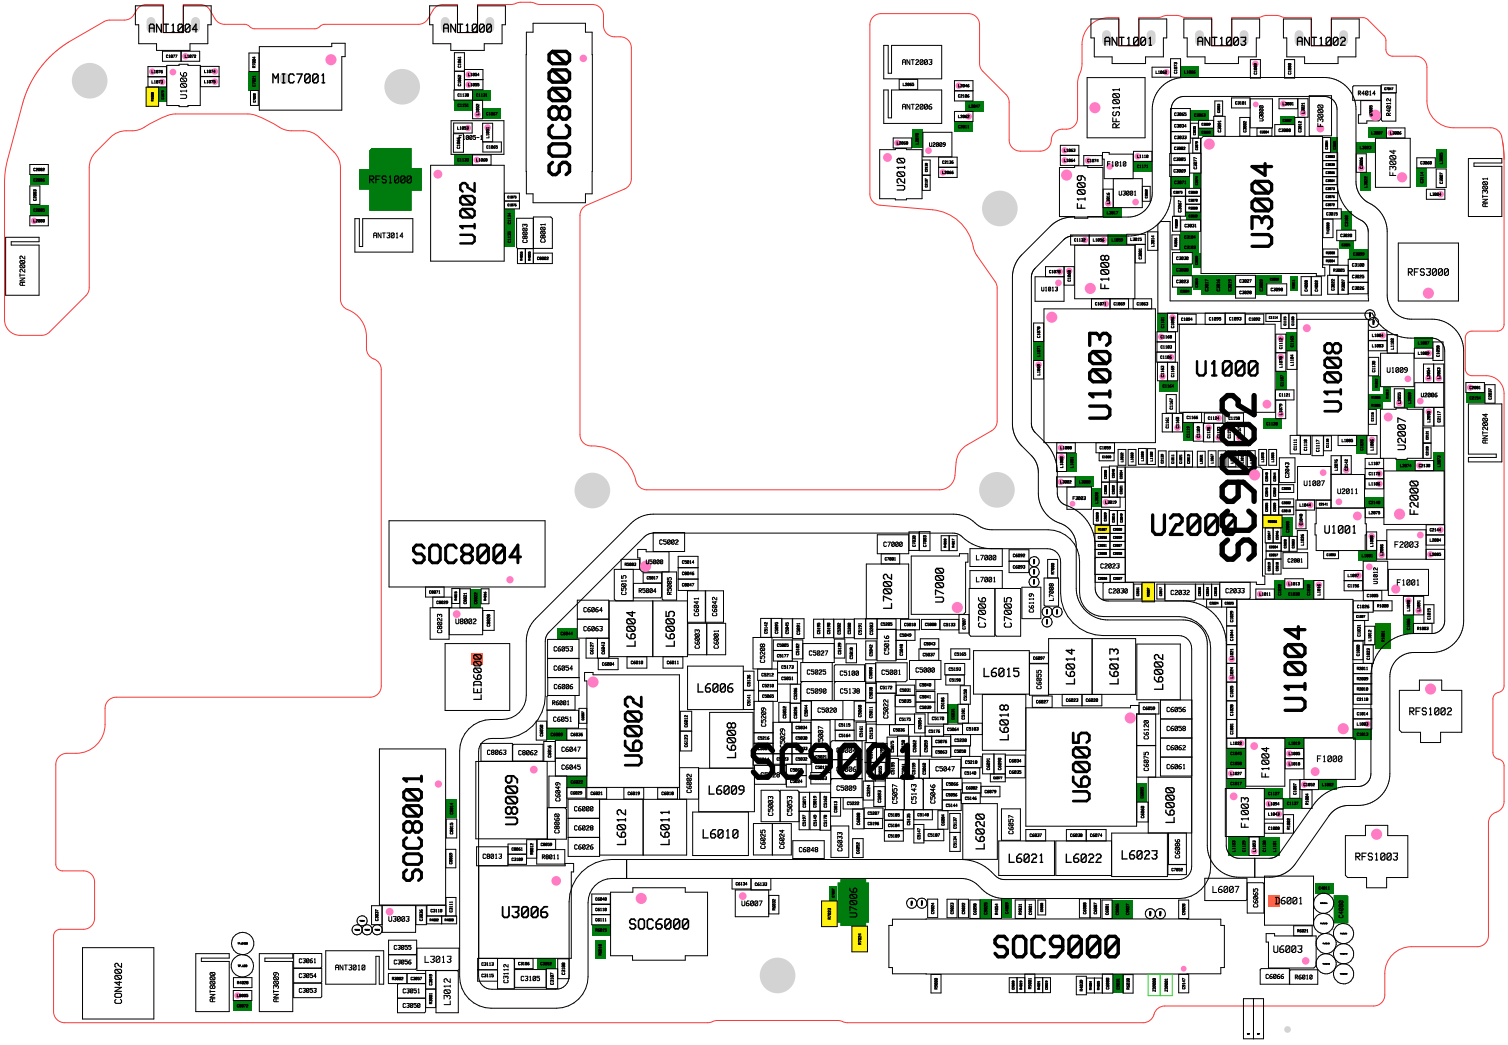
ANT1004
MIC7001
ANT1000
SOC8000
RFS1000
ANT3014
U1002
ANT2002
ANT2003
ANT2006
U2010
ANT1001
ANT1003
ANT1002
RFS1001
U3004
RFS3000
U1003
U1000
U1008
U2007
ANT3001
ANT2004
U2000
SC9002
U1001
F2000
F2003
F1001
SOC8004
LED6000
U6002
L6004
L6005
L6006
L6008
L6009
L6010
L6011
L6012
U8009
SOC8001
U3006
SOC6000
L7002
U7000
L7001
C7006
C7005
L6015
L6014
L6013
L6002
L6018
U6005
L6000
L6020
L6021
L6022
L6023
U7006
L6007
U6001
U6003
SOC9000
U1004
F1004
F1000
F1003
RFS1002
RFS1003
CON4002
ANT4000
ANT3000
ANT3010
L3013
L3012

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION AND PROPRIETARY TO SAMSUNG ELECTRONICS CO.'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.

A73_5G_SUB_SVC

MAIN ANTENNA (LB) MAIN1

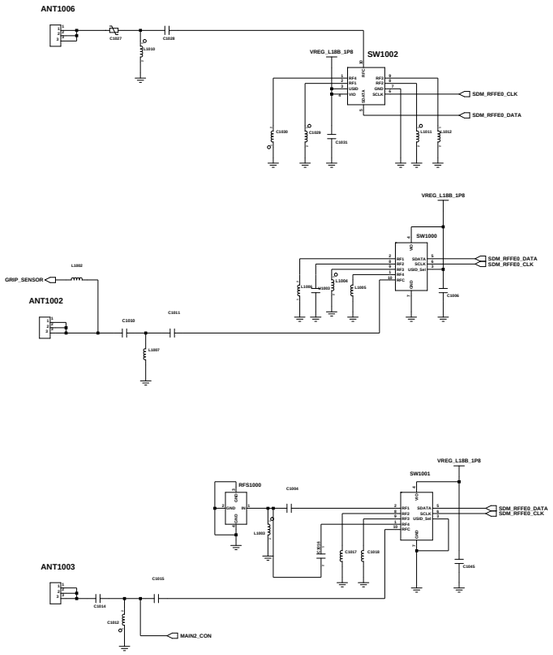

MAIN ANTENNA (MB, HB) MAIN2

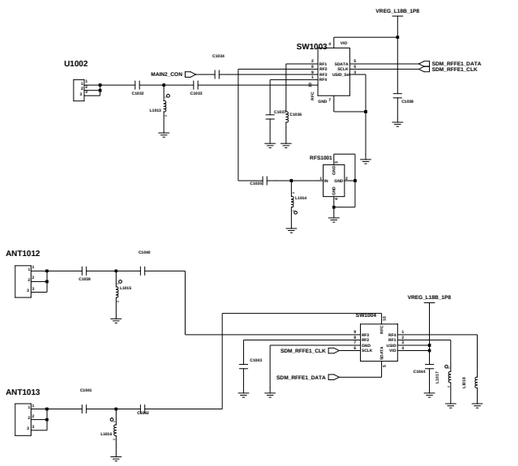

IF CON (TYPE-C)

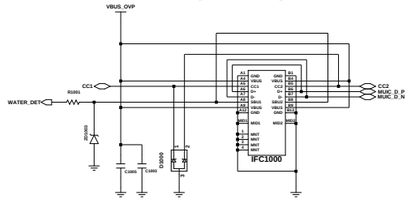

SPK



BTP CON



MIC



MOTOR



HALL_IC



BAT_THM



SUB_REV



GRIP SENSOR

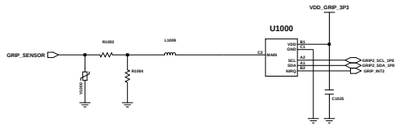

MAIN FPCB

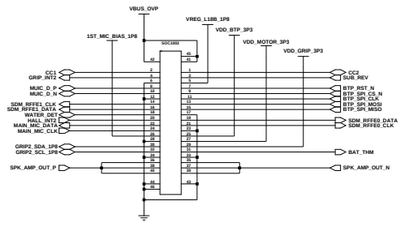

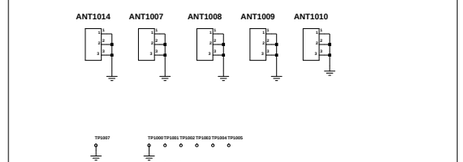

Engineer:	
Drawn by:	
R&D CHK:	TITLE:
DOC CTRL CHK:	
MFG ENGR CHK:	

Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page:

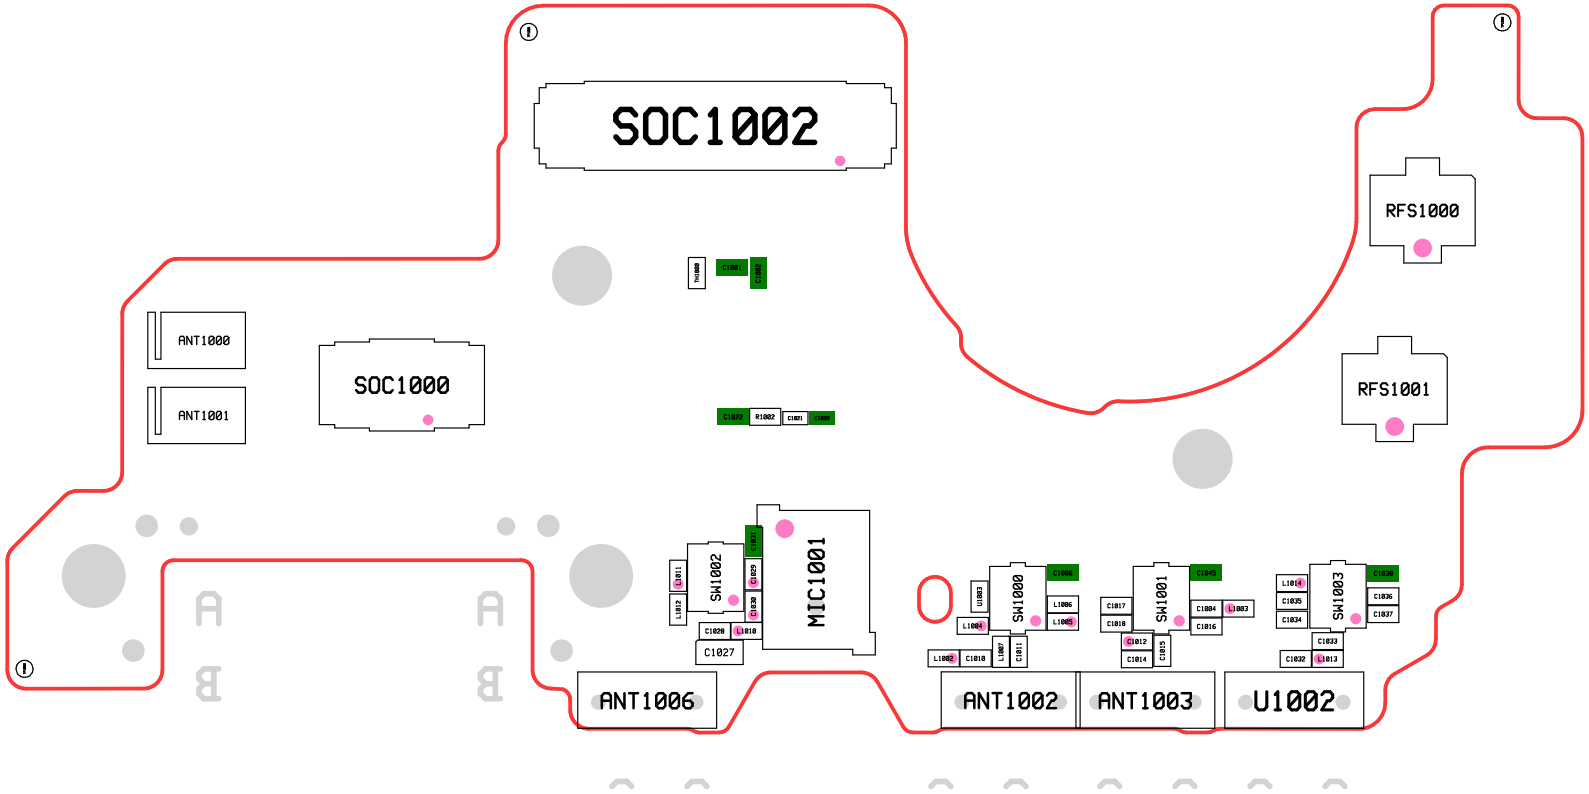
SOC1002
RFS1000
ANT1000
ANT1001
SOC1000
RFS1001
SW1002
MIC1001
C1027
SW1000
SW1001
SW1003
ANT1006
ANT1002
ANT1003
U1002

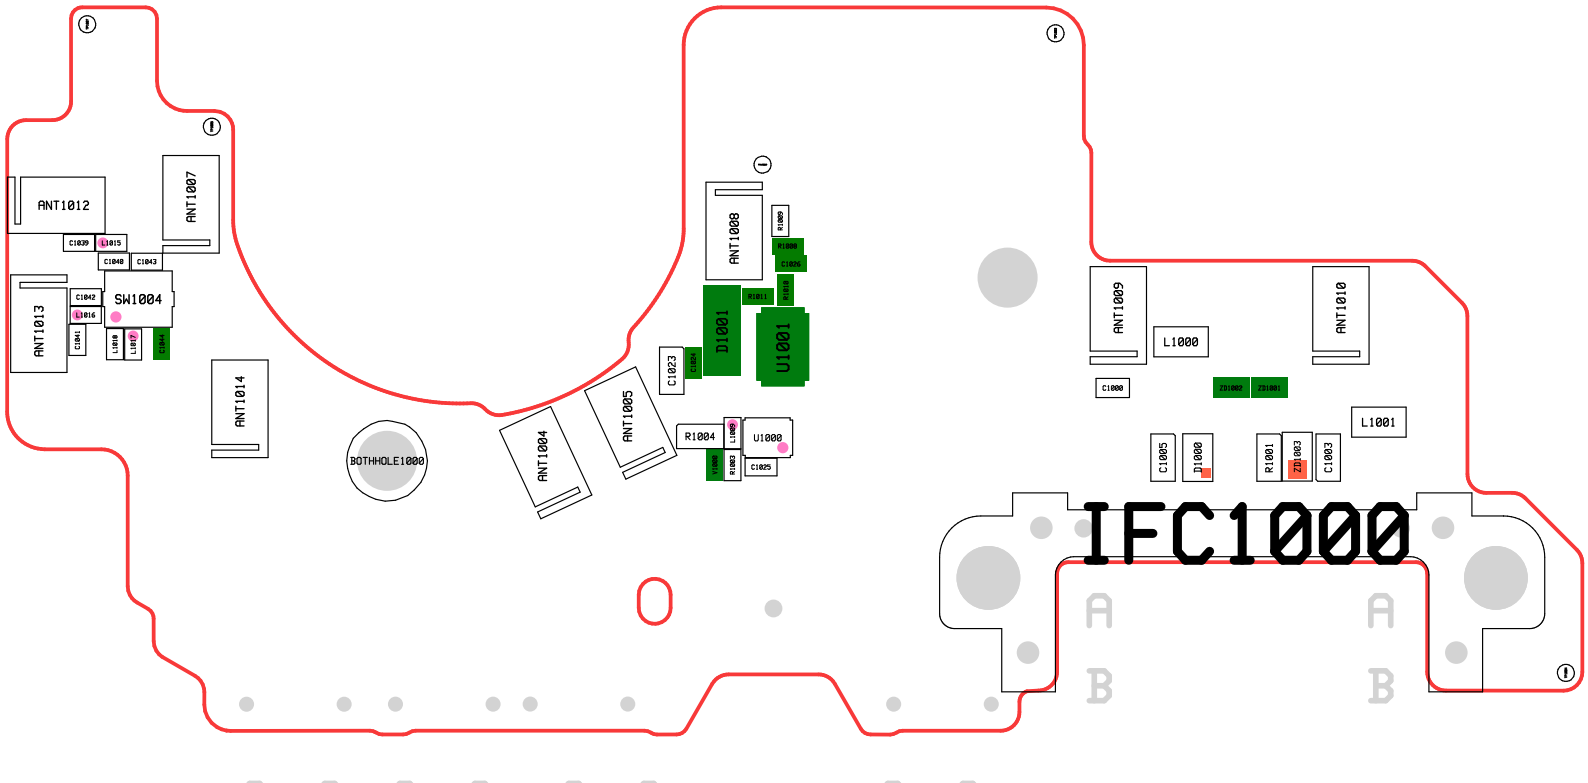
ANT1012
ANT1007
C1039
L1015
C1040
C1043
C1042
SW1004
L1016
ANT1013
C1041
L1018
L1017
C1044
ANT1014
BOTHHOLE1000
ANT1004
ANT1005
ANT1008
R1009
R1000
C1026
R1011
R1010
D1001
U1001
C1023
C1024
R1004
L1002
U1000
R1005
R1003
C1025
ANT1009
L1000
ANT1010
C1000
ZD1002
ZD1001
L1001
C1005
D1000
R1001
ZD1003
C1003
IFC1000
A
B
A
B