



5-1. Wiring Diagram

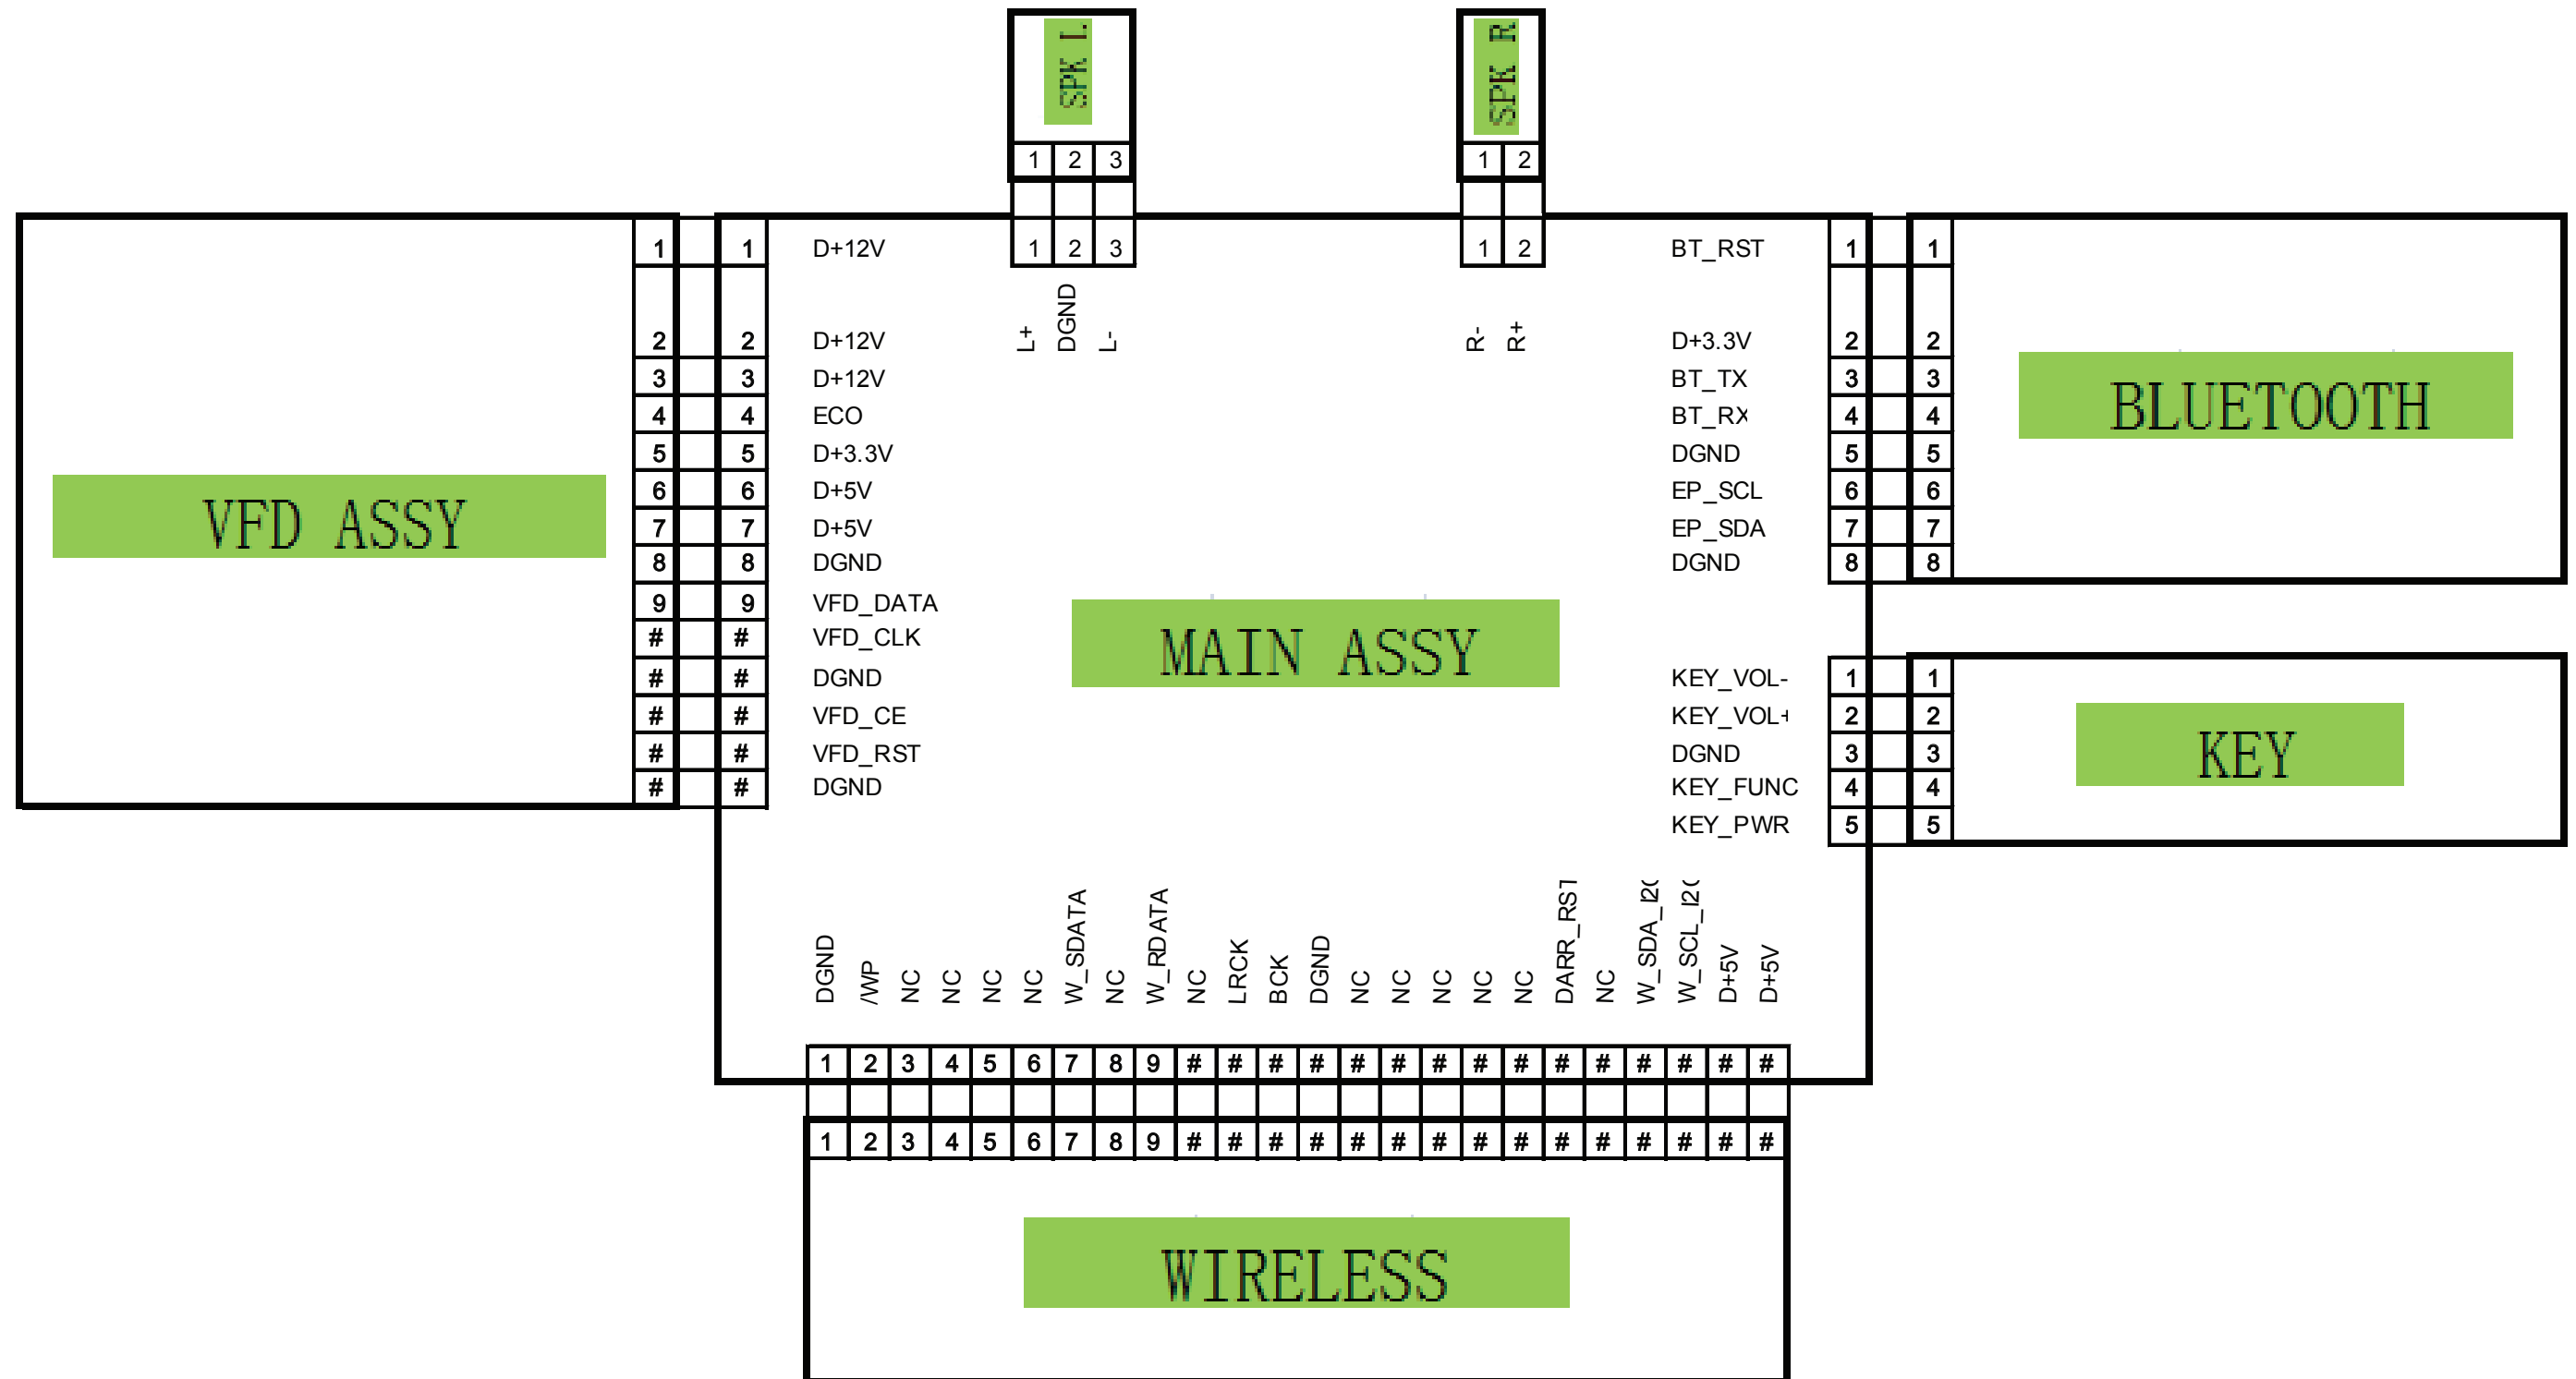

5-2. MAIN PCB Top

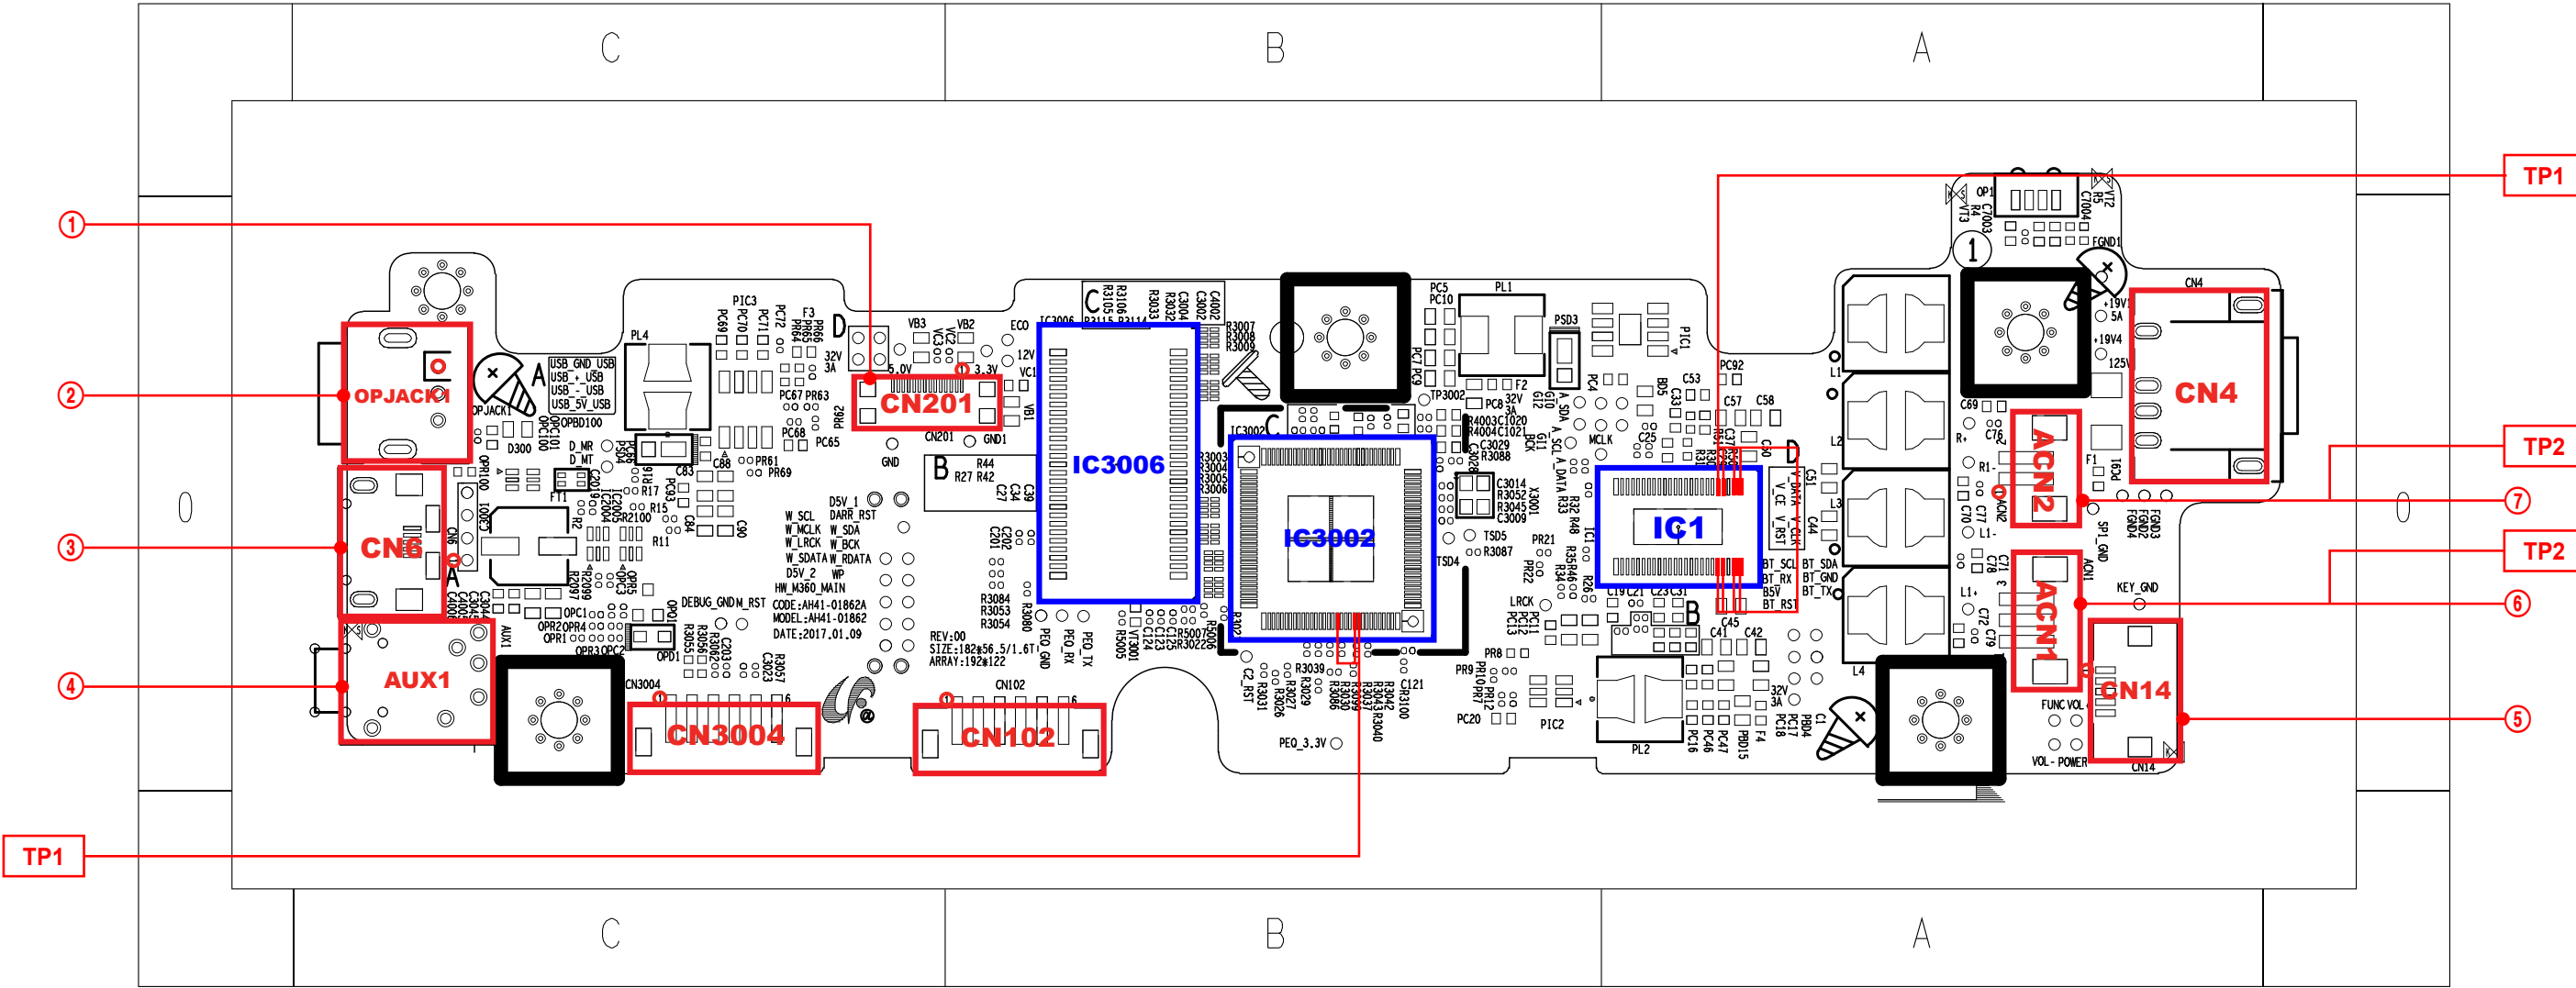

5-2-1. Pin Connection

① CN201 (VFD Connector)	
1	D+12V
2	D+12V
3	D+12V
4	ECO
5	D+3.3V
6	D+5V
7	D+5V
8	DGND
9	VFD_DATA
10	VFD_CLK
11	DGND
12	VFD_CE
13	VFD_RST
14	DGND

② OPJACK1 (Optical Signal)	
1	HM3.3V
2	HDGND
3	OPTICAL_0_H

③ CN6 (USB)	
1	5V
2	USB-
3	USB+
4	NC
5	GND



④ AUX1 (AUX Signal)	
1	DGND
2	AUX_L
3	NC
4	AUX_R
5	DGND
6	AUX_SENS_H
7	DGND

⑤ CN14 (TACK KEY)	
1	FUNC
2	VOL+
3	GND
4	VOL-
5	POWER


⑥ ACN1 (SPEAKER L)	
1	FULL RANGE L+
2	FULL RANGE L-

⑦ ACN2 (SPEAKER R)	
1	FULL RANGE R+
2	FULL RANGE R-

5-2-2. Test Point Wave Form

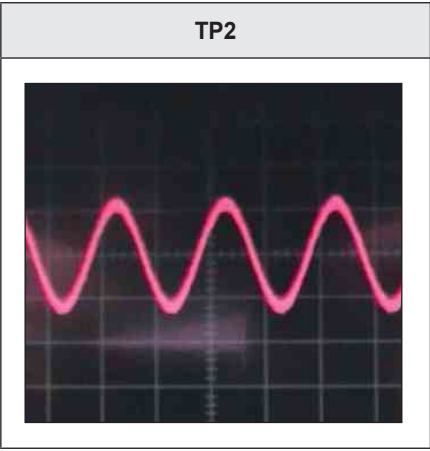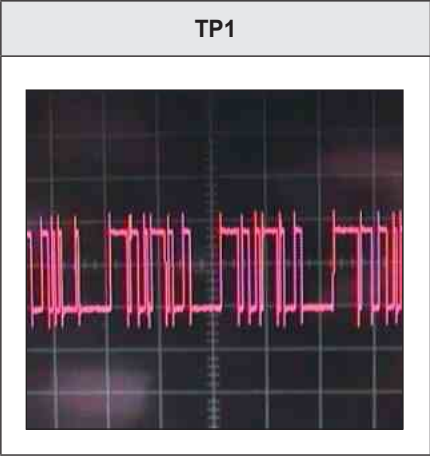


5-5

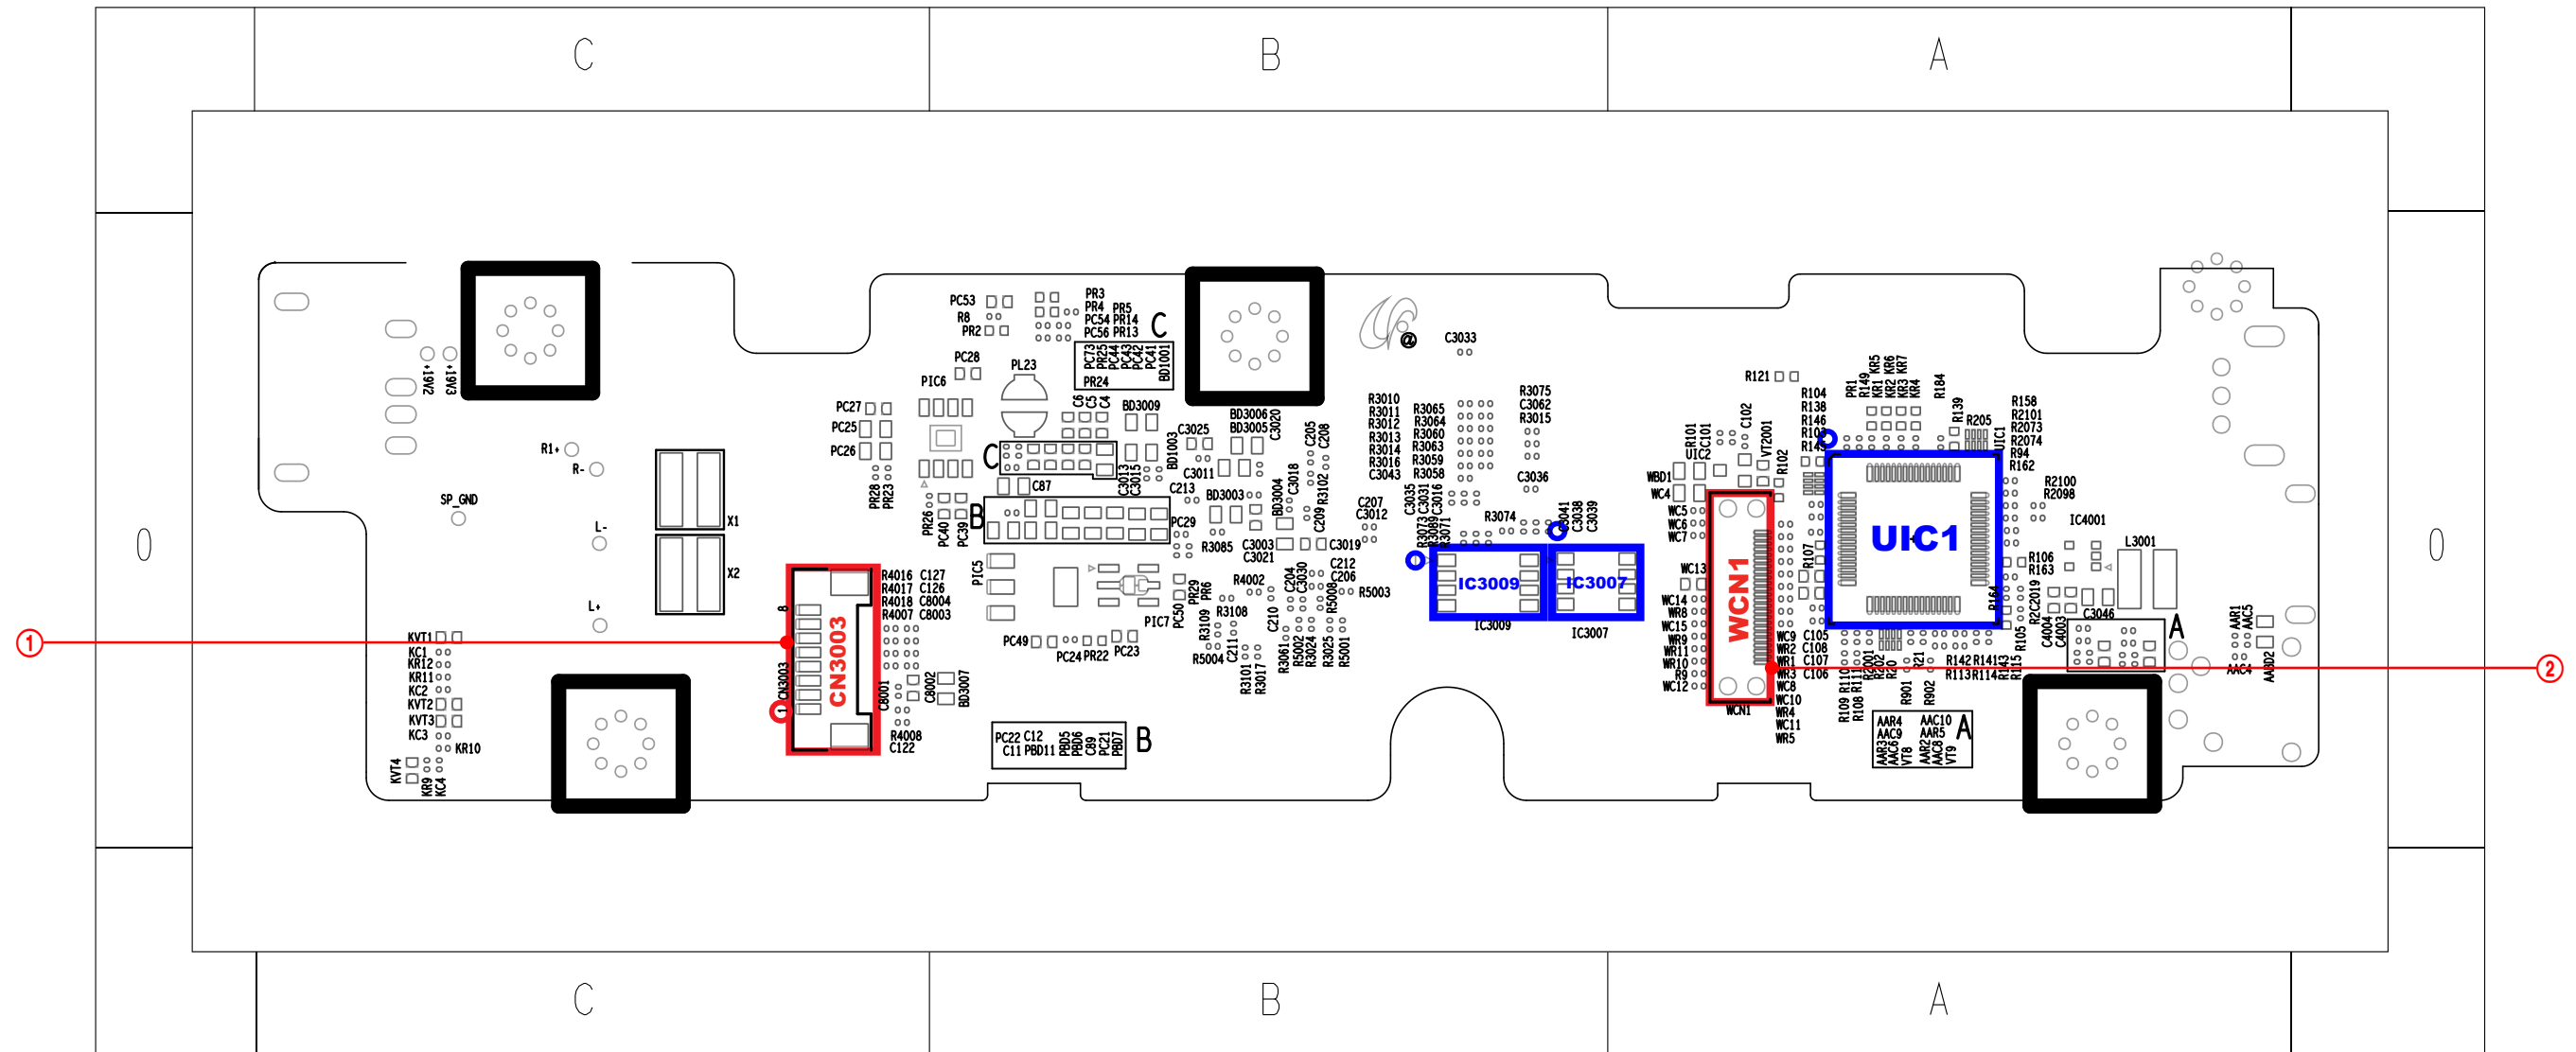


5-3-1. Pin Connection

① CN3003 (BT Module Connector)		② WCN1 (Wireless Module Connector)	
1	BT_RST	1	GND
2	D+3.3V	2	WP
3	BT_TX	3	NC
4	BT_TX	4	NC
5	DGND	5	NC
6	EP_SCL	6	NC
7	EP_SDA	7	W_SDATA
8	DGND	8	NC
		9	W_RDATA
		10	NC
		11	LRCK
		12	BCK
		13	GND
		14	NC
		15	NC
		16	NC
		17	W_SDA
		18	W_CLK
		19	DARR_RST
		20	NC
		21	W_SDA_I2C
		22	W_SCL_I2C
		23	D+5V_PW
		24	D+5V_PW

5-4. VFD PCB Top

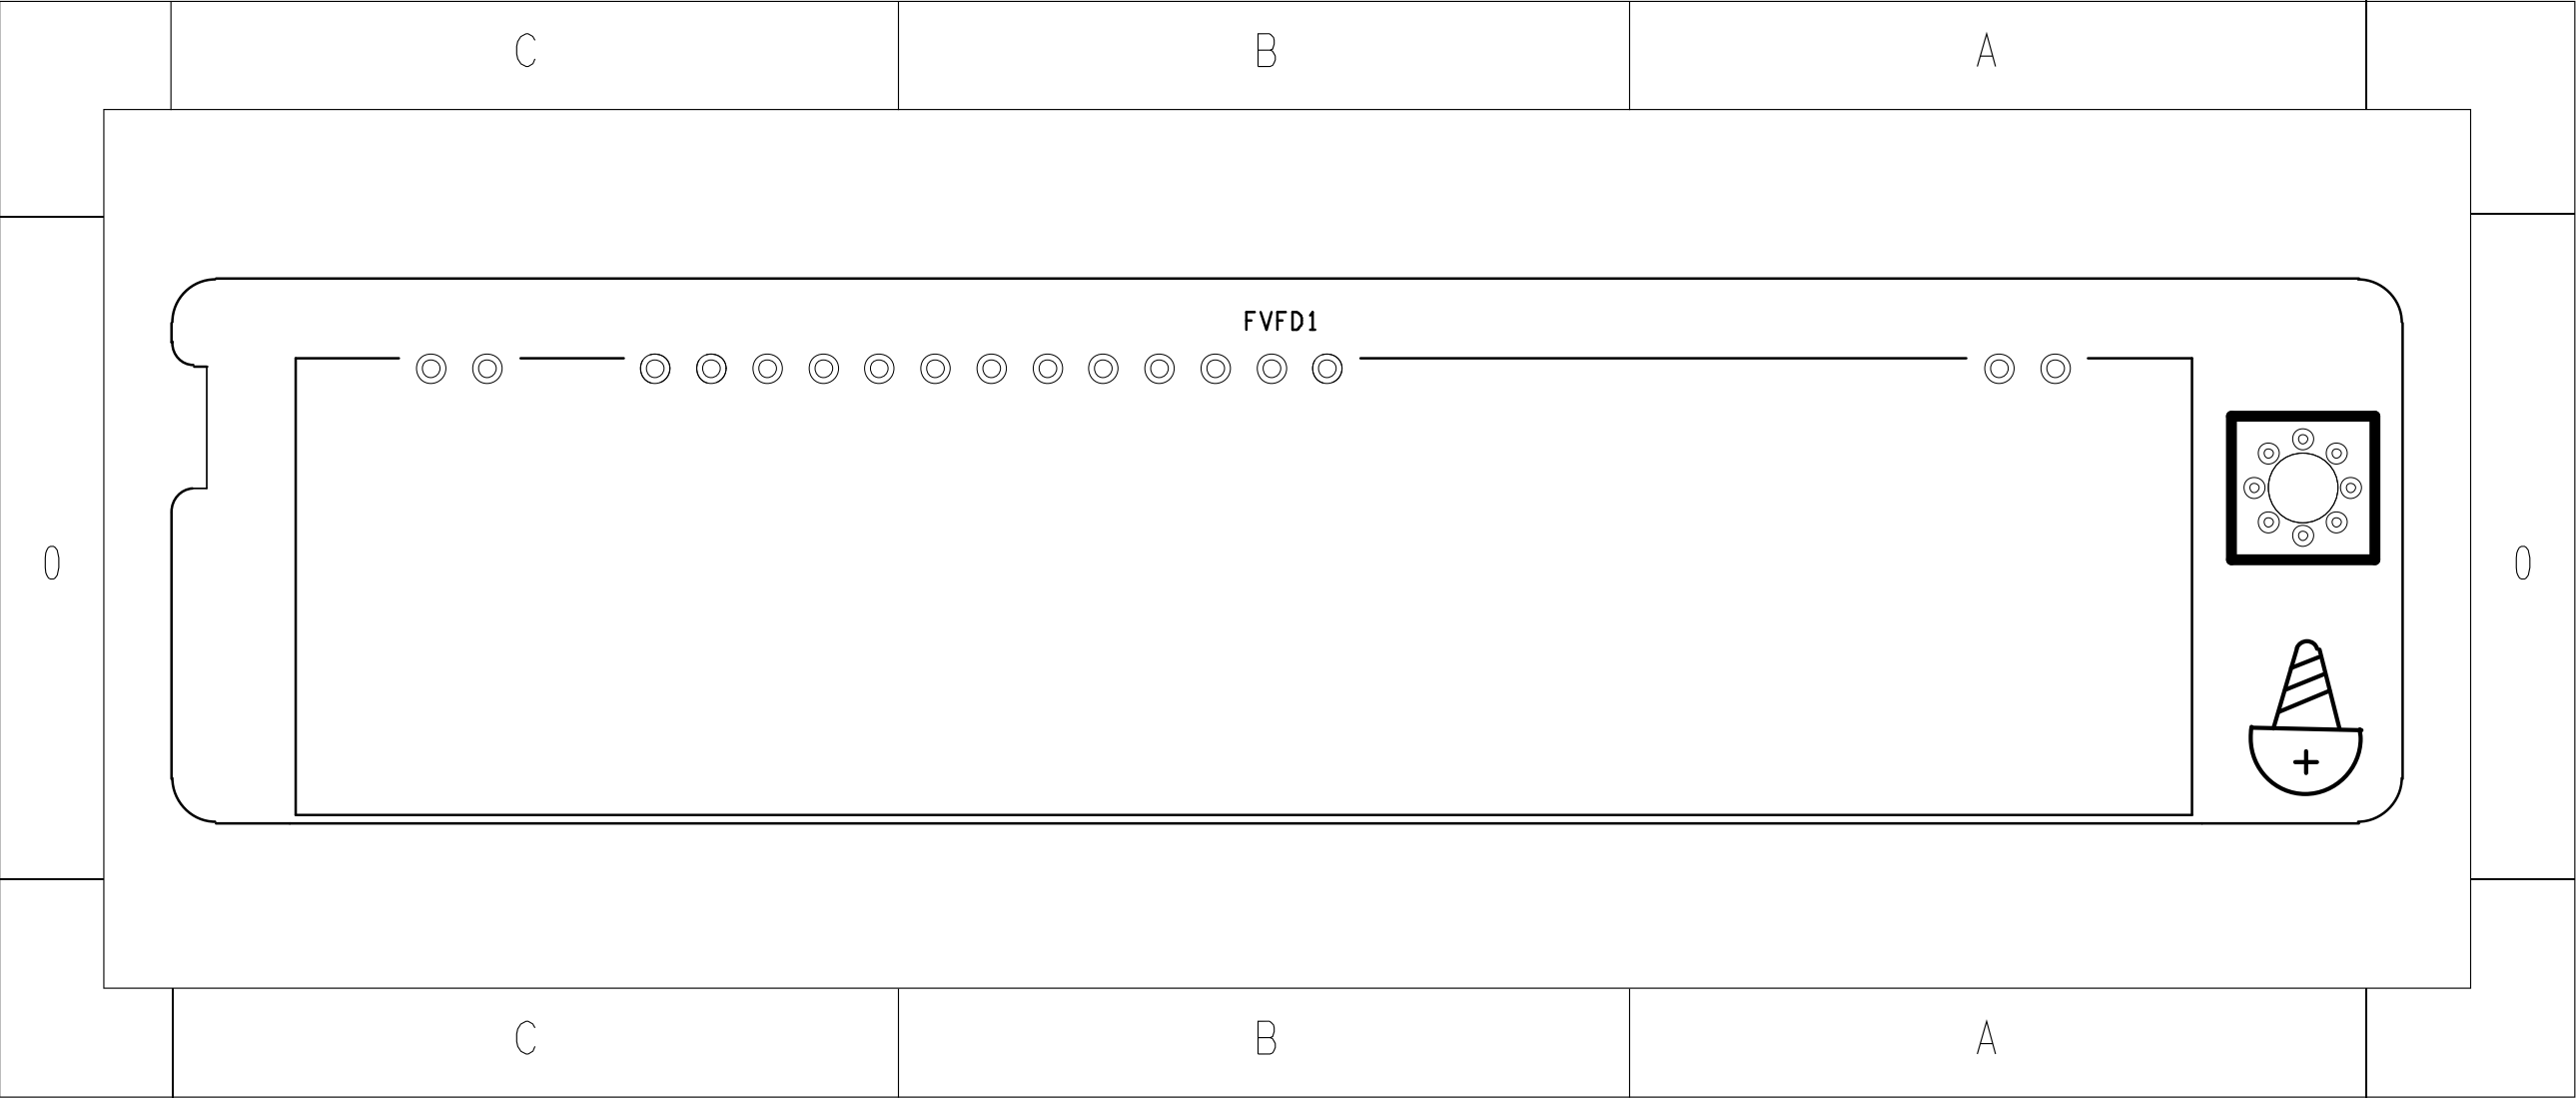

5-5. VFD PCB Bottom

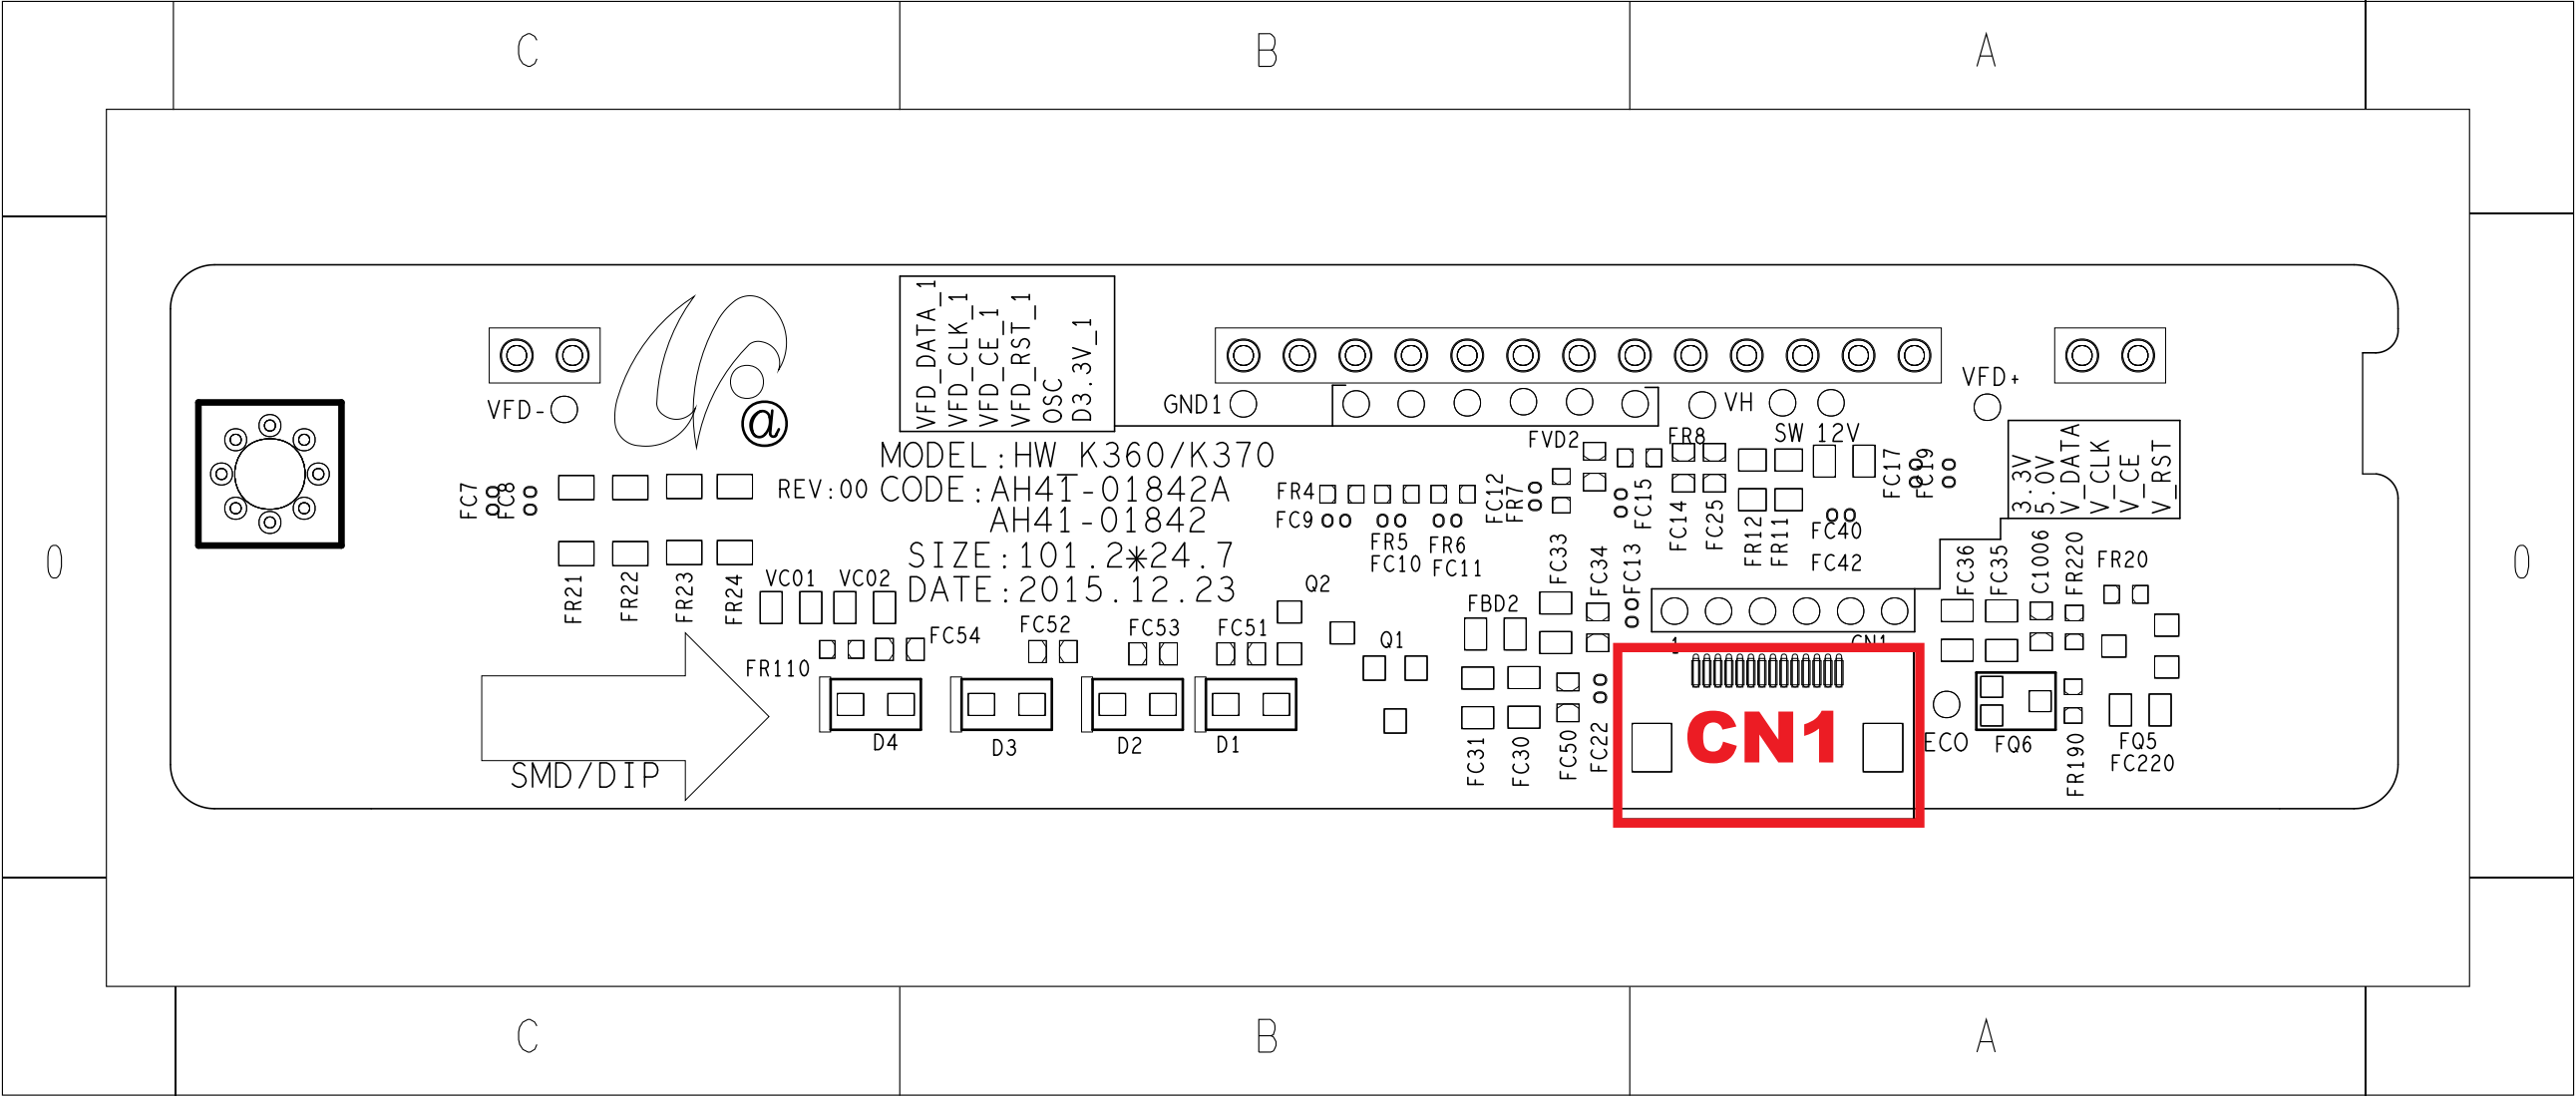

ashakaas