




ANIBAL GARCIA

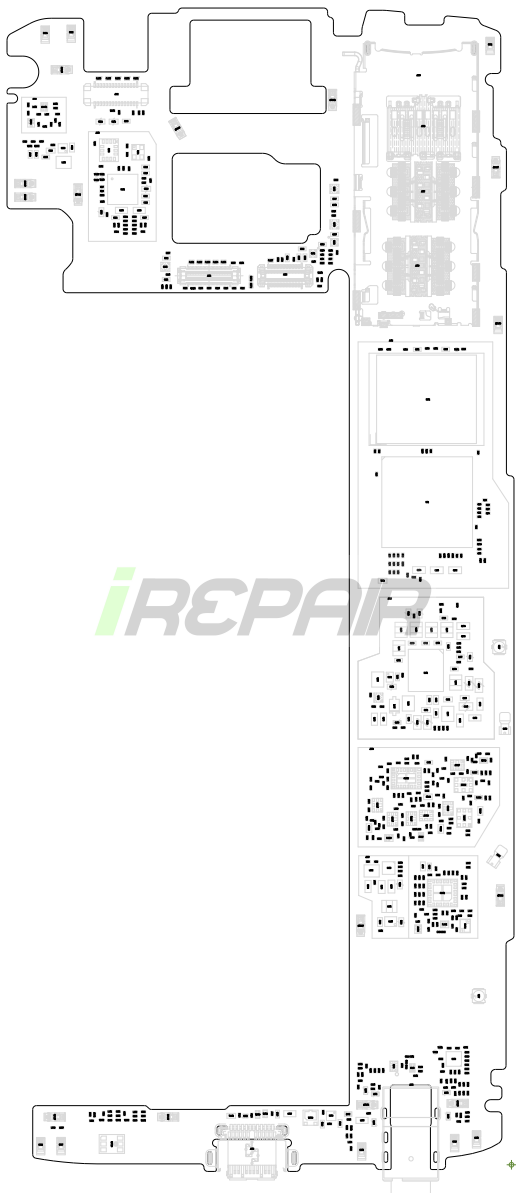

ANIBAL GARCIA

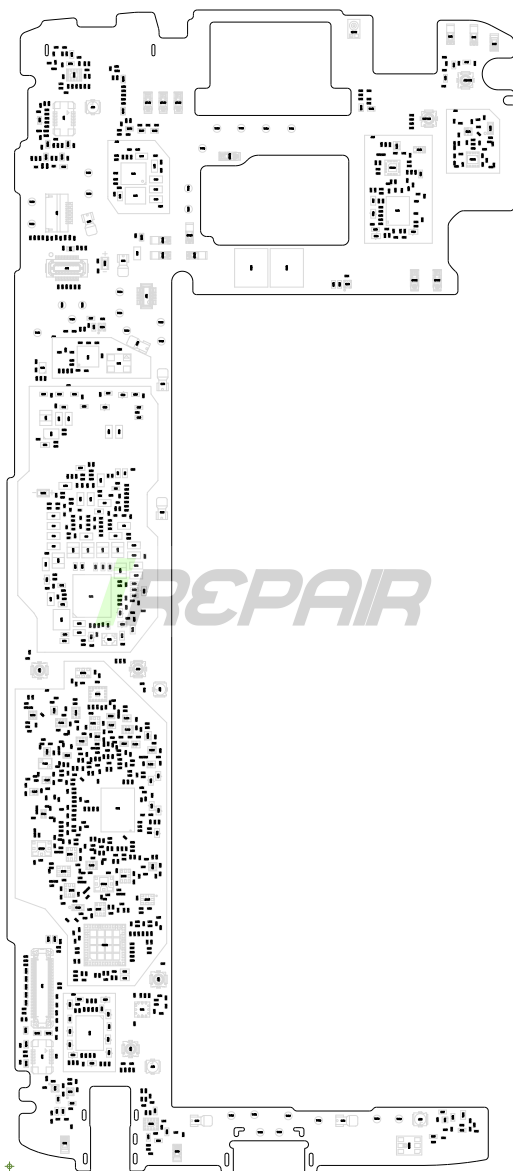

ANIBAL GARCIA

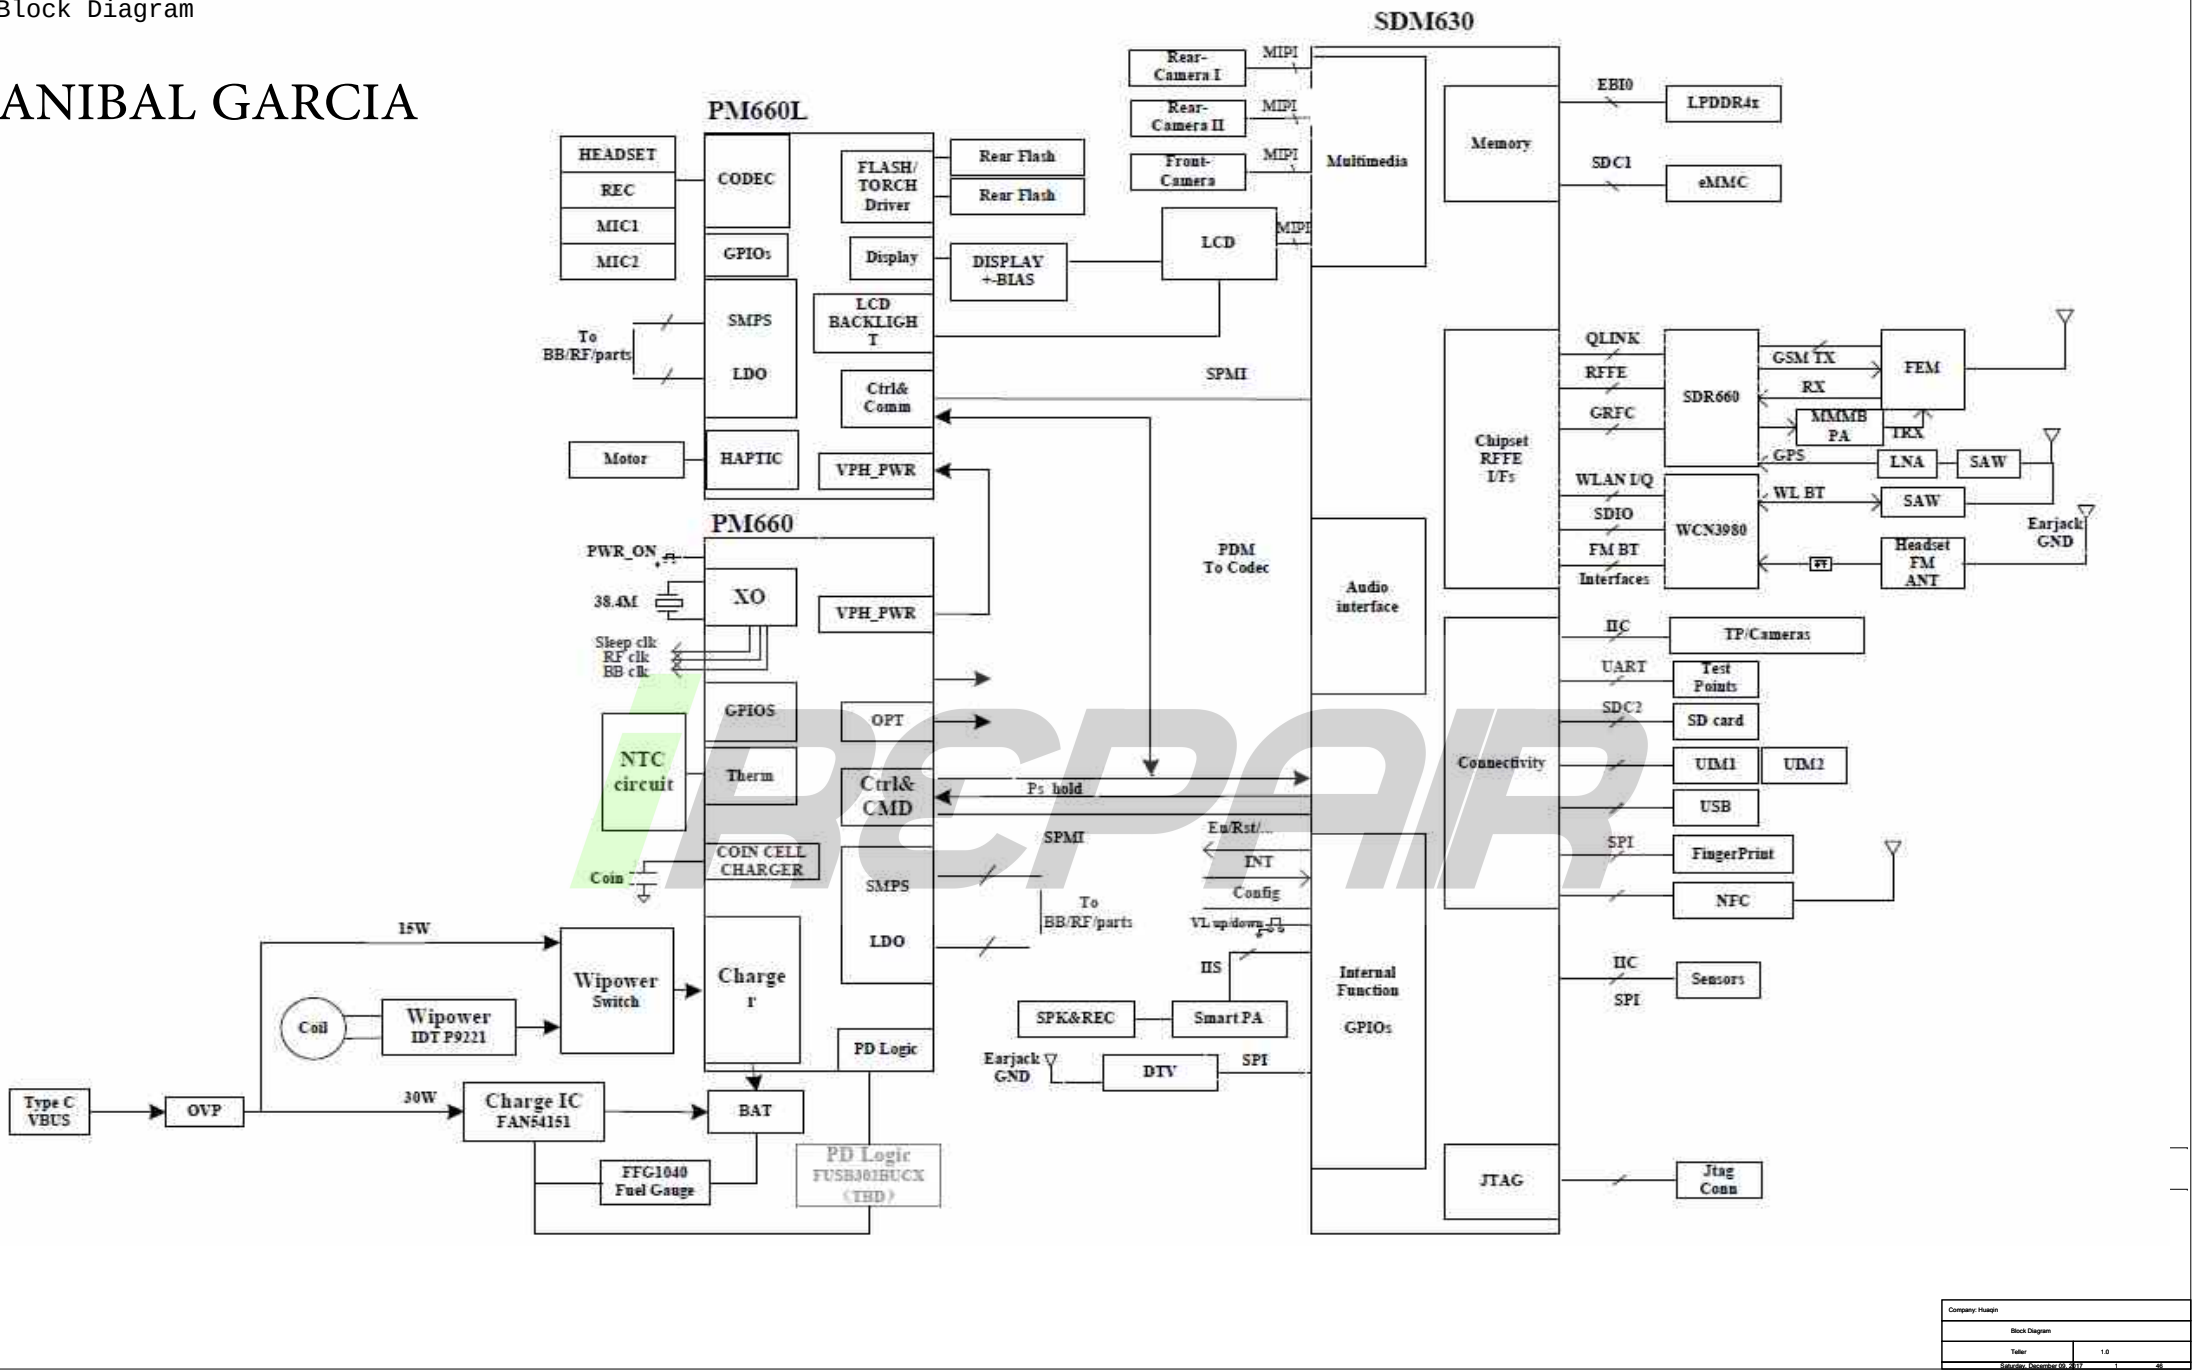

I2C Configuration Table

I2C	Function	I2C Slave Address(7-bit mode)
BLSP2_I2C	eMCP DCDC	FAN53526 I2C Address:0x60 (Write:0xC0 Read:0xC1) PM3003A I2C Address:0x60 (Write:0xC0 Read:0xC1) RT5738 I2C Address:0x53 (Write:0xA6 Read:0xA7)
	2nd Charger IC	BQ25970-Default NC I2C Address:0x?? (Write:0x?? Read:0x??)
	Smart PA	CS35L35 I2C Address:0x40 (ADR=0 Write:0x80 Read:0x81)
	HPUE	TPS61280 I2C Address:0x75 (Write:0xEA Read:0xEB)
	Sar Sensor	CY8C4024FNI-S412 I2C Address:0x?? (Write:0x?? Read:0x??)
BLSP3_I2C	TP	GT917D I2C Address:0x5D (Write:0xBA Read:0xBB) FT5446 I2C Address:0x38 (Write:0x70 Read:0x71)
BLSP6_I2C	NFC	PN553 I2C Address:0x28 (Write:0x50 Read:0x51)
CCI_I2C0	Dedicated Cam I2C0	S5K2L7SA-Rear Main CAM I2C Address:0x2D (Write:0x5A Read:0x5B)
CCI_I2C1	Dedicated Cam I2C1	S5K4H7YX-Front Cam I2C Address:0x10 (Write:0x20 Read:0x21) OV5675-Rear Slave Cam I2C Address:0x36 (Write:0x6C Read:0x6D)
LPI_I2C	ALS&PS	TMD27253 I2C Address:0x39 (Write:0x72 Read:0x73)
	eCompass	AK09918C I2C Address:0x0C (Write:0x18 Read:0x19)

SPI Configuration Table

SPI	Function
BLSP1_SPI	FPS interface
BLSP4_SPI	DTV interface
LPI_SPI	A+G sensor interface


I2S Configuration Table

I2S	Function
I2S_2	Smart PA CS35L35 interface
I2S_1_MCLK	Smart PA CS35L35 mclk

ANIBAL GARCIA

Table of Content

Sheet	Content	Sheet	Content
01.	Block Diagram	24.	AUDIO_MIC_RCV_SPK
02.	I2C Configuration Table	25.	AUDIO_HEADSET
03.	Table of Content	26.	SENSORS_MOTOR
04.	GPIO MAP	27.	LCD_TP
05.	SDM630 Control/UFS/SDC1/SDC2	28.	REAR_CAM/FLASH
06.	SDM630 LPDDR4	29.	FRONT_CAM/CAM_POWER
07.	SDM630 CSI/DSI	30.	SIM_SD_KEY_LINK_BATT
08.	SDM630 GPIO (Internal Codec)	31.	DTV
09.	SDM630 Power (Core)	32.	NFC
10.	SDM630 Power (Other, LP4X)	33.	PRIMARY_ANTENNA
11.	SDM630 Ground	34.	PA & PA THERMAL
12.	PM660 CLKs/Control_GND	35.	TRX_LB
13.	PM660 Buck Converter	36.	TRX_MHB
14.	PM660 LDO Circuits	37.	DIVERSITY_ANT
15.	PM660 Charger_FG	38.	DRX_MB_HB
16.	PM660L Control and Bob_Flash	39.	DRX_LB
17.	PM660L Buck and LDO	40.	SDR660_MSS
18.	PM660L CODEC	41.	SDR660_PWR
19.	PM660L Display	42.	SDR660_DA/PRX/DRX/FBRX
20.	eMCP	43.	QFE4101
21.	30W CHARGE	44.	WIFI_2.4G_5G & BT
22.	Wipower	45.	GPS
23.	Test Points	46.	WCN3980

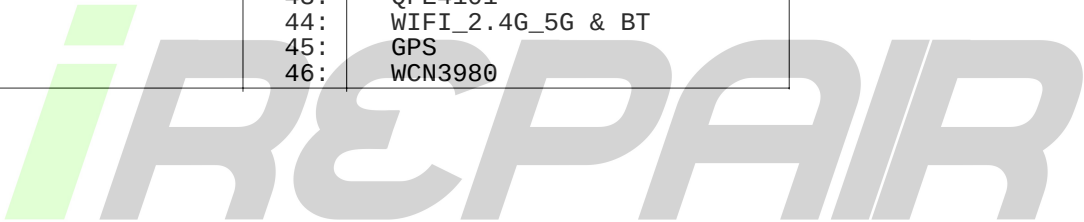

ANIBAL GARCIA

GPIO MAP

SDM630 GPIO Configuration

GPIO_0	BLSP_SPI_MOSI_1	GPIO_42	NC	GPIO_84	UIM2_CLK
GPIO_1	BLSP_SPI_MISO_1	GPIO_43	NC	GPIO_85	UIM2_RESET
GPIO_2	BLSP_SPI_CS1_N_1	GPIO_44	NC	GPIO_86	UIM2_PRESENT
GPIO_3	BLSP_SPI_CLK_1	GPIO_45	NC	GPIO_87	UIM1_DATA
GPIO_4	BLSP_UART_TX_2	GPIO_46	CAM0_RST_N	GPIO_88	UIM1_CLK
GPIO_5	BLSP_UART_RX_2	GPIO_47	CAM1_RST_N	GPIO_89	UIM1_RESET
GPIO_6	BLSP_I2C_SDA_2	GPIO_48	CAM2_RST_N	GPIO_90	UIM1_PRESENT
GPIO_7	BLSP_I2C_SCL_2	GPIO_49	NC	GPIO_91	UIM_BATT_ALARM
GPIO_8	BLSP_SPI_MOSI_3	GPIO_50	CAM_AF_VDD_EN	GPIO_92	NC
GPIO_9	BLSP_SPI_MISO_3	GPIO_51	CAM_AVDD_EN	GPIO_93	NC
GPIO_10	BLSP_SPI_CS_N_3	GPIO_52	NC	GPIO_94	NC
GPIO_11	BLSP_SPI_CLK_3	GPIO_53	LCD0 RESET_N	GPIO_95	NC
GPIO_12	NC	GPIO_54	SD_CARD_DET_N	GPIO_96	WD0G_DISABLE
GPIO_13	KEYPAD_LED_PWM	GPIO_55	DP_EN_N	GPIO_97	NC
GPIO_14	BLSP_I2C_SDA_4	GPIO_56	USBC_ORIENTATION	GPIO_98	NC
GPIO_15	BLSP_I2C_SCL_4	GPIO_57	FORCED_USB_BOOT	GPIO_99	QLINK_REQUEST
GPIO_16	BLSP_UART_TX_5	GPIO_58	USB_PHY_PS	GPIO_100	QLINK_ENABLE
GPIO_17	BLSP_UART_RX_5	GPIO_59	MDP_VSYNC_P	GPIO_101	RFFE1_DATA - SDR660 debug
GPIO_18	BLSP_UART_CTS_N_5	GPIO_60	NC	GPIO_102	RFFE1_CLK - SDR660 debug
GPIO_19	BLSP_UART_RFR_N_5	GPIO_61	NC	GPIO_103	RFFE2_DATA - (41)QAT3533
GPIO_20	FP_SUB_RESET	GPIO_62	NC	GPIO_104	RFFE2_CLK - (41)QAT3533
GPIO_21	SMB_STAT	GPIO_63	NC	GPIO_105	NC
GPIO_22	BLSP_I2C_SDA_6	GPIO_64	NC	GPIO_106	NC
GPIO_23	BLSP_I2C_SCL_6	GPIO_65	NC	GPIO_107	RFFE4_DATA-(45)QSW8574,(48)RF1656SR
GPIO_24	CDC_SWR_CLK	GPIO_66	TS_RESET_N	GPIO_108	RFFE4_CLK -(45)QSW8574,(48)RF1656SR
GPIO_25	CDC_SWR_DATA	GPIO_67	TS_INT_N	GPIO_109	RFFE5_DATA-(52)QAT3514, (52)QAT3550,(47) QAT3522
GPIO_26	WSA_SPKR_SD_N_1	GPIO_68	ACC_GYRO_DATA_AVA_INT_N	GPIO_110	RFFE5_CLK-(52)QAT3514, (52)QAT3550,(47)QAT3522
GPIO_27	NC	GPIO_69	ACC_GYRO_MOT_INT_N	GPIO_111	RFFE6_DATA - (46)QET4101 ch0, (41)QPA4361
GPIO_28	NFC_IRQ	GPIO_70	MAG_INT_N	GPIO_112	RFFE6_CLK - (46)QET4101 ch0, (41)QPA4361
GPIO_29	NFC_EN	GPIO_71	ALSP_INT_N	GPIO_113	NC
GPIO_30	NFC_DWL_REQ	GPIO_72	FP_INT_N_1	LPI_GPIO_0	LPI_SPI_1_CS1_N
GPIO_31	NFC_ESE_PWR_REQ	GPIO_73	NC	LPI_GPIO_1	LPI_PWR_EN
GPIO_32	CAM_MCLK0	GPIO_74	NC	LPI_GPIO_2	LPI_I2C_3_SDA
GPIO_33	CAM_MCLK1	GPIO_75	NC	LPI_GPIO_3	LPI_I2C_3_SCL
GPIO_34	CAM_MCLK2	GPIO_76	NC	LPI_GPIO_4	LPI_SPI_2_CS_N
GPIO_35	NC	GPIO_77	AUDIO_USBC_EN2_N	LPI_GPIO_5	LPI_SPI_2_CLK
GPIO_36	CCI_I2C_SDA0	GPIO_78	WMSS_RESETN	LPI_GPIO_6	LPI_SPI_2_MOSI
GPIO_37	CCI_I2C_SCL0	GPIO_79	PWM_CNTRL	LPI_GPIO_7	LPI_SPI_2_MISO
GPIO_38	CCI_I2C_SDA1	GPIO_80	AUDIO_USBC_EN1	LPI_GPIO_8	LPI_SPI_1_CS_N
GPIO_39	CCI_I2C_SCL1	GPIO_81	MSS_LTE_COXM_TXD	LPI_GPIO_9	LPI_SPI_1_CLK
GPIO_40	NC	GPIO_82	MSS_LTE_COXM_RXD	LPI_GPIO_10	LPI_SPI_1_MOSI
GPIO_41	FL_STROBE_TRIG	GPIO_83	UIM2_DATA	LPI_GPIO_11	LPI_SPI_1_MISO

LPI_GPIO_12	LPI_UART_1_TX
LPI_GPIO_13	LPI_UART_1_RX
LPI_GPIO_14	NC
LPI_GPIO_15	NC
LPI_GPIO_16	NC
LPI_GPIO_17	NC
LPI_GPIO_18	CDC_PDM_CLK
LPI_GPIO_19	CDC_PDM_SYNC
LPI_GPIO_20	CDC_PDM_TX
LPI_GPIO_21	CDC_PDM_RX0
LPI_GPIO_22	CDC_PDM_RX0_COMP
LPI_GPIO_23	CDC_PDM_RX1
LPI_GPIO_24	CDC_PDM_RX1_COMP
LPI_GPIO_25	CDC_PDM_RX2
LPI_GPIO_26	CDC_DMIC_CLK1
LPI_GPIO_27	CDC_DMIC_DATA1
LPI_GPIO_28	CDC_DMIC_CLK2
LPI_GPIO_29	CDC_DMIC_DATA2
LPI_GPIO_30	LPI_QCA_SB_CLK
LPI_GPIO_31	LPI_QCA_SB_DATA0


PM660 GPIO Configuration

GPIO_1	OPTION1	GPIO_8	SLB
GPIO_2	DIV_CLK2	GPIO_9	uUSB_TYPEC
GPIO_3	NC	GPIO_10	WCSS_VCTRL
GPIO_4	NFC_CLK_REQ	GPIO_11	HOMEKEY_FP_PM_INT
GPIO_5	WLAN_SW_CTRL	GPIO_12	WIPWR_MODE
GPIO_6	SLP_CLK	GPIO_13	PM_A_GPIO_13
GPIO_7	UIM_BATT_ALARM		


PM660A GPIO Configuration


GPIO_1	OPTION2	GPIO_8	SD_CARD_DET_N
GPIO_2	LPI_PWR_EN	GPIO_9	WCSS_VCTRL
GPIO_3	FRONT_CAM_DVDD_EN	GPIO_10	SLB
GPIO_4	REAR_CAM_DVDD_EN	GPIO_11	LP4x_CTRL
GPIO_5	NC	GPIO_12	LP4x_MODE
GPIO_6	FP_VDD_EN		
GPIO_7	KEY_VOL_UP_N		


ANIBAL GARCIA

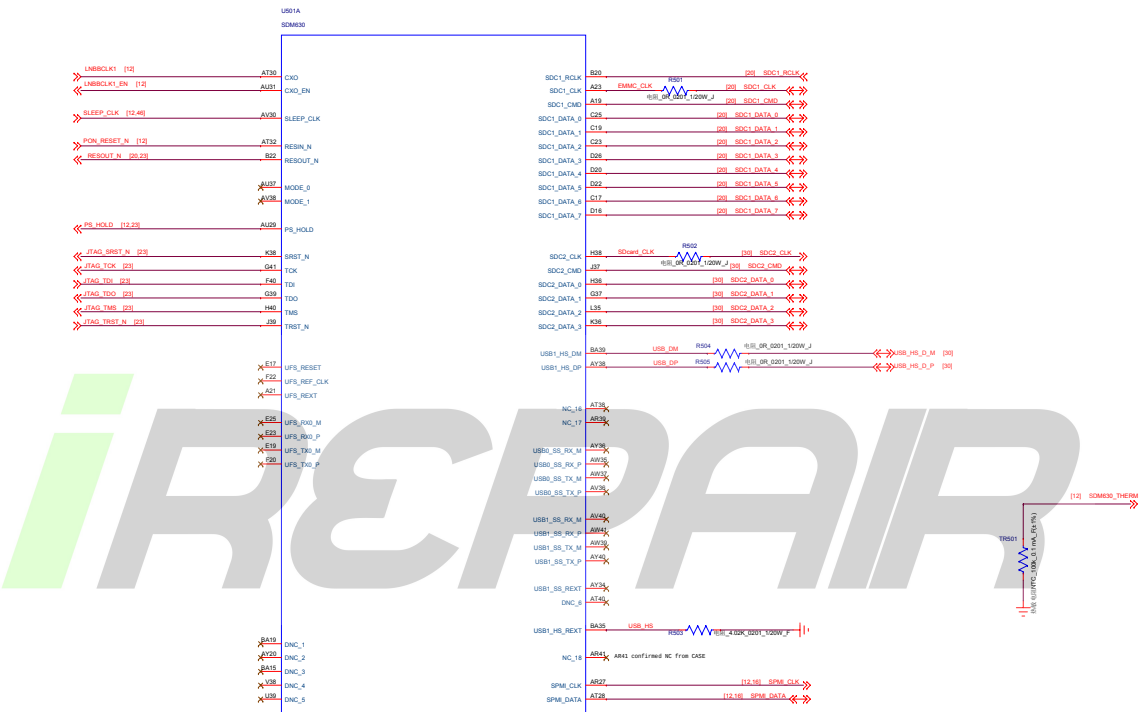


ANIBAL GARCIA

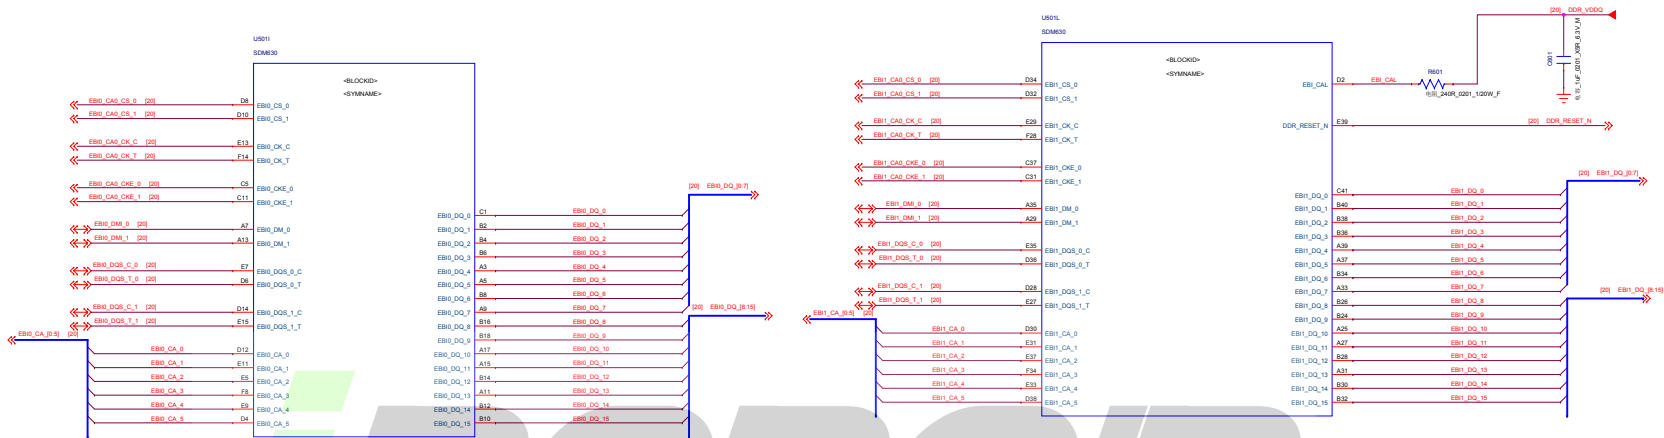


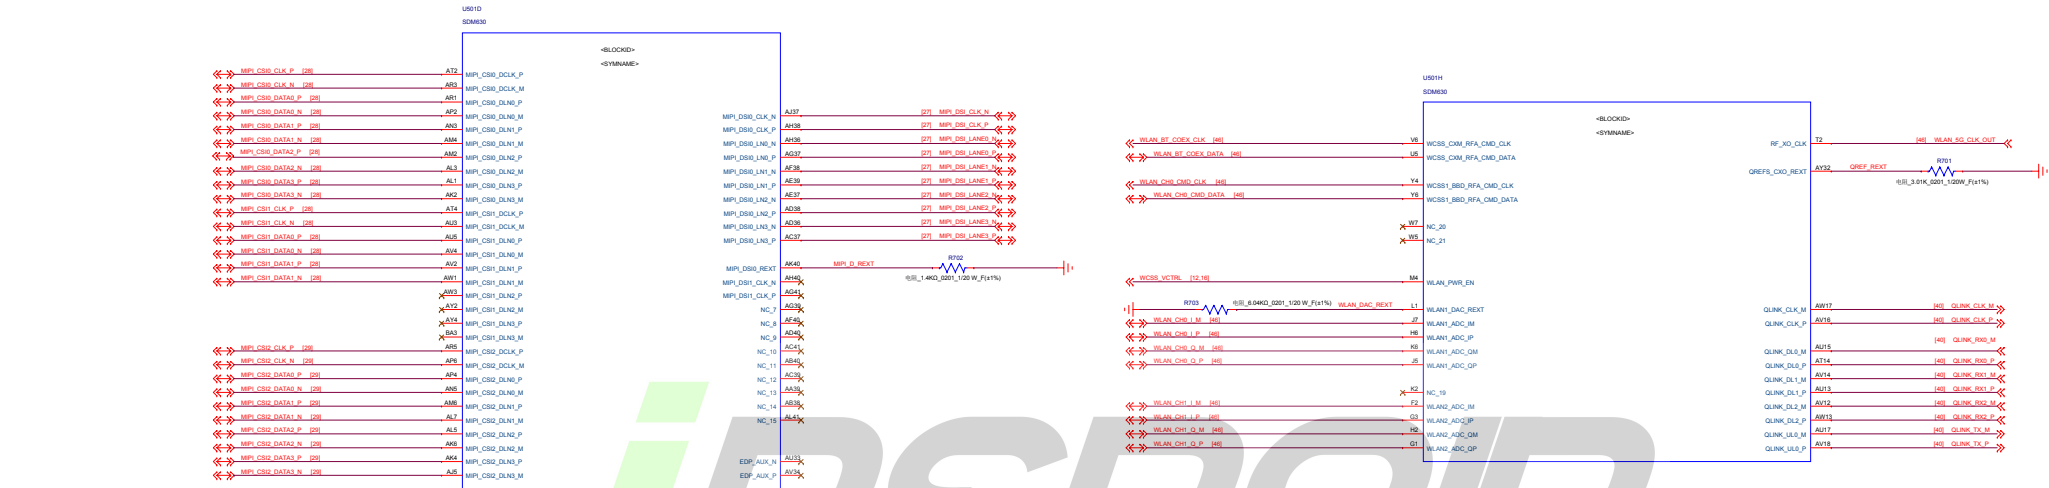


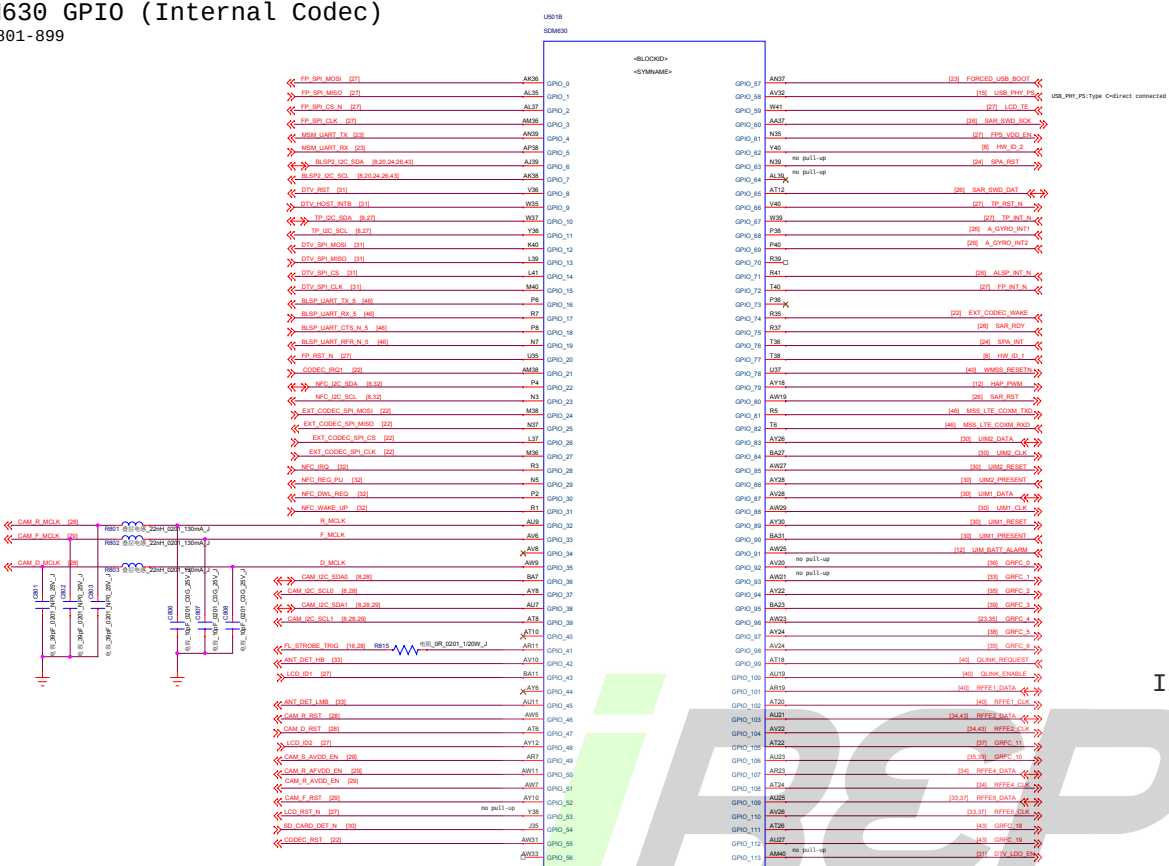


I2C pull up

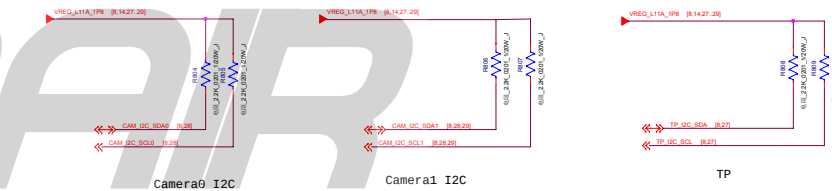


Hardware ID

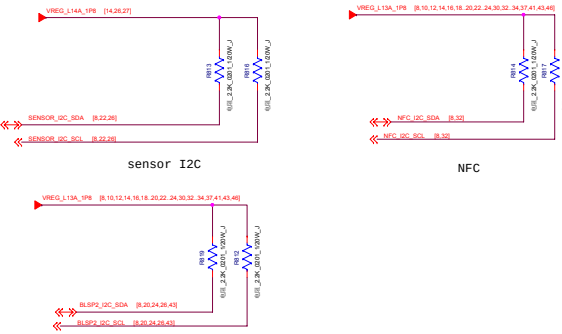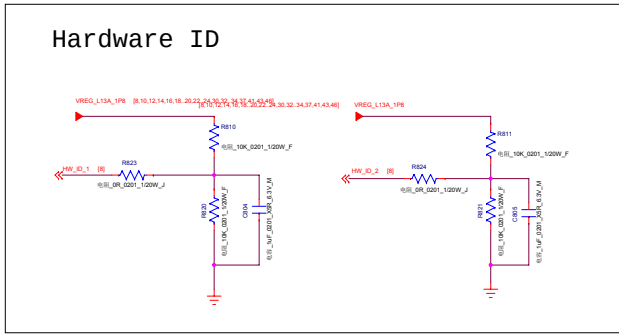


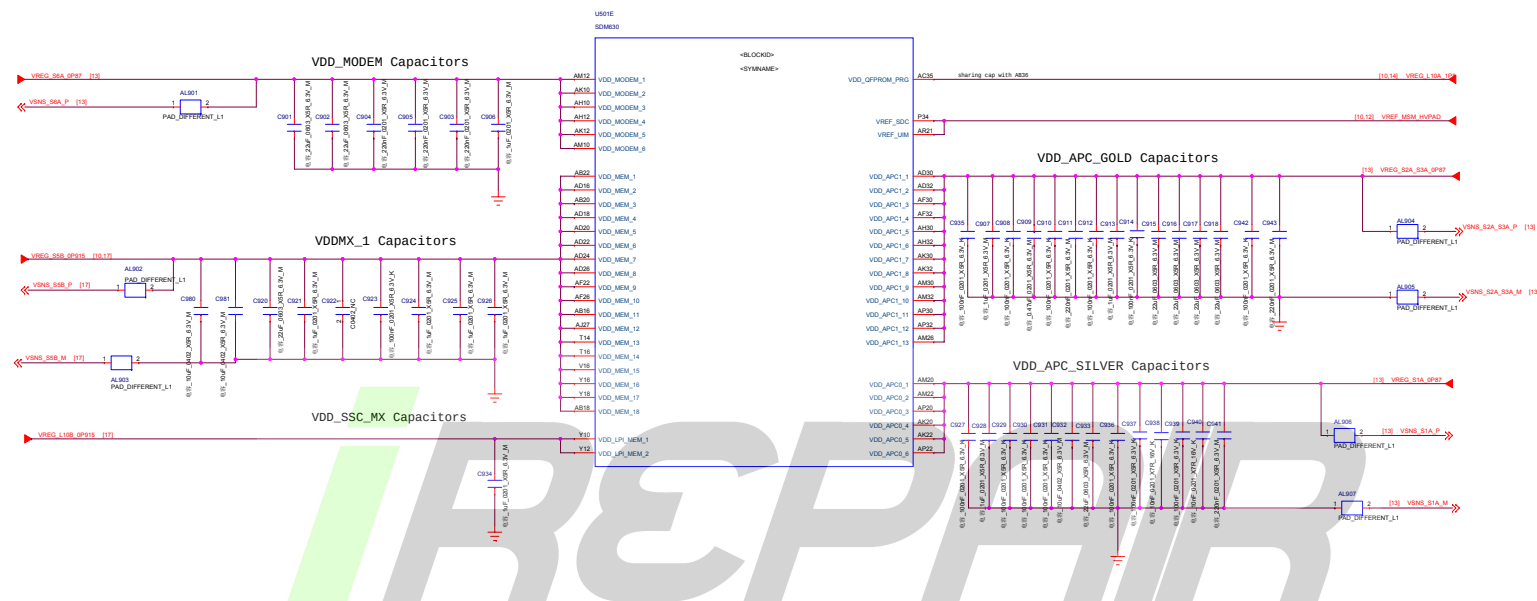


REF 1001-1099






PM660 CLKs/Control_GND
REF 1201-1299

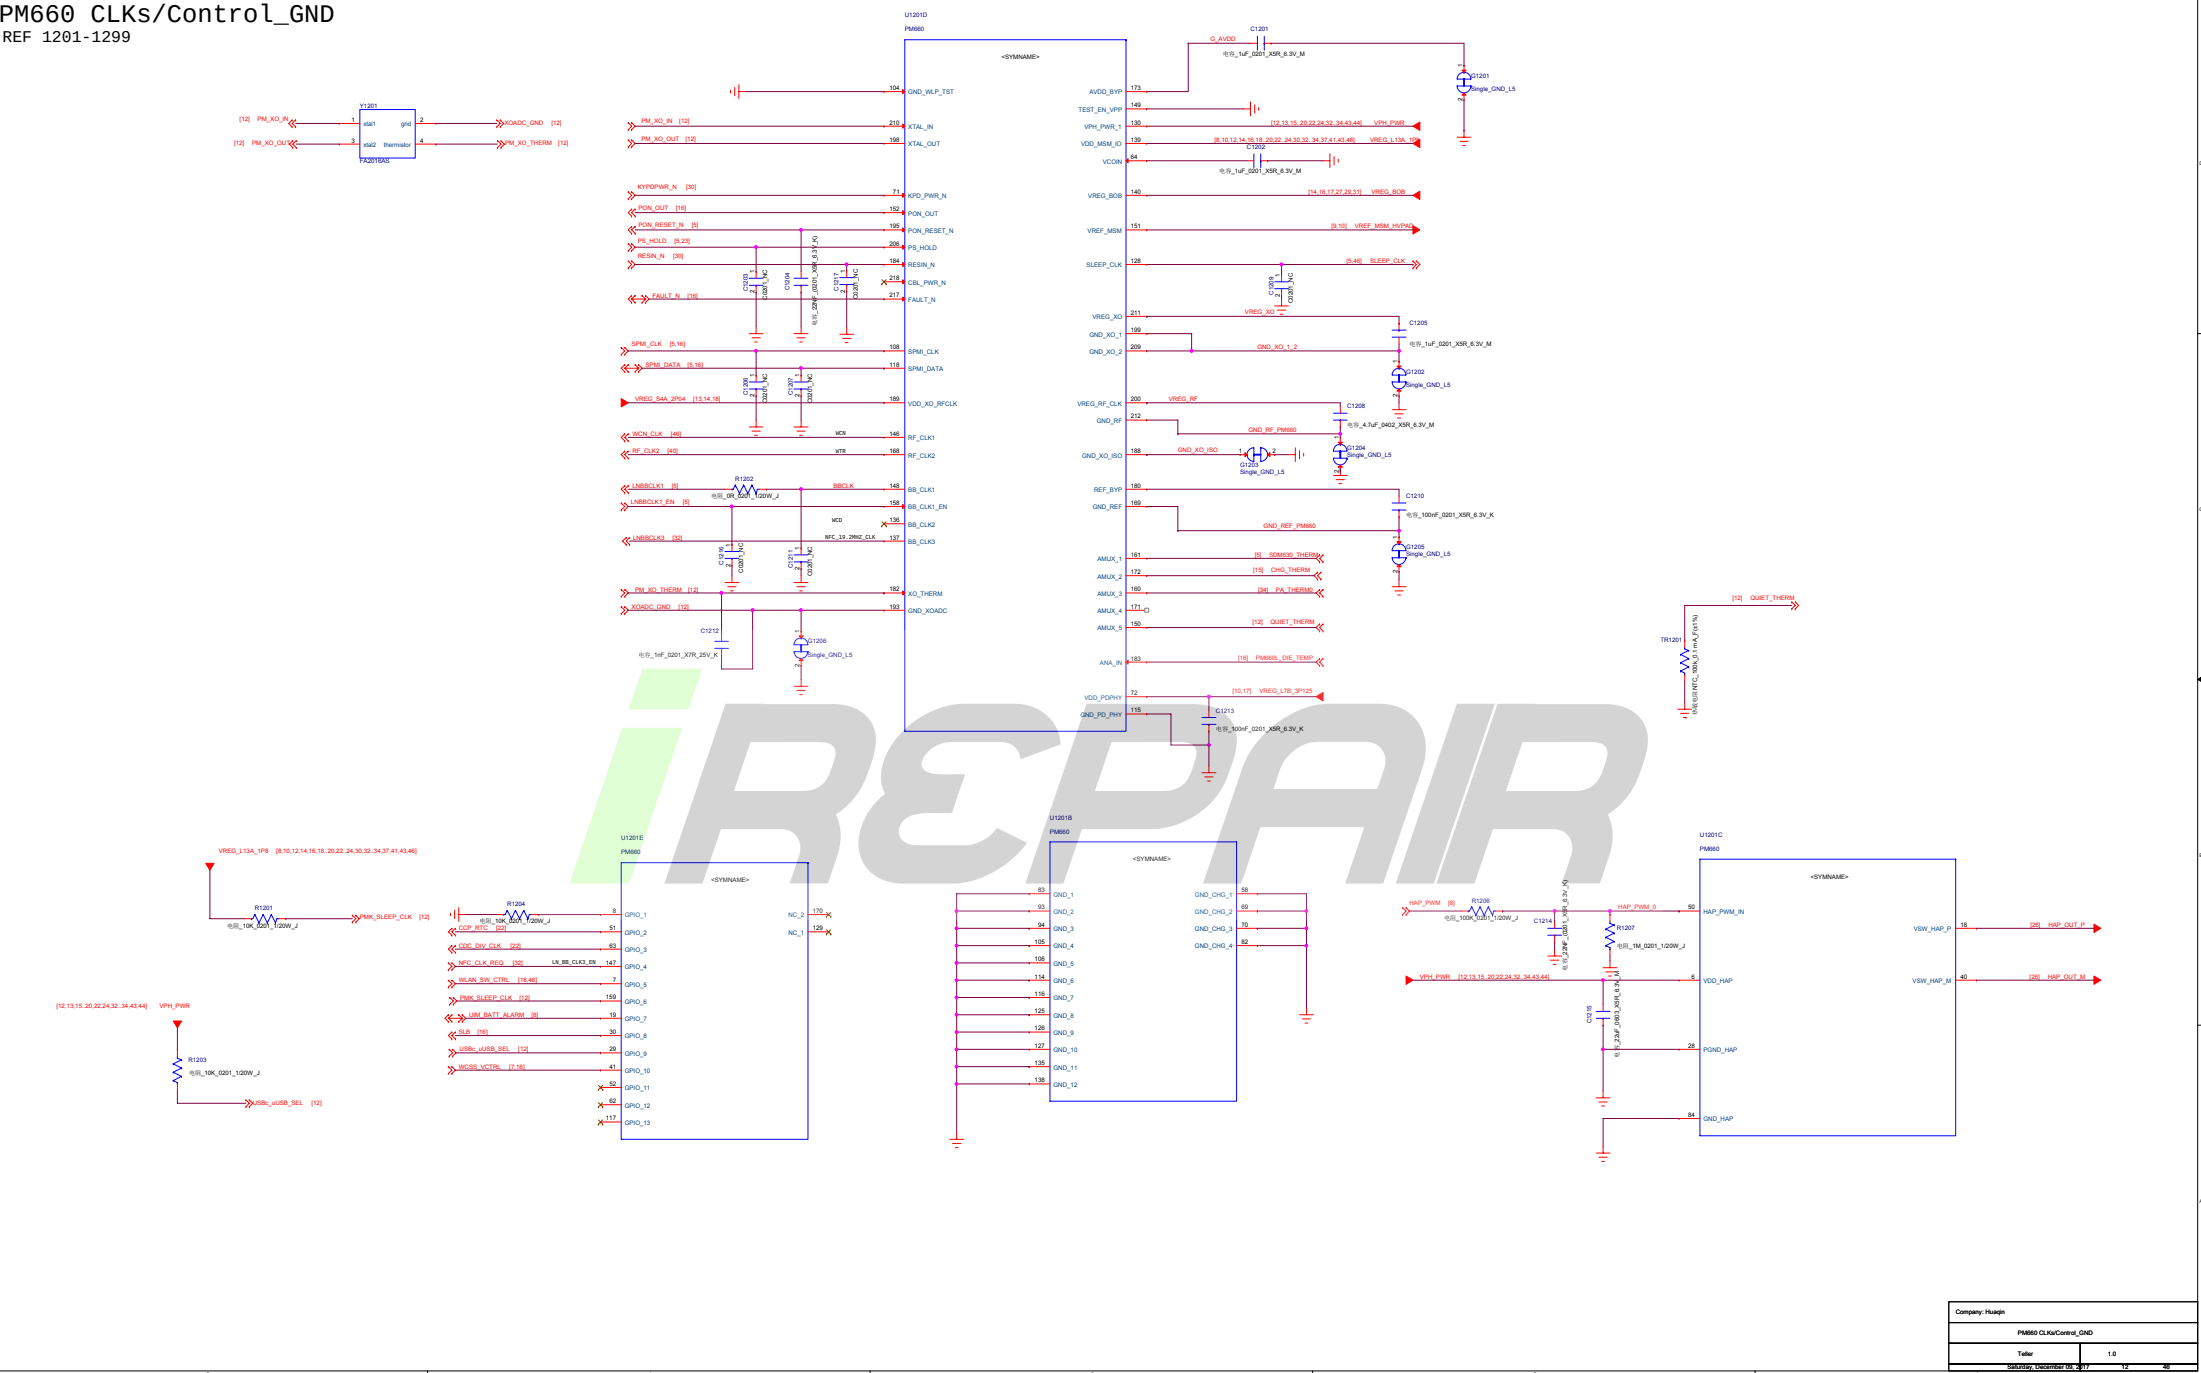


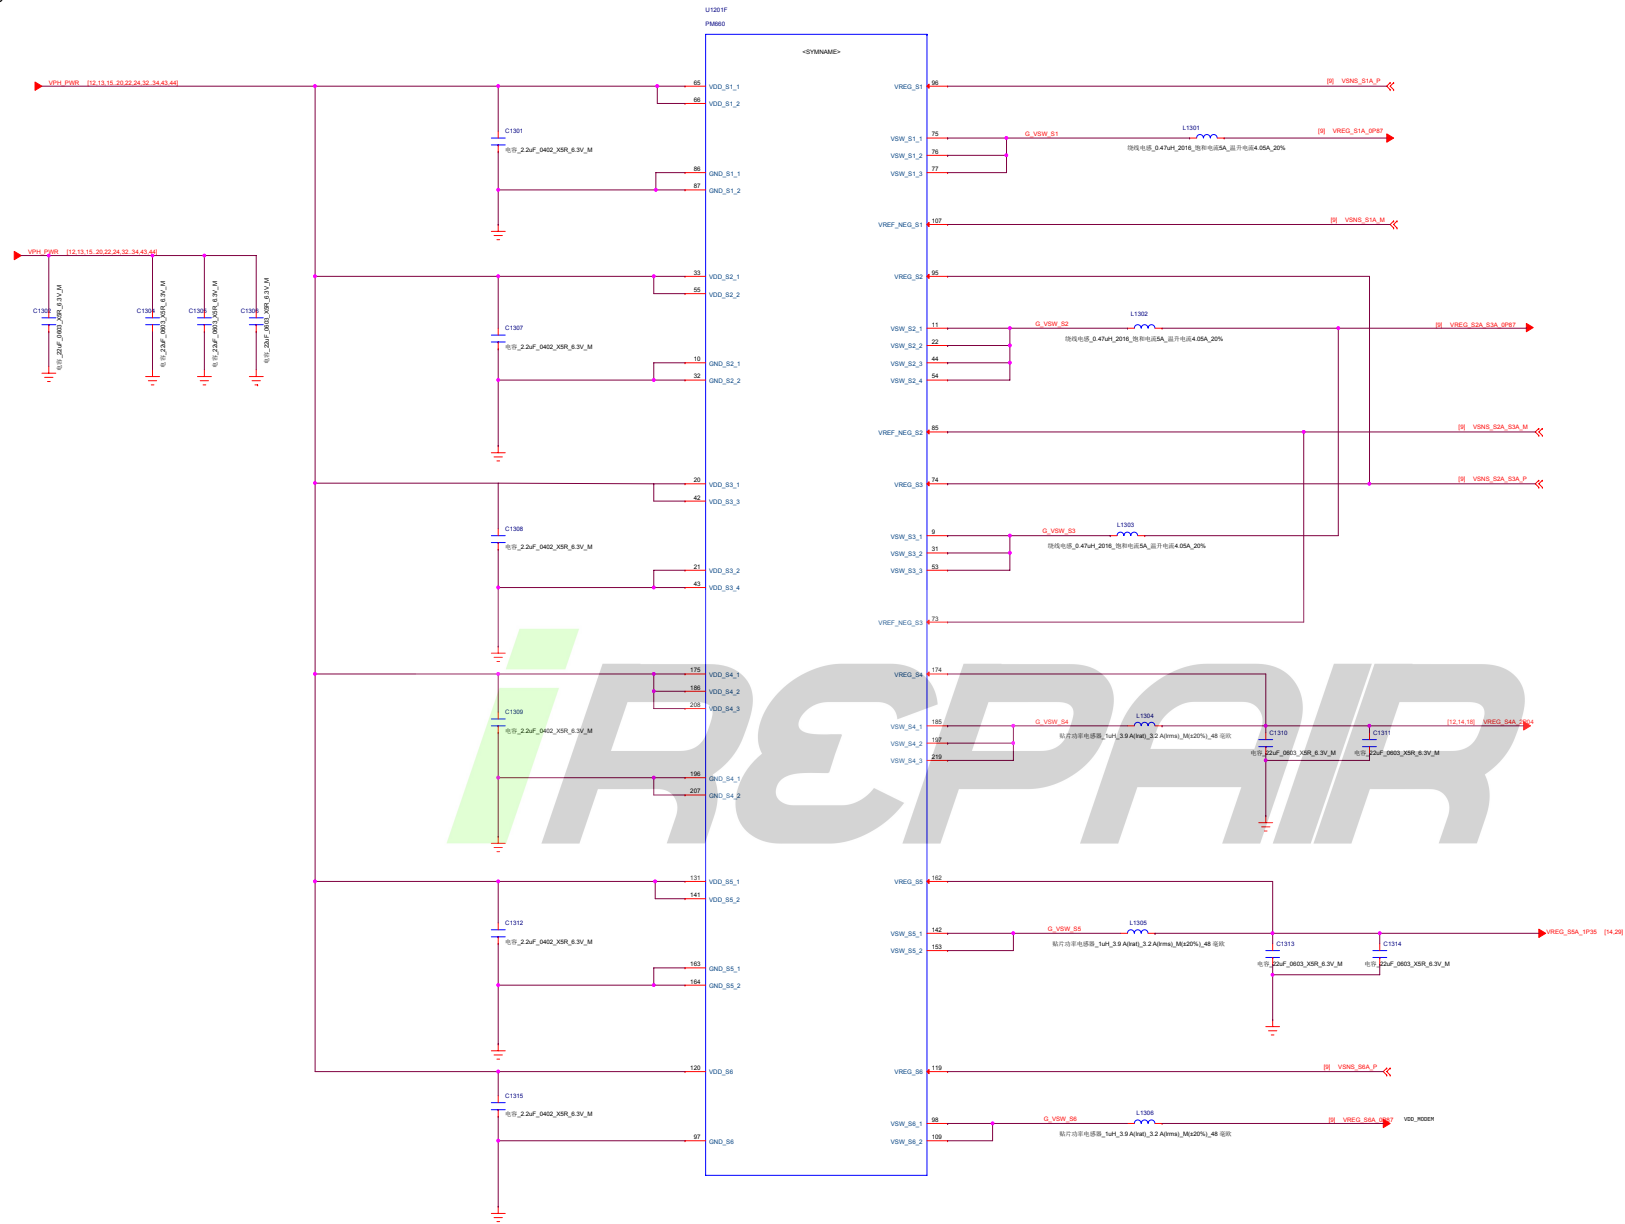




REF 1601-1699

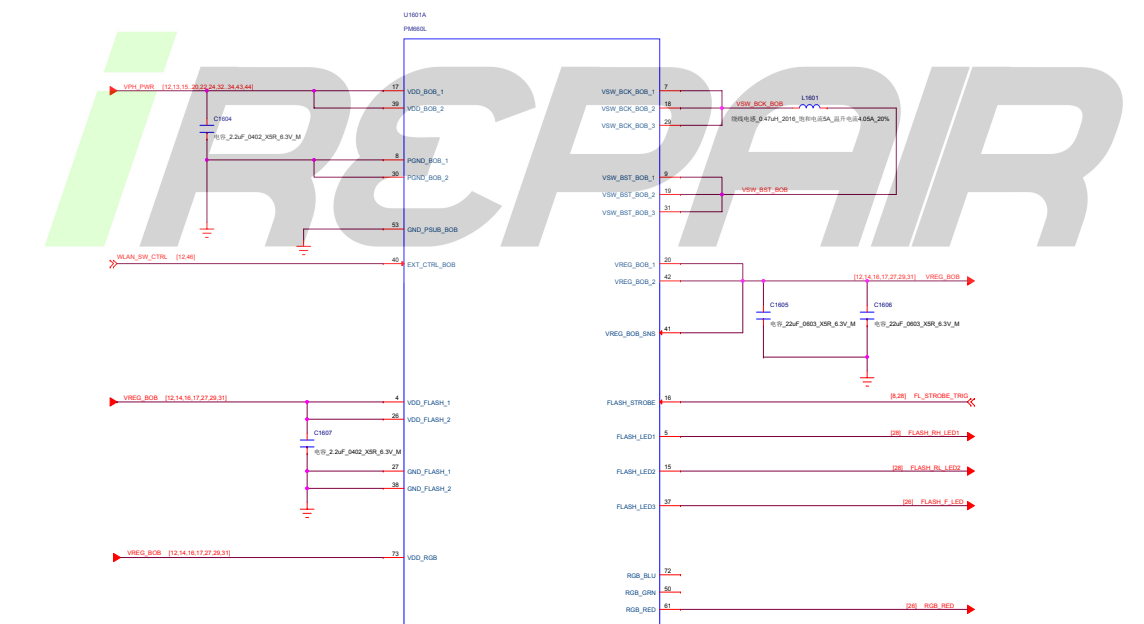

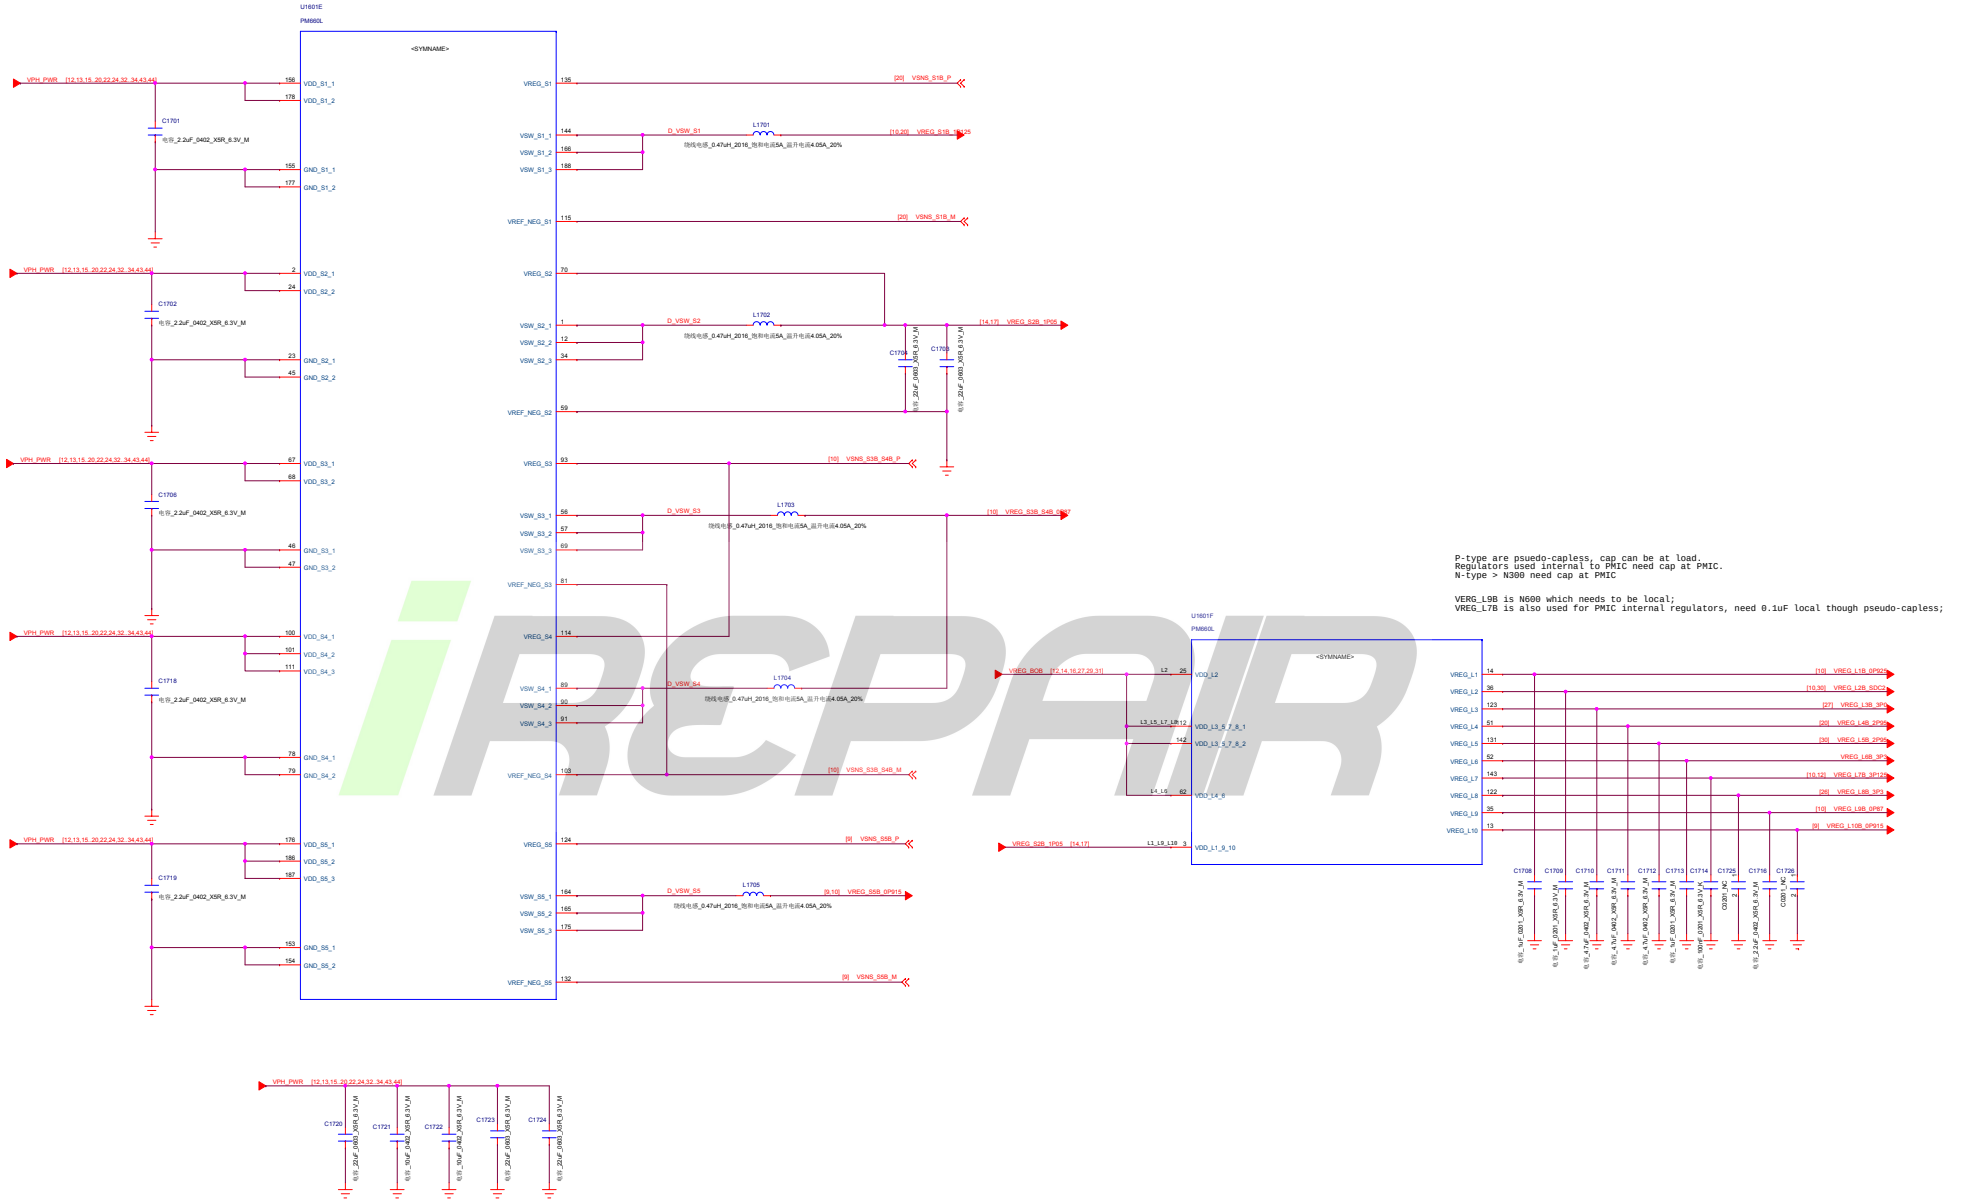



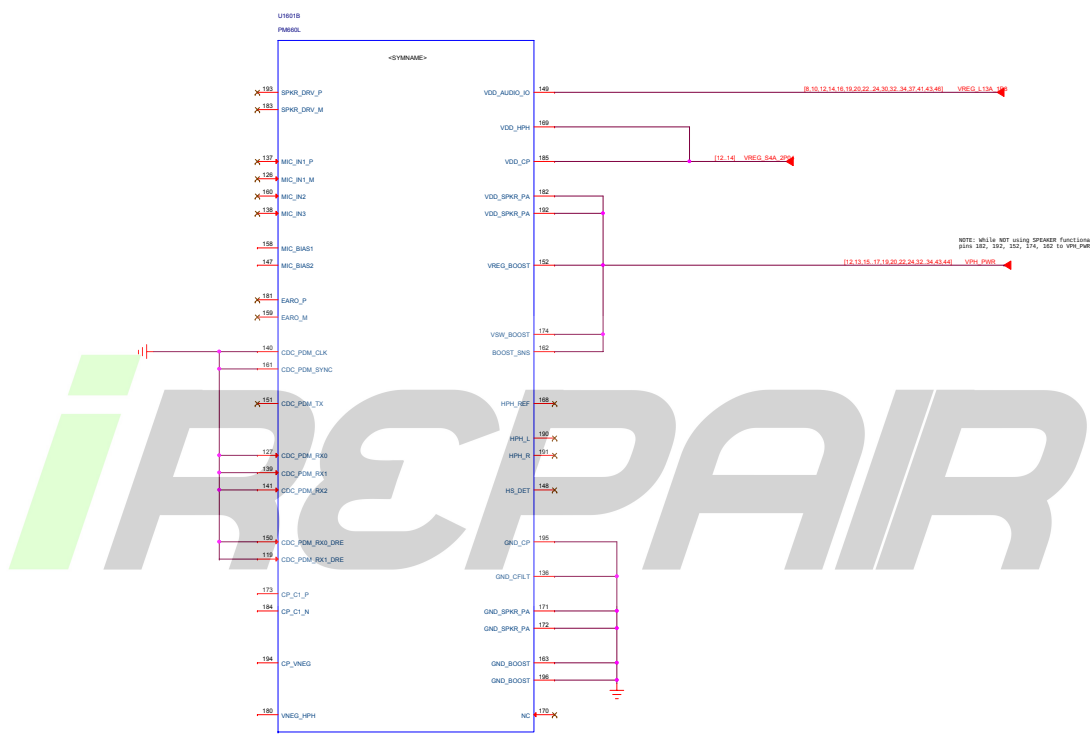


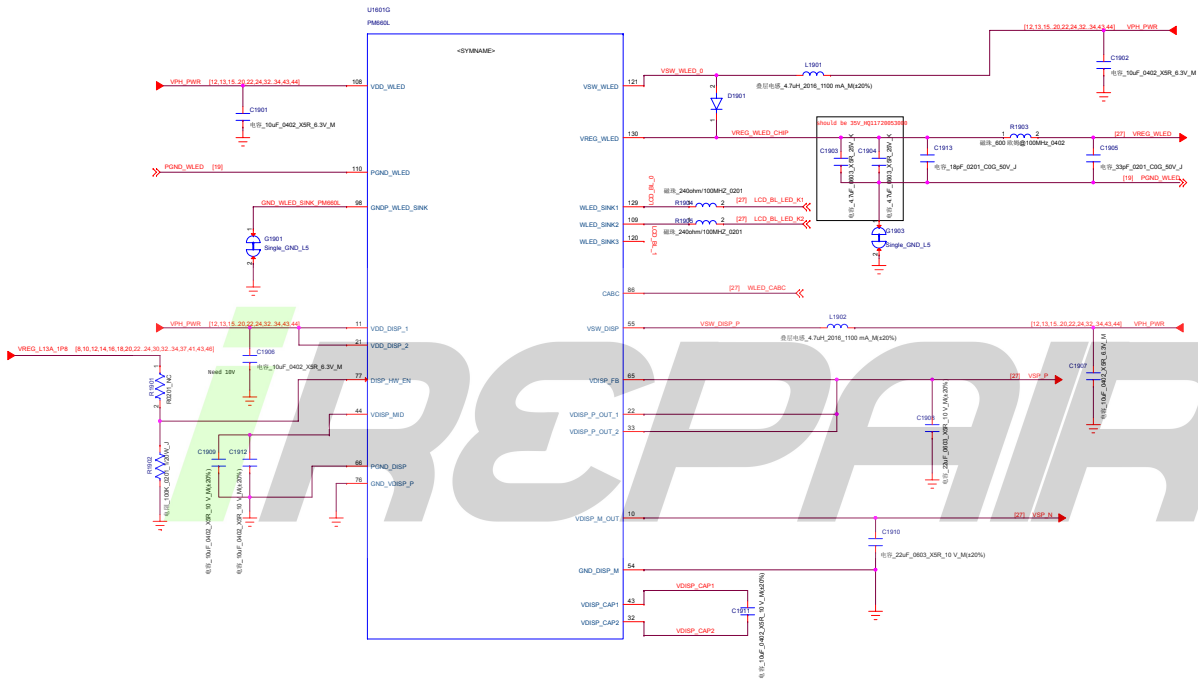

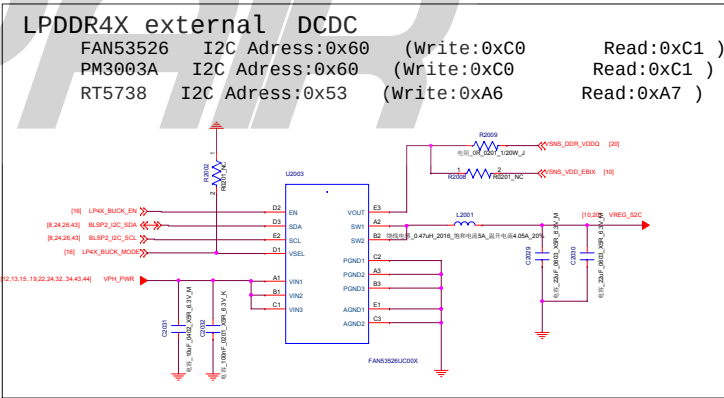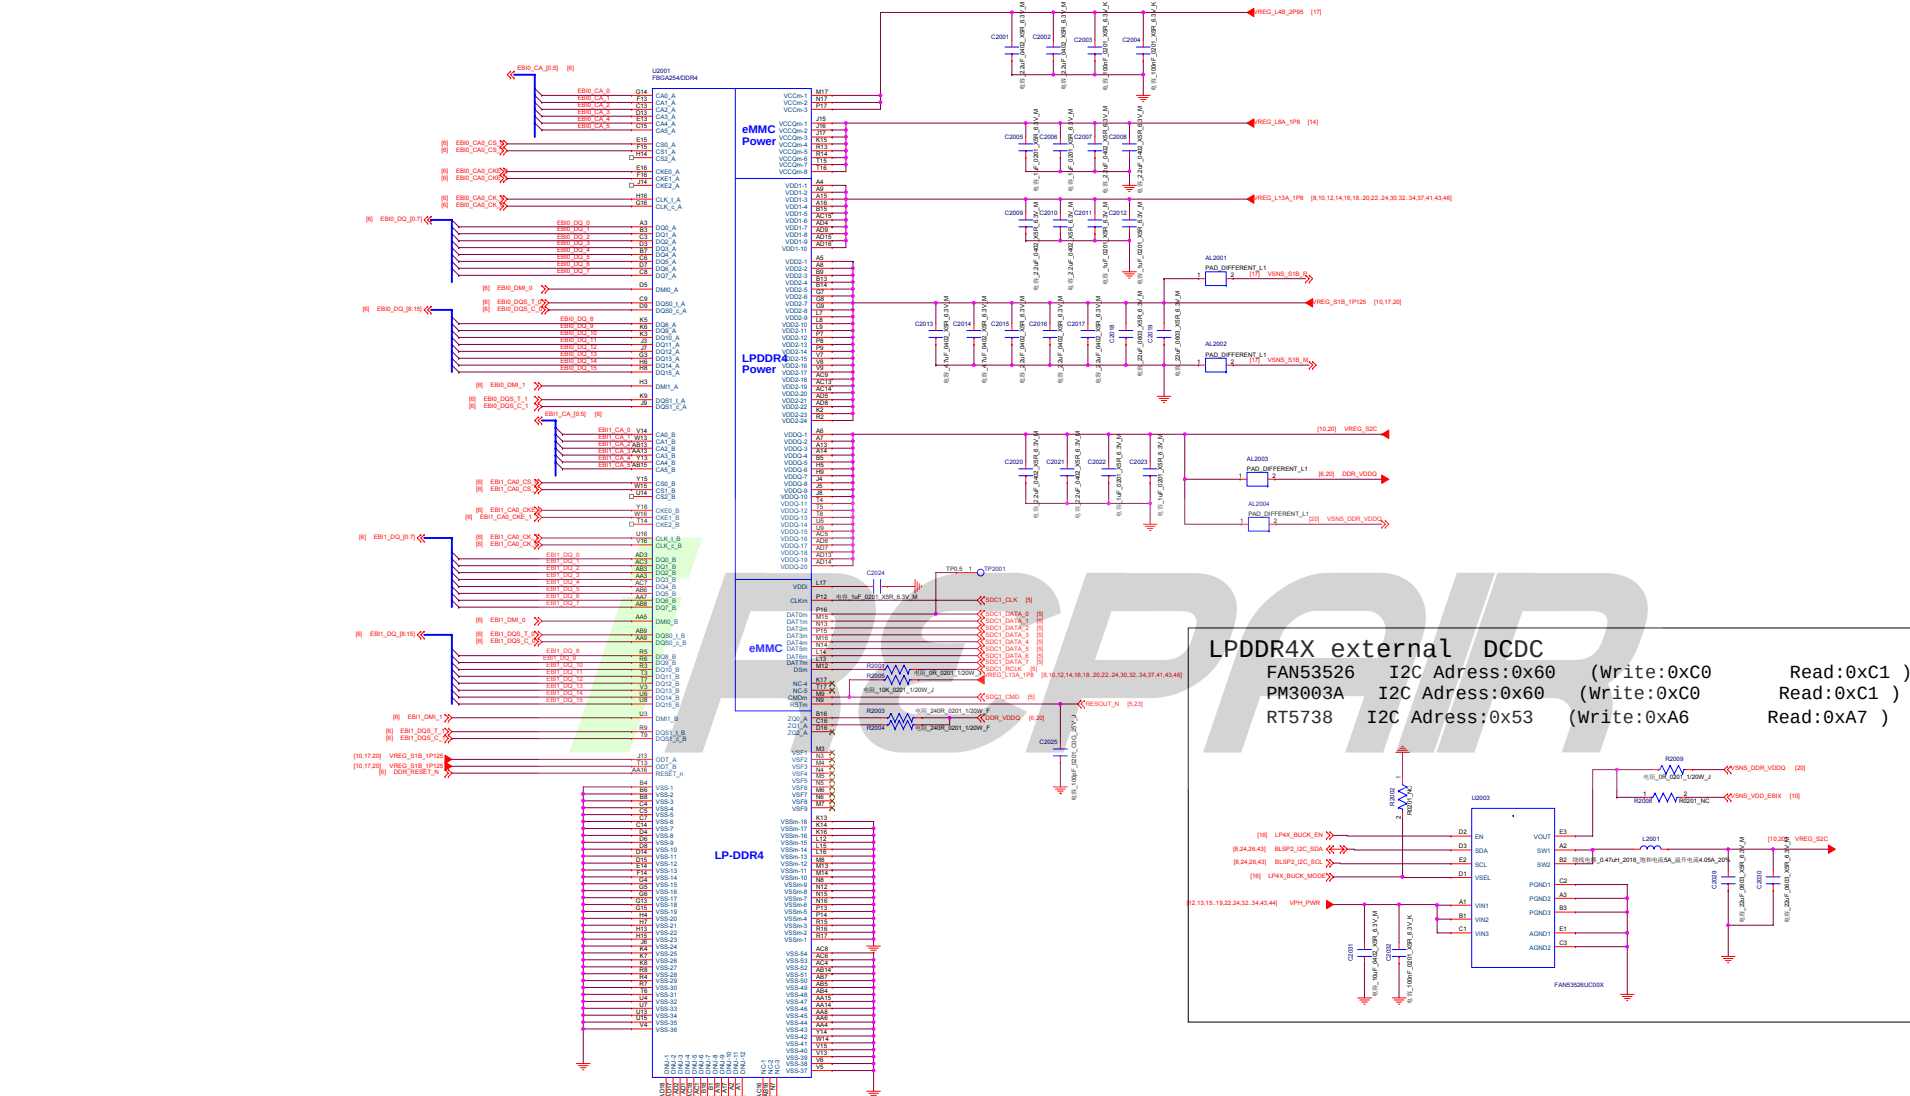





Company Name	
24W CHARGE	
Teller	1.0
REPAIR DOCUMENT NO. 21 21 21	

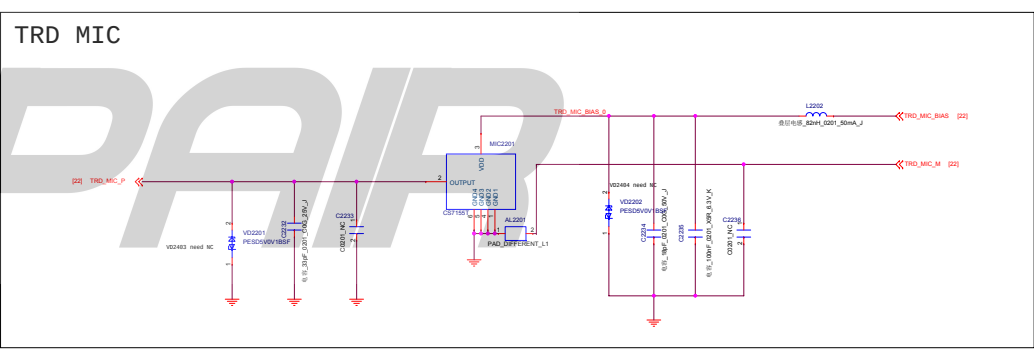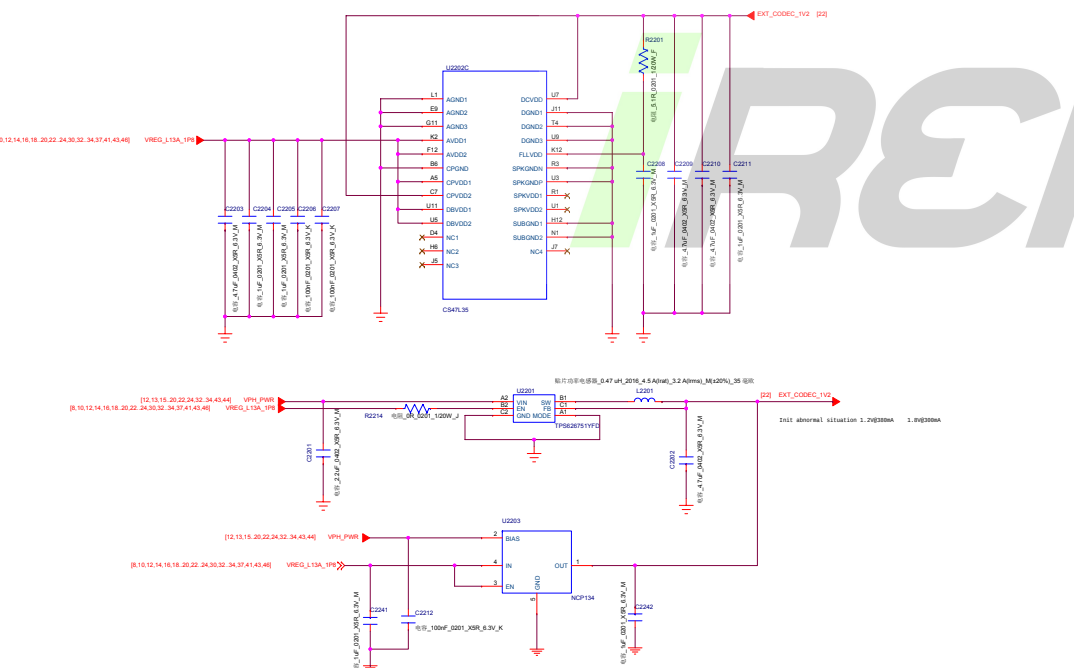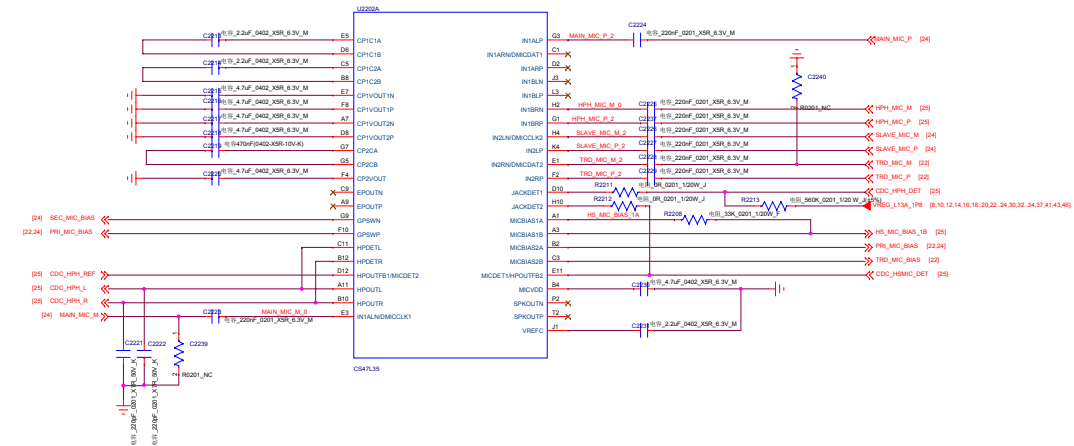


UART and Force USB boot

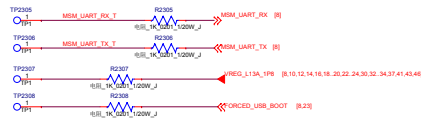


Grounding Springs

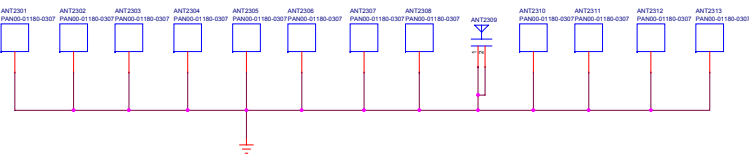


JTAG CONNECTOR

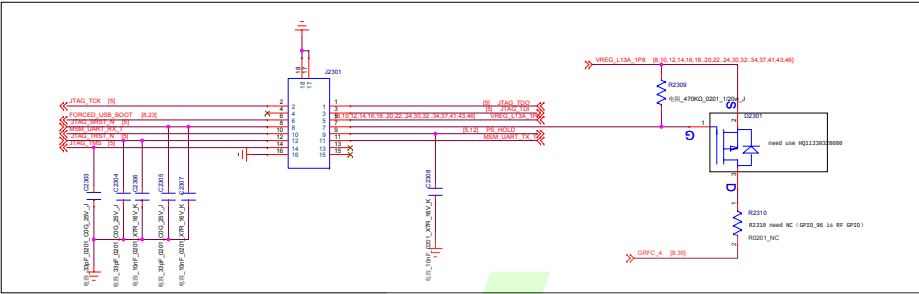


Cable clamp

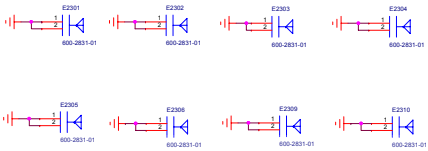


Shields

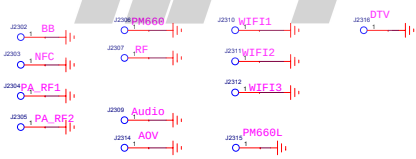

power key +volup to enter 9908 mode

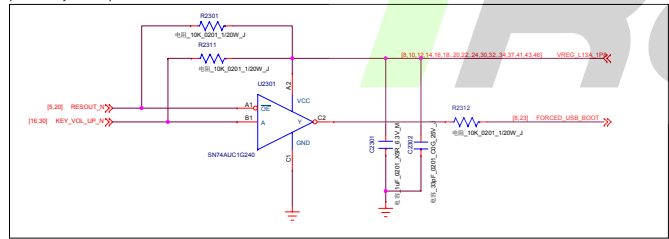


MOTOR

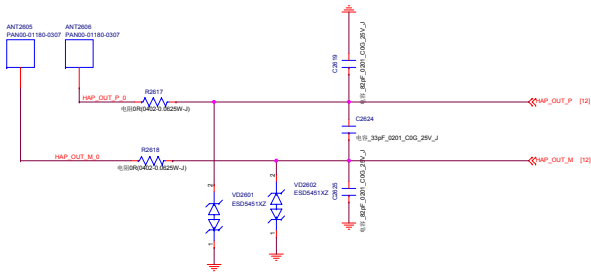


eCOMPASS AK89918C I2C Address:0x0C (Write:0x18

Read:0x19)

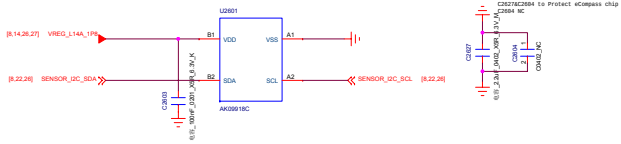


Gyro+G-sensor

BMI120 SPI interface

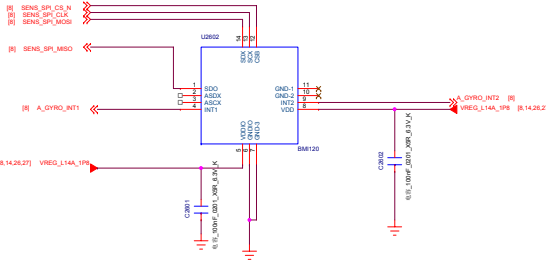


FPC: 1 ALS&PS, 2 SOL LED, 3 Front Flash LED

ALS&P:TMD27253 I2C Address:0x39 (Write:0x72 Read:0x73)

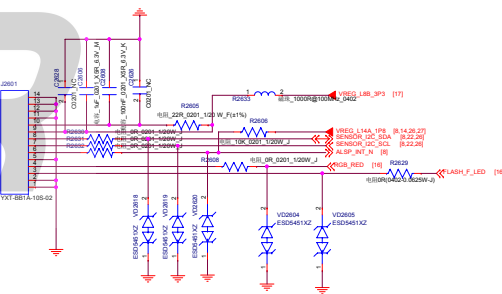


Rear Cam Inteface

S5K2L7SA-Rear Main CAM I2C Adress:0x2D (Write:0x5A Read:0x5B)

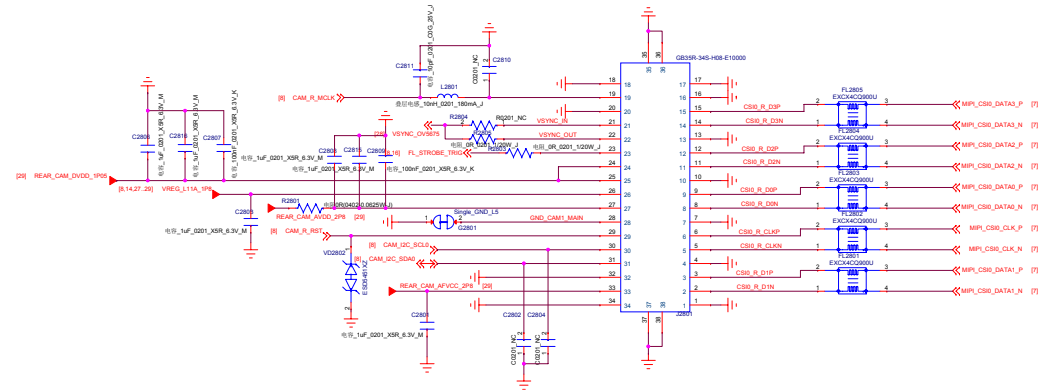


Rear Cam FLASH LED-Dual CCT

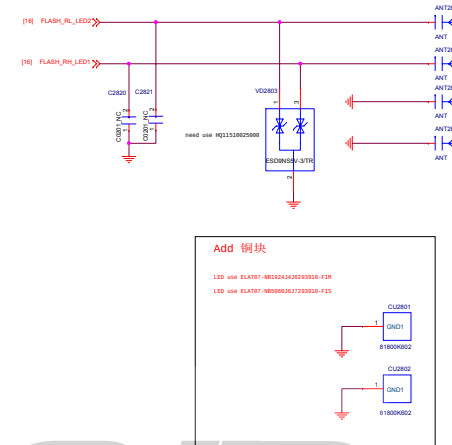


SLAVE CAMERA

OV5675-Rear Slave Cam I2C Adress:0x36 (Write:0x6C Read:0x6D)

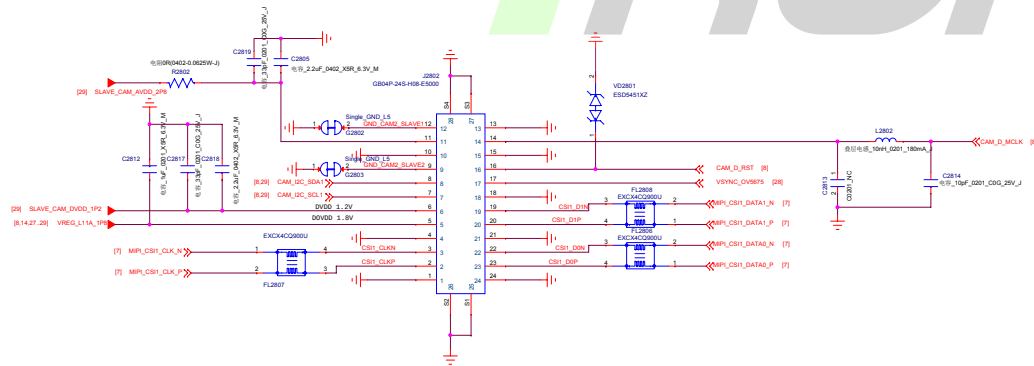


FRONT CAMERA
S5K4H7YX-Front Cam I2C Adress:0x10 (Write:0x20 Read:0x21)

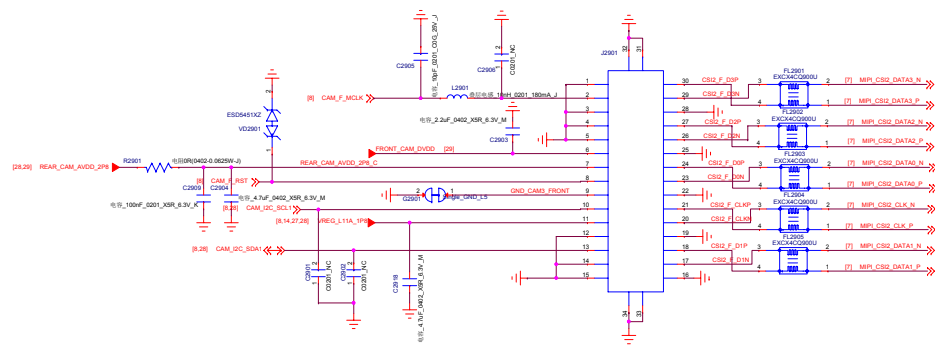


Camera Power Supply Map

	Front CAM	REAR_CAM_MAIN	REAR_CAM_SLAVE
DVDD	8M - - LD01-1V2 12/20 M - -LD02-1V	LD03-1V05	LD01-1V2
AVDD	LD04-2V8		LD05-2V8
IOVDD	VREG_L11A		
AFVDD	/	LD06-2V8 or VREG_L8B	/


Rear-Main DVDD 1.05V

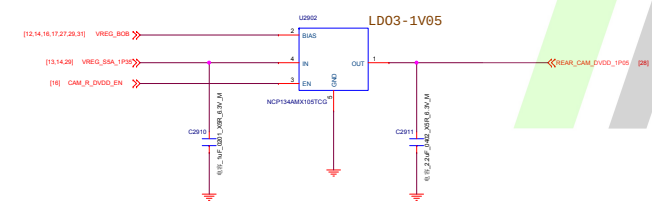


Rear-Main AFVCC 2.8V

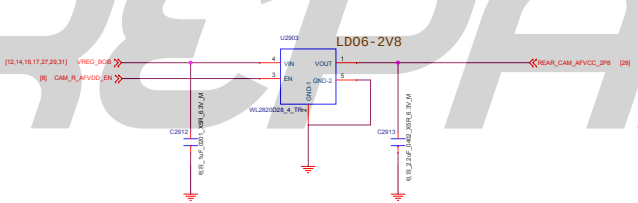


Rear-Main AVDD 2.8V (also Front AVDD)

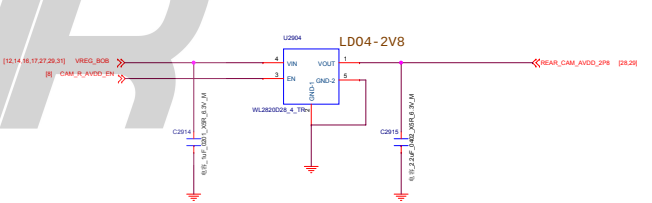


Front DVDD 1V for Front 16M

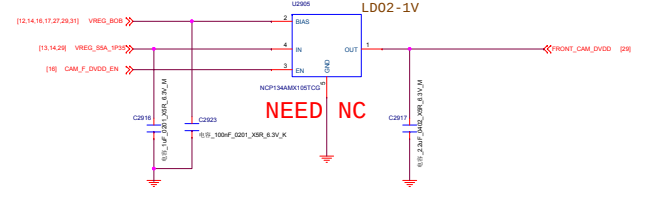


Rear-Slave AVDD 2.8V

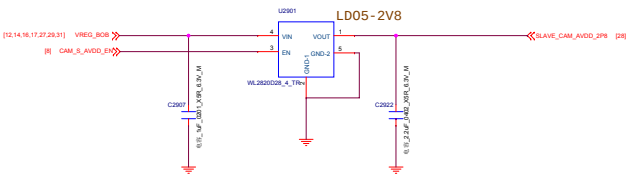


Rear-Slave DVDD 1.2V (Also 8M Front DVDD)



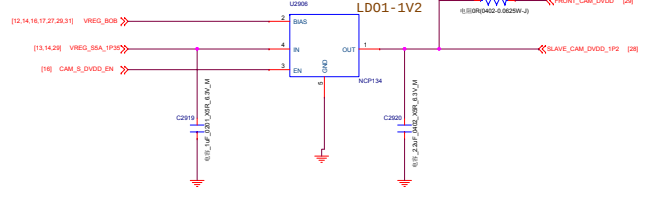



REF 3001-3099

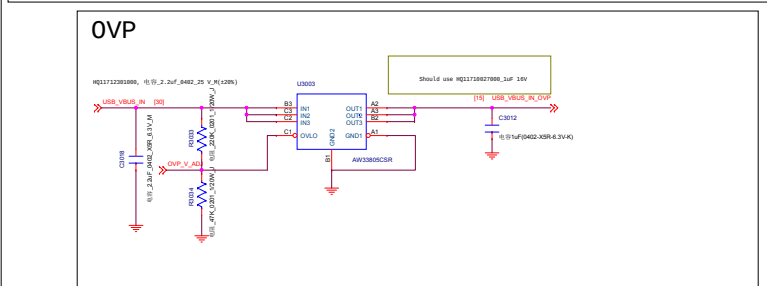

VD3018 NA sku should be 18V; other SKUs should be 15V

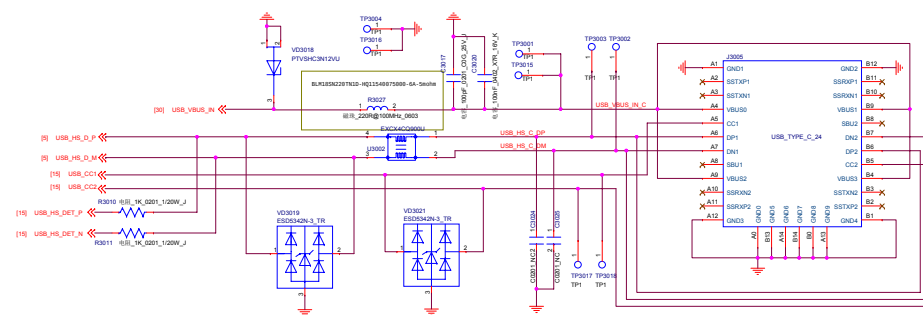


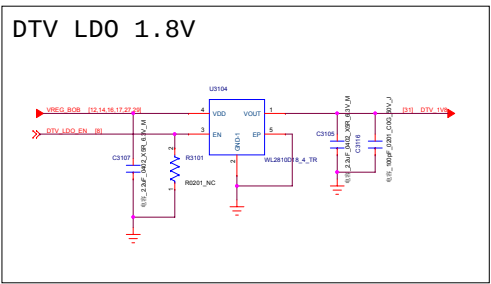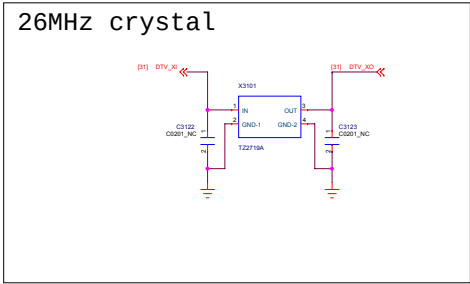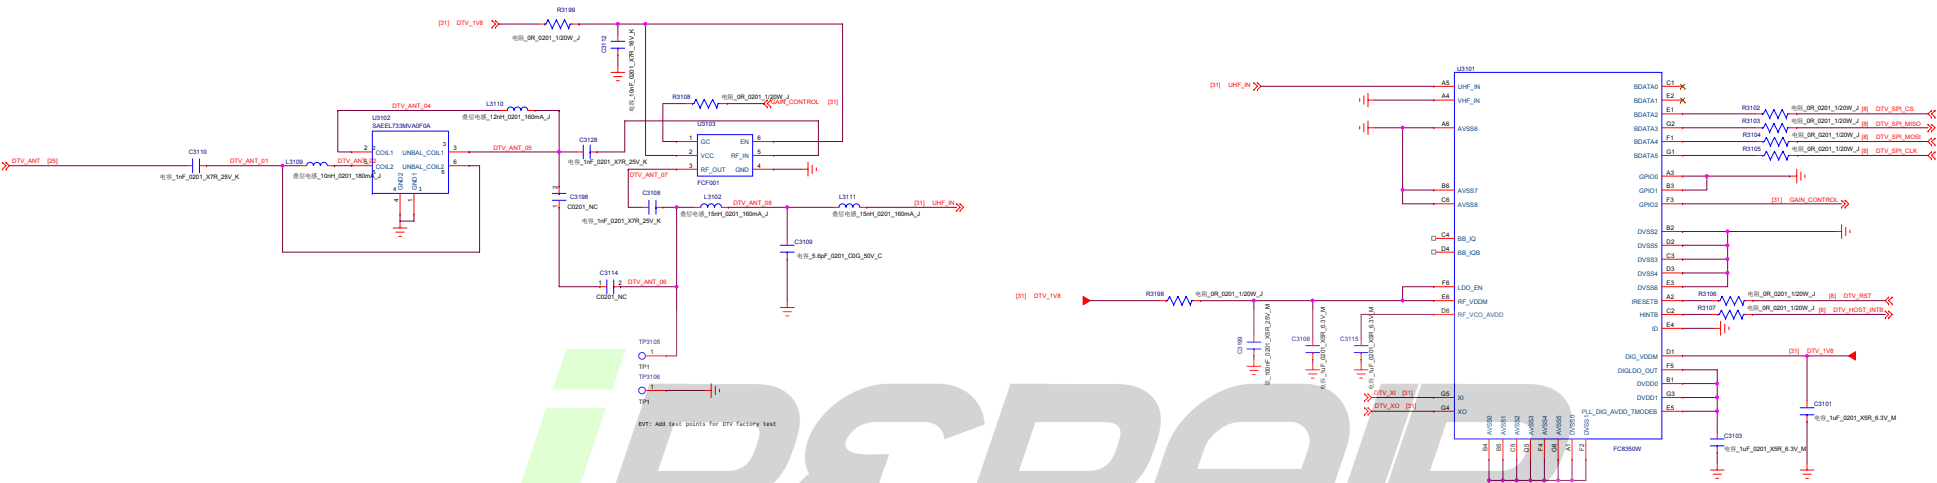

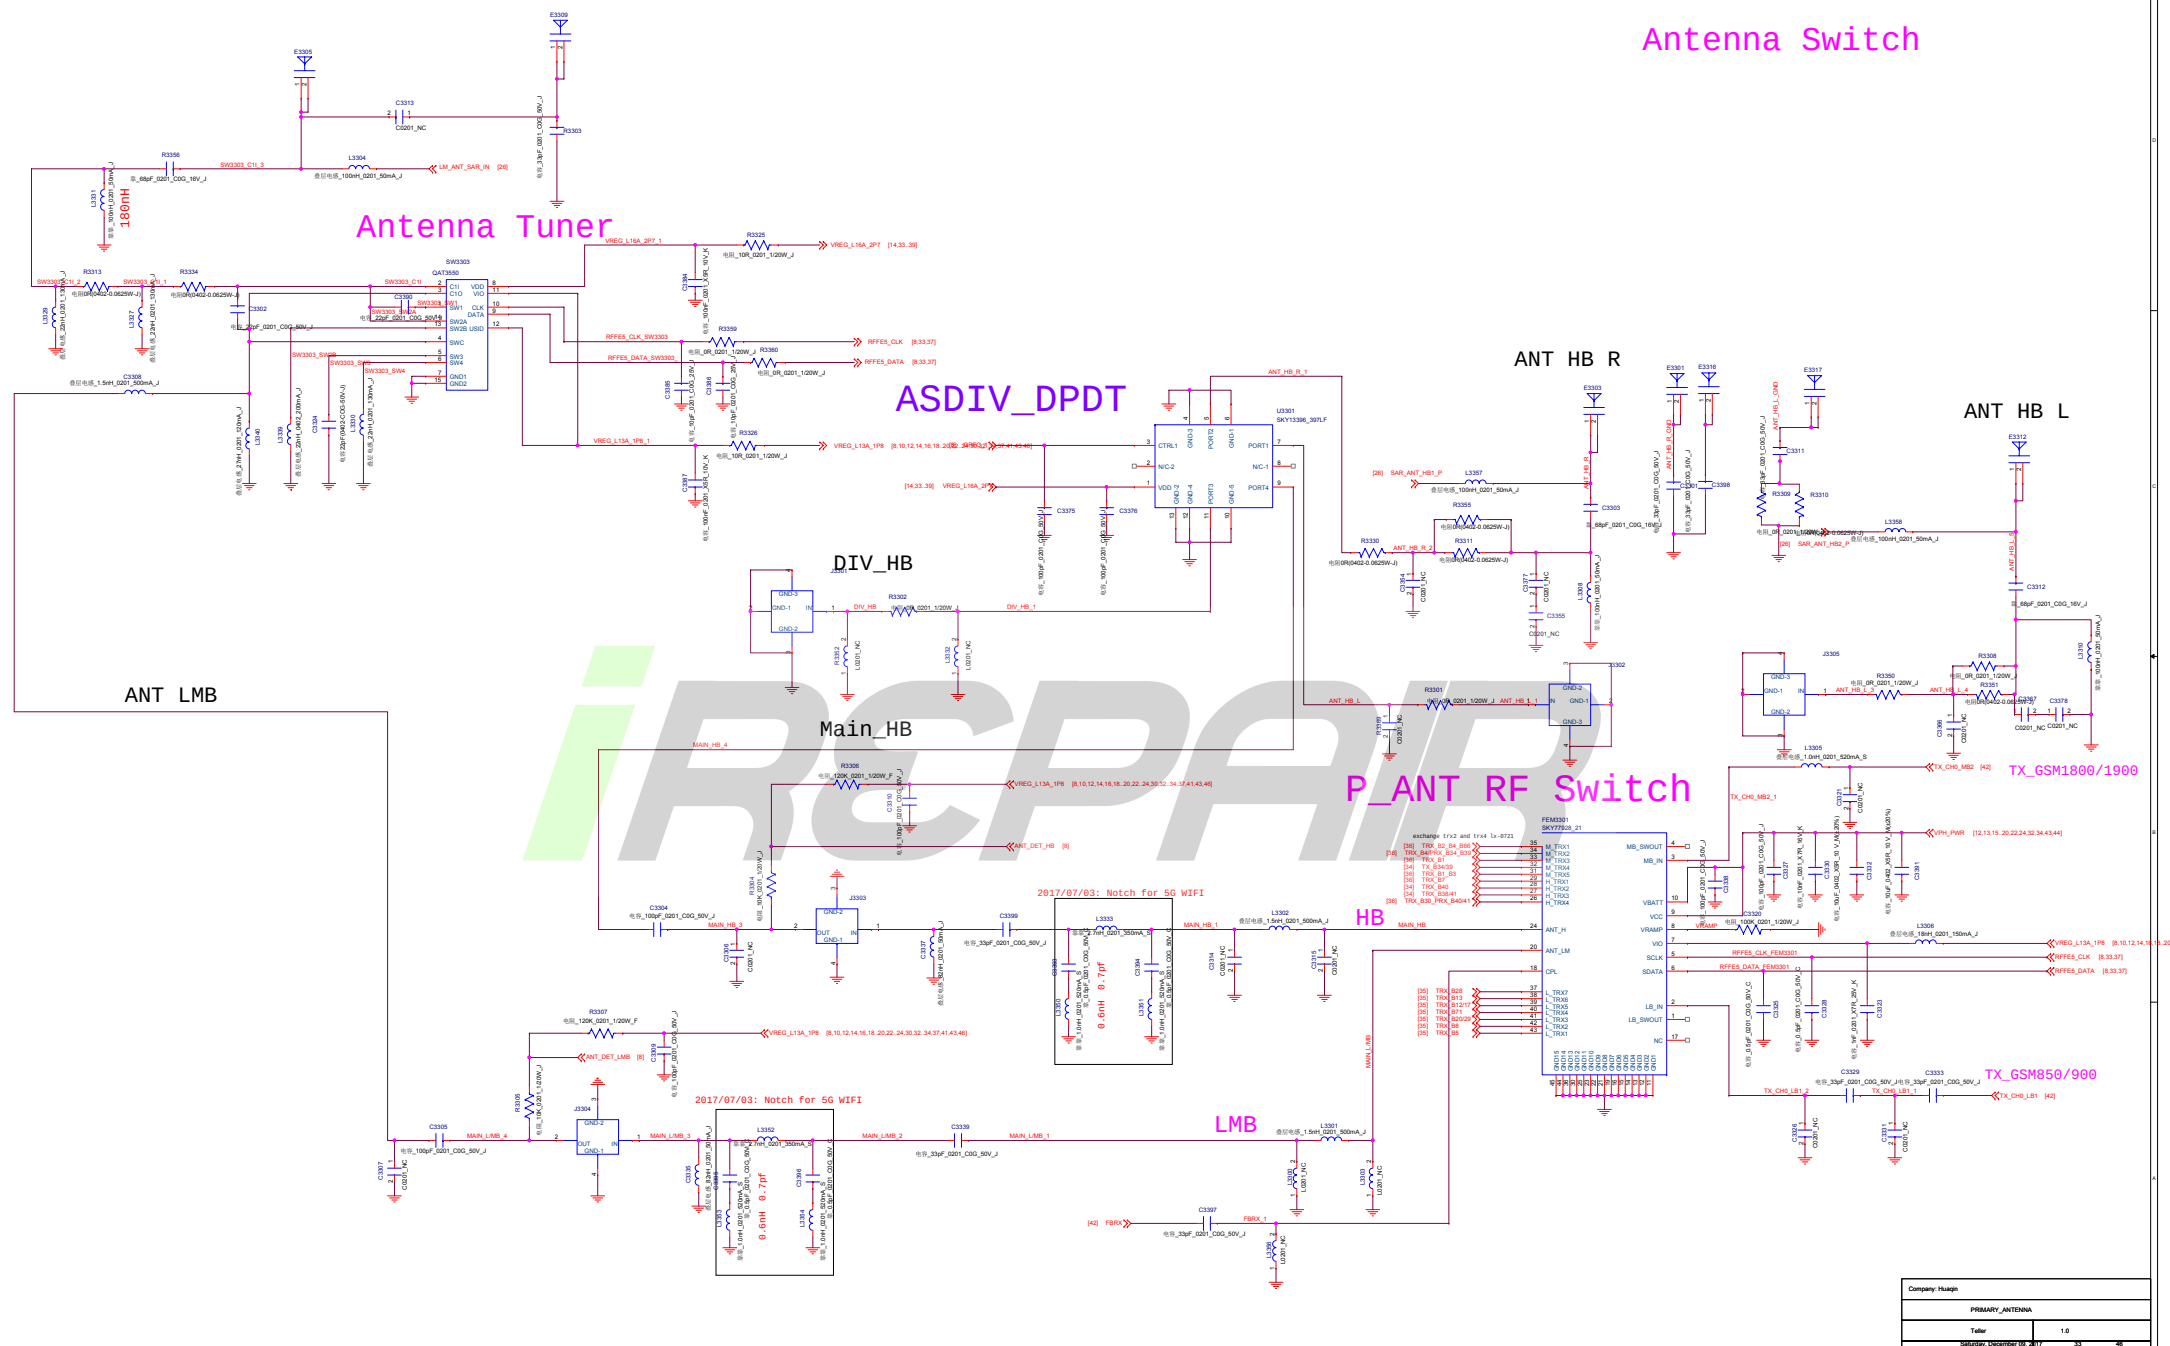


PA & PA THERMAL

REF 3401-3499

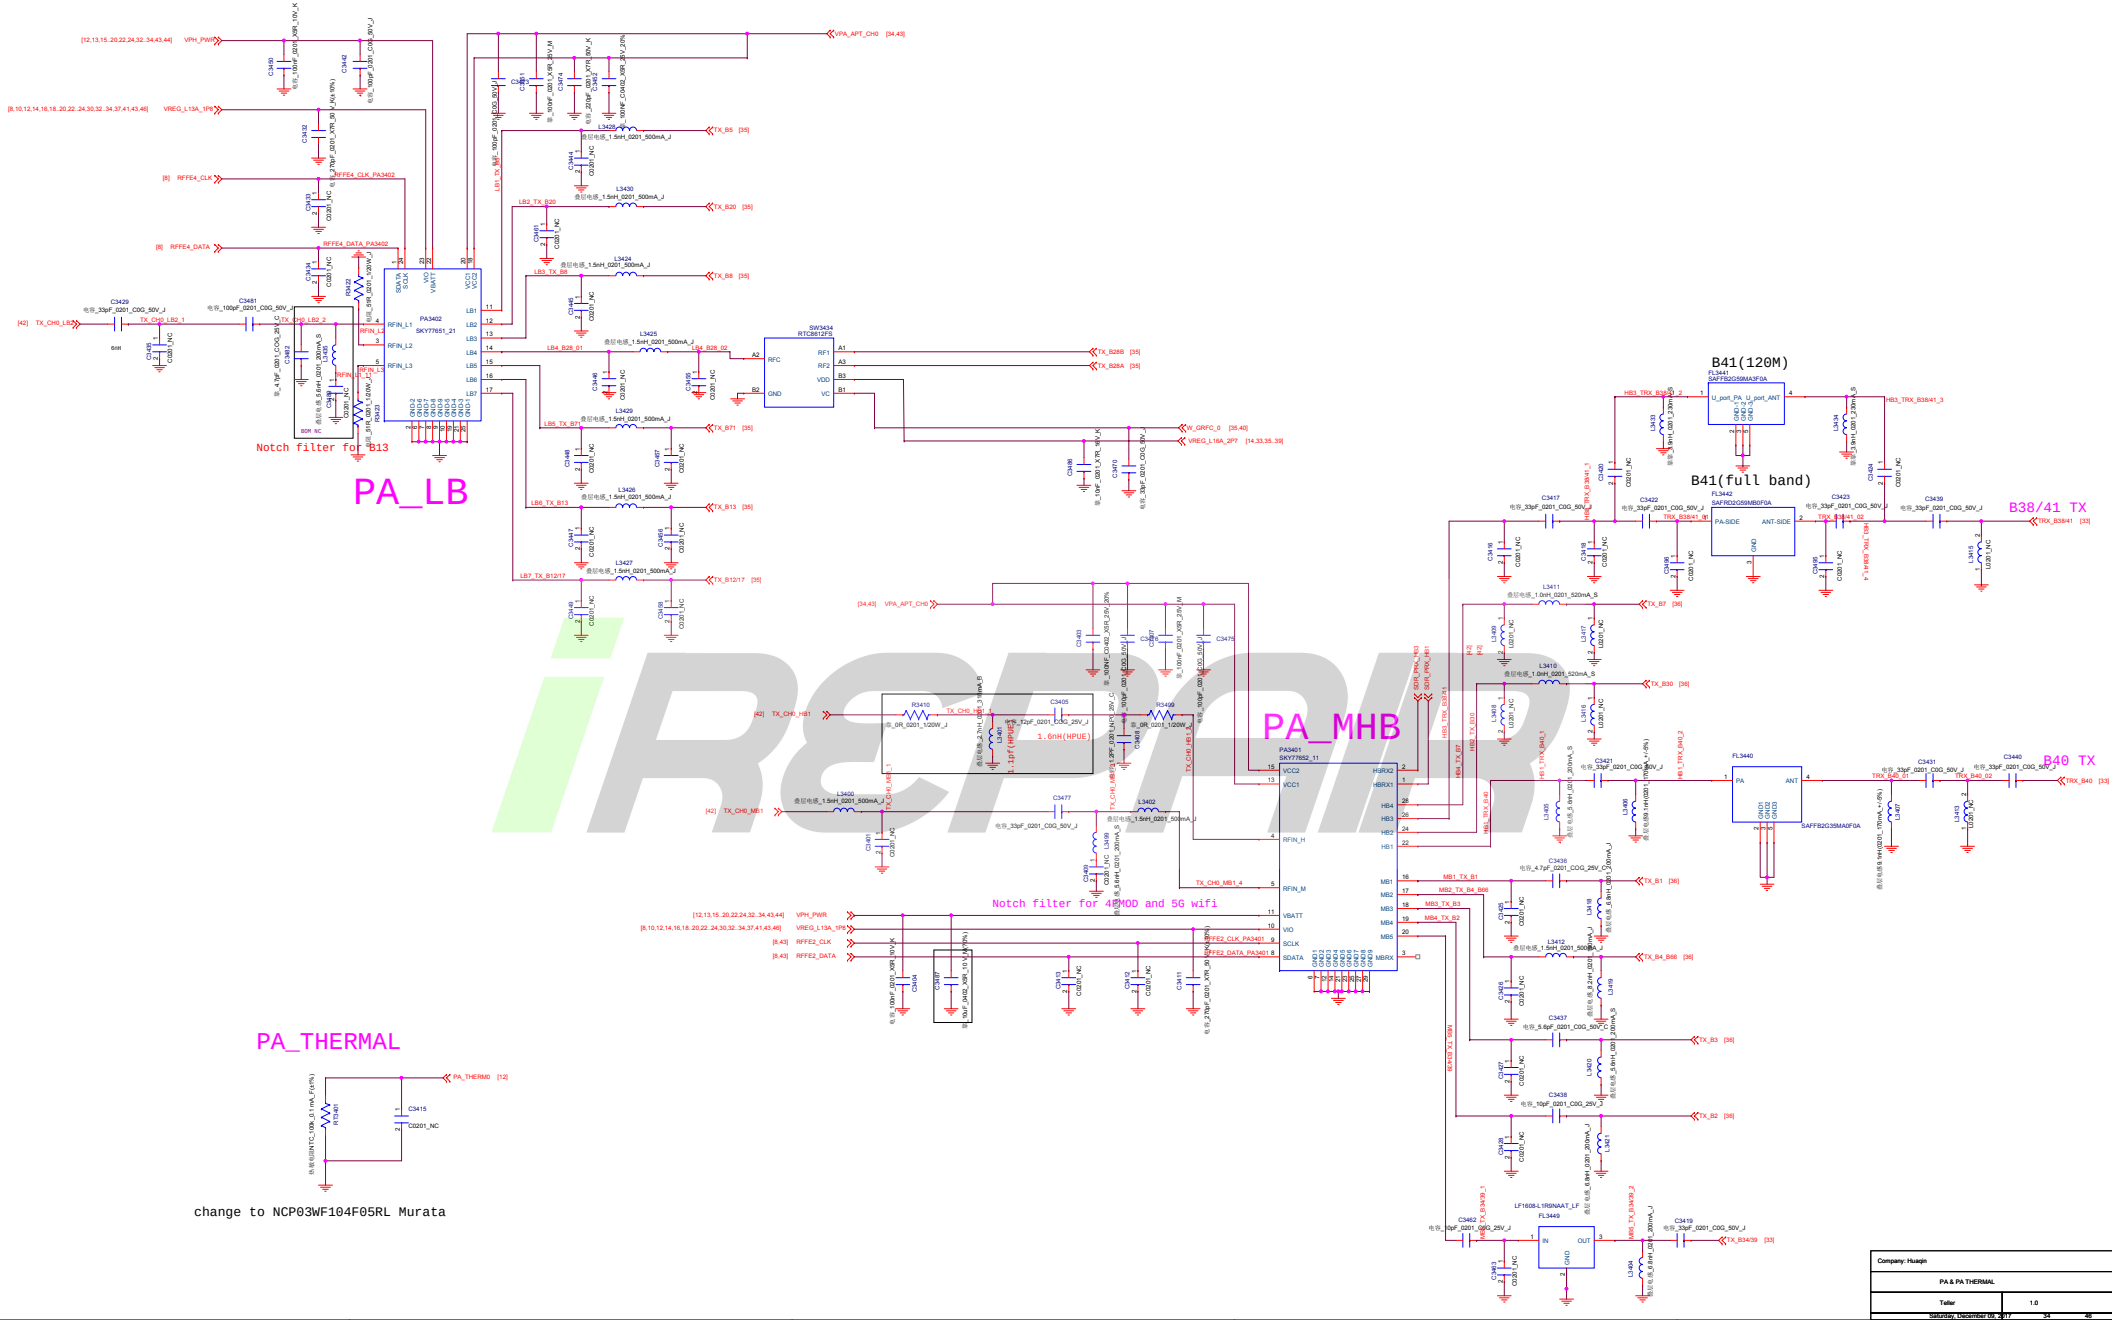

Company Housen	
PA & PA THERMAL	
Taller	1.0
DESIGNER: VICTOR NG	25

TRX_LB

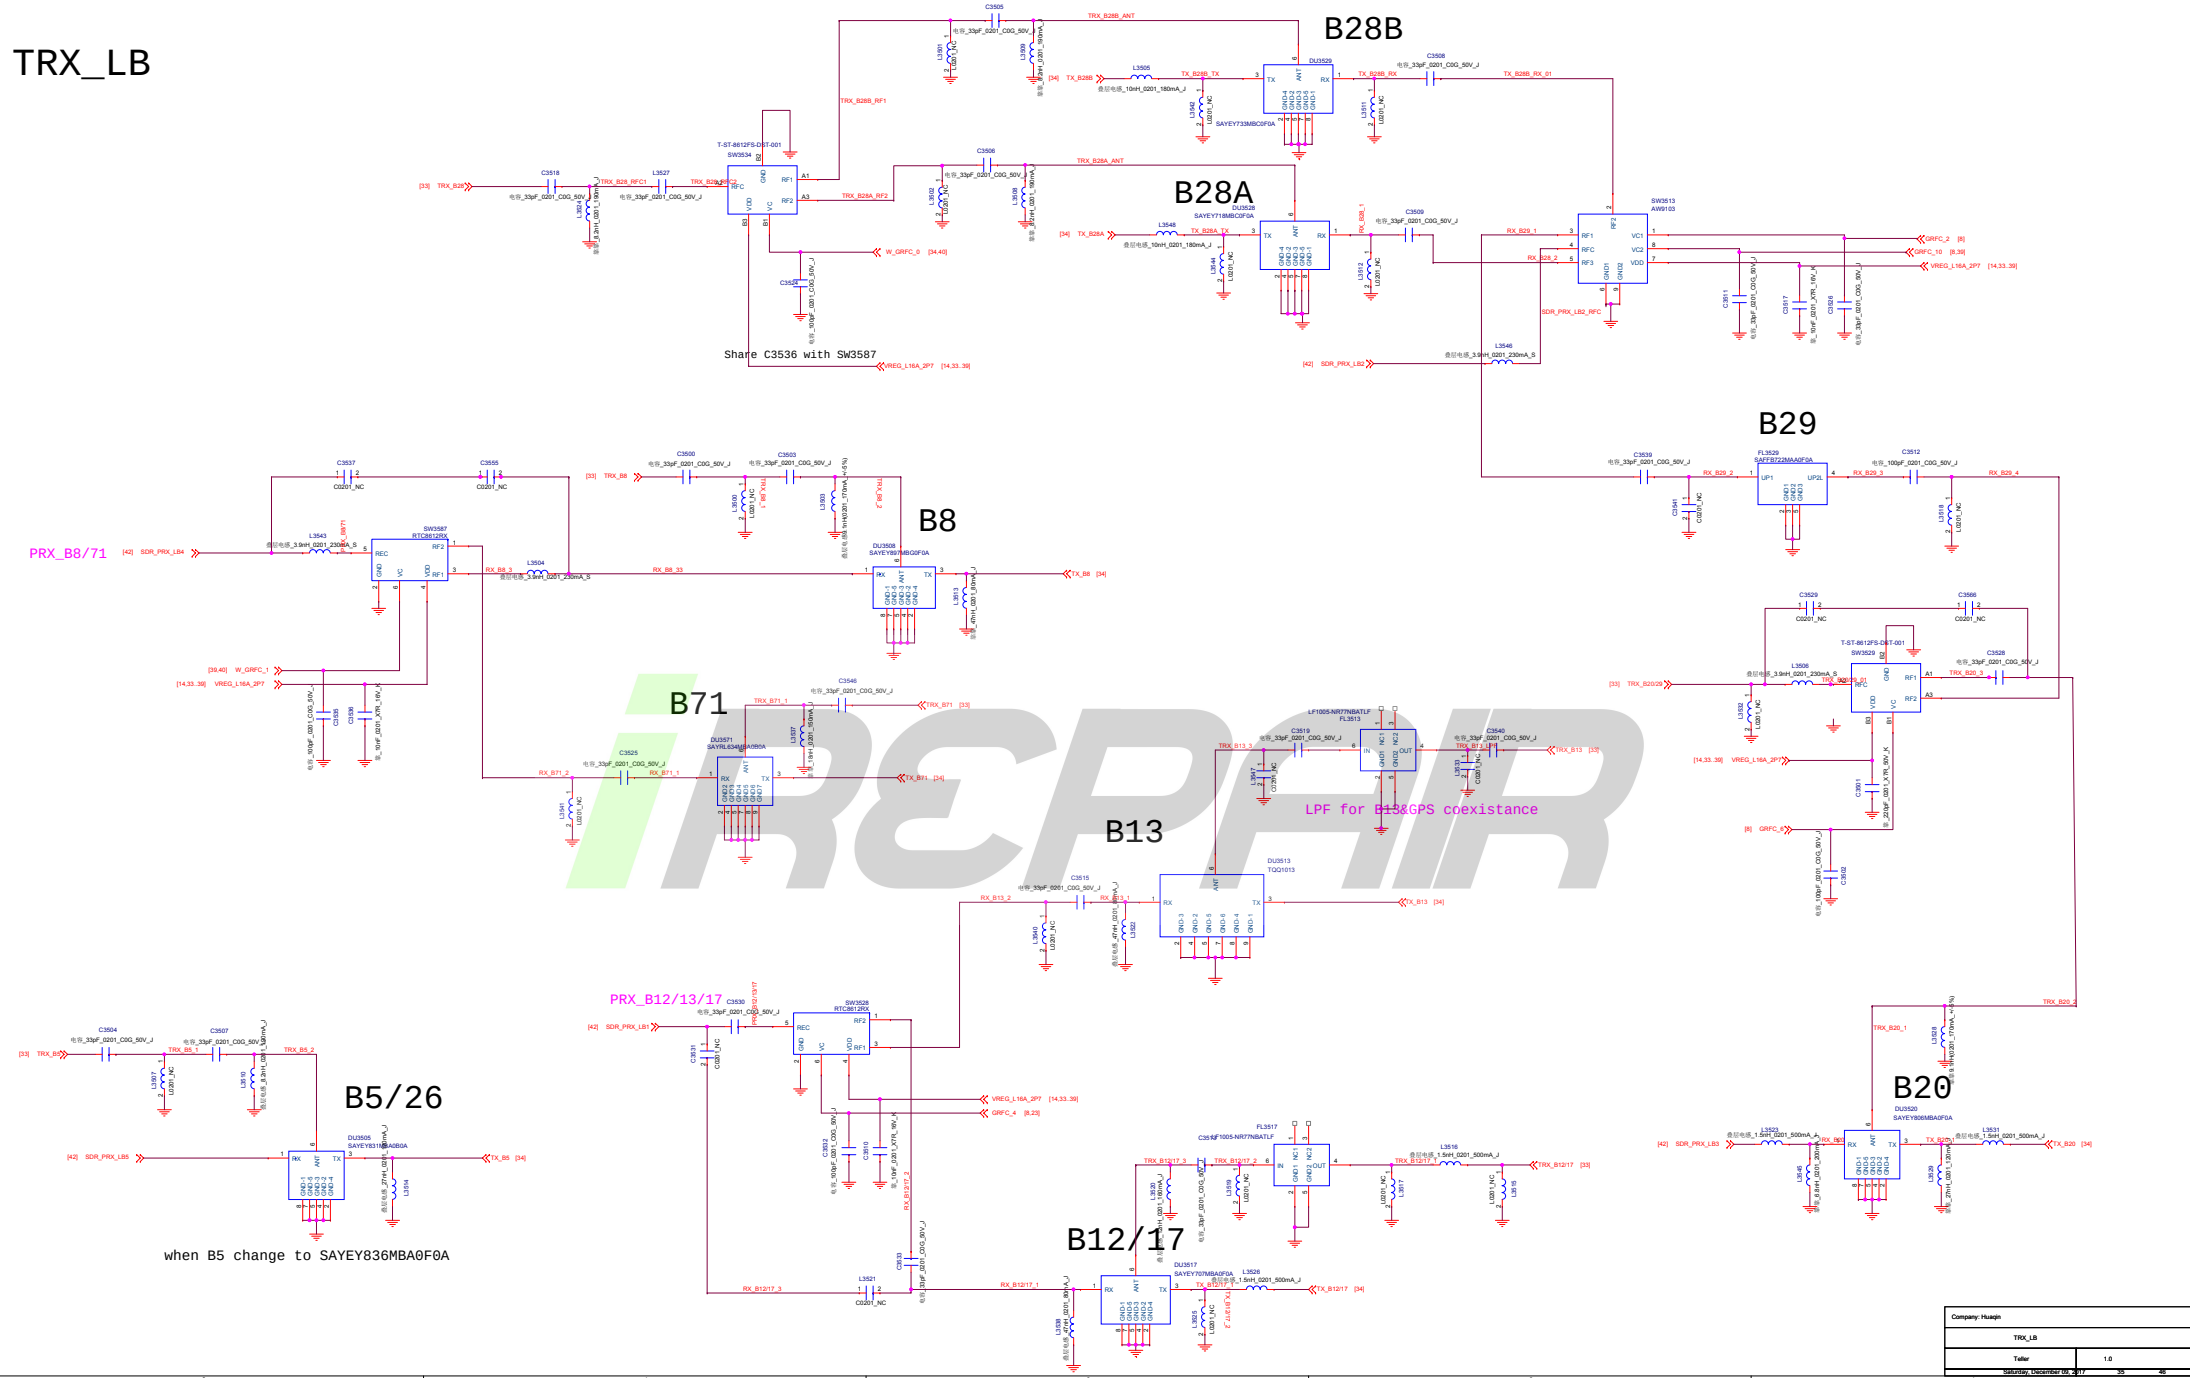

Company Hsuan	
TRX_LB	
Taller	1.0
DATE: 2023/08/17	35

B2 DPX

B34/39 PRx

B25/B66 QPX

PRX_B4

B30 DPX




B3 DPX

B1/B3 QPX







B1 DPX

B7 DPX


DIVERSIT_ANT

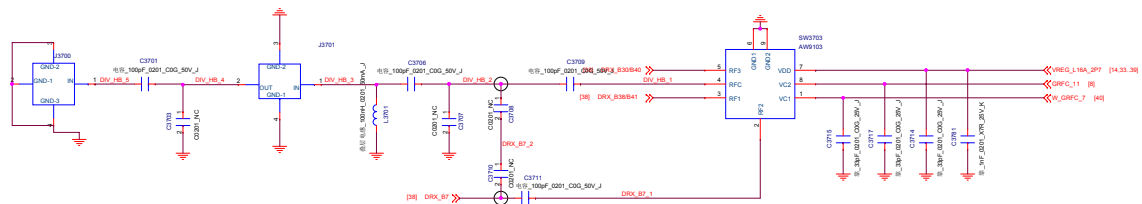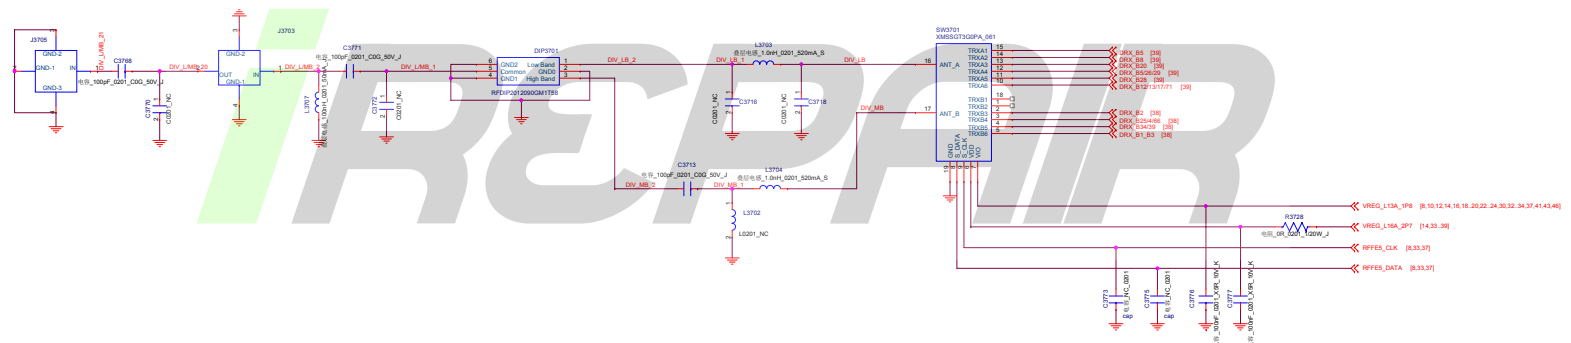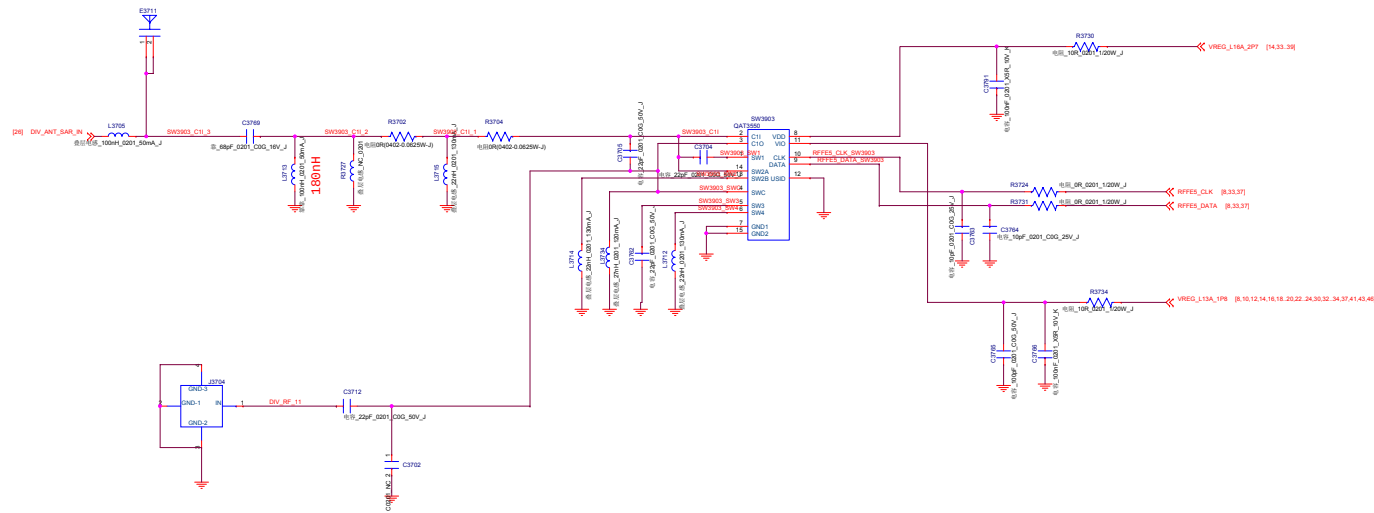


DRX_MB_HB

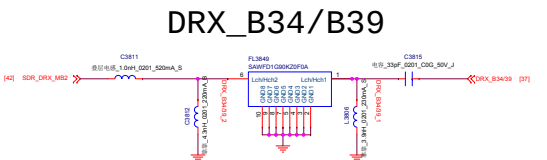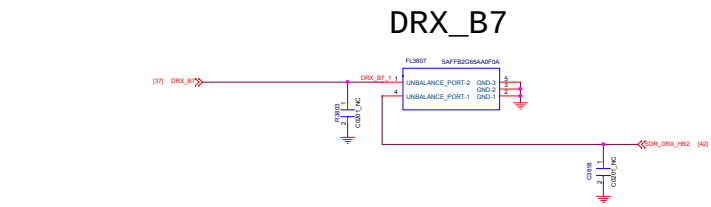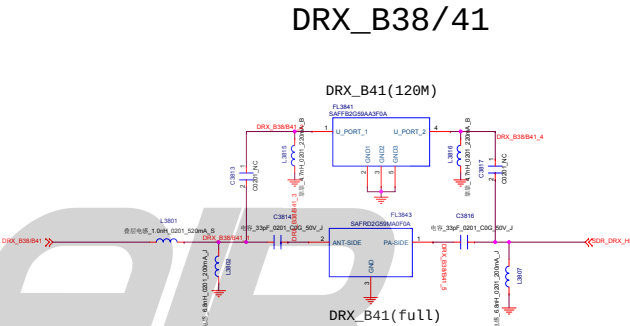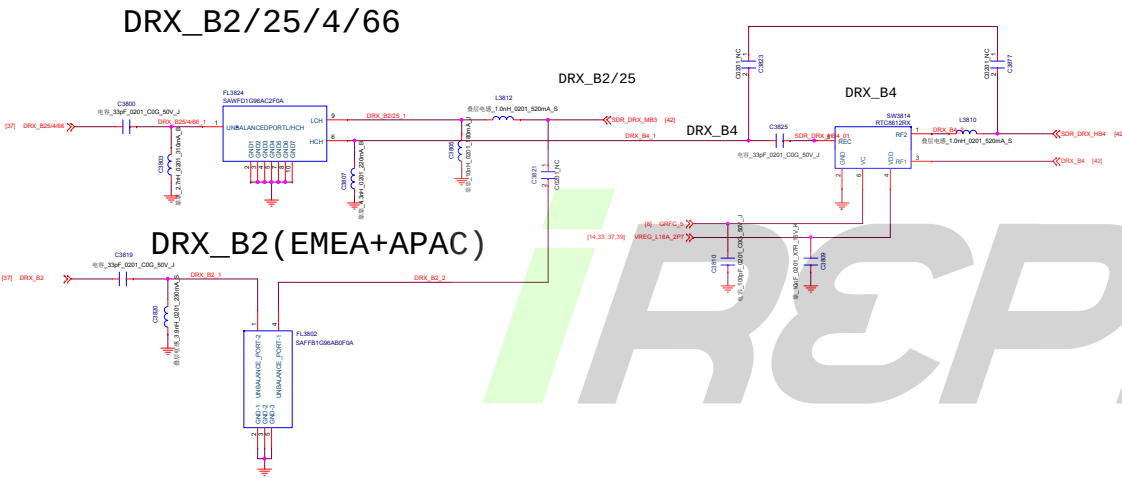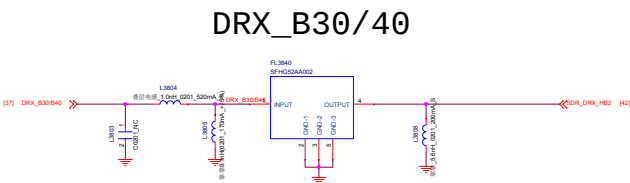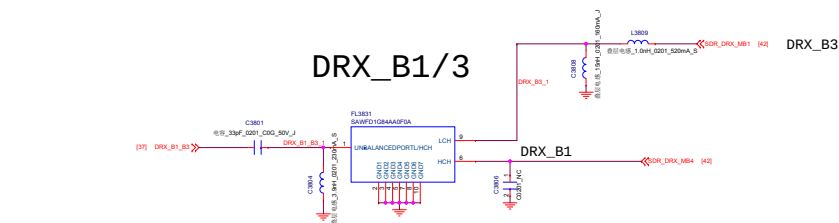


DRX_LB

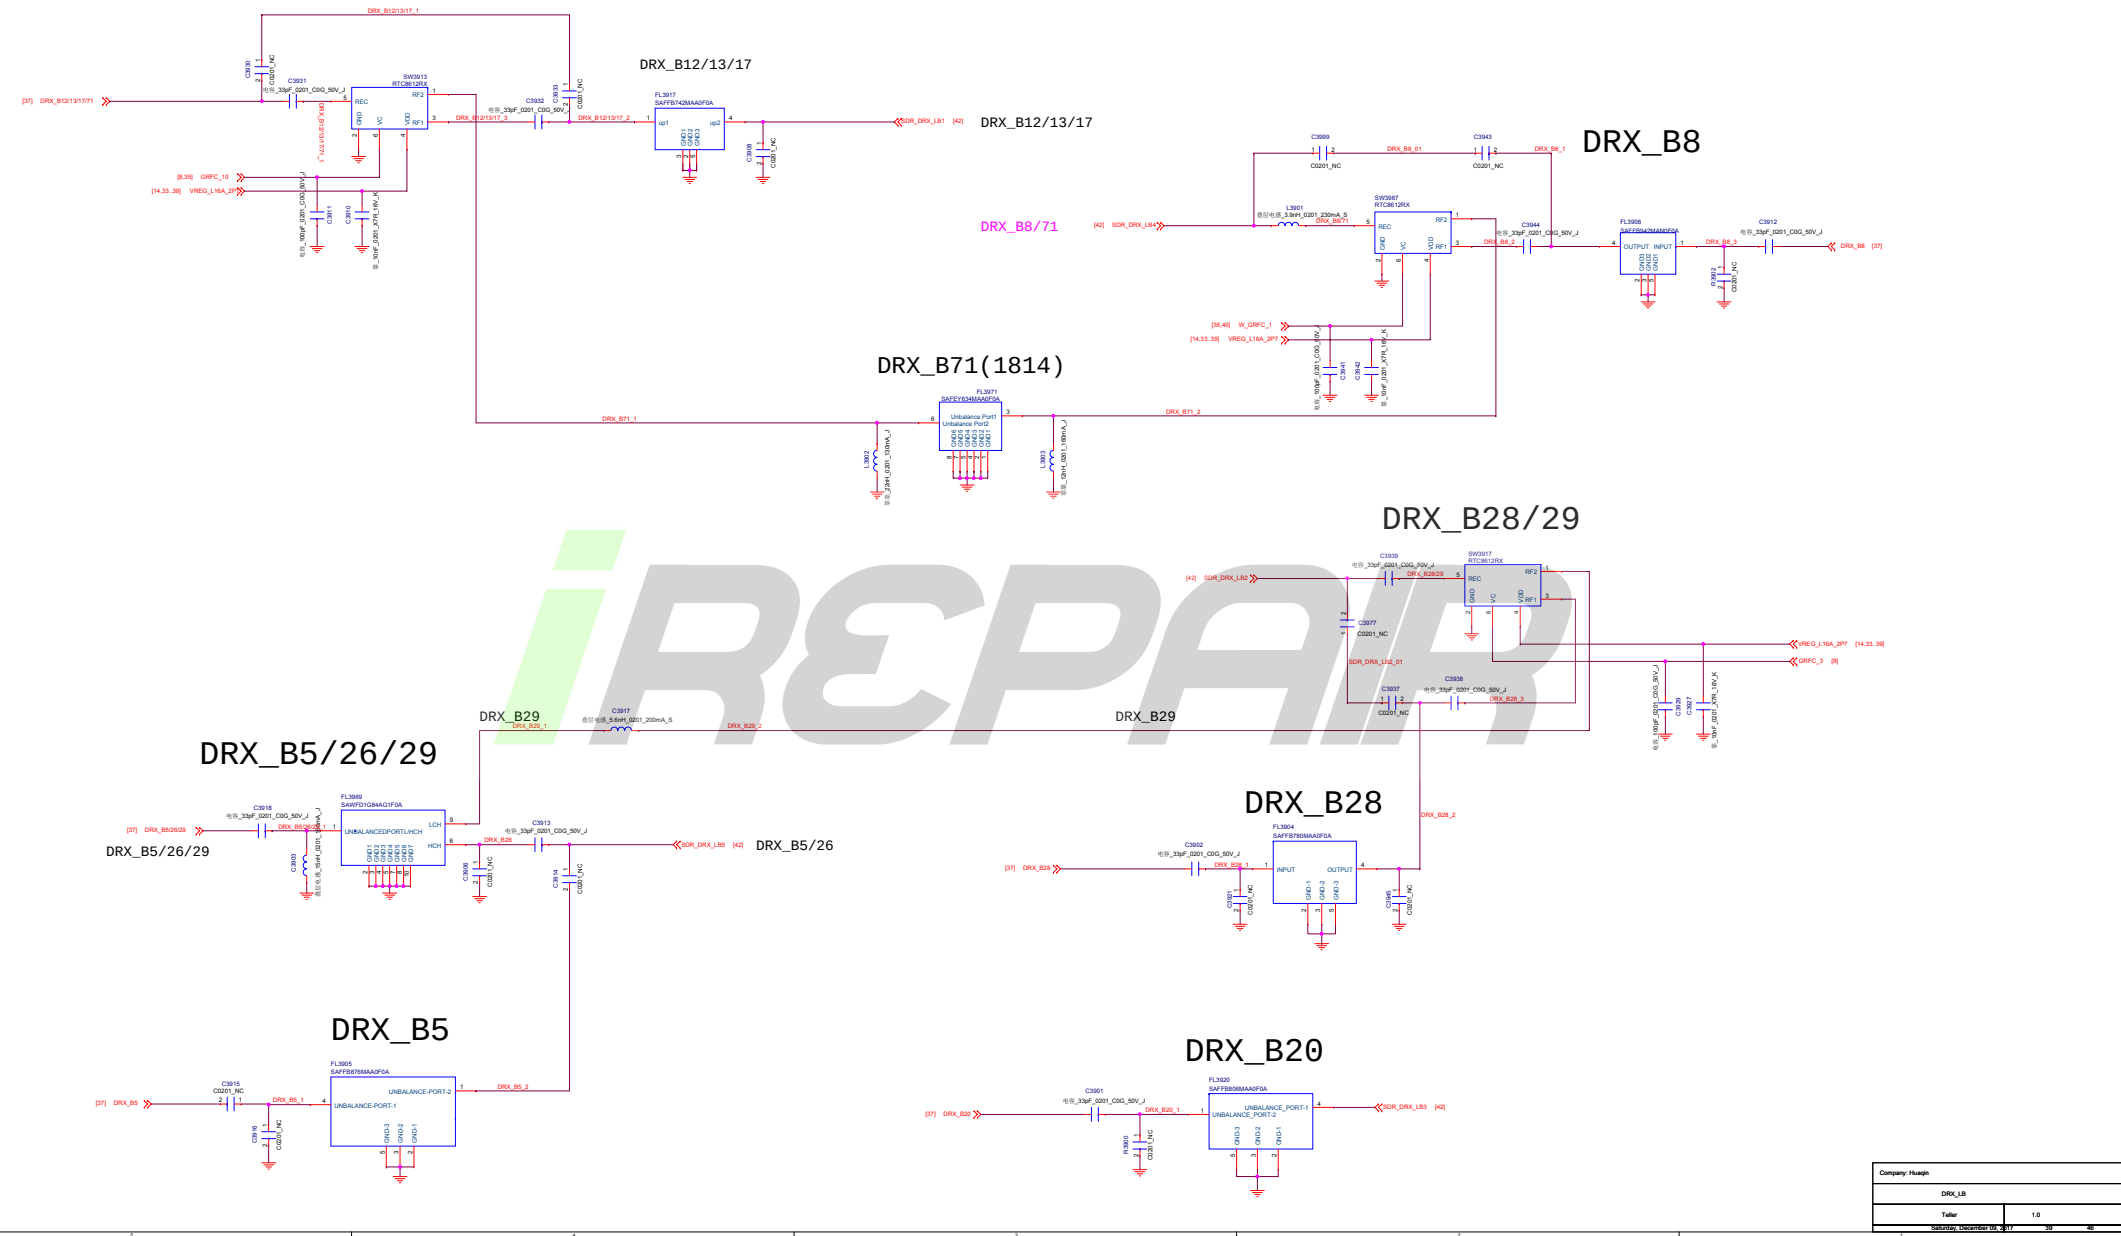

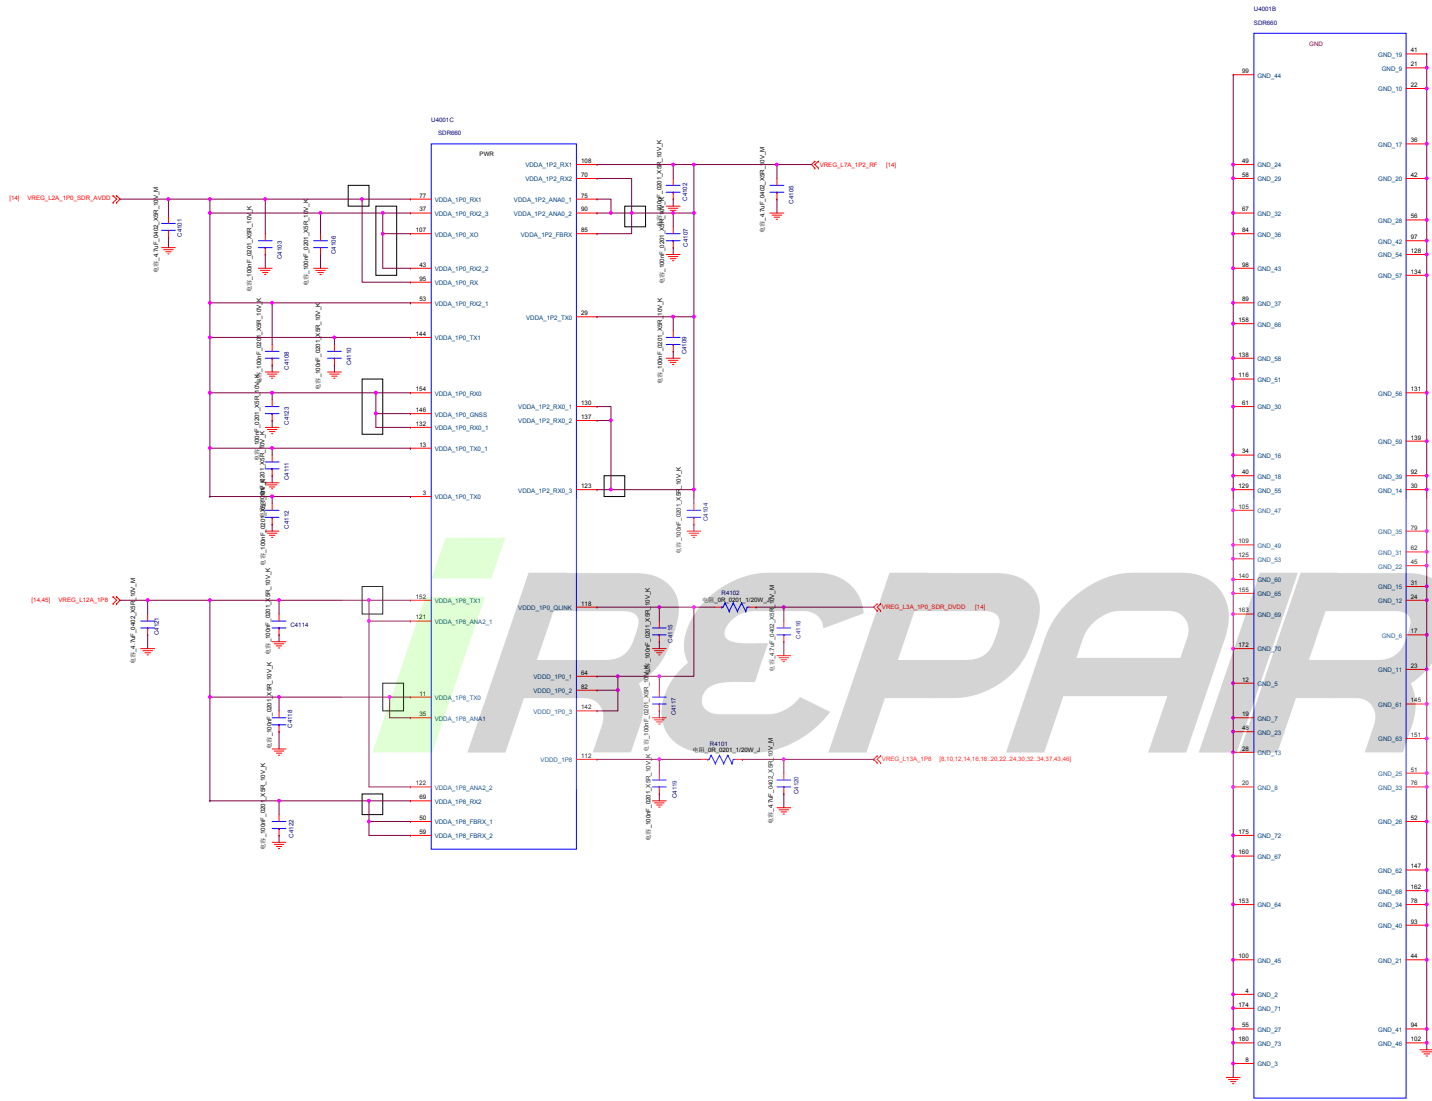

WIFI 2.4G/5G/BT

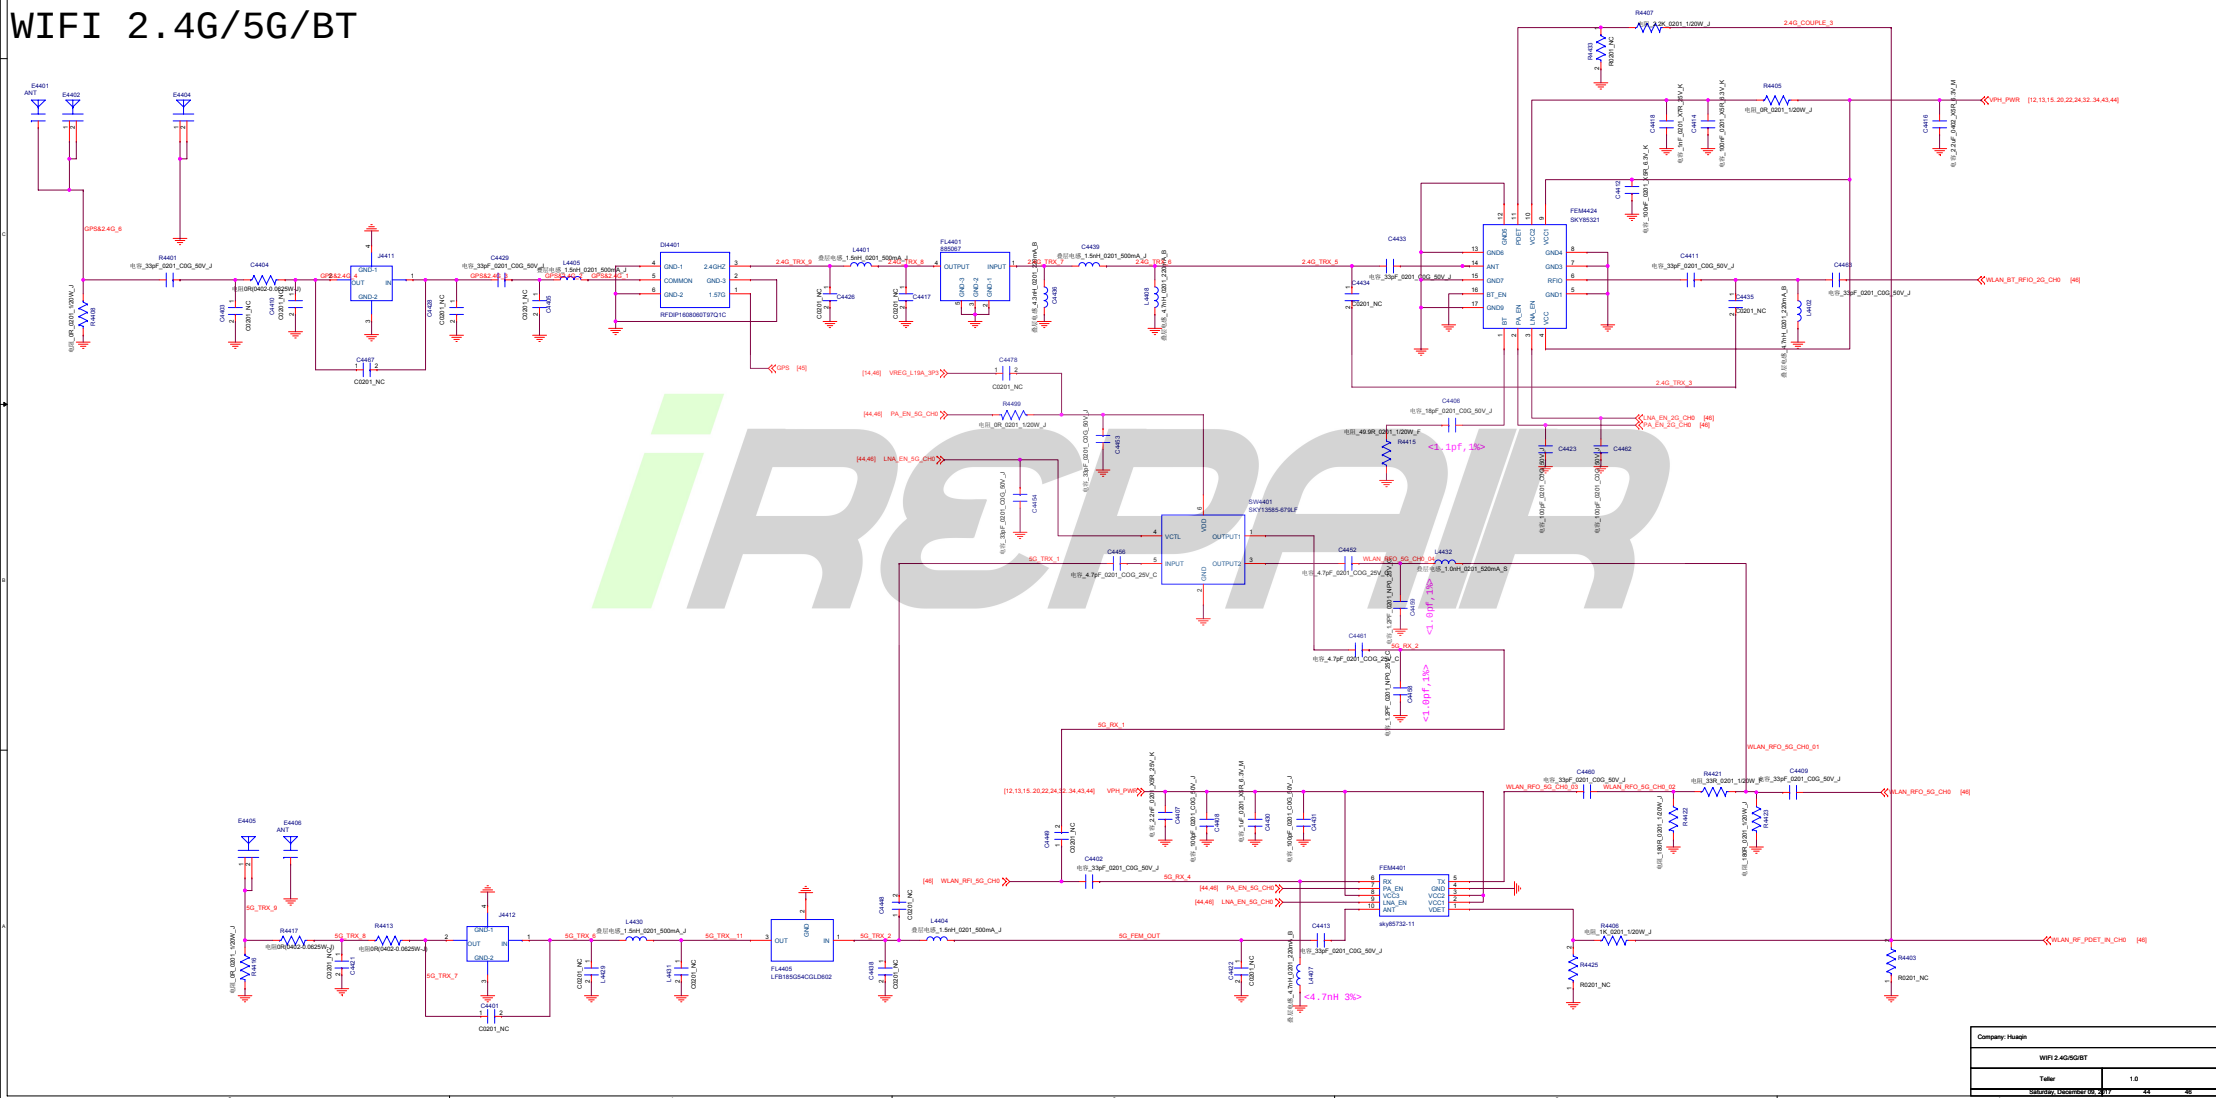

Company Hsuan	
WIFI 2.4G/5G/BT	
Taller	1.0
DATE: 2023/10/10	23

GPS

