

RedMeter6 ProThree LevelTie upDecorateFingerGuided V01

SkillMethodPut

upHoldInteriorPartCharacterAccuse : RedMeter

6 Pro ThreeLevelTie upDecorateFingerGuide

V01GoUseMouldEnclose :

DivideDivideCentreHeart、Unus

ualOwnerBoard、TidyTrigger

mechanismTie

upDecorateWorkerYardChange

ChangeExperienceHistory :

InitialPrinting block 2018/7/18

- [RedMeter6 Pro](#)
 - [ThreeLevelTie](#)
[upDecorateFingerGuide V01 1.](#)
[BasePlinthTrueBreathLi](#)
[e betweenCarry](#)
[forward](#)
 - [1.1 Product Overview](#)
 - [1.2Redmi 6 ProSpecial welding fixtures](#)
 - [1.3 Redmi 6 ProPower adapter cable](#)
 - [1.4Repair label pasting location and specification](#)
 - [1.5 Notes for motherboard maintenance](#)
 - [1.6 Flashing method](#)
 - [1.7 RF Calibration Test Related](#)
 - [2. Introduction to Logic Board Modules](#)
 - [2.1 Redmi 6 ProDistribution map of motherboard components](#)
 - [2.2 Redmi 6 ProDistribution map of sub-board components](#)
 - [2.3 Redmi 6 ProIntroduction to power-on timing and key signal measurement meters](#)
 - [3. Troubleshooting](#)
 - [3.1 Switch](#)
[failure](#)
 - [3.1.1 No power, constant current](#)
 - [3.1.2 No power, current not maintained](#)
 - [3.1.3 No power, no current](#)
 - [3.1.4 No power, power leakage](#)
 - [3.1.5 Automatic shutdown](#)
 - [3.2 Restart failure](#)
 - [3.3 Freeze failure](#)
 - [3.4 Signal failure](#)
 - [3.5 SIMCard failure](#)
 - [3.6 Charging failure](#)
 - [3.7 Display failure](#)
 - [3.8 Audio failure](#)
 - [3.8.1 Speaker failure](#)
 - [3.8.2 MicrophoneFault](#)
 - [3.8.3 Receiver failure](#)
 - [3.8.4 Headphone failure](#)
 - [3.9 WIFI/BT/FMFault](#)
 - [3.10 Camera failure](#)
 - [3.11 Sensor failures](#)
 - [3.12 Touch Screen Failure](#)

- [3.13 Vibration-related functional failure](#)
- [3.14 Fingerprint Identification Failure](#)

1. . Introduction to basic information

1.1 Product Overview

Give birth toArticleMannerRelate :



红米6 Pro

AI双摄 高颜值大电量

5.84" 异形全面屏
19:9 FHD+, 高屏占比

后置1200万+500万
AI 双摄, 随手拍大片

骁龙625 八核处理器
14nm 制程, 强劲性能

4000mAh大电量
畅快使用, 精彩不断

AI人脸解锁
单反级背景虚化

2+1 卡槽
最高可扩展256GB



红米6 Pro

3GB + 32GB / 4GB + 32GB / 4GB + 64GB
骁龙 625 八核处理器, 最高主频 2.0GHz
AI双摄相机1200万+500万, 500万前置美颜自拍、人脸解锁
高度: 149.33mm 宽度: 71.68mm 厚度: 8.75mm 重量: 178 g
5.84 英寸 (对角线) 19:9 全面屏, 2280x1080分辨率, 432 PPI, 对比度1500:1, 500 (typ) nit 亮度
支持双Nano-Sim卡+micro-SD扩展, 全网通3.0, 任意卡槽均可设置为主卡支持双卡不限运营商, 不能同时支持双卡4G驻网
4000mAh (typ) / 3900mAh (min) 5V/2A
支持802.11a/b/g/n WiFi协议, 支持 2.4G WiFi / 5G WiFi / WiFi Direct / WiFi Display, 蓝牙4.2 无线技术
GSM (频段 B2/3/5/8), CDMA1X / EVDO (频段 BC0), WCDMA (频段B1/2/5/8), TD-SCDMA (频段 B34/39), TDD-LTE (频段 B34/38/39/40/41 (100MHz), FDD-LTE (频段 B1/3/5/7/8)

1.2 Red rice6 Pro Special welding fixtures

ThingExpectWeaveSign or thing indicating number: SCNC020057200

1.3 Red rice6 ProPower adapter cable

ThingExpectWeaveSign or thing indicating number: SCNC030025900 (GiveSmallMeter5XF or.
LightningEmbellish one's speech with literary quotationsCome into contact withThreadLead toUse)

1.4 Repair label pasting location and specification

Tie upDecorateTreetopSignStick toPastePlaceSet upComply withPicture :



1.5 Notes for motherboard maintenance

1. AtOwnerBoardWeldCome into contact withGo toMove forwardNeedWantBringLooseHotSiliconGluePluckDoorsteps , DamStopPut one thing on top of anotherHotSeasonJostlePressArriveLooseHotSiliconGlueCushionLow position or rankTaxiRush pithFlat, thin pieceGo toAccomplishOwnerBoardReasonBlock.
2. Come into contact withMouthAndSimCalorieSeatThisA fewYesMouldExpectYuanItem , AtWeldCome into contact withThisA fewYuanItemTaxiCircleEncloseSeasonNeedDoGoodDamWeldChangeTaxiManageBestow.
3. U1500With U100Yes. TieCalmCloseDo up, U1500Losses Break downSeasonApproveBy means ofSingleOnlyChangeExchangeNewExpect , Be likeChangeExchange U100Need to WantAttachBeltChangeExchangeNewTaxi U1500.


1.6 Flashing method

BrushTrigger mechanismLevelYou: MiFlash
TidyTrigger
mechanismSpecificUseWorkerYardB
ag: Fastboot
workersYardSpecificUseBrushTrigge
r mechanismSquareStandards:
Fastboot modelStandardsLow
position or rankBrushTrigger
mechanism

ChangeHowlSpecificUseWorker
YardBag : (RaiseStayNV bag
) Tie
upDecorateSpecificUseWorkerY
ardBag : (ClearDoorstepsNV
package) BrushTrigger
mechanismSquareStandards : D
eepLinear measureBrushTrigger
mechanism(EDL)


1. HandTrigger mechanismAtCloseTrigger mechanismAppearanceAppearanceShortCome into contact with
T 端口 (COM 和 LPT) P2707This TwoSelfSpot , SendHandTrigger
Qualcomm HS-USB QDLoader 9008 (COM10)
n 计算机 nStandards (Have a sense ofDon' t 9008End of Mouth) 。

2SelectSelectMutuallyShould doTaxiSoftItemBag, tickSelect MiFlashThe bottom
erYearSetComplete",

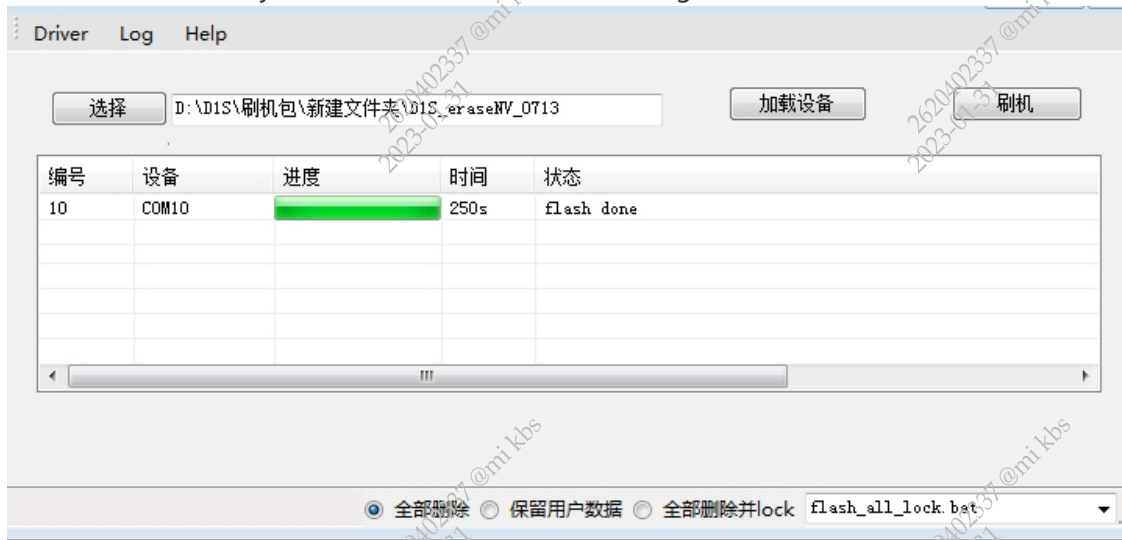

Take notice of : FahrenheitASmall sizeTBOoT Bag Used for FahrenheitASmall sizeTBOoT Swipe

the factory version in mode, you need to solve it before brushing. BLarge sizeLock, after brushing Operation such as writing numbers can be carried out normally. EDimensionLarge size Bag (EDimensionLarge sizeIt refers to the emergency flash, that is, what we call the deep flash). The special package for deep flashing needs to be shortened into the deep brush mode before it can be used. There is no need to solve it before flashing. BLarge sizeLock, after brushing EDimensionLarge sizeThe first boot after the package is advanced. FFBMedium sizeMode (FahrenheitASmall sizeT FahrenheitACentigradeTORy BOoT Medium sizeODimensionE, Fast Engineering Startup Mode) SelectInformation technologyEMedium size TESmall sizeT" Perform relevant tests.

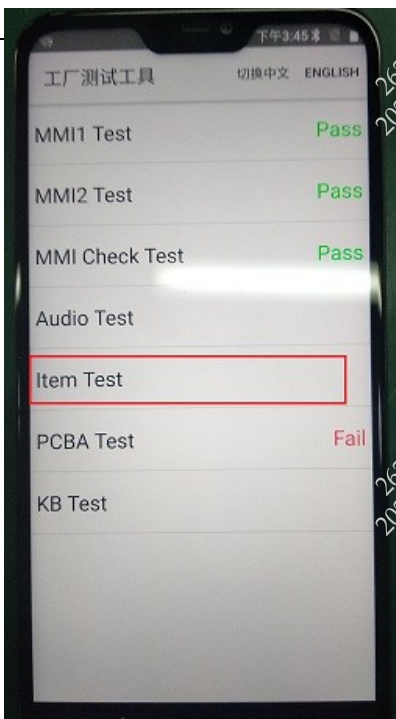


1.7 RF Calibration Test Related


1. DeepBrushWorkerYardSoftItem (RedMeter6 Pro-earseNV-EDL), using DTWorker ProvideWriteEnterFSN EmpressCompareStandard. Note DesiredDTWorkerProvideNeedChangeNewReach DT 2018.7.12.0_factoryOr either By means ofEmpressTaxiPrinting blockRoot , AskPush downHoldWorkshopFingerGuideSendUse.
2. HitOpenCompareStandardSoftItem, handsTrigger mechanismOpenTrigger mechanismAppearanceAppearanceLow position or rank, evenCome into contact withGoodOwnerCome into contact withDetainSkyThreadAndAssistHelpCome into contact withDetainTwoTwigShootRepeatedlyThread. ConnectCome into contact with Universal serial busLines EmpressHandTrigger mechanismOpenBeginningShootRepeatedlyCompareStandard.
3. CompareStandardAccomplishAchievementGo toEmpress , UseSmall Meter5XOf. WriteTreetopWillPlaceWorkerProvide: "NV Read & Write V2.2" WriteTreetopWillPlace. AccomplishAchievementEmpressWriteEnterTreetopWillPlaceEmpress , WorkerProvideUpGet togetherObviousShow" Succes" 。 CompareStandardWholeAccomplishGo toEmpress , AtWorkerYardPatternStandardsLow position or rankTaxiPrinting blockRootTrueBreathCentreApproveBy means ofLook afterArrive BTAnd FTShow. ShowTaxiYes" FAIL",SingleHaveBe equalWriteTreetopWillPlaceAccomplishAchievementEmpress , AtWorkerYardPatternStandardsLow position or rankTaxiPrinting blockRootTrueBreathCentreBT And FTTalented Get togetherObviousShow"PASS".
4. CompareStandardAccomplishAchievementAndWriteWholeTreetopWillPlaceEmpress, ifWantMeasureTryTrueHowIAchievementNai, need toWantSendUse DTWorker ProvideRepeatOpenHandTrigger mechanism.

2 . Introduction to Logic Board Modules

2.1 Red rice6 Pro Distribution map of motherboard components

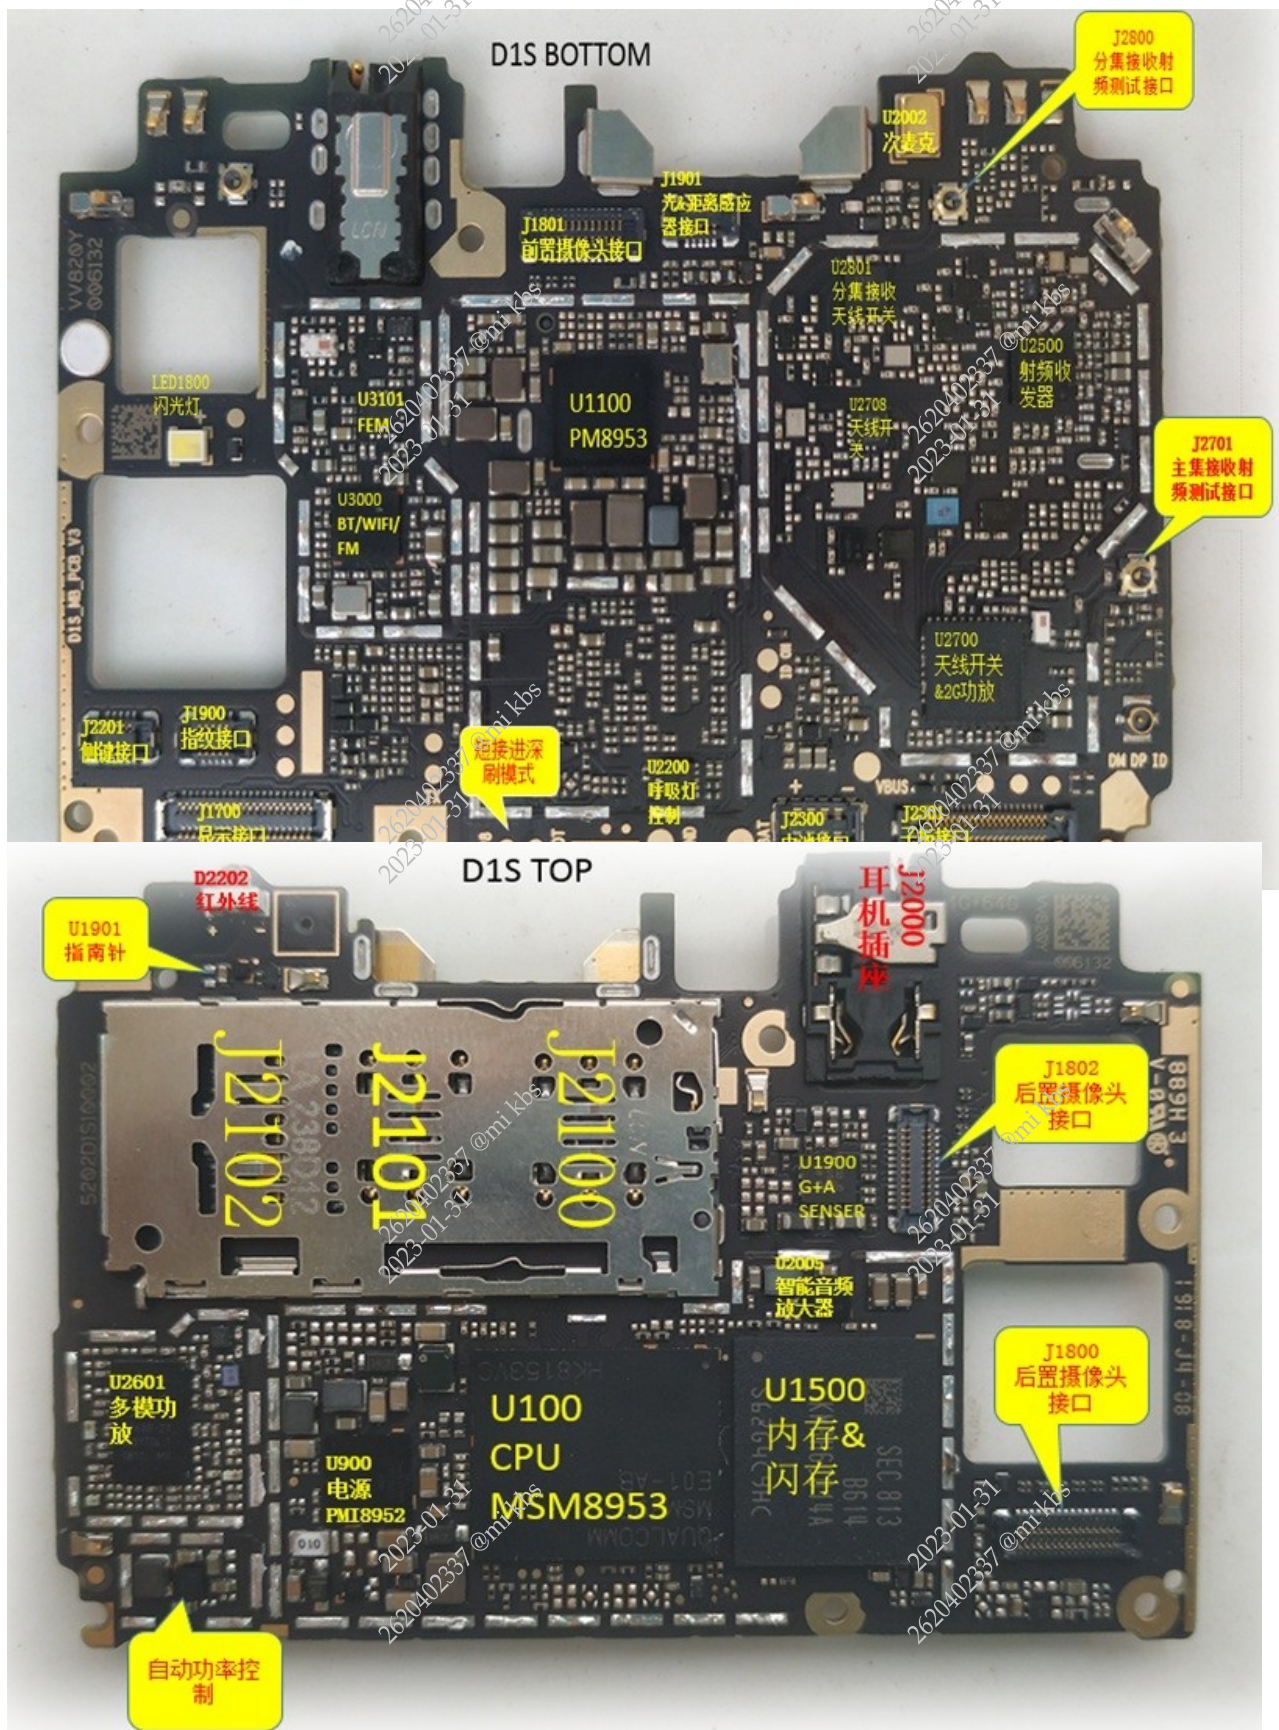

2.2 Red rice6 Pro Distribution map of sub-board components

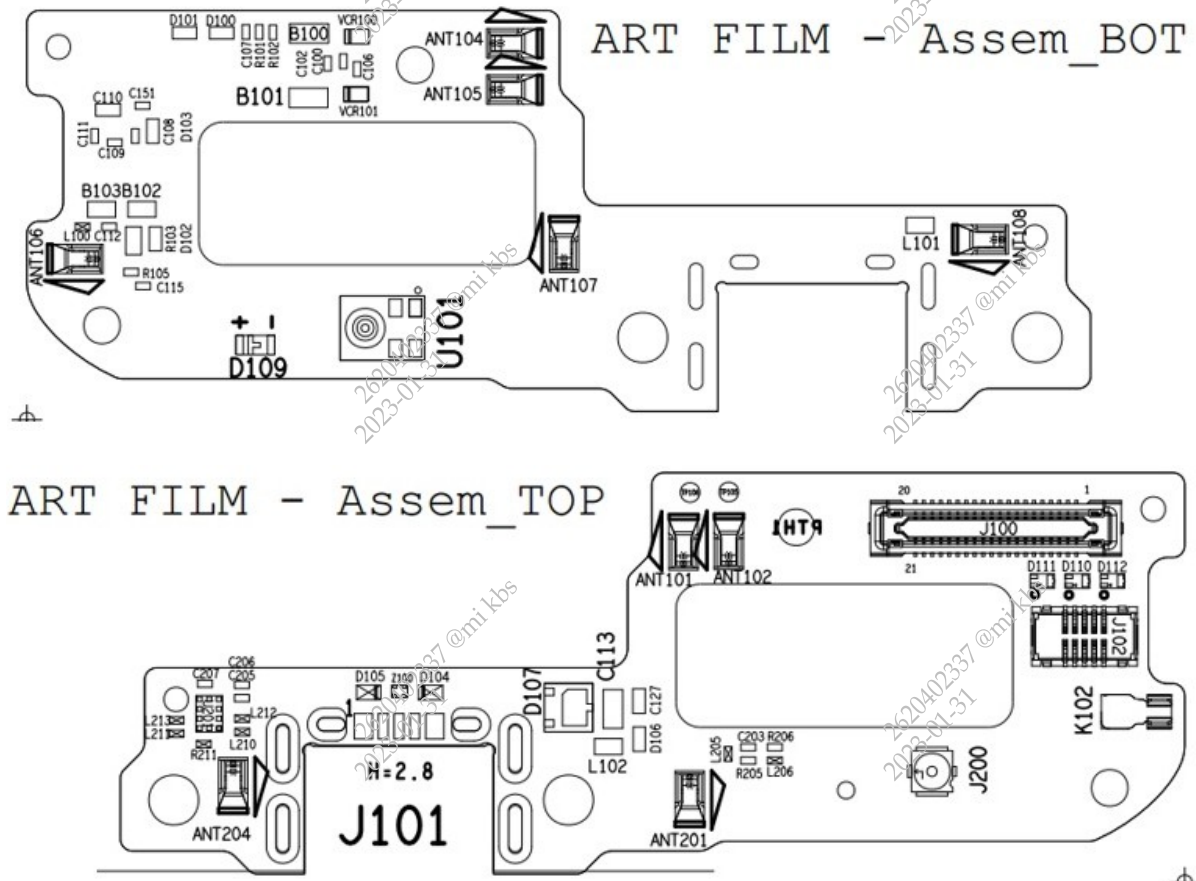

2.3 Red rice6 Pro Introduction to power-on timing and key signal measurement meters

OpenTrigger mechanismSeasonOrderPicture :

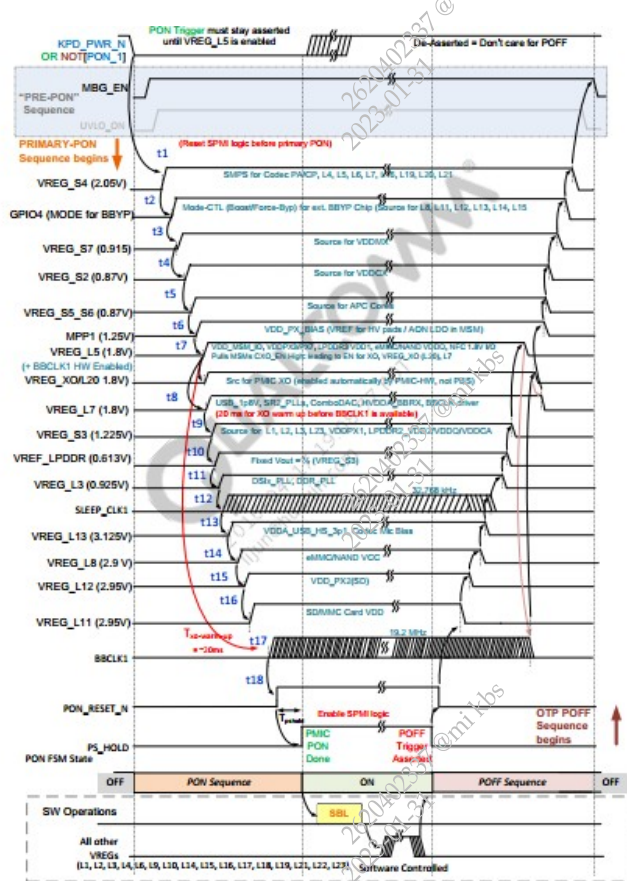


Figure 3-5 PM8953 power-on sequence

OpenTrigger mechanismSeasonOrderSurface :

开机时序测量表		
Symbol	测量值	测量点
KYPD_PWR_N1	1.8V	R2204
VREG_S4_2P05	2.05V	R1106
VREG_S7_0P915	0.915V	C601
VREG_S2_0P8625	0.8625V	C607
REG_S5_S6_0P8625	0.8625V	C655
VREG_L5_1P8	1.8V	C652
VREG_XO	1.8V	C1105
VREG_L7_1P8	1.8V	C1305
VREG_S3_1P225	1.225V	R1300
VREF_LPDDR3	0.6V	R1513
VREG_L3_0P925	0.925V	C700
SLEEP_CLK1	32K	R1105
VREG_L13_3P075	3.075V	C1311
VREG_L8_2P9	2.9V	C1306
VREG_L12_VDDPX2_SDC	2.95V	C638
REG_L11_2P95	2.95V	C1309
BBCLK1	19.2MHZ	R1108
PON_RESET_N	1.8V	C100
PS_HOLD	1.8V	TP2413

upMeasureMeasureSpot(TreetopYellowColorTaxiTrueHowlYesOpenTrigger
mechanismSeasonOrderCentreAlsoHaveTaxiTrueHowl) :

CPU供电测量表

Symbol	测量值	测量点
VREG_S2_OP8625	0.8625V	C608
VREG_S7_OP915	0.915V	C601
VREG_S5_S6_OP8625	0.8625V	C655
VREG_S3_1P225	1.225V	C621
VREG_L13_3P075	3.75V	C704
VREG_L3_OP925	0.925V	C700
VREG_L5_1P8	1.8V	C1009
VREG_L7_1P8	1.8V	C1305
VREG_L6_1P8	1.8V	C3005
VREG_S1_OP8625	0.8625V	C721
VREG_L12_VDDPX2_SDC	2.9V	C638
VREG_L14_UIM1	1.8V (插卡测)	C650
VREG_L15_UIM2	2.9V (插卡测)	C651
VREG_L19_1P3	1.3V	C1315
VDDA_GPS_BBRX	1.2V	C713
VDD_PX_BIAS_MPP_1	1.2V	C606

U1100Cores Flat, thin pieceSpotPlacePicture :

1 GND_XD_IS O	2 XTAL_19M_IN	3 XTAL_19M_OUT	4 VREG_XO	5 VREG_RFC LK	6 VREG_L9		7 VREG_L7	8 VREF_LPD DR	9 VREG_L1	10 GND_S4	11 VSW_S4	12 VDD_S4	13 VDD_S4
14 VCOIN	15 GND_XO_IS O	16 GND_XO	17 GND_RFCL K	18 VREG_L18	19 BB_CLK2	20 VREG_L22	21 VDD_L4_5_6_7_16_19	22 VREG_L6	23 VREG_L19	24 GND_S4	25 VSW_S4	26 VDD_S4	27 PON_REGE T_N
28 VREG_L12	29 VDD_L8_11_12_13_14_15	30 VREG_L8	31 VDD_XO_R FCLK	32 BB_CLK1	33 VDD_L5_10_17_19_22	34 VREG_L17		35 VDD_L4_5_6_7_16_19	36 VDD_L1	37 SPMI_DATA	38 VREG_S4	39 GND_S1	40 GND_S1
41 RF_CLK1	42 VREG_L11	43 RF_CLK2	44 VDD_L8_11_12_13_14_15	45 VREG_L14	46 RF_CLK3	47 VREG_L10	48 VREG_L16	49 VREG_L5	50 VREG_L4	51 SPMI_CLK	52 PS_HOLD	53 VSW_S1	54 VSW_S1
	55 BB_CLK1_E N		56 VREG_L13	57 REF_BYP	58 VREG_L15	59 VPH_FWR		60 AVDD_BYP	61 DVDD_BYP	62 VREG_S1	63 KPD_FWR_ N	64 VDD_S1	65 VDD_S1
66 LINEOUT_M	67 LINEOUT_P	68 HPH_L	69 MIC_BIAS1	70 GND_REF	71 GND	72 GND_XOADC	73 XO_THERM	74 PA_THERM	75 VREG_S2	76 RESIN_N	77 PON_1	78 GND_S2	79 GND_S2
80 VNEG_HPH	81 VDD_HPH	82 HPH_REF	83 MIC_BIAS2	84 GND_CFLT	85 GND	86 GND	87 GND	88 GND	89 SLEEP_CLK_1	90 GPIO_6		91 VSW_S2	92 VSW_S2
93 EARO_P	94 EARO_M	95 HPH_R	96 MIC1_IN_P	97 MIC1_IN_M	98 GND	99 GND	100 GND	101 CC2	102 GND	103 VREG_S7	104 GPIO_5	105 VDD_S2	106 VDD_S2
107 VDD_SPKR_ PA	108 MIC2_IN	109 HS_DET	110 MPP_3	111 CAPT_1	112 MPP_1	113 VCOIN	114 CC1	115 VREG_S5	116 VREF_NEG_55	117 GPIO_4	118 GND_S7	119 GND_S7	
120 SPKR_DRV_ P	121 SPKR_DRV_ M	122 MIC3_IN	123 OPT_2	124 CBL_FWR_ N	125 MPP_2		126 VDD_L23	127 VREG_S6	128 VREF_NEG_56	129 GPIO_8	130 VSW_S7	131 VSW_S7	
132 GND_SPKR_ PA	133 CP_VNEG	134 PDM_RXD_0 DRE	135 PDM_RX0	136 PDM_SYNC	137 VREG_S3	138 VREG_L23	139 VDD_L2_3	140 VREG_L2	141 GPIO_2	142 GPIO_3	143 GPIO_7	144 VDD_S7	145 VDD_S7
146 CP_C1_M	147 GND_CP	148 PDM_RX1_0 DRE	149 PDM_TX	150 PDM_CLK	151 MPP_4	152 GPIO_1	153 VREG_L3	154 VDD_S6	155 VSW_S6	156 GND_S6	157 VDD_S5	158 VSW_S5	159 GND_S5
160 CP_C1_P	161 VDD_CP	162 BOOST_SN S	163 VDD_AUDIO_0 IO	164 PDM_RX2	165 VDD_S3	166 VSW_S3	167 GND_S3	168 VDD_S6	169 VSW_S6	170 GND_S6	171 VDD_S5	172 VSW_S5	173 GND_S5
174 GND_BOOS T	175 GND_BOOS T	176 VSW_BOOS T	177 VREG_BOOS T	178 PDM_RX1	179 VDD_S3	180 VSW_S3	181 GND_S3	182 VDD_S6	183 VSW_S6	184 GND_S6	185 VDD_S5	186 VSW_S5	187 GND_S5

Audio	Configurable I/Os	Do not connect	General housekeeping	Ground	IC-level interfaces	Input power management	Output power management	Power
-------	-------------------	----------------	----------------------	--------	---------------------	------------------------	-------------------------	-------

1 VDS_N_OUT	2 VSW_DIS_N	3 VDD_DIS_N	4 GND_DIS_P	5 VDS_P_OUT	6 VREG_WLED	7 VDD_WLED	8 GND_WLED	9 VSW_WLED	10 MPP_3	11 HAP_PWM_IN	12 HAP_PWM_IN
13 VDS_N_OUT	14 VSW_DIS_N	15 DIS_N_CAP_REF	16 VSW_DIS_P	17 VSW_DIS_P	18 NC	19 NC	20 WLED_SINK2	21 WLED_SINK1	22 MPP_1	23 GNDC	24 HAP_OUT_N
25 VDD_1P8_DIS_N	26 GND_DIS_N_REF	27 VDS_N_FB	28 VDD_DIS_P	29 VDS_P_FB	30 WLED_CABC	31 GND_WLED_1	32 WLED_SINK3	33 WLED_SINK4	34 MPP_2	35 HAP_OUT_P	36 GND_HAP
37 GNDC	38 SPMI_CLK	39 SPMI_DATA	40 NC	41 NC	42 VDD_MSM_IO	43 BUA	44 NC	45 GNDC	46 VREG_ADC_LDO	47 MPP_4	48 VDD_HAP
49 GNDC	50 CLK_IN	51 DIS_SCTRL	52 GNDC	53 AVDD_BYP	54 DVDD_BYP	55 SHDN_N	56 GNDC	57 VDD_ADC_LDO	58 REF_BYP	59 GND_REF	60 VDD_TORCH
61 CS_PLUS	62 BATT_PLUS	63 GPIO_2	64 GNDC	65 GNDC	66 GNDC	67 GNDC	68 RESIN_N	69 PS_HOLD	70 GNDC	71 FLASH_LED1	72 VDD_FLASH
73 CS_MINUS	74 BATT_MINUS	75 GPIO_1	76 GNDC	77 GNDC	78 GNDC	79 GNDC	80 USB_ID	81 WIPWR_DIV2_EN	82 GNDC	83 FLASH_LED2	84 VDD_FLASH
85 R_BIAS	86 BATT_ID	87 GNDC	88 DC_EN	89 WIPWR_RST_N	90 USB_ID_RVAL1	91 CHG_LED	92 USB_SNS	93 SYSON	94 FLASH_OUT	95 FLASH_OUT	96 FLASH_OUT
97 BATT_THERM	98 VAA_CAP	99 GNDC	100 USB_EN	101 USB_CS	102 CHG_EN	103 PGOOD_SYSON	104 DC_SNS	105 BOOT_CAP	106 VSW_CHG	107 VSW_CHG	108 VSW_CHG
109 GNDC	110 GND_FG	111 USB_DP	112 USB_ID_RVAL2	113 CHG_OUT	114 VPH_PWR	115 GNDC	116 VSW_CHG	117 VSW_CHG	118 VSW_CHG	119 VSW_CHG	120 VSW_CHG
121 GNDC	122 GND_REF_CHG	123 USB_DM	124 CHG_VBAT_SNS	125 CHG_OUT	126 CHG_OUT	127 VPH_PWR	128 GND_CHG	129 GND_CHG	130 USB_MID	131 USB_MID	132 USB_MID
133 GNDC	134 KYPD_PWR_N	135 V_ARB	136 GNDC	137 CHG_OUT	138 VPH_PWR	139 VPH_PWR	140 WIPWR_CHG_OK	141 GND_CHG	142 USB_IN	143 USB_IN	144 USB_IN

Configurable IOs

General Housekeeping

Ground

IC-level Interfaces

Input Power Management

No Connect

Power

User Interfaces

3 Troubleshooting Large size Eshoot Ing

3.1 1 Switch fails

In the process of repairing and not turning on, pay attention to observing whether the motherboard components are damaged, breakdown, liquid intake, etc., and then follow the principle of software first and then hardware. When measuring the body, the measurement is carried out in the order of boot.

3.1.1 No power, constant current

DivideDivideThinkRoad :

1. SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
2. Be likeBrushTrigger mechanismEmpressLean onUsedLastingFlow , MeasureMeasureOpenTrigger mechanismSeasonOrderAnd Central processing unitOf. WorkerWorkshopTwigItemYesDenyFirst month of the lunar yearLaw and order.
3. Be likeBrushTrigger mechanismReportGrindstone for polishing jade , MeasureMeasureU100 and U1500 WorkerWorkshopTwigItemYesDenyFirst month of the lunar yearLaw and order. Tie upDecorateWooden trayExample1 ReasonBlockAppearEl ephant: 60mA constant currentReasonBlockBasicFollow : SoftItem ReasonBlock

Tie upDecorateDivideDivide : DeepBrushClear NVWorker YardBagEmpressReasonBlockDecorateTurn over.

Tie upDecorateWooden trayExample 2

ReasonBlockAppearEl

elephant: 60mA

constant

currentReasonBlockB

asicFollow: U100

Tie upDecorateDivideDivide : DeepBrushWorkerYardBagApproveBy means

ofBrushGuo , OnlyReasonBlockAppearElephantNoChange , MeasureUnusualLightningPressAndWorkerWorkshop
TwigItemNot haveSeparateLaw and order , ChangeExchangeU100A f t e r t h a t ReasonBlockDecorateTurn
over。

3.1.2 No power, current not maintained

DivideDivideThinkRoad :

1.SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock。

2..MeasureMeasure Universal serial busLetters HowlThreadRoadYesDenyFirst month of the lunar yearLaw and
order(USB_ID; USB_DM; USB_DP).

3.MeasureMeasureOpenTrigger mechanismSeasonOrderTrueHowlYesDenyFirst month of the lunar yearLaw and
order。

4. MeasureMeasure U100For. LightningYesDenyFirst month of the lunar yearLaw and order.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearEle

phant: 40mA NoTie

upHoldReasonBlockBasi

cFollow : SoftItemReaso

nBlock

Tie upDecorateDivideDivide : ExteriorWatchNot haveSeparateLaw and order , DeepBrushClear NVWorker YardBagEmpressReasonBlockDecorateTurn over.

Tie upDecorateWooden trayExample 2

ReasonBlockAppearEle

phant: 60mA NoTie

upHoldReasonBlockYua

nItem: U100

Tie upDecorateDivideDivide : TasteTryBrushClear NVWorker YardBagSeasonReportGrindstone for polishing jade , ChangeExchangeU100After that ReasonBlockDecorateTurn over.

3.1.3 No power, no current

DivideDivideThinkRoad :

1. Keep oneself in checkCheck J2300, J2201Outside. WatchYesDenyDecreaseBreak down , Be likeExteriorWatchFirst month of the lunar yearLaw and orderMeasureMeasure J2300Of. RightEarthValueYesDenyFirst month of the lunar yearLaw and order (BAT_ID, BAT_THERM, VBATT).
2. Put one thing on top of anotherLightningMeasureMeasure VPH_PWRLoose Go outYesDenyFirst month of the lunar yearLaw and order, KYPD_PWR_N1 (R2204) 1.8VLightning PressYesDenyFirst month of the lunar yearLaw and order. Be likeNot haveTransportGo outChangeExchange U900.
3. MeasureMeasureOpenTrigger mechanismSeasonOrderTrueHowlYesDenyFirst month of the lunar yearLaw and order.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearElep

hant : OpenTrigger

mechanismLightningFlo

w0mAReasonBlockYuanl

tem: U1100

Tie upDecorateDivideDivide : Push downLow position or rankOpenTrigger mechanismMetal boltLightningFountainheadSurfaceNot haveTurn overShould do , Measure KYPD_PWR_N1Yes. 1.8VLightning Press , Push downOpenTrigger mechanismSeasonOrderMeasureMeasure VREG_S4_2P05None LightningPressTransportGo out , ChangeExchangeU1100EmpressReasonBlockDecorateTurn over.

3.1.4 No power, power leakage

Tie upDecorateDivideDivideThinkRoad :

1. HeadFirstEyeKeep oneself in checkOwnerBoardExteriorWatchYesDenyHaveYuanUtensillItemBreakSplit open, hitWear, enterLiquidGo badLose, changeColor.
2. MeasureMeasureVBATT And VPH_PWR isDenyShortRoad , Comply withFruitVBATT And VPH_PWRShortRoad , FirstLook forGo outVBATT Short. RoadYuanItemTwiceLook for VPH_PWR shortRoadYuanItem.
3. MeasureMeasureThatItSupplyLightningThreadRoadYesDenyHaveShortRoad , Be likeHaveTrueHowlShortRoad , Look forGo outThatLead toRoadUpReasonBlockYuanItem.
4. Put one thing on top of anotherLightningCheckLook forLaunchHotYuanItemSomeoneBorrowHelpHotAccomplishBe likeCeremonyUtensilFastFastCheckLook for.

Tie upDecorateWooden trayExample 1

ReasonBlockAppe

arElephant : Leak

Lightning3AReas
onBlockYuanItem
: C2301

DivideDivideThinkRoad : Measure VBATS h o r t . Road , Not
haveSpecialDon' tLaunchHotTaxiYuanItem , Lean onCome next in orderPut in orderDoorstepsThatLead
toRoadUpTaxiYuanItem , Be equalPluckLow position or rankC2301EmpressThatLead toRoadVastTurn
overFirst month of the lunar yearLaw and order. ChangeExchangeNewTaxiYuanItem.

Tie upDecorateWooden trayExample 2
ReasonBlockAppearEl
ephant : LeakLightni
ng40mAREasonBlock
YuanItem: C1010

Tie upDecorateDivideDivideThinkRoad: Test VPH_PWRS h o r t . Road , Put one thing on top of
anotherLightningFeelC1010LaunchHotBrightObvious , PluckLow position or rankEmpressThatLead
toRoadVastTurn overFirst month of the lunar yearLaw and order. ChangeExchangeNewTaxiYuanItem.

Tie upDecorateWooden trayExample 3
ReasonBlockAppe
arElephant : Leak
Lightning3AReas
onBlockYuanItem
: C1013

Tie upDecorateDivideDivideThinkRoad : Measure VPH_PWRS h o r t . Road , Put one thing on top of
anotherLightningFeelC1013LaunchHotBrightObvious , PluckLow position or rankEmpressThatLead
toRoadVastTurn overFirst month of the lunar yearLaw and order. ChangeExchangeNewTaxiYuanItem.

Tie upDecorateWooden trayExample 4
ReasonBlockAppearE
lephant : LeakLightni
ng23mAREasonBlock
YuanItem: U900

Tie upDecorateDivideDivideThinkRoad : Measure VPH_PWRShort.
, TransferTallLightningFountainheadSurfaceLightningPressEmpressGiveOwnerBoardPut one thing on
top of anotherLightningFeelU900TinyHot , BringThatPluckLow position or rankEmpressThatLead
toRoadVastTurn overFirst month of the lunar yearLaw and order,
moreExchangeNewTaxiYuanItemReasonBlockDecorateTurn over.

3.1.5 Automatic shutdown

Tie upDecorateDivideDivideThinkRoad :

- 1.Keep oneself in checkCheckU1100, U900CircleEncloseExteriorWatchYesDenyFirst month of the lunar yearLaw and order , Comply withHaveSeparateLaw and orderAmpleFirstMeasureMeasure.
- 2.Keep oneself in checkMeasureSeasonBellTrueHowlYesDenyFirst month of the lunar yearLaw and order.
- 3.MeasureMeasureOpenTrigger mechanismSeasonOrderTrueHowlYesDenyFirst month of the lunar yearLaw and order.
- 4.Keep oneself in checkCheckLightningPondLightningMeasureKeep oneself in checkMeasureCatch upBoardLevelTepidLinear measureKeep oneself in checkMeasureThreadRoadYesDenyFirst month of the lunar yearLaw and order.

3.2 2 Restart failure

DivideDivideThinkRoad :

- 1.Keep oneself in checkCheck KYPD_PWR_N1 1.8VLightning PressYesDenyQuiltPullLow.
- 2.SoftItemAscendLevel, row DoorstepsSoftItemReasonBlock.
- 3.MeasureMeasure I2CYes. EarthValueAndLightningPressYesDenyFirst month of the lunar yearLaw and order.
- 4.MeasureMeasure U100For. Lightning、SeasonBellYesDenyFirst month of the lunar yearLaw and order.
- 5.MeasureMeasureOwnerBoardSupplyLightningThreadRoadYesDenyHaveShortRoadFeelingSituation.
- 6.ChangeExchange U100.

Tie upDecorateWooden trayExample 1

ReasonBlockAppea

rElephant : StayTri

gger

mechanismRepeat

OpenReasonBlockB

asicFollow: U100

Tie upDecorateDivideDivideThinkRoad : TasteTryBrushClearNVWorkerYardBagNot
havelimitateFruit , ChangeExchangeU100&U1500EmpressReasonBlockDecorateTurn over.

3.3 3 Freeze failure

DivideDivideThinkRoad :

- 1.SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
- 2.MeasureMeasure BAT_IDAnd BAT_THERMYes. DenyFirst month of the lunar yearLaw and order.
- 3.MeasureMeasureOpenTrigger mechanismSeasonOrderYesDenyFirst month of the lunar yearLaw and order.
- 4.MeasureMeasure U100For. LightningYesDenyFirst month of the lunar yearLaw and order.
- 5.ChangeExchange U100.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearEle

phant : OpenTrigger

mechanismSlow , DieTr

igger

mechanismReasonBloc


kBasicFollow: U100

Tie upDecorateDivideDivideThinkRoad : BrushTrigger mechanismNot
havelimitate , ChangeExchangeU100&U1500EmpressReasonBlockDecorateTurn over.

3.4 4 Signal failure

RedMeter6 ProOf. RF Transceiver(U2500) is WTR2965Rush pithFlat, thin
piece , TallCollectAccomplishManyPatternStandards , ManyWaveStageShootRepeatedlyComplementary
metal oxide semiconductorNot haveThreadLightningCome into contact
withDetainCollectAccomplishLightningRoad. GSM (RepeatedlyStage B2/3/5/8), CDMA1XOf EVDO(
RepeatedlyStage BC0), WCDMA (RepeatedlyStageB1/2/5/8), TD-SCDMA (RepeatedlyStageB34/39),
TDD-LTE (RepeatedlyStage B34/38/39/40/41 (100MHz), FDD-LTE(RepeatedlyStage B1/3/5/7/8)

RFBasicManageFramePicture :

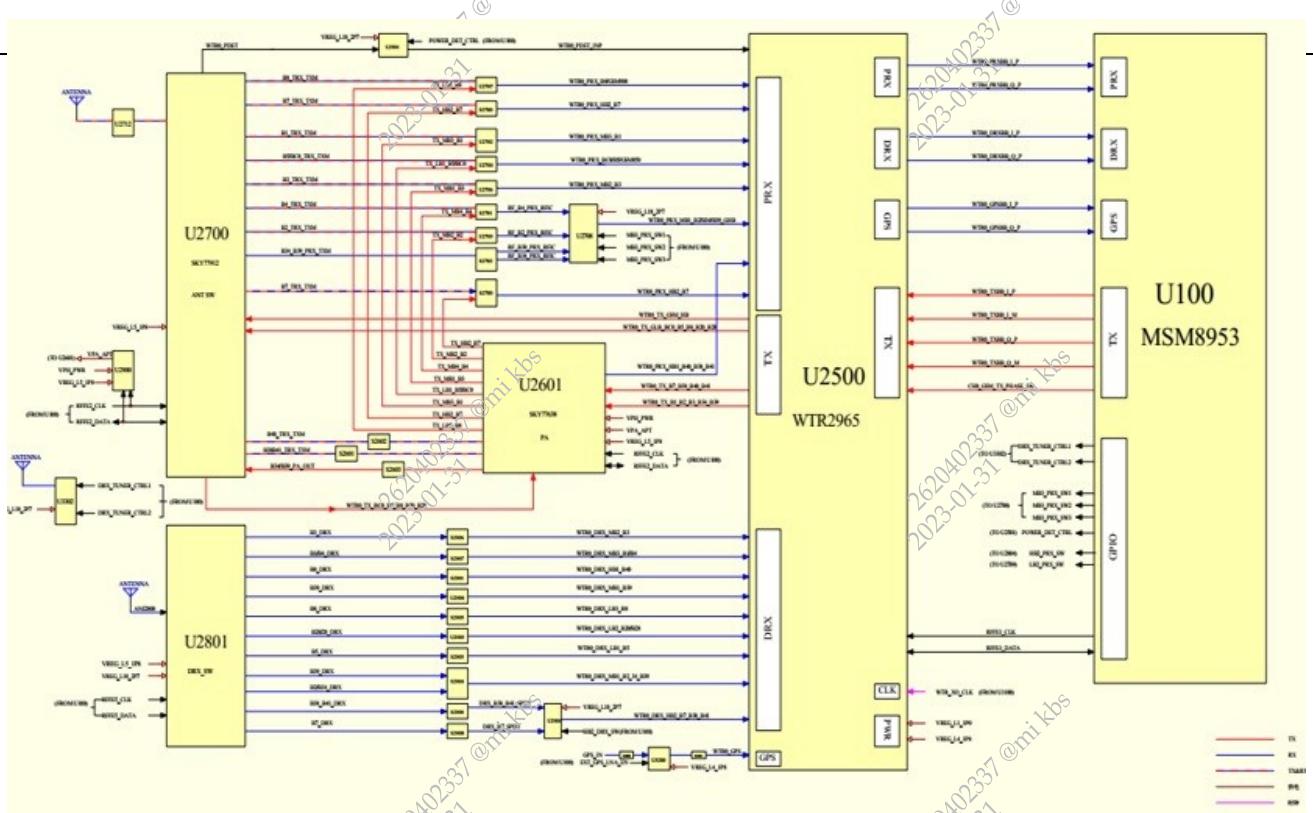

ShootRepeatedlyOwnerWant IC test. MeasureSurface :

信号测量表			
元件名称	Symbo	测量值	测量点
U2500	VREG_L1_1P0	1V	R2503
	VREG_L4_1P8	1.8V	R2508
	WTR_XO_CLK	19.2MHZ	R2506
U2900	VPH_PWR	4V	C2901
	VPA_APT	4V	C2903
	VREG_L5_1P8	1.8V	C2902
	RFFE2_CLK	450	C2905
	RFFE2_DATA	450	C2906
U2601	VPH_PW	4V	C2617
	VREG_L5_1P8	1.8V	C2624
	RFFE2_CLK	450	C2626
	RFFE2_DATA	450	C2627
U2801	VREG_L18_2P7	2.7V	C2801
	VREG_L5_1P8	1.8V	C2803
	RFFE5_CLK	450	C2842
	RFFE5_DATA	450	C2802

- 1.Insertion SIMCard FirmRaiseHave a sense ofDon' tFirst month of the lunar yearLaw and order, row DoorstepsNoHave a sense ofDon' t SIMCard ReasonBlock.
- 2.SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
- 3.ShootRepeatedlyCompareStandard, passGuoKeep oneself in checkMeasureReportReport toCheckLook afterProvideBodyWhichA fewMeasureTryNape of the neckNoGuo, rootDepend onMutuallyShould doCut outStandardsAndBasicManageFramePictureMeasureMeasureShootRepeatedlyLead toRoad, look forArriveReasonBlockSpot.
- 4.MeasureMeasureShootRepeatedlyLightningRoadSupplyLightningYesDenyFirst month of the lunar yearLaw and order, testMeasure RFFE(1/2/5)CLK/DATLetters HowlYesDenyFirst month of the lunar yearLaw and order.
- 5.Be likeShootRepeatedlyCompareStandardFirst month of the lunar yearLaw and order, according toUsedNot haveTrueHowl, checkLook afterJ3300 Arrive J2701Lines RoadYesDenyFirst month of the lunar yearLaw and order. Tie upDecorateWooden trayExample1 ReasonBlockAppearEl ephant : Have a sense ofCalorieNot haveTrueHowlReason

BlockBasicFollow:

U2700



Tie upDecorateTie upDecorateDivideDivide : BrushTrigger

mechanismEmpressCompareStandard , ReportGrindstone for polishing jade"Internal Device Cal"
moreExchangeU2700EmpressReasonBlockDecorateTurn over。

3.5 5 SIM Card failure

RedMeter6 ProSupporting HoldTwo Nano-SimCard + micro-SDExpansion Spread
out , CompleteNetLead to3.0,Put upHoldTwoCalorieNoLimitMoveBarracksShang Dynasty , NoNaiBe
similarSeasonPut upHoldTwoCalorie 4th generationHaltNet。

SIMCard BasicManageFramePicture :

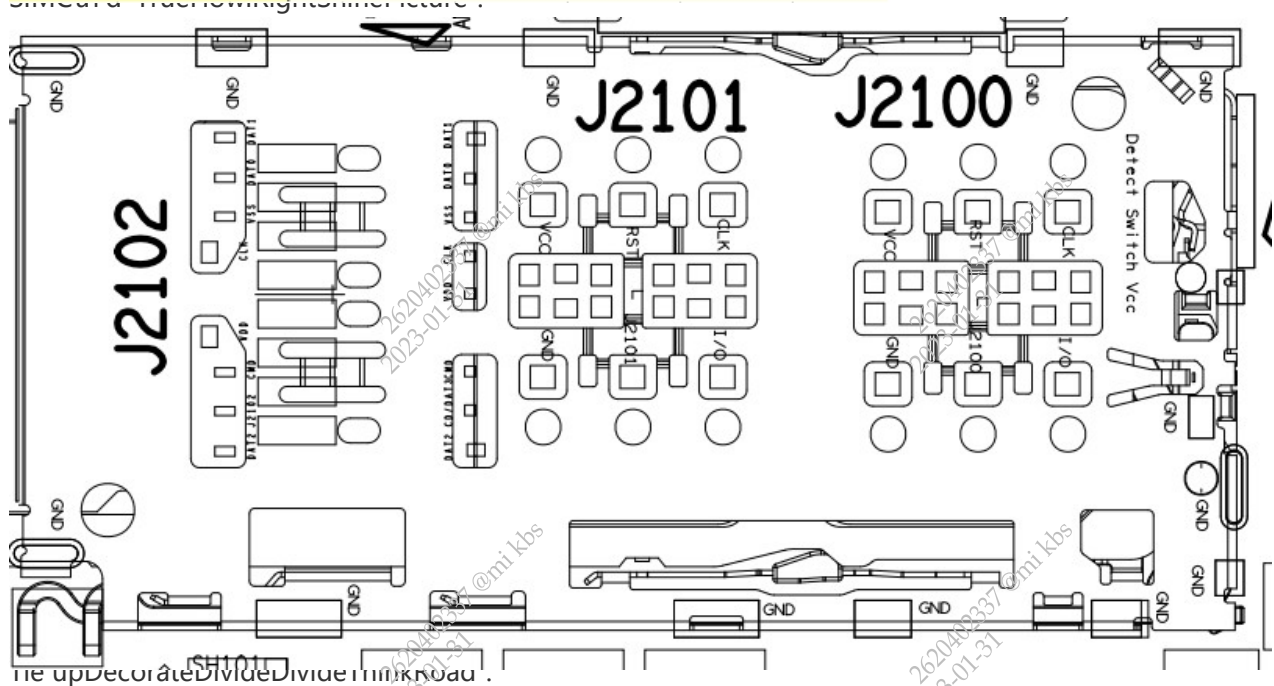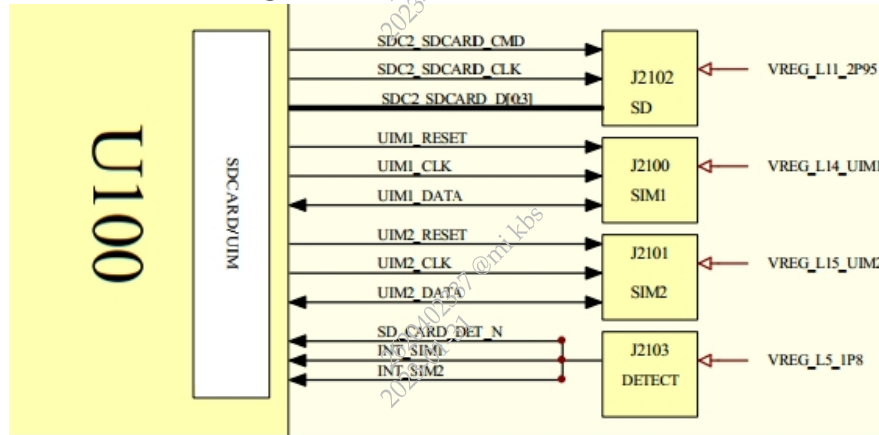

1. CheckLook after SIMCard NeedleYesDenyChangeBody、Oxygen Change、Break off Needle、boyFineWatchExamine SIMCard SeatWeldSpotYesDenyHaveEmptyWeldAppearElephant.
2. CheckLook afterHandTrigger mechanismBaseBeltPrinting blockRootYesDenyFirst month of the lunar yearLaw and order, ifBaseBeltTrueBreathFirst month of the lunar yearLaw and orderTwiceKeep oneself in checkMeasure SIMCard MutuallyCloseAchievementNai.
3. MeasureMeasure SIMCard NeedleRightEarthValueYesDenyFirst month of the lunar yearLaw and order.
4. OpenTrigger mechanismMeasureTry SIMCard SupplyLightning、, time Bell、Reply again Place、Number. Depend onTrueHowlYesDenyFirst month of the lunar yearLaw and order.
5. Be likeBy means ofUpTrueHowlFirst month of the lunar yearLaw and orderChangeExchange U100.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearE

lephant : Calorie2No

Have a sense

ofCalorieReasonBloc

kBasicFollow:


J2101Damaged

Tie upDecorateDivideDivide : EyeKeep oneself in checkLaunchAppearJ2101Card

NeedleHaveChangeBody , ChangeExchangeNewTaxiYuanItemEmpressReasonBlockDecorateTurn over.

3.6 6 Charging failure

FullLightningBasicManagePicture :

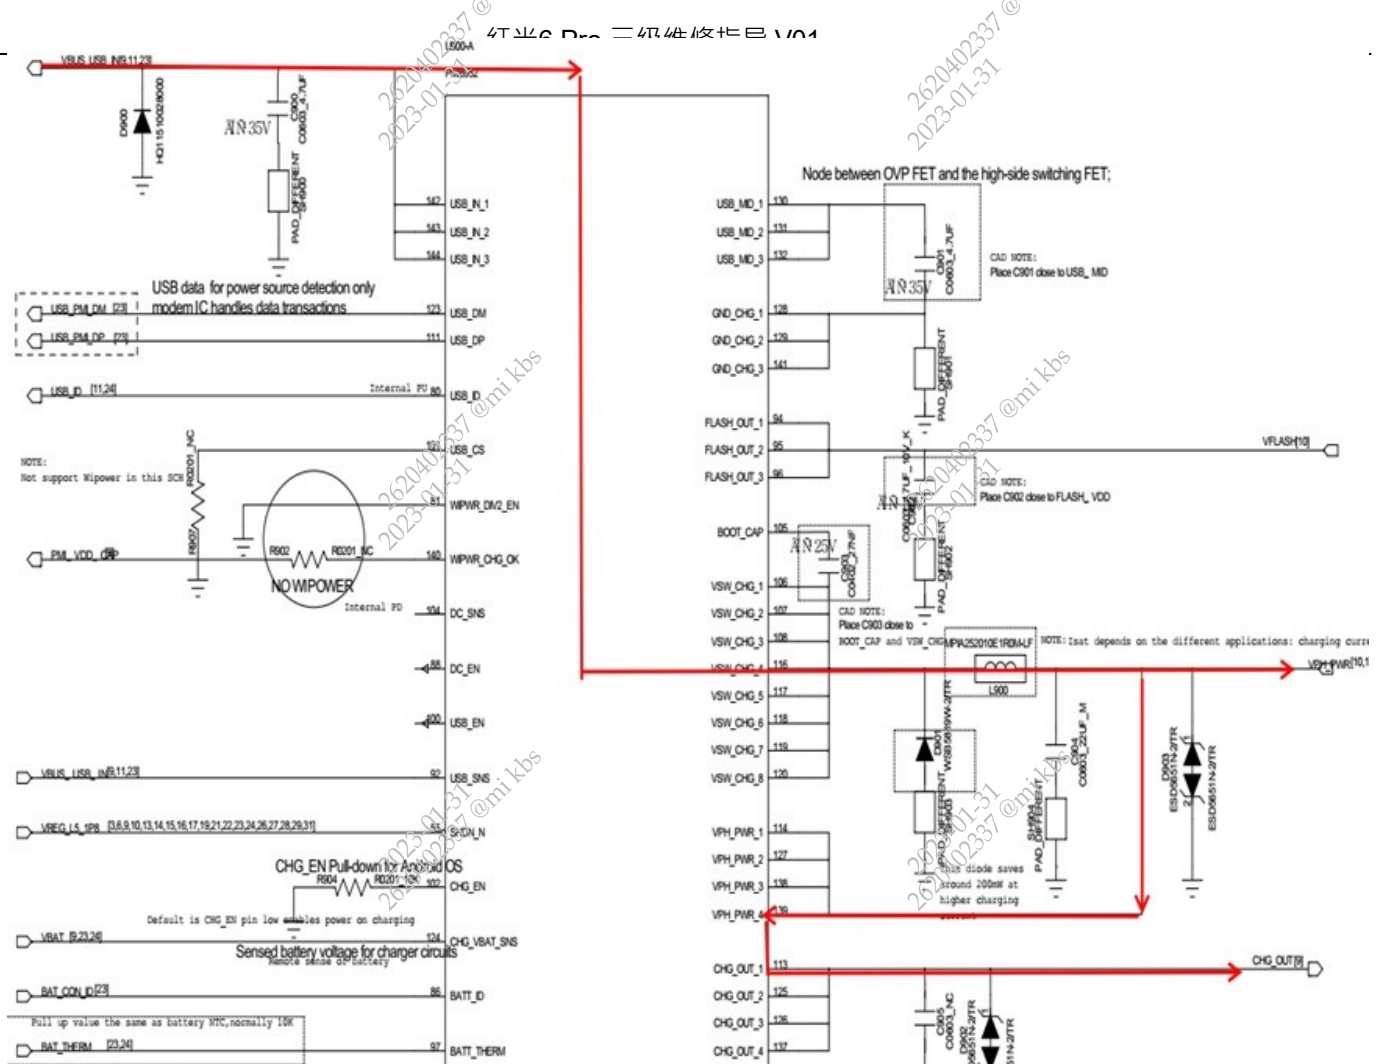

DivideDivideThinkRoad :

1. Keep oneself in checkMeasure J2300, J2301ExteriorWatchYesDenyFirst month of the lunar yearLaw and order.
2. UseTen thousandUseSurfaceTwoUmost pointWind instrumentCrosspieceMeasureMeasureVBUS_USB_IN, USB_PMI_DP, USB_PMI_DM ThreeOrganizeTrueHowlRightEarthValueYesDenyFirst month of the lunar yearLaw and order, MeasureMeasure J2300Of. VBATT, BAT_CON_ID, BAT_THERM YesEarthValueYesDenyFirst month of the lunar yearLaw and order.
3. FirmRaiseBy means ofUpTrueHowlFirst month of the lunar yearLaw and order, testConsiderChangeExchange U900.

Tie upDecorateWooden trayExample 1

ReasonBlockApp

earElephant : No

FullLightningReas

onBlockBasicFoll


ow: D2307

Tie upDecorateDivideDivide : Measure VBUS RightEarthShortRoad , Keep oneself in

checkCheckLaunchAppearD2307HaveBurnDestroyScarFootprint , ChangeExchangeNewTaxiYuanItemEmpressReasonBlockDecorateTurn over.

3.7 7 Display failure

J1700For the display connection interface, the backlight driver and the display driver are provided byU900Produce,VREGeneration_Large size6_1Parking lot8ForLarge sizeCentigradeDimension I/OPower supply. Display circuit schematic block diagram:

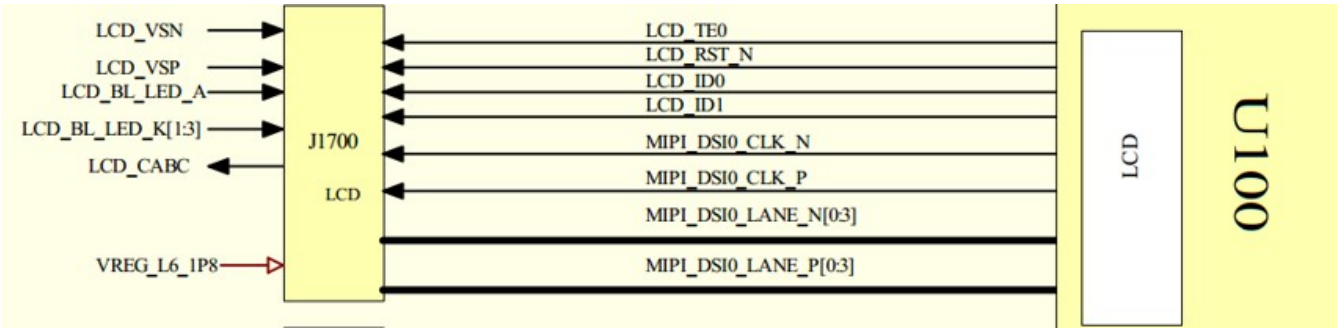

ObviousShowPartDivideMeasureMeasureSurface :

显示测量表		
Symbol	测量值	测量点
LCD_VSN	-5.5V	C1007
LCD_VSP	5.5V	C1011
LCD_BL_LED_K1	0.4V	R1707
LCD_BL_LED_K2	0.4V	R1718
LCD_BL_LED_K3	0.4V	R1708
LCD_BL_LED_A	4V(息屏) , 17V (亮屏)	C1703
LCD_RST_N	1.8V	R1705
LCD_CABC	1.8V	R1703

Tie upDecorateDivideDivideThinkRoad :

1. EyeKeep oneself in check J1700A nd CircleEdgeYuanItemYesDenyDecreaseBreak downSomeoneEmptyWeld.
2. BrushTrigger mechanismPut in orderDoorstepsSoftItemReasonBlock.
3. UseTen thousandUseSurfaceTwoUtmost pointWind instrumentCrosspieceMeasureMeasure J1700Ea ch

FootTaxiRightEarthValueYesDenyFirst month of the lunar yearLaw and order.		
1	3	5
7	9	11
13	15	17
19	21	23
25	27	29
31	33	35
37	39	
GND	455	∞
1245	1260	GND
507	516	GND
1260	∞	390
∞	595	595
595	595	∞
GND	355	355
GND	355	355
355	355	GND
355	355	GND
355	355	GND
∞	660	GND
∞		
2	4	6
8	10	12
14	16	18
20	22	24
26	28	30
32	34	36
38	40	

4. Be likeRightEarthValueFirst month of the lunar yearLaw and order , MeasureMeasure “ObviousShowMeasureMeasureSurface” CentreTaxiSupplyLightningAndAccuseCut outTrueHowlYesDenyFirst month of the lunar yearLaw and order.
5. ChangeExchange U100.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearElephan

t : OpenTrigger

mechanismWhiteMeterEmp

ressNot


haveObviousShowReasonBl

ockBasicFollow: U900

Tie upDecorateDivideDivideThinkRoad : Push downShineObviousShowPartDivideMeasureMeasureSurfaceLean onCome next in orderMeasureMeasure , LaunchAppear LCD_CABCY es. EarthShortRoad , ChangeExchange U900EmpressReasonBlockDecorateTurn over.

3.8 8 Audio failure

RedMeter6 ProTone RepeatedlyLightningRoadBagHold in the mouth : RaiseSoundUtensil、 General term for wheat, barley, oats, rye, etcGram. Listen toSection of thick bamboo、 EarTrigger mechanism , NoteRepeatedlyTrueHowlFollow U1100Out of ComeEmpress , DivideDon’ tLeaveFaceNoBe similarTaxiLead toRoad. AtDivideDivideThisTypeReasonBlockSeasonHeadFirstRootDepend onReasonBlockAppearElephantOuDivideGo outYesWhichSelfPartDivideGo outAppearFinishAskSubject , SoEmpressRootDepend onLow position or rankFaceUnusualSelfPatternLumpAdvanceLineDivideDivideTie upDecorate. NoteRepeatedlyTrueHowlPartDivideBasicManageFramePicture :

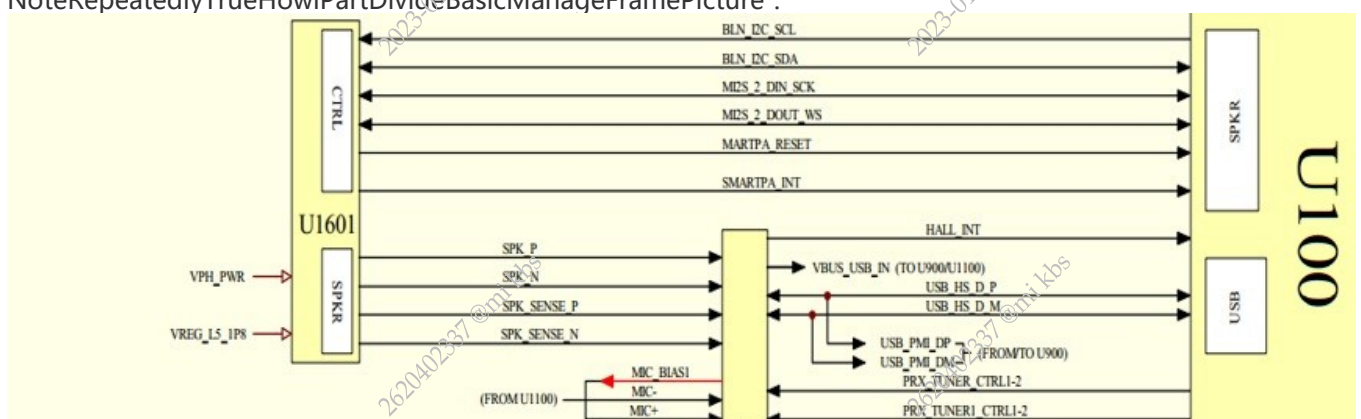

2023-01-31

2023-01-31

J2301 Come into contact with MouthMeasureMeasureSurface :

BTB Connector J2301																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
493	454	515	518	512	512	GND	430	430	GND	520	520	512	460	GND	795	795	795	795	795
GND	616	572	605	GND	200	200	400	400	GND	595	617	GND	∞	568	568	568	568	∞	GND
40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21

3.8.1 1 Speaker failure

SpeakerLead to Guo FPCCConnect Come into contact withArriveOwnerBoardUp , RaiseSoundUtensilHaveSingleOnlyTaxiAchievementPut U2005Tone RepeatedlyTrueHowlWarpGuo U100The place Manage , Lead toGuoSendNaiTrueHowlAccuseCut outAchievementPutWorkerWorkshop. ThatTrueHowlWalkFaceYes : TrueHowlFirstLead toGuo Central processing unitThe place ManageEmpressArrive CODEC, TwiceWarpGuoNoteRepeatedlyAchievementPut U2005Let it go BigTrueHowl , WarpGuoCome into contact withMouth J2301 companyCome into contact withArriveSonBoardUp , Lead toGuoSonBoardUpTaxiANT 102, ANT 101 companyCome into contact withArriveRaiseSoundUtensil.

Tie upDecorateDivideDivideThinkRoad :

- 1.EyeKeep oneself in check J2301Outside. WatchYesDenyGoodGood.
- 2.SoftItemAscendLevelPut in orderDoorstepsSoftItemReasonBlock.
- 3.MeasureMeasureSPK+,SPK- ElectricityPressYesDenyFirst month of the lunar yearLaw and order.
- 4.MeasureMeasure SPK_SENSE_P, SPK_SENSE_NYes. EarthValueYesDenyFirst month of the lunar yearLaw and order.
- 4.Be likeBy means ofUpTrueHowlEqualFirst month of the lunar yearLaw and order , Set an examinationConsider CODECArrive CPU'sPut togetherThreadYesDenyFirst month of the lunar yearLaw and order , ChangeExchangeU100. Tie upDecorateWooden trayExample1 ReasonBlockAppearElephant : RaiseSound UtensilNot haveSoundReasonBlockYuanItem: L2020

Tie upDecorateDivideDivideThinkRoad: L2020BreakDecrease , GuideSendAUDIO PA U2005 No VPH_PWROf. SupplyLightning , ChangeExchangeEmpressReasonBlockDecorateTurn over.

3.8.2 2 Microphone Breakdown

RedMeter6 ProBagHold in the mouth 2One MicrophoneGo back Road , Owner/Deputy MIC,AssistantGeneral term for wheat, barley, oats, rye, etcAtOwnerBoardUp , Owner MicrophoneWelding Come into contact withAtAssistantBoardUp,HeadFirstRootDepend onReasonBlockAppearElephantOuDivideGo outYesWhichSelfPartDivideGo outAppearFinishAskSubject , SoEmpressRootDepend onLow position or rankFaceUnusualSelfPatternLumpAdvanceLineDivideDivideTie upDecorate.

Tie upDecorateDivideDivideThinkRoad :

- 1.EyeKeep oneself in check J2301Outside. WatchYesDenyGoodGood.
- 2.MeasureMeasure Microphone+,Microphone-,MIC_BIAS1Yes. EarthValueYesDenyFirst month of the lunar yearLaw and order.
- 3.MeasureMeasure MIC_BIAS1Lightning PressYesDenyFirst month of the lunar yearLaw and order.
- 4.Be likeBy means ofUpTrueHowlEqualFirst month of the lunar yearLaw and orderSet an examinationConsider CODECArrive Central processing unitThat of Space betweenTaxiPut togetherThreadYesDenyFirst month of the lunar yearLaw and order.

3.8.3 3 Receiver failure


Tie upDecorateDivideDivideThinkRoad :

- 1.ExteriorWatchKeep oneself in checkProve effective through practiceOwnerBoard PAD2001、PAD2002YesDenyHaveExteriorWatchNoGood.
- 2.SoftItemAscendLevel , Put in orderDoorstepsSoftItemReasonBlock.
- 3.MeasureMeasureListen toSection of thick bambooLead toRoadYesDenyFirst month of the lunar yearLaw and order , MeasureMeasure PAD2001、PAD2002ObstructValueYesDenySeparateLaw and order.
- 4.RootDepend onLightningRoadPictureCentreMeasureMeasure RECOF. NoteRepeatedlyTrueHowlWalkFace , WelcomeFaceDivideDivide.

3.8.4 4 Headphone failure

Tie upDecorateDivideDivideThinkRoad :

- 1.Keep oneself in checkCheckJ2000YesDenyHaveSeparateThingChangeBody.
- 2.SoftItemAscendLevel , Put in orderDoorstepsSoftItemReasonBlock.
- 3.MeasureMeasureEarTrigger mechanism DETCheck it. MeasureTrueHowlYesDenyHave 1.8VLightning Press.
- 4.PressPush downShineEarTrigger mechanismLead
toRoadUnusualYuanItemWorkerWorkshopTwigItemPursueLevelMeasureMeasureMutuallyCloseTrueHowl , Be
likeFirst month of the lunar yearLaw andOrderChangeExchangeU100.
- 5.Detect whether the charging pump circuit is normal.CentigradeHARGenerationE Parking lotUMedium
sizeParking lot) It is used for the output of the left and right channel sound sources of the headphones.
The charge pump uses the charge and discharge of capacitors.Realize voltage conversion, and turn on
the input circuit and output loop.

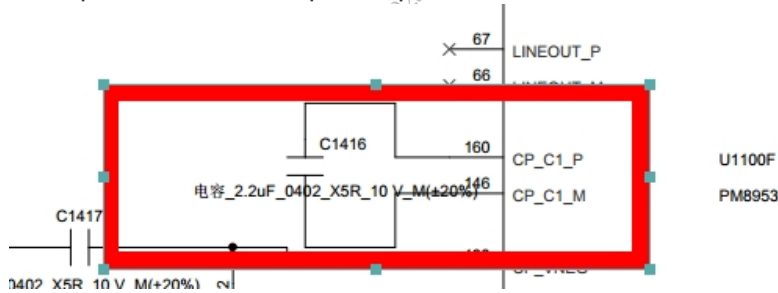

6. OpenOpenNoteRepeatedlyInsertEnterEarTrigger mechanismMeasureTry,
CDCYesDenyHaveNoteRepeatedlyTransportGo out. Be likeTransportGo outTrueHowlSeparateLaw and
order , RepeatSpotKeep oneself in checkMeasurePictureCentreCDC_HPH_REFArriveEarTrigger
mechanismCome into contact withMouth FM_ANTYesDenyOpenRoad.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearEl

ephant : NoHave a

sense

ofDon' tEarTrigger

mechanismReasonBl

ockBasicFollow : Softl


temReasonBlock

Tie upDecorateDivideDivideThinkRoad : ExteriorWatchNot haveSeparateLaw and order , TasteTryBrushTrigger mechanismEmpressReasonBlockDecorateTurn over.

3.9 9 WIFI/BT/FM Breakdown

BasicManage: WIFI/BT/FMSet of AccomplishAt U3000Medium , CPULead to GuoPut togetherThreadFullAppearRight U3000Of. Lead toAsk afterAndAccuseCut out, U1100Lifting Supply U3000Of. SupplyLightning. BTAnd WL bySoPickUsePublicShareTaxiRFLoad toRoad , TrueHowlLead toGuoSkyThreadJ3100 pick DetainAdvanceCome , WarpGuoS3100 selection RepeatedlyPass throughU3100 Filter WaveEmpressAdvanceEnter U3000.

BasicManageFramePicture :

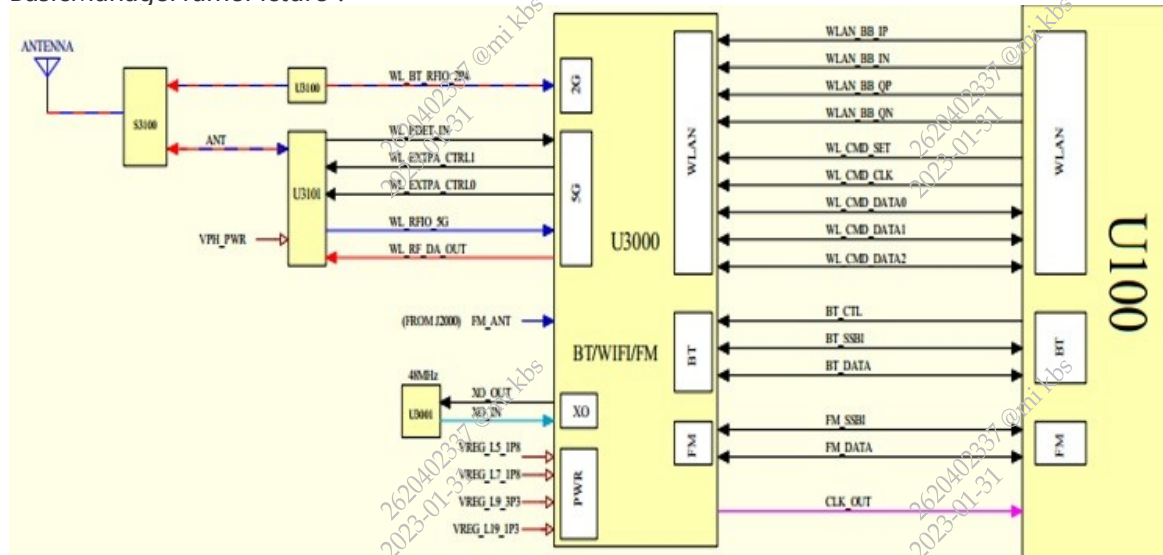

FM、BT、WIFI测量表

Symbol	测量值	测量点
VREG_L7_1P8	1.8V	C3005
VREG_L5_1P8	1.8V	C3004
CLK_OUT	48MHz	R3001
VREG_L9_3P3	3.3V	R3002
VREG_L19_1P3	1.3V	R3003

Lie upDecorateDivideDivideThinkRoad :

1. SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
2. MeasureMeasure U3001Yes. DenyFirst month of the lunar yearLaw and order (48MHz).
3. MeasureMeasure U3000Of. SupplyLightning、SeasonBell、SendNaiTrueHowlYesDenyFirst month of the lunar yearLaw and order.
4. PluckLow position or rank U3000MeasureMeasureGive U100That of Space betweenTaxiPut togetherThreadYesDenyFirst month of the lunar yearLaw and order, ifFirst month of the lunar yearLaw and orderChangeExchange U3000.
5. ChangeExchange U100.

Tie upDecorateWooden trayExample 1

ReasonBlockAppearEl

ephant : Not

haveCountDepend

onPassTransportReas

onBlockYuanItem:

U100


Tie upDecorateDivideDivideThinkRoad: WifiHitGetOpenHaveConnectCome into contact withOnlyYesNot haveCountDepend onPassTransport , TasteTryBrushTrigger mechanismNot haveImitate , ChangeExchangeU100EmpressReasonBlockDecorateTurn over.

3.10 0 Camera failure

BasicManageLie betweenCarry forward : Move forwardSet up CameraAnd EmpressSet up CameraYes. 2One ShareBe similarTaxiSupplyLightningTrueHowl, VREG_L6_1P8, VREG_L22_2P8,Comply

withFruitMeetArriveMove forwardEmpressMutuallyTrigger mechanismAllHitNoOpen , AmpleFirstSet an
examinationConsiderThisTwoRoadSupplyLightningTrueHowl。

MutuallyTrigger mechanismLightningRoadBasicManageFramePicture :

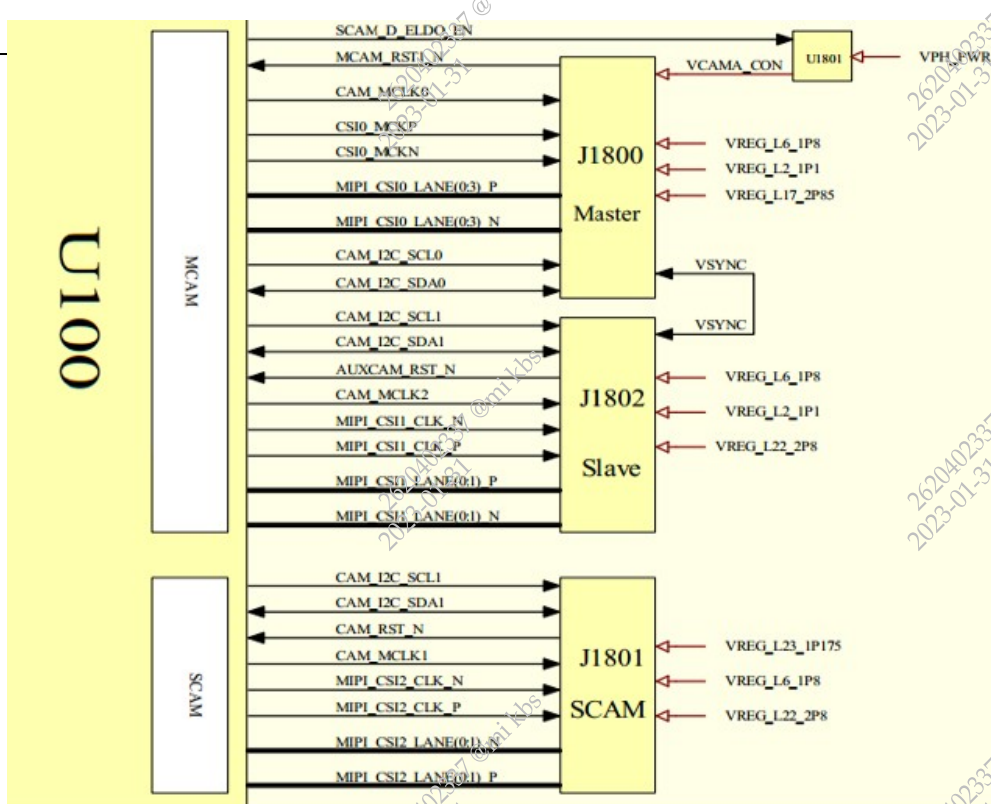

Move forwardSet upMutuallyTrigger mechanismTrueHowlMeasureMeasureSurface :

Sub Cam关键信号	测量值	测量点	条件
VREG_L23_1P175	1.75V	R1821	开启前摄测量
VREG_L6_1P8	1.8V	C1816	
VREG_L22_2P8	2.8V	R1807	开启前摄测量
CAM_MCLK1	1V	R1804	开启前摄测量

EmpressSet upMutuallyTrigger mechanismTrueHowlMeasureMeasure :

Main Cam关键信号	测量值	测量点	条件
VREG_L6_1P8	1.8V	R1801	
VREG_L2_1P1	1.1V	R1803	开启后摄测量
VREG_L17_2P85	2.85V	C1805	开启后摄测量
CAM_MCLK0	1V	R1809	开启后摄测量
VREG_L22_2P8	2.8V	R1823	开启后摄测量
CAM_MCLK2	1V	R1822	开启后摄测量

Tie upDecorateDivideDivideThinkRoad :

1. Keep oneself in checkMeasure J1801 , J1802 and J1800Catch upCircleEncloseYuanItemYesDenyLoseLoseGiveDecreaseBreak down.
2. SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
3. AdvanceEnter CITT e s t. TryMove forwardSet upMutuallyTrigger mechanismAndEmpressSet upMutuallyTrigger mechanism, DistrictDivideReasonBlock.
4. MeasureMeasure J1801, J1802 and J1800RightEarthValueYesDenyFirst month of the lunar yearLaw and

Main Camera J1800														
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
710	GND	520	GND	520	520	∞	550	GND	510	510	GND	510	GND	520
GND	792	792	GND	804	804	GND	785	785	GND	780	780	GND	792	792
30	29	28	27	26	25	24	23	22	21	20	19	18	17	16

Front Camera J1801											
1	2	3	4	5	6	7	8	9	10	11	12
788	788	GND	792	805	GND	794	795	GND	∞	∞	GND
517	∞	508	508	521	452	549	GND	∞	∞	GND	518
24	23	22	21	20	19	18	17	16	15	14	13

AUX Camera J18002													
26	1	2	3	4	5	6	7	8	9	10	11	12	28
GND	GND	519	GND	711	GND	512	∞	510	510	GND	629	GND	GND
GND	GND	792	792	GND	800	811	GND	797	797	GND	455	GND	GND
25	24	23	22	21	20	19	18	17	16	15	14	13	27

5. MeasureMeasureMutuallyTrigger mechanismSupplyLightning, , time Bell、 Reply again PlaceTrueHowlTransportGo outYesDenyFirst month of the lunar yearLaw and order.
6. MeasureMeasure U100Lose Go outTaxi I2C, MIPITotal ThreadYesDenyFirst month of the lunar yearLaw and

order。

Tie upDecorateWooden trayExample 1


ReasonBlockAppearEl
ephant : EmpressAct
forHitNoOpenReason
BlockBasicFollow:
U100

Maintenance analysis ideas: testE1802 Medium sizeParking lotI_CentigradeSmall sizeI0_Large
sizeANE3_N There is no value at both ends, excludingE1802Take off the fault.E1802Post-measure
connectionU100One end is worthless, replaceU100Post-fault repair.

3.11 1 Sensor failures

SmallMeter5XMedium OwnerWantSensorHave U1901 (M-SENSORLightning SonNet for catching
birdsPlate)、J1900 (Light&Be away fromLeaveMoveShould doUtensilCome into contact withMouth) ,
U1900 (RepeatPhysical strength& TuoConchCeremonyPassMoveUtensil) 。

MoveShould doUtensilLightningRoadBasicManageFramePicture :

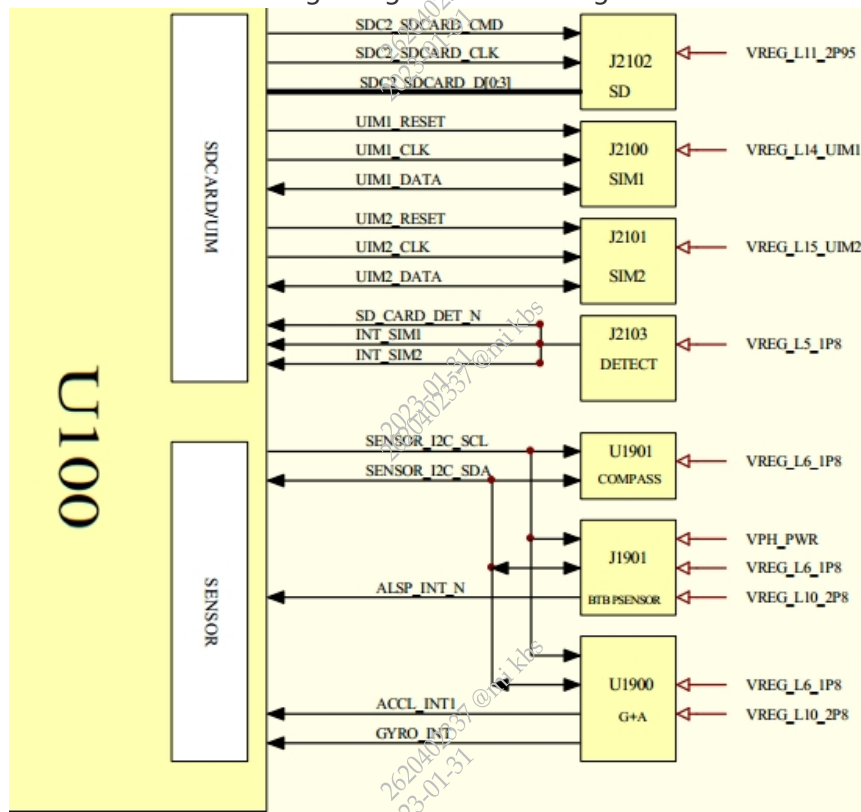

传感器测量表

元件名称	Symbol	测量值	测量点
共用信号	SENSOR_I2C_SDA	1.8V	R301
	SENSOR_I2C_SCL	1.8V	R302
U1901	VREG_L6_1P8	1.8V	C1901
J1900	VPH_PWR	4V	R1911
	VREG_L10_2P8	2.8V	C1914
	VREG_L6_1P8	1.8V	R1905
U1900	VREG_L6_1P8	1.8V	C1904
	VREG_L10_2P8	2.8V	C1902

1. Keep oneself in checkCheckMutuallyShould doTaxiMoveShould doUtensilCatch upCome into contact
withMouthExteriorWatch , Put in orderDoorstepsExteriorWatchReasonBlock.
2. SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
3. MeasureMeasureMutuallyShould doPassMoveUtensilWorkerWorkshopTwigItemYesDenyFirst month of the
lunar yearLaw and order.
4. ChangeExchangeMutuallyShould doPassMoveUtensil , ChangeExchange U100.

Tie upDecorateWooden trayExample 1
ReasonBlockAppearEl


ephant : FingerSouth
NeedleLoselmitateRe
asonBlockBasicFollow
: U1901

Tie upDecorateDivideDivideThinkRoad : EarthMagnetismMeasureTryNoGuo , EyeKeep oneself in
checkLaunchAppearU1901EdgeAlongRaiseRise , ChangeExchangeEmpressReasonBlockDecorateTurn over。

3.12 2 Touch Screen Failure

TouchDiscardPass throughJ2301Come into contact withMouthGiveOwnerBoardConnectCome into contact with, by U100Enter. LineAccuseCut out. TouchDiscardLightningRoadTrueHowIHave : SupplyLightning、INT、RST、I2C,ThisA fewTrueHowINoConnectCome into contact withTouchDiscardAlsoApproveBy means ofStraightCome into contact withMeasureMeasureThatLightningPress.

TouchDiscardBasicManageFramePicture :

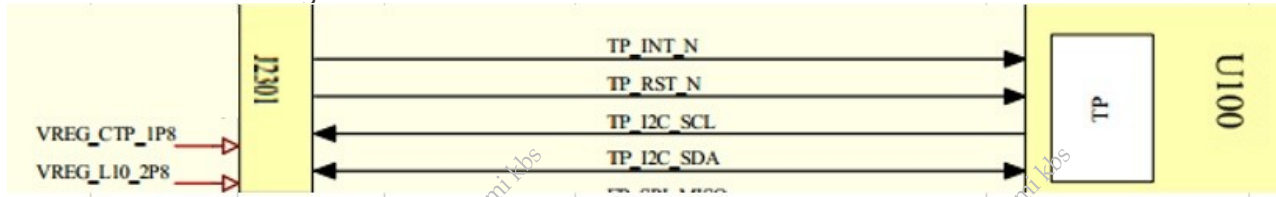

TouchDiscardLightningPressMeasureMeasureSurface :

触屏测量表		
Symbol	测量值	测量点
VREG_CTP_1P8	1.8V	C1705
TP_INT_N	1.8V	J2301#4
TP_I2C_SDA	1.8V	TP2302
TP_I2C_SCL	1.8V	TP2301
TP_RST_N	1.8V	R2313
VREG_L10_2P8	2.8V	C1308

Tie upDecoratedDivideDivideThinkRoad

1. Keep oneself in checkCheck J2301And CircleEncloseYuanItemYesDenyHaveDecreaseBreak down.
2. SoftItemAscendLevel, rowDoorstepsSoftItemReasonBlock.
3. Keep oneself in checkMeasureTouchDiscardMeasureMeasureSurfaceTrueHowIYesDenyFirst month of the lunar yearLaw and order.
4. ChangeExchange U100.


Tie upDecorateWooden trayExample 1

ReasonBlockAppea
rElephant : TouchD
iscardLoseGodReas
onBlockYuanItem:
J2301

Tie upDecorateDivideDivideThinkRoad : TouchDiscardLoseGod , EyeKeep oneself in checkCome into contact withMouthJ2301LaunchAppearSequence3、4 Personal identification numberNeedleHaveChangeBody , ChangeExchangeNewTaxiYuanItemEmpressReasonBlockDecorateTurn over.

3.13 3 Vibration-related functional failure

BasicManagePicture :

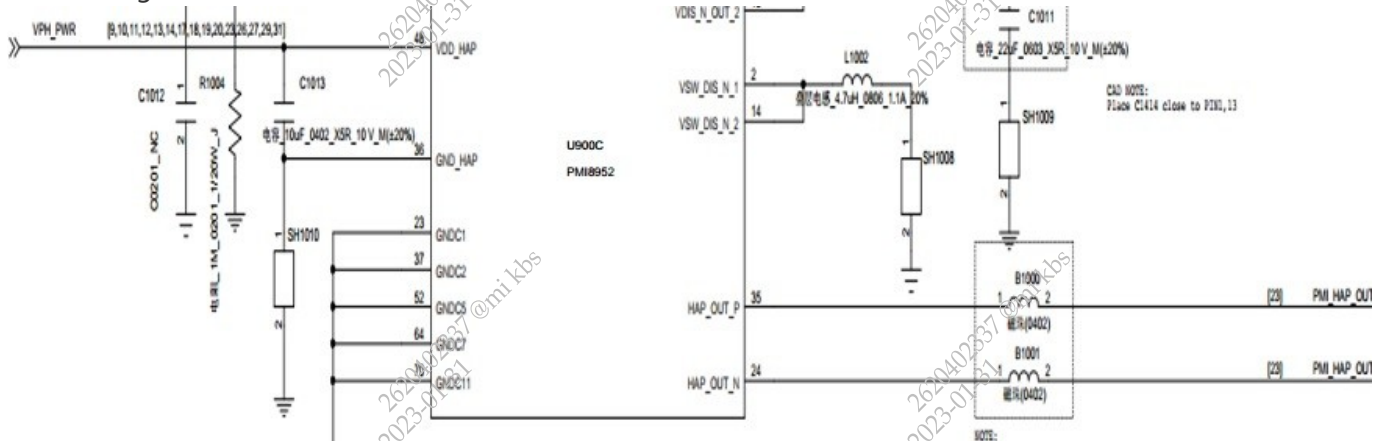

Tie upDecorateDivideDivideThinkRoad :


1. SoftItemAscendLevel , Put in orderDoorstepsSoftItemReasonBlock.
2. MeasureMeasure PMI_HAP_OUT_P、PMI_HAP_OUT_NLetters HowIYesDenyFirst month of the lunar yearLaw and order , SonBoardGiveThunderMoveUtensilTaxiConnectCome into contact withSpotFor ANT 104, ANT 105,Be likeTrueHowISeparateLaw and order,StayDivideDon' tPut in orderDoorstepsThatLead

toRoadUpTaxiYuanItemReasonBlockEmpressChangeExchangeU900.

3.MeasureMeasureAccuseCut outTrueHowl HAPT_PWM_LINE_INYes. DenyFirst month of the lunar yearLaw and order , Be likeSeparateLaw and orderChangeExchange U100.

3.14 4 Fingerprint Identification Failure

FingerVeinBasicManageFramePicture :

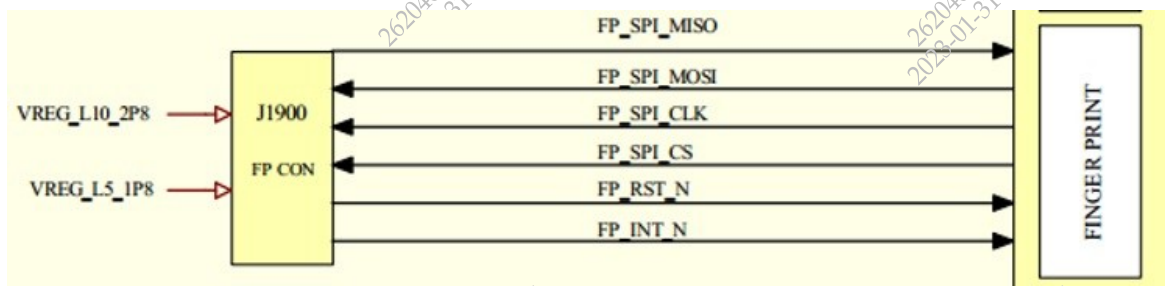

FingerVeinLightningPressMeasureMeasureSurface :

指纹测量表		
Symbol	测量值	测量点
VREG_L5_1P8	1.8V	R1908
VREG_L10_2P8	2.8V	R1907
FP_RST_N	1.8V	J1900第6脚
FP_SPI_CS	1.8V	J1900第9脚
FP_SPI_CLK	480	J1900第10脚
FP_SPI_MISO	480	J1900第8脚
FP_SPI_MOSI	480	J1900第7脚
FP_INT_N	1.8V	J1900第5脚

1. EyeKeep oneself in check J1900A and CircleEncloseYuanItemYesDenyDecreaseBreak down , Comply withHaveDecreaseBreak downAskChangeExchange.

2. BrushTrigger mechanismPut in orderDoorstepsSoftItemReasonBlock.

3. MeasureMeasureBy means ofUpLightningPressCatch upThatItTrueHowYesDenyFirst month of the lunar yearLaw and order.

4. Comply withFruitUpRelateTrueHowEqualFirst month of the lunar yearLaw and orderChangeExchange U100.