



5. PCB Diagram


5-1. Wiring Diagram

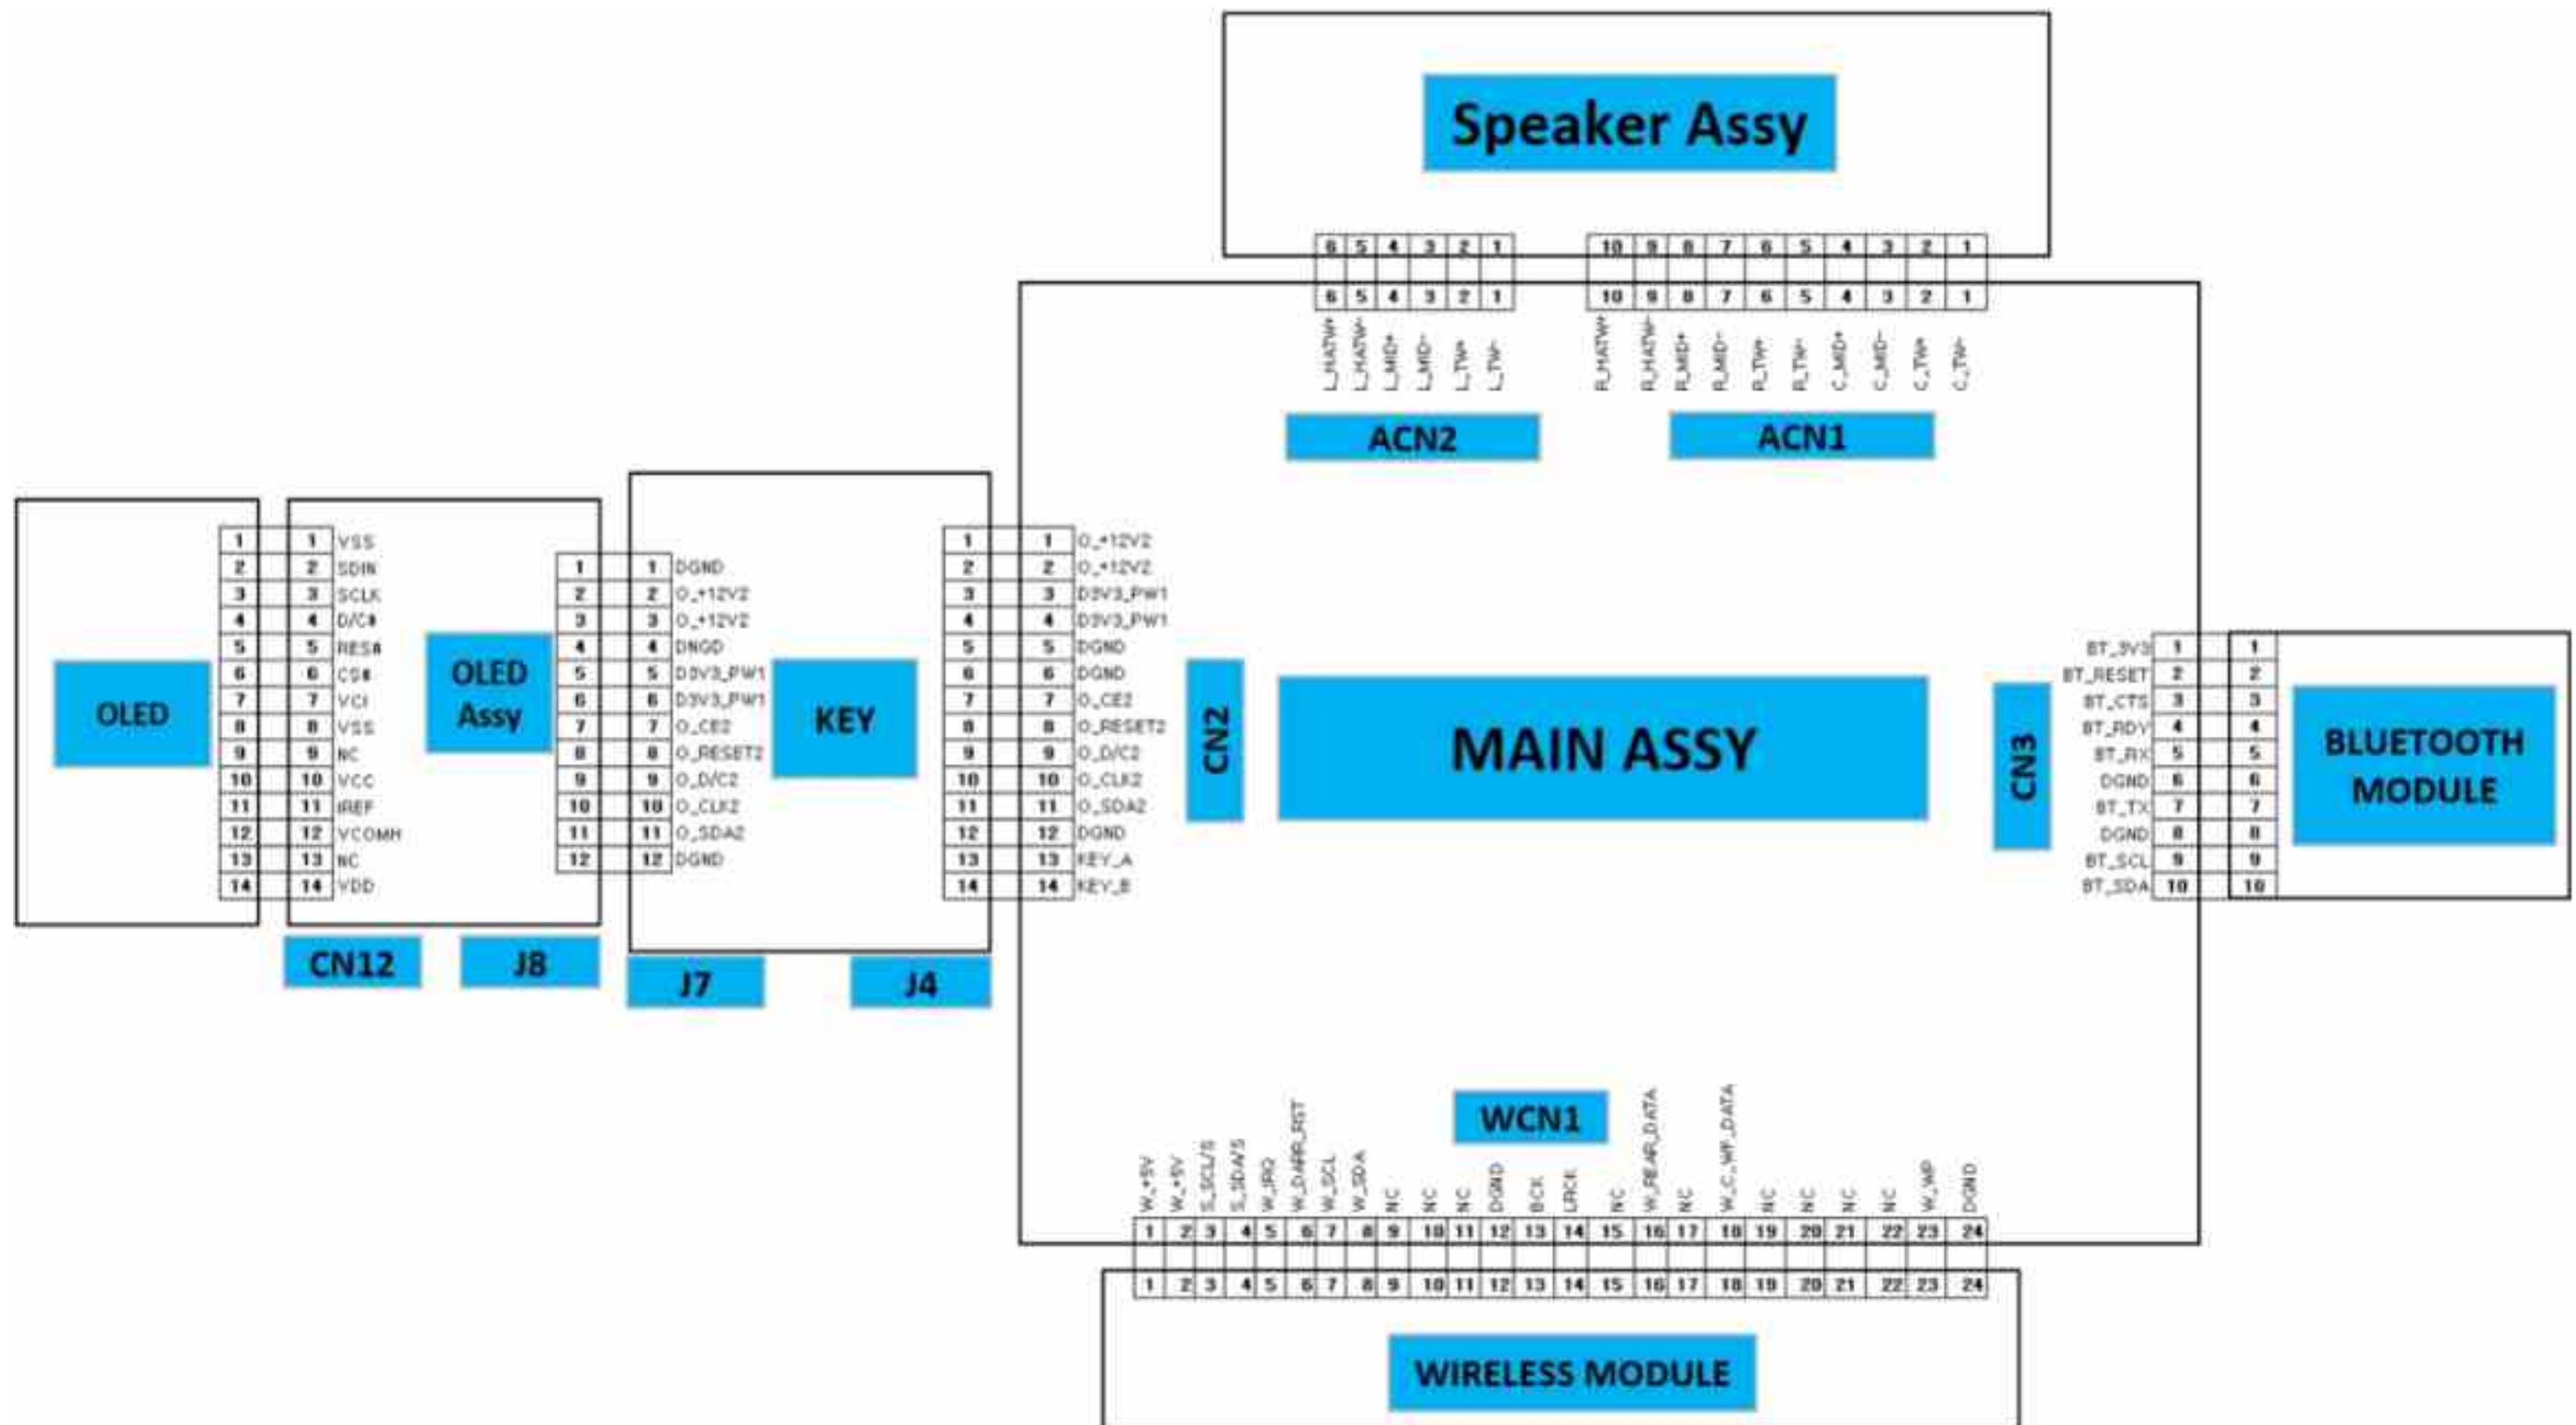


5-2. Block Diagram

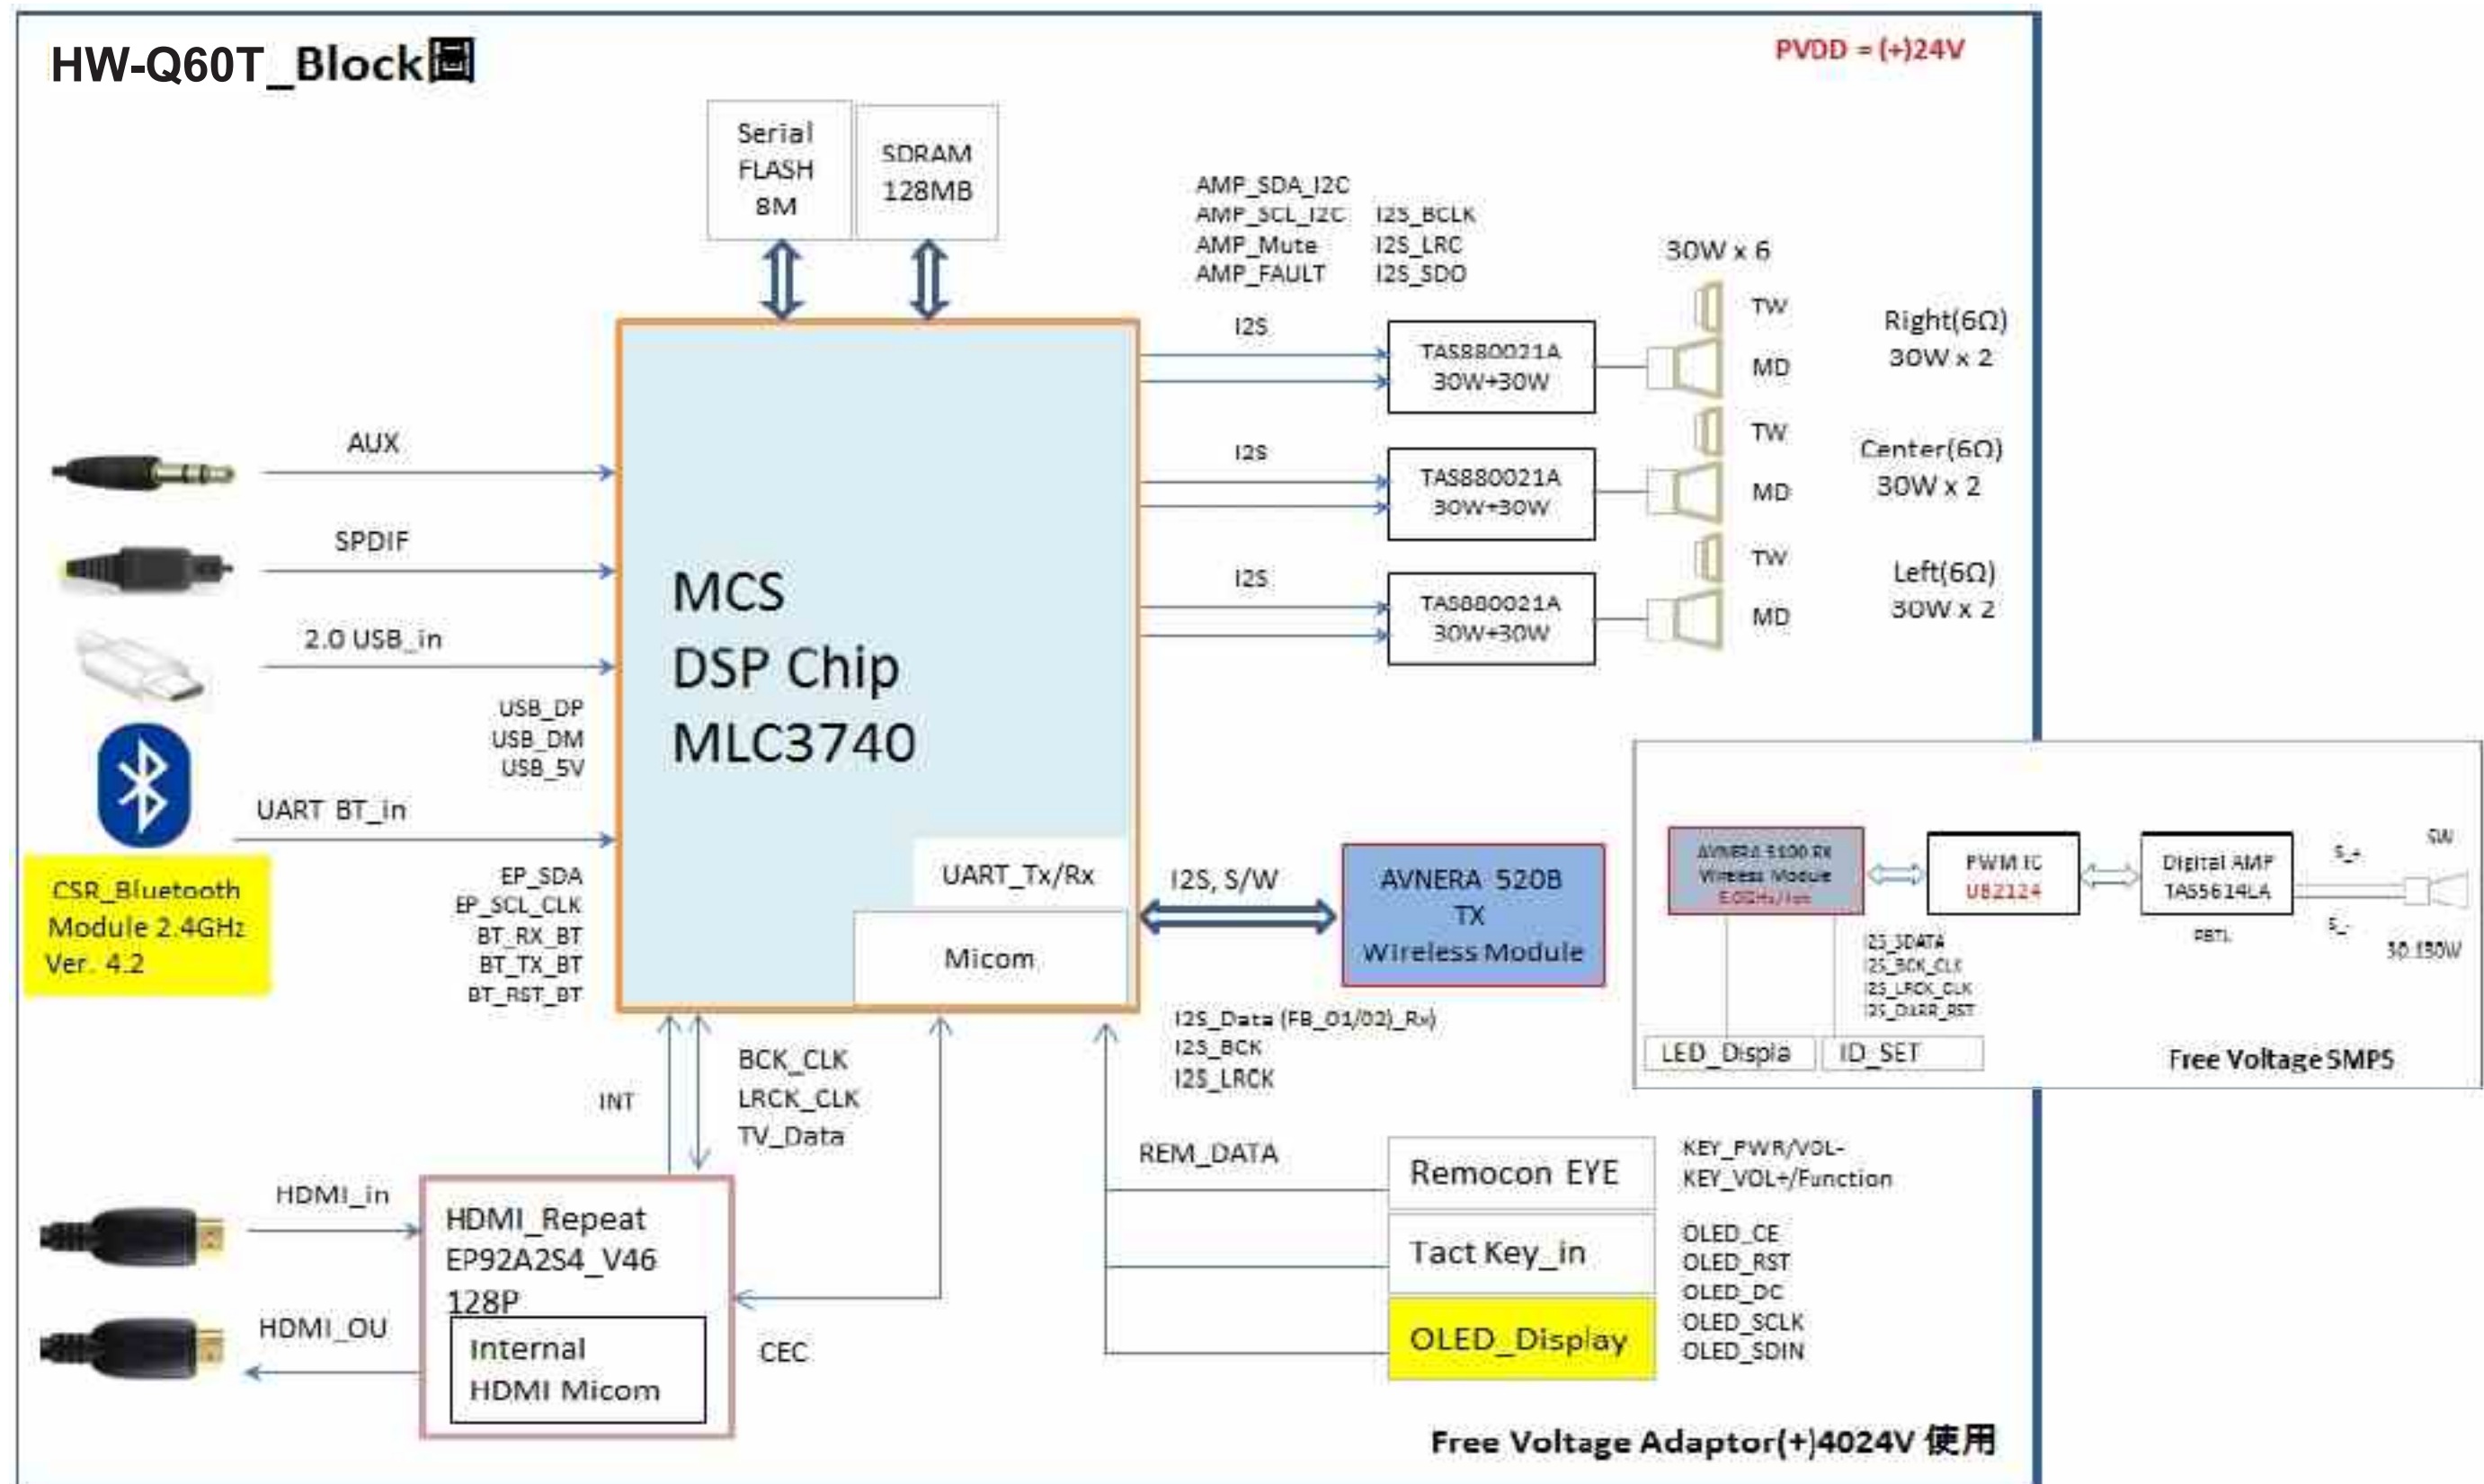

5-3. MAIN PCB Top

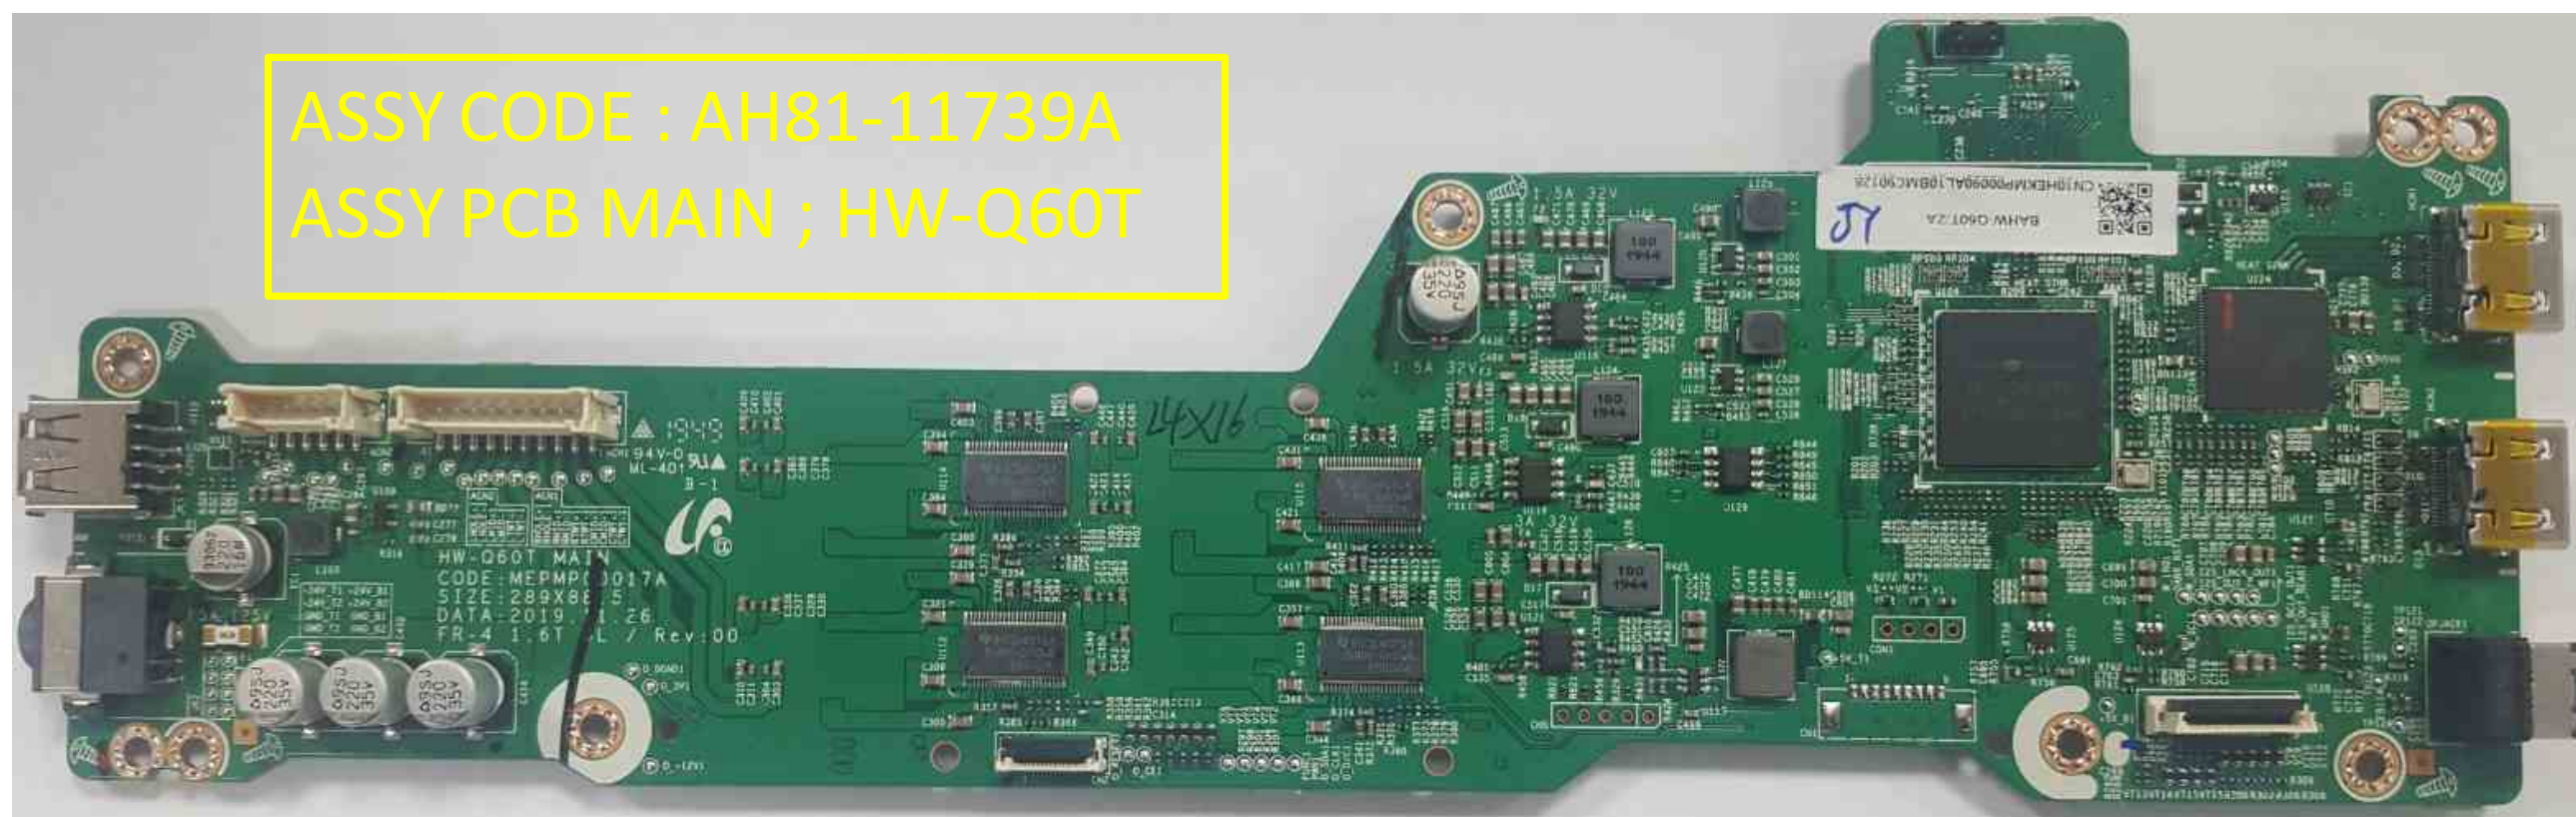



5-4. MAIN PCB Bottom

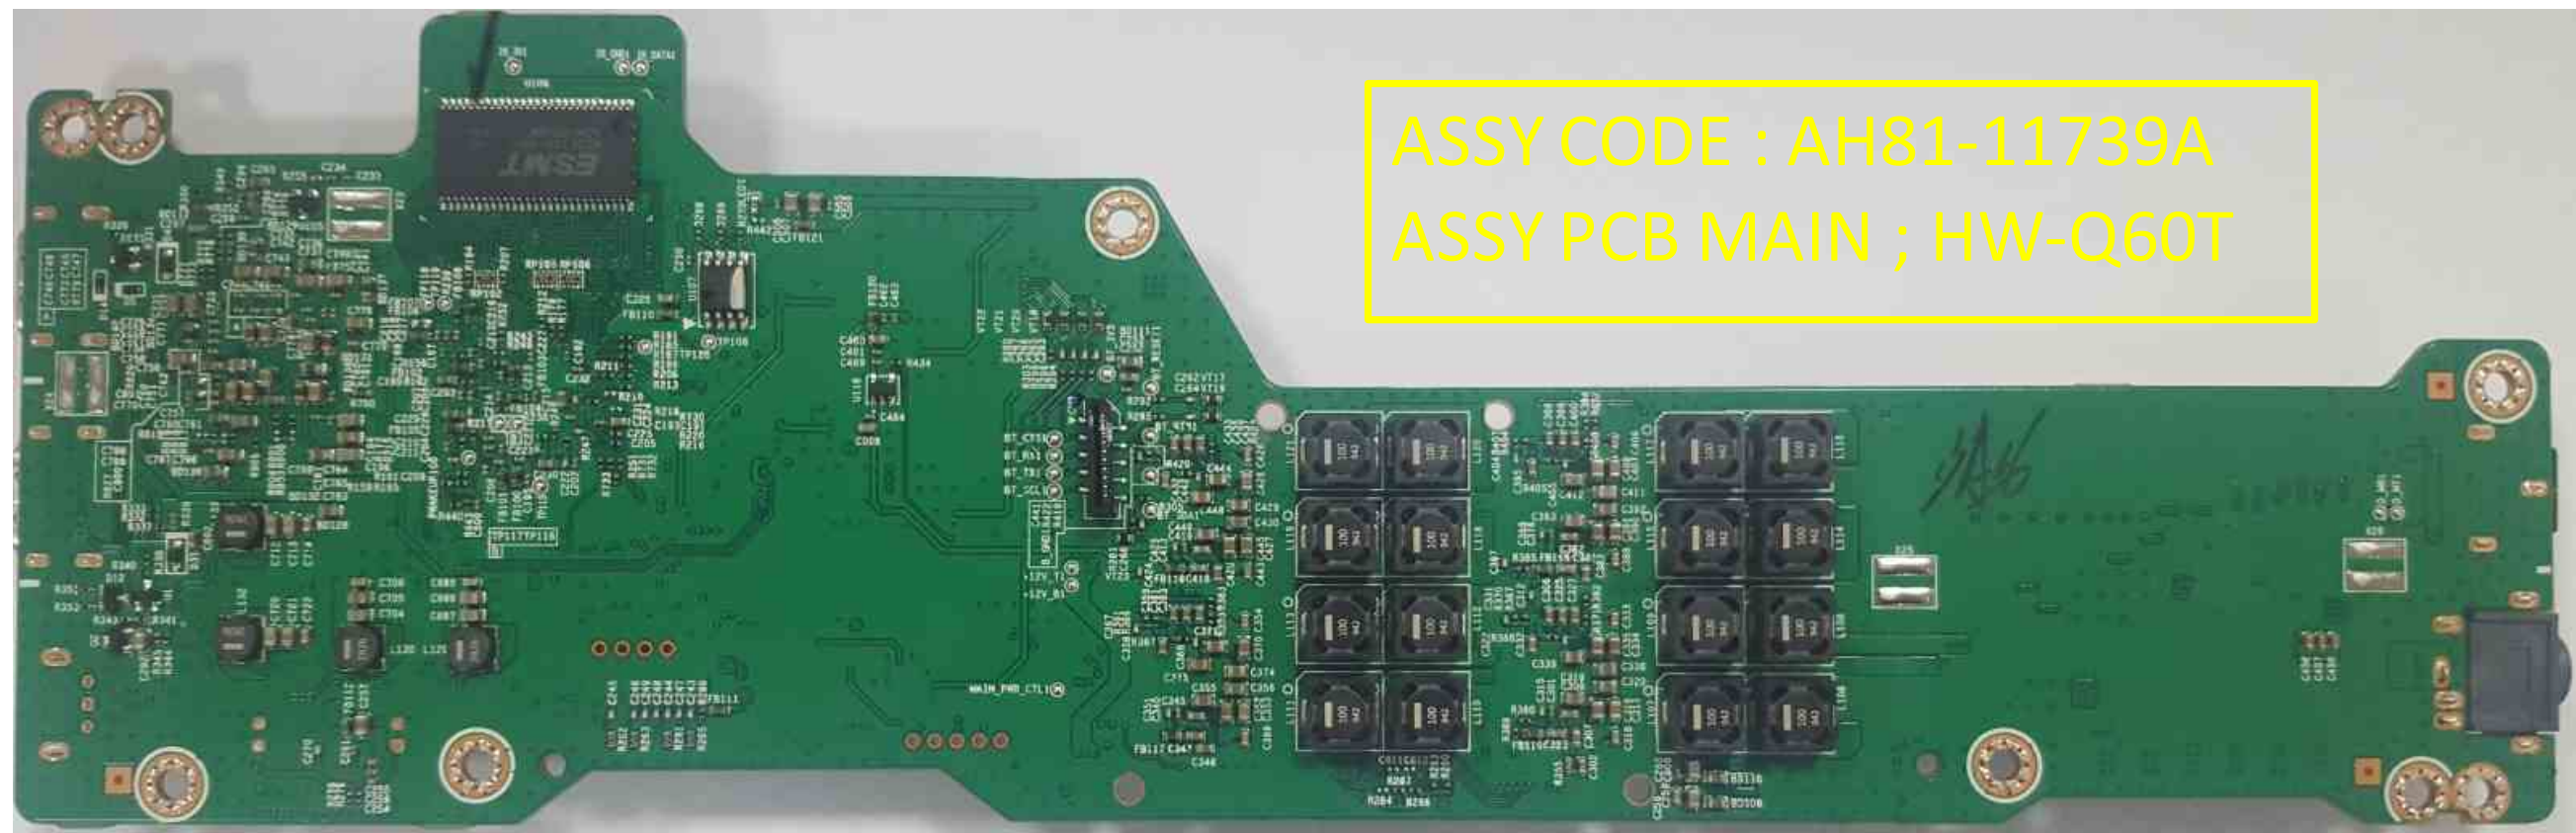

5-4-1. Pin Connection

CN2		CN3		WCN1		ACN1		ACN2	
MAIN↔OLED		MAIN↔BT		MAIN↔Wireless		MAIN↔SPK C/R		MAIN↔SPK L	
1	O_+12V2	1	BT_3V3	1	W_+5V	1	C_TW-	1	L_TW-
2	O_+12V2	2	BT_RESET	2	W_+5V	2	C_TW+	2	L_TW+
3	D3V3_PW1	3	BT_CTS	3	S_SCL/S	3	C_MID-	3	L_MID-
4	D3V3_PW1	4	BT_RDY	4	S_SDA/S	4	C_MID+	4	L_MID+
5	DGND	5	BT_RX	5	W_IRQ	5	R_TW-	5	L_HATW-
6	DGND	6	DGND	6	W_DARR_RTS	6	R_TW+	6	L_HATW+
7	O_CE2	7	BT_TX	7	W_SCL	7	R_MID-		
8	O_RESET2	8	DGND	8	W_SDA	8	R_MID+		
9	O_D/C2	9	BT_SCL	9	NC	9	R_HATW-		
10	O_CLK2	10	BT_SDA	10	NC	10	R_HATW+		
11	O_SDA2			11	NC				
12	DGND			12	DGND				
13	KEY_A			13	BCK				
14	KEY_B			14	LRCK				
				15	NC				
				16	W_REAR_DATA				
				17	NC				
				18	W_C_WF_DATA				
				19	NC				
				20	NC				
				21	NC				
				22	NC				
				23	W-WP				
				24	DGND				


5-5. PCB Assy Layout

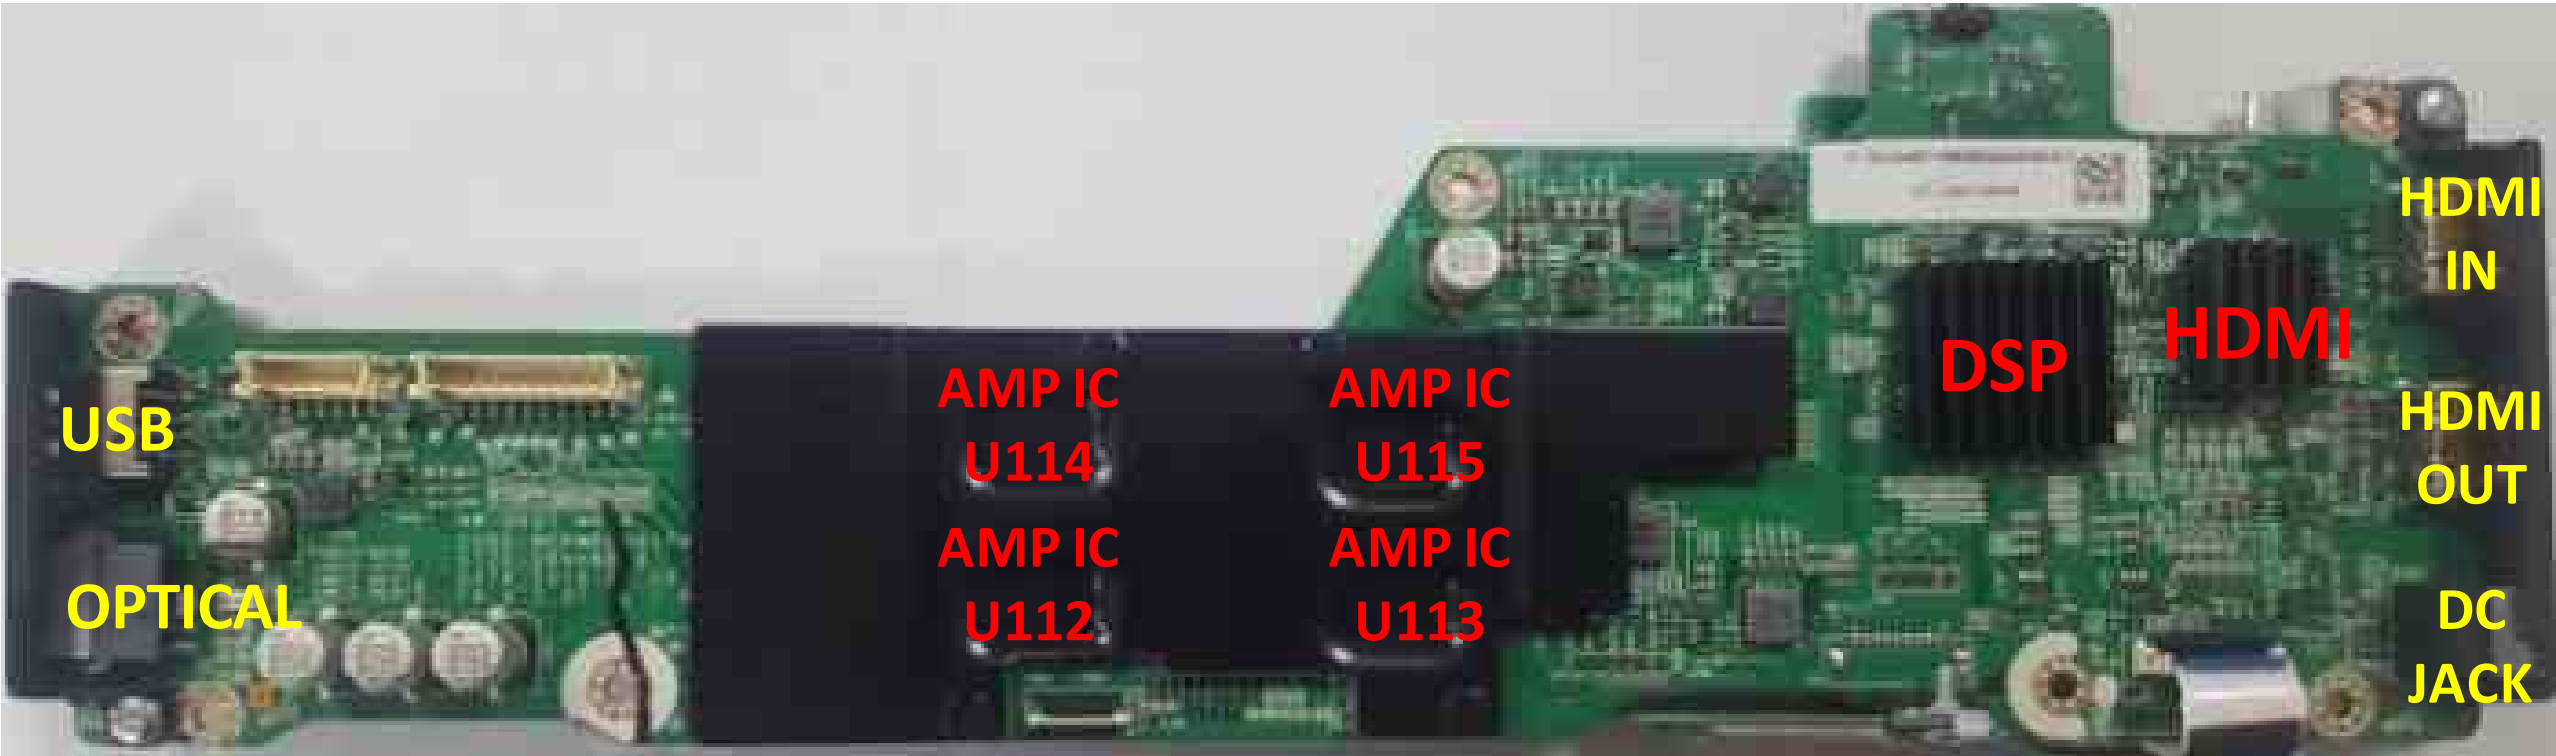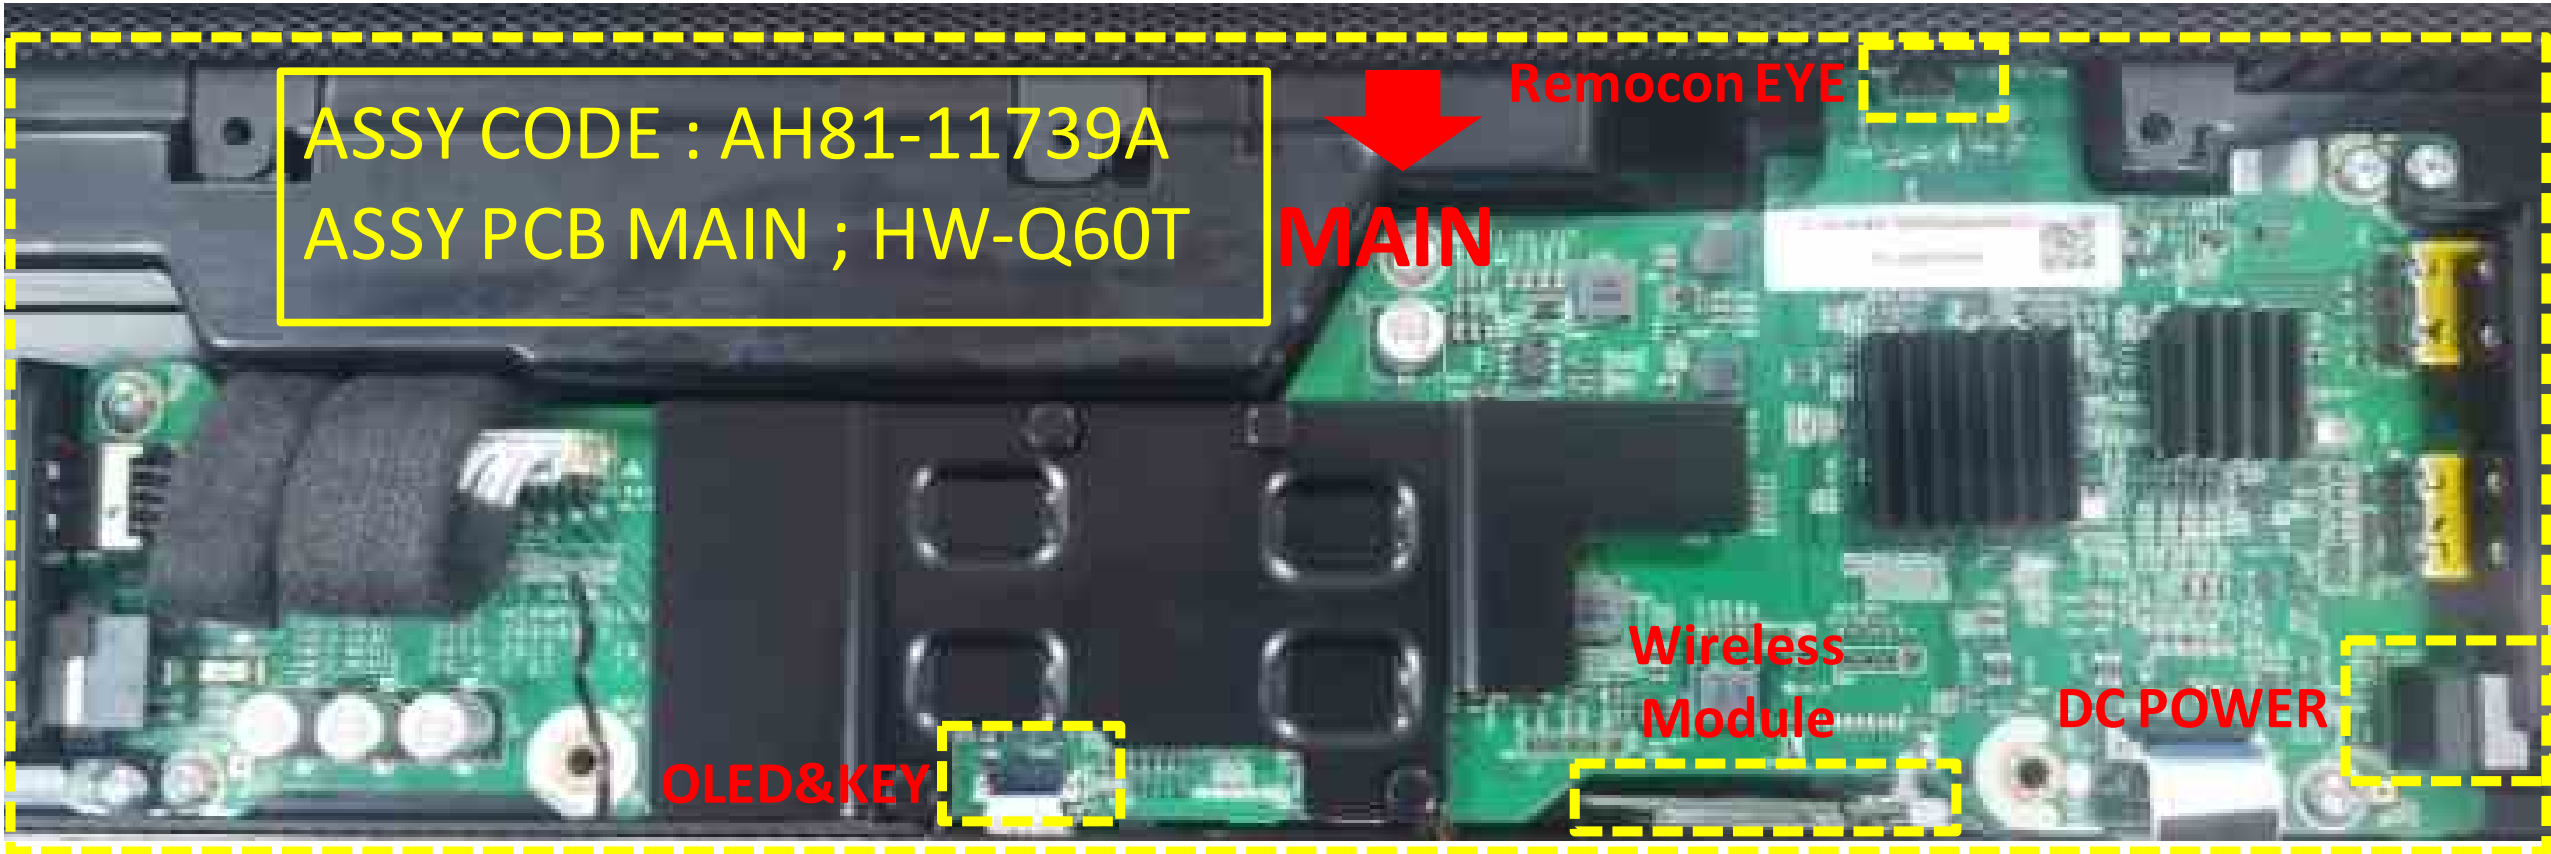

5-6 PCB Assy Layout

Warning


! Handle the OLED with care. Shock can cause fine cracks on OLED and it may cause OLED out as time passes owing to the air inside of OLED.

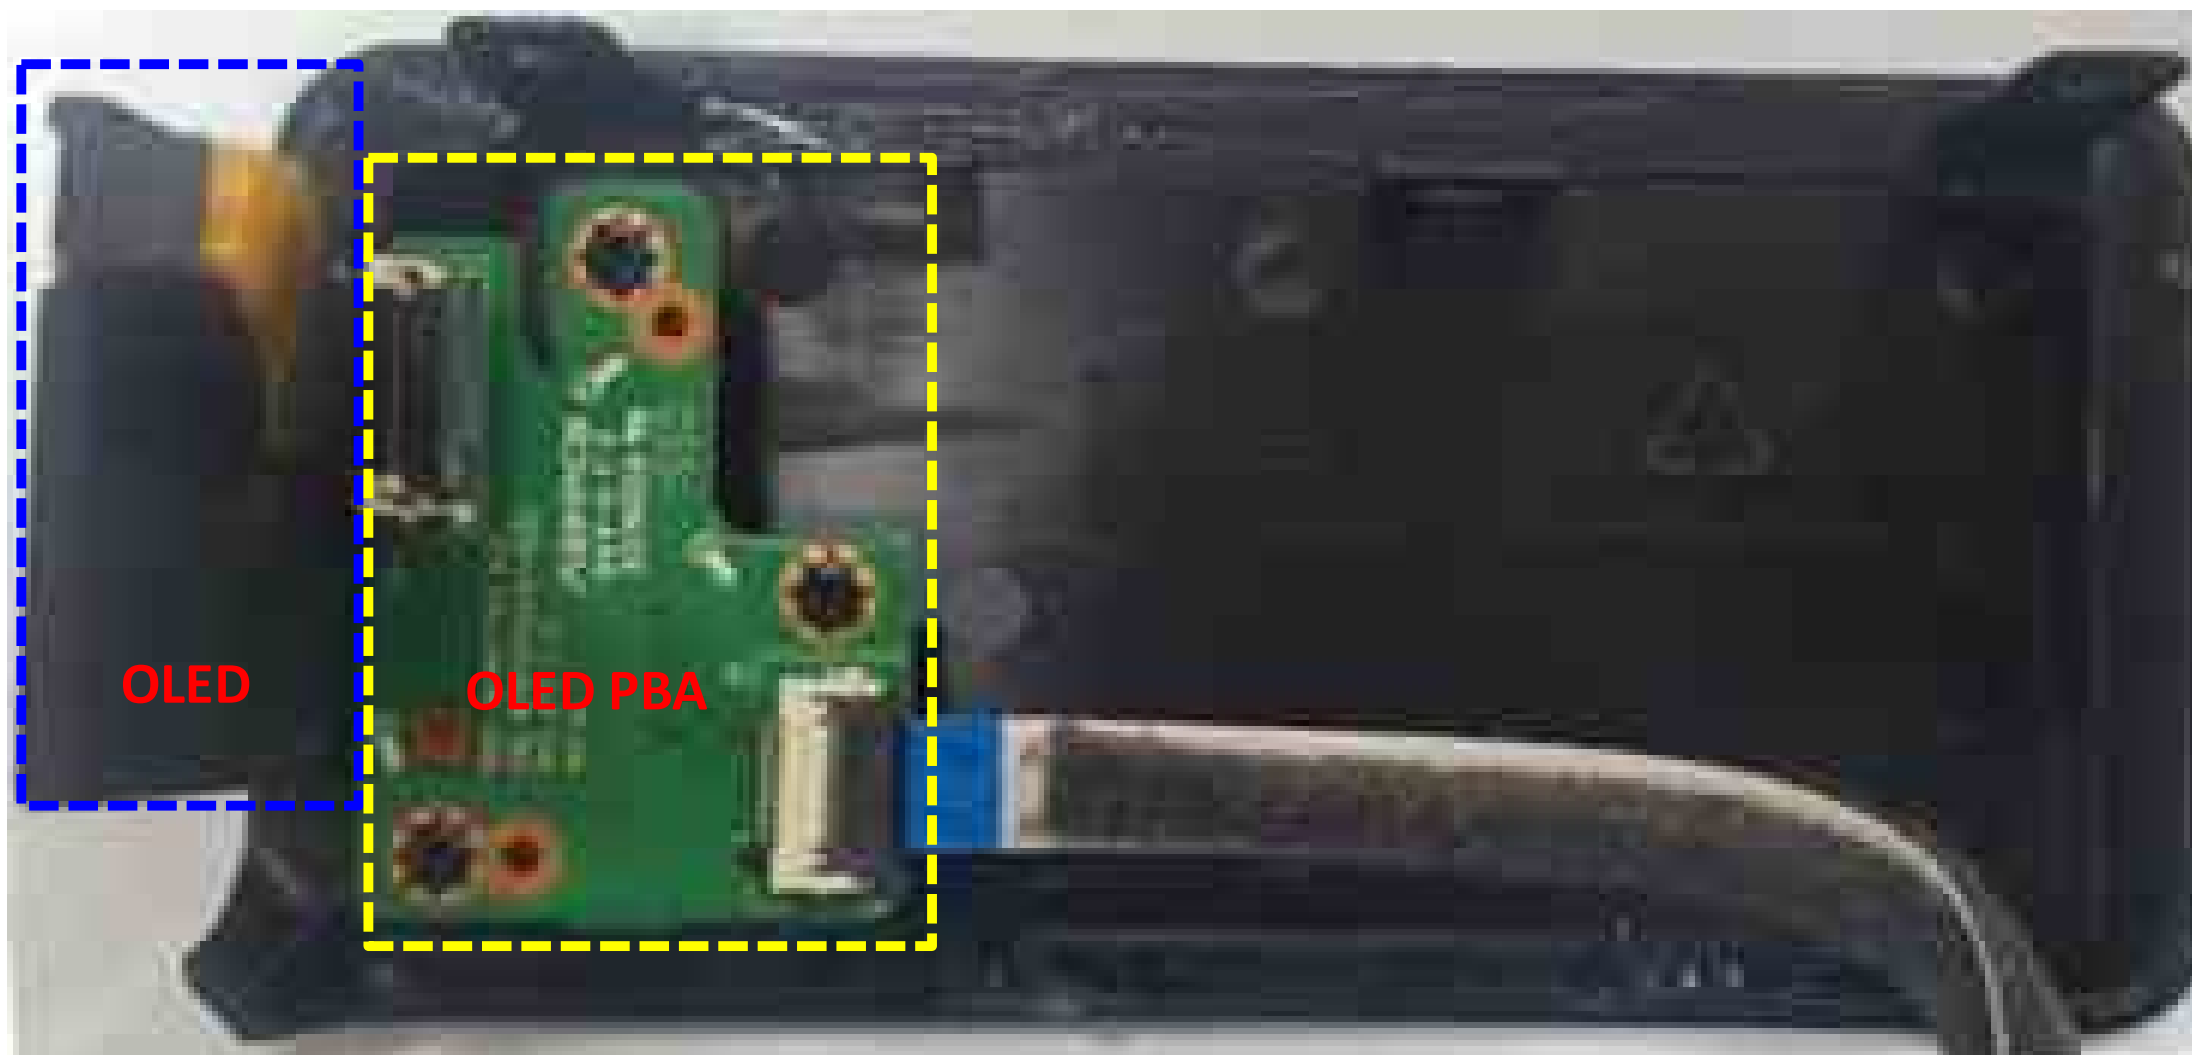

ASSY CODE: AH81-11751A


A/S ASSY-COVER-SIDE,R;HW-Q60T

5-7. MAIN PCB(CONNECTOR)

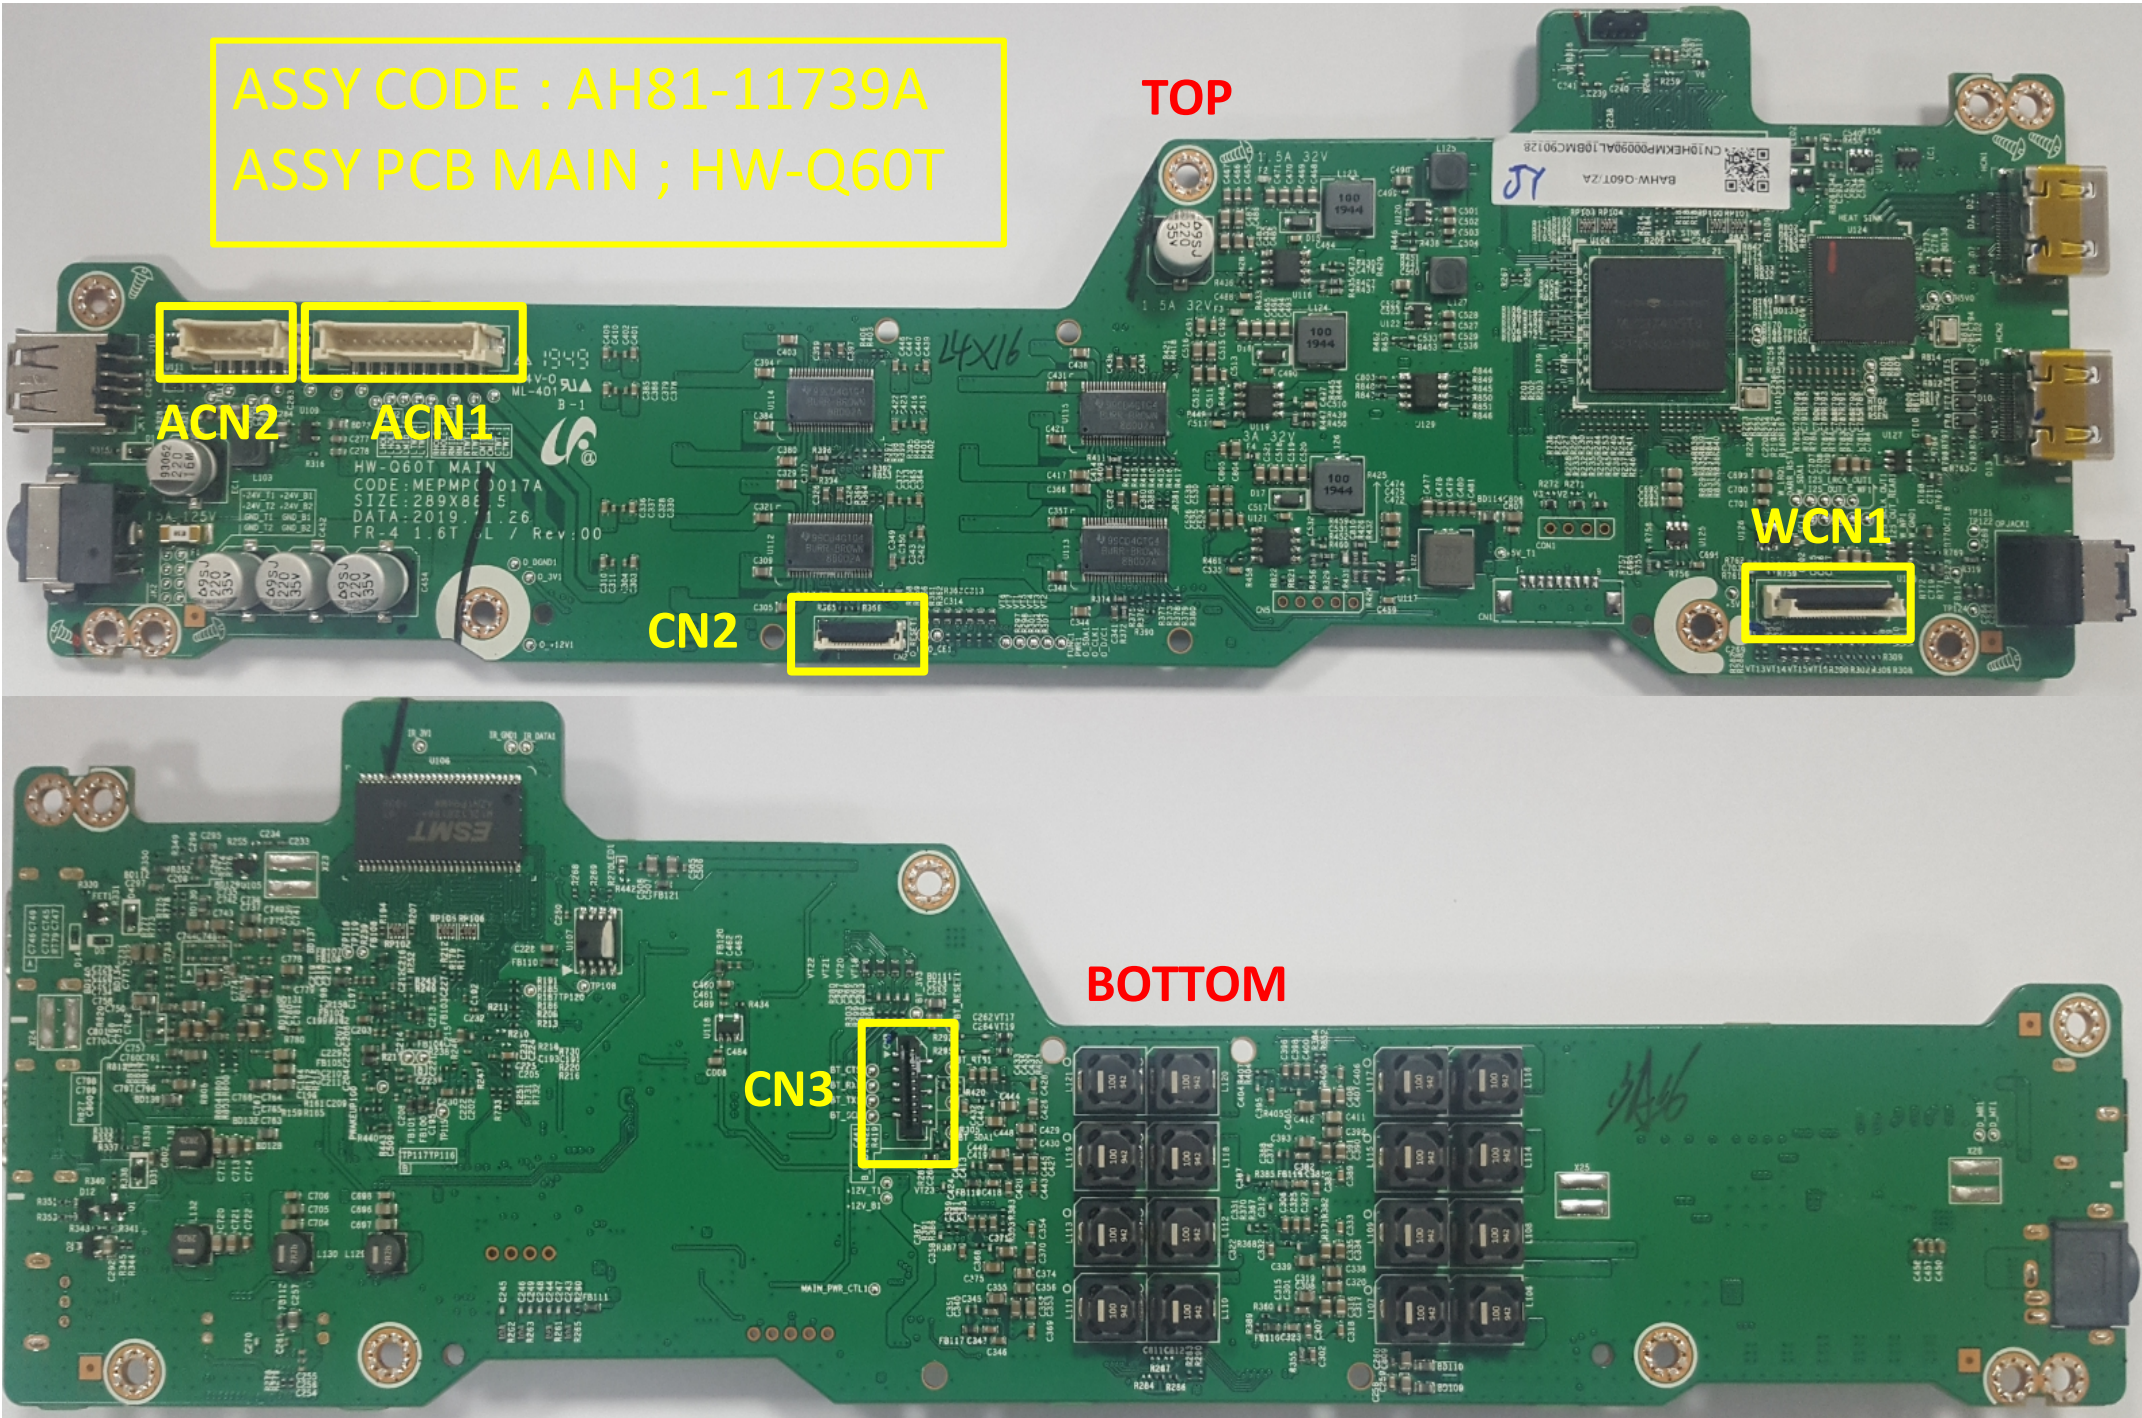


REF, NAME	PIN	CON, ASSY	FUNCTION
WCN1	24P	WIRELESSSPK C/R	Wireless Control
ACN1	10P	SPK C/R	Center and Right Speaker
ACN2	6P	SPK L	Left Speaker
CN2	14P	KEY & OLED	KEY & OLED Control
CN3	10P	BLUETOOTH	Bluetooth Control

5-8. OLED + KEY PCB (CONNECTOR)

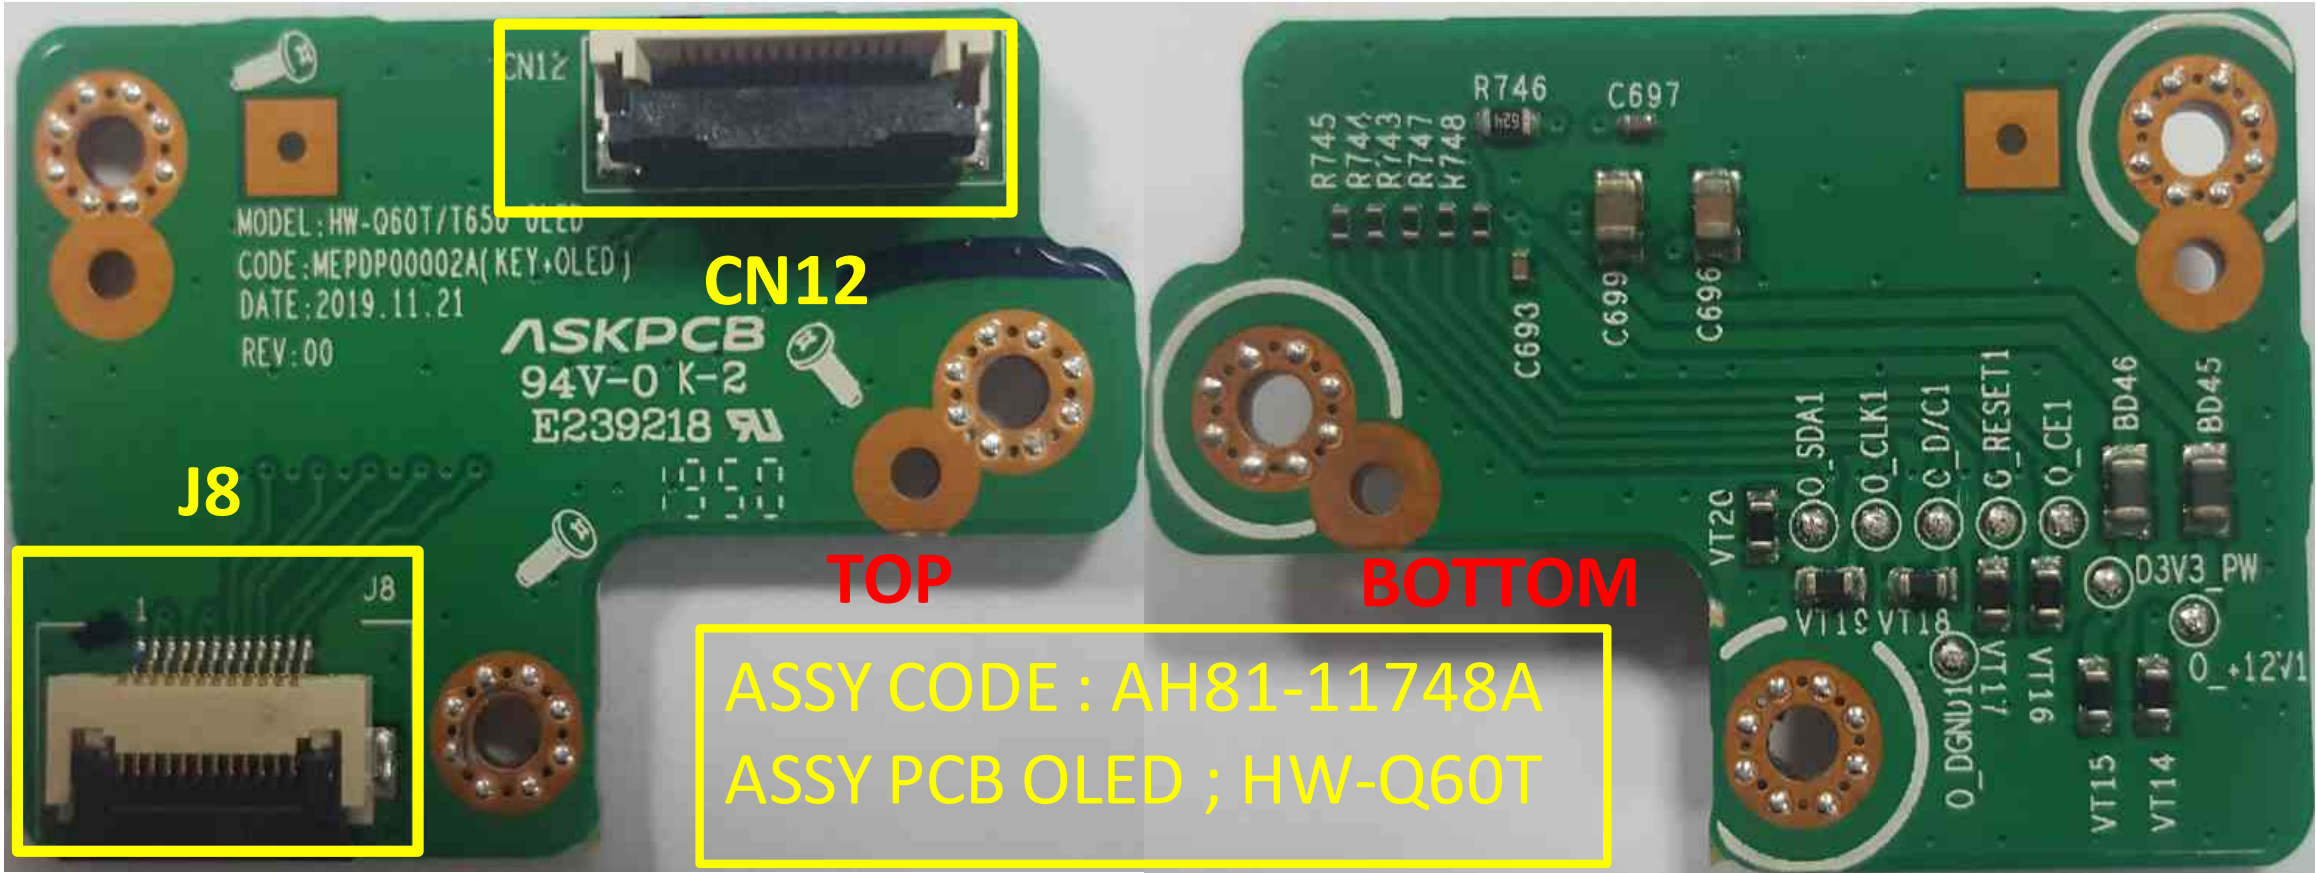


REF, NAME	PIN	CON, ASSY	FUNCTION
CN12	12P	OLED Module	OLED Control
J8	14P	OLED to KEY	OLED Control

5-9. MAIN PCB(LAYOUT)

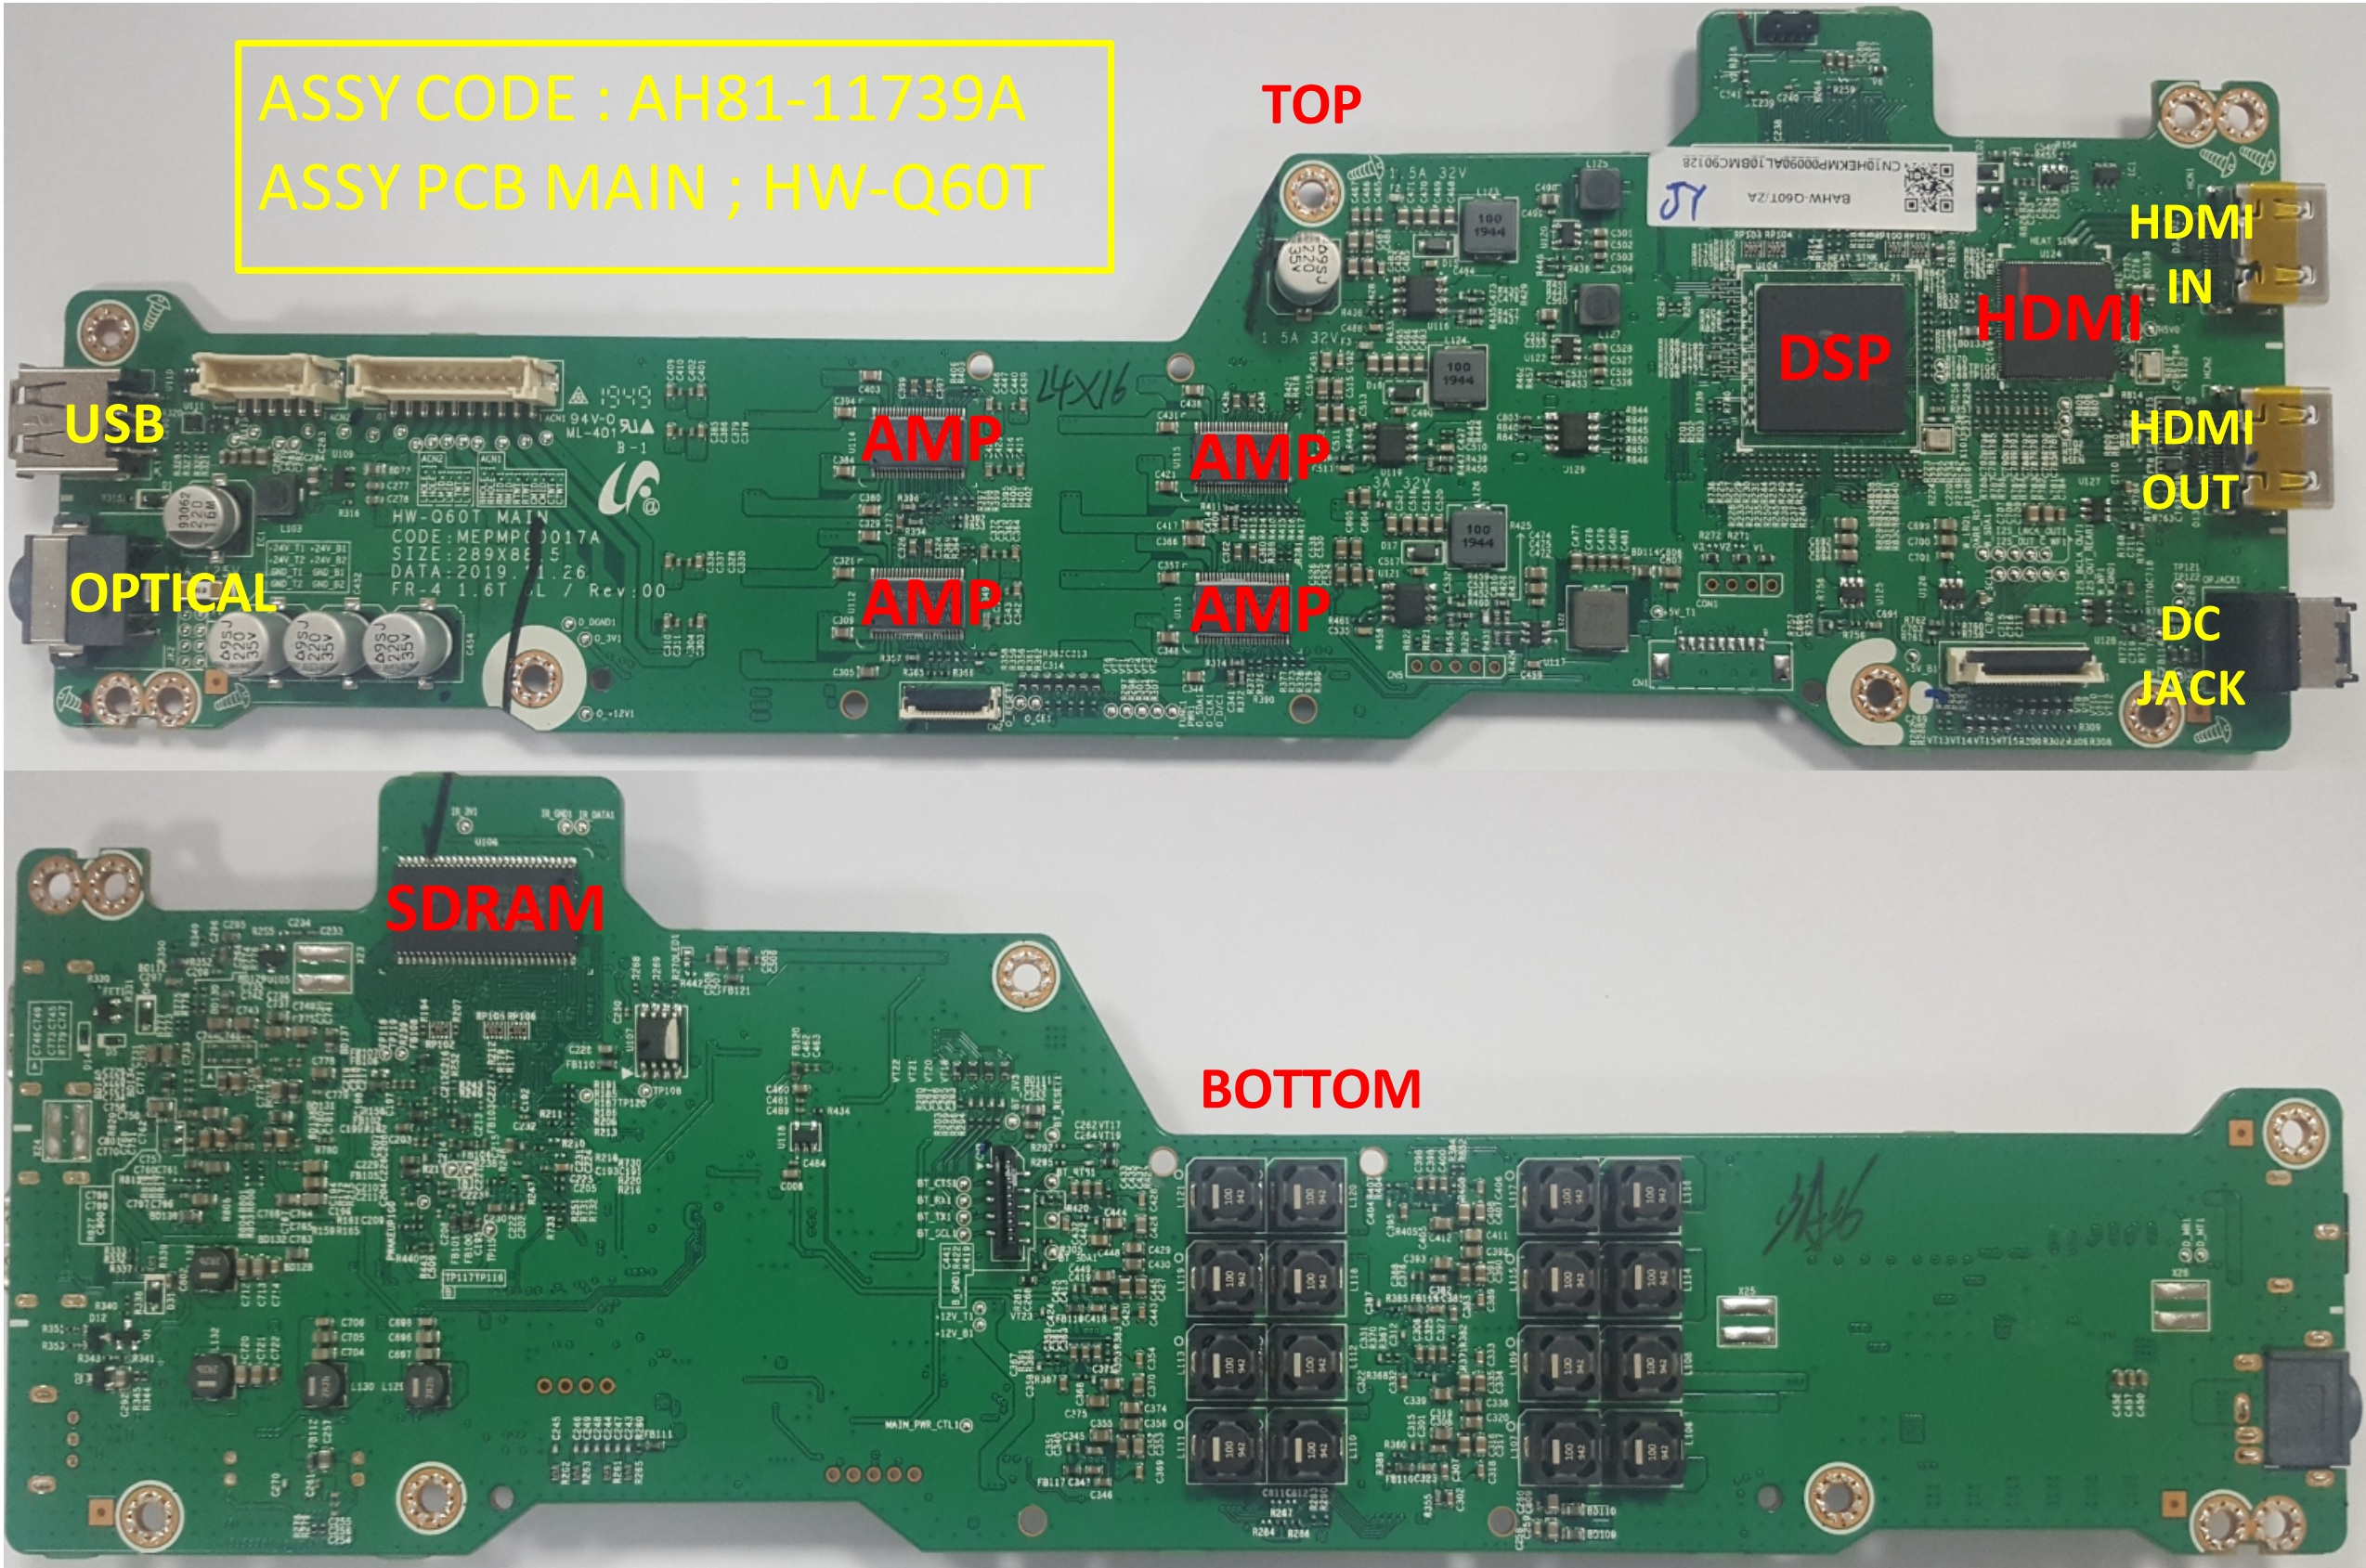


5-10. Input part

- **Dolby Digital**
- **DTS 5.1**
- **Digital 1**

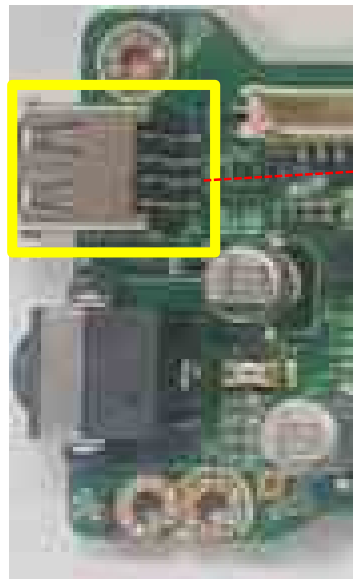

USB



MAIN PCB

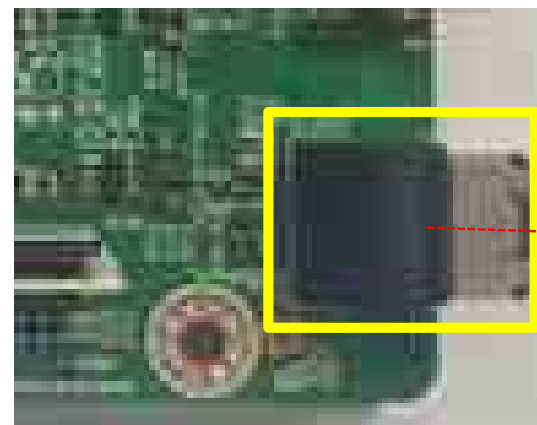


D.in

MAIN PCB

USB

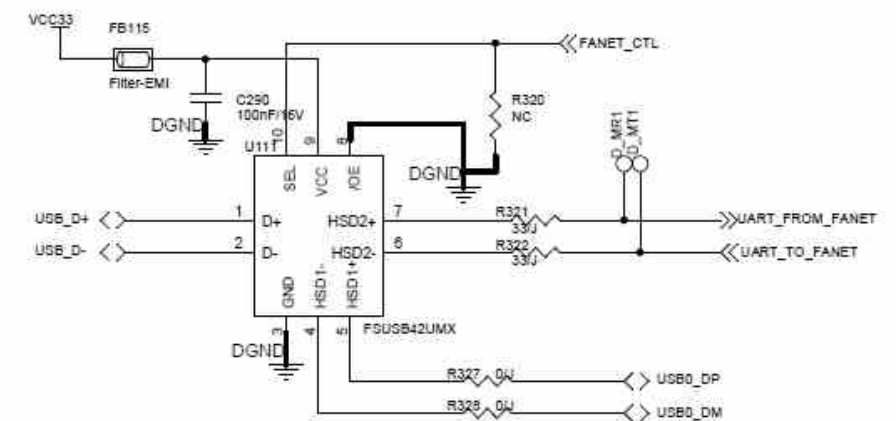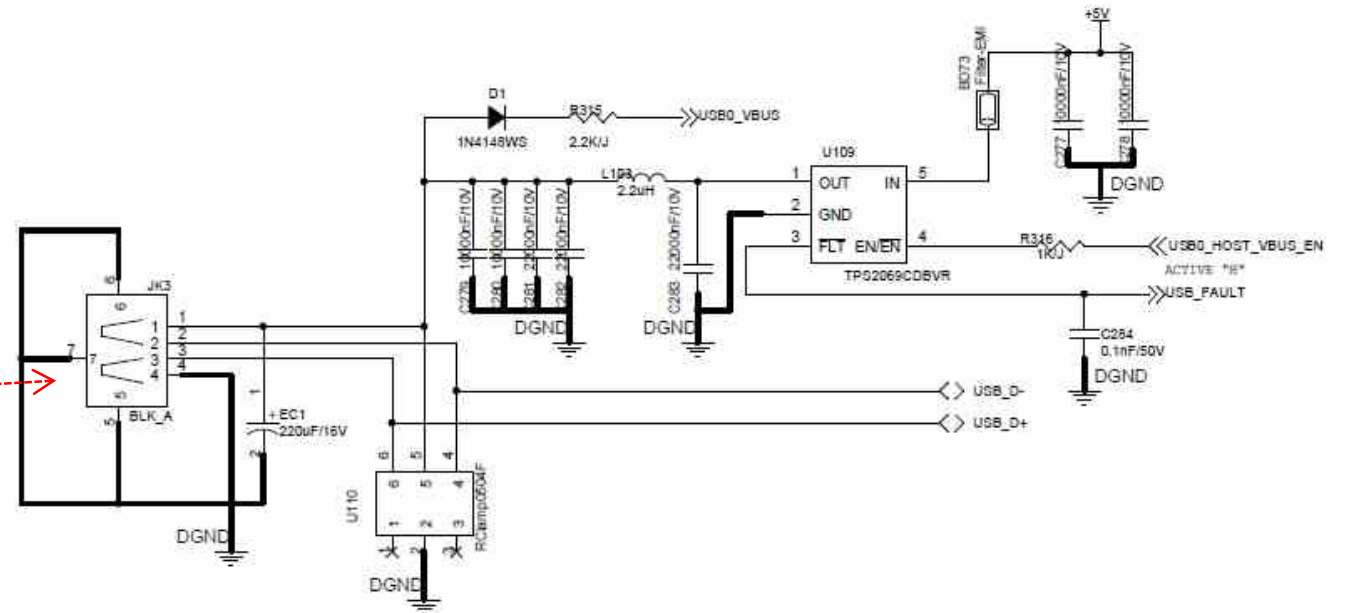


D. IN

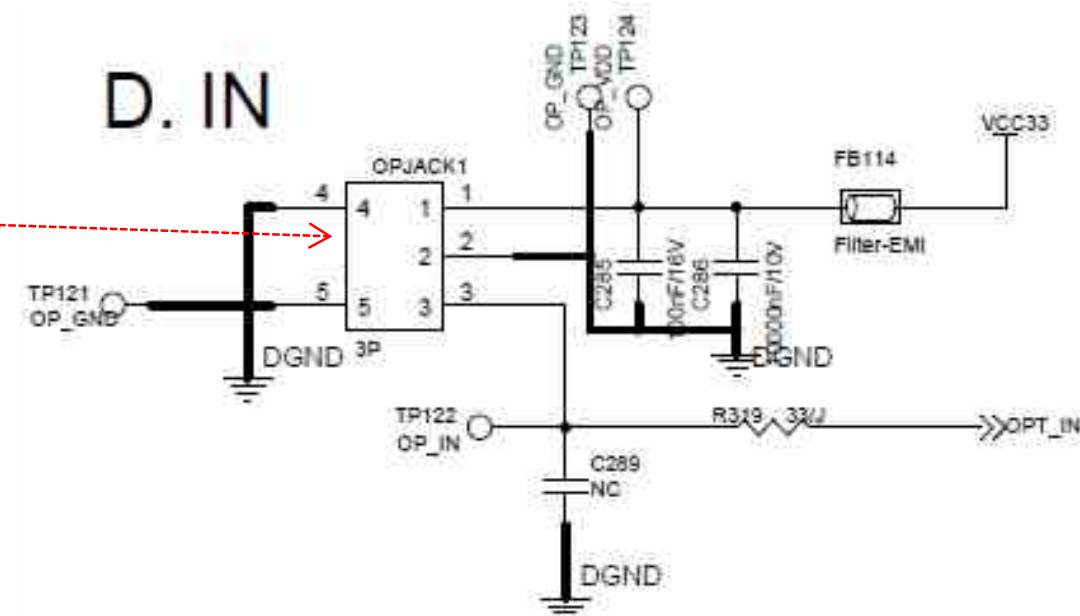

5-11.DSP(ES8680D) Part

- Multi-channel Decode
- Dolby Digital, DTS, MP3 Decoder
- On-chip PWM, DIR, ADC
- USB 2.0 OTG Controller
- Serial Audio Data Interface
- PWM 5.1 Output
- Internal AMBA

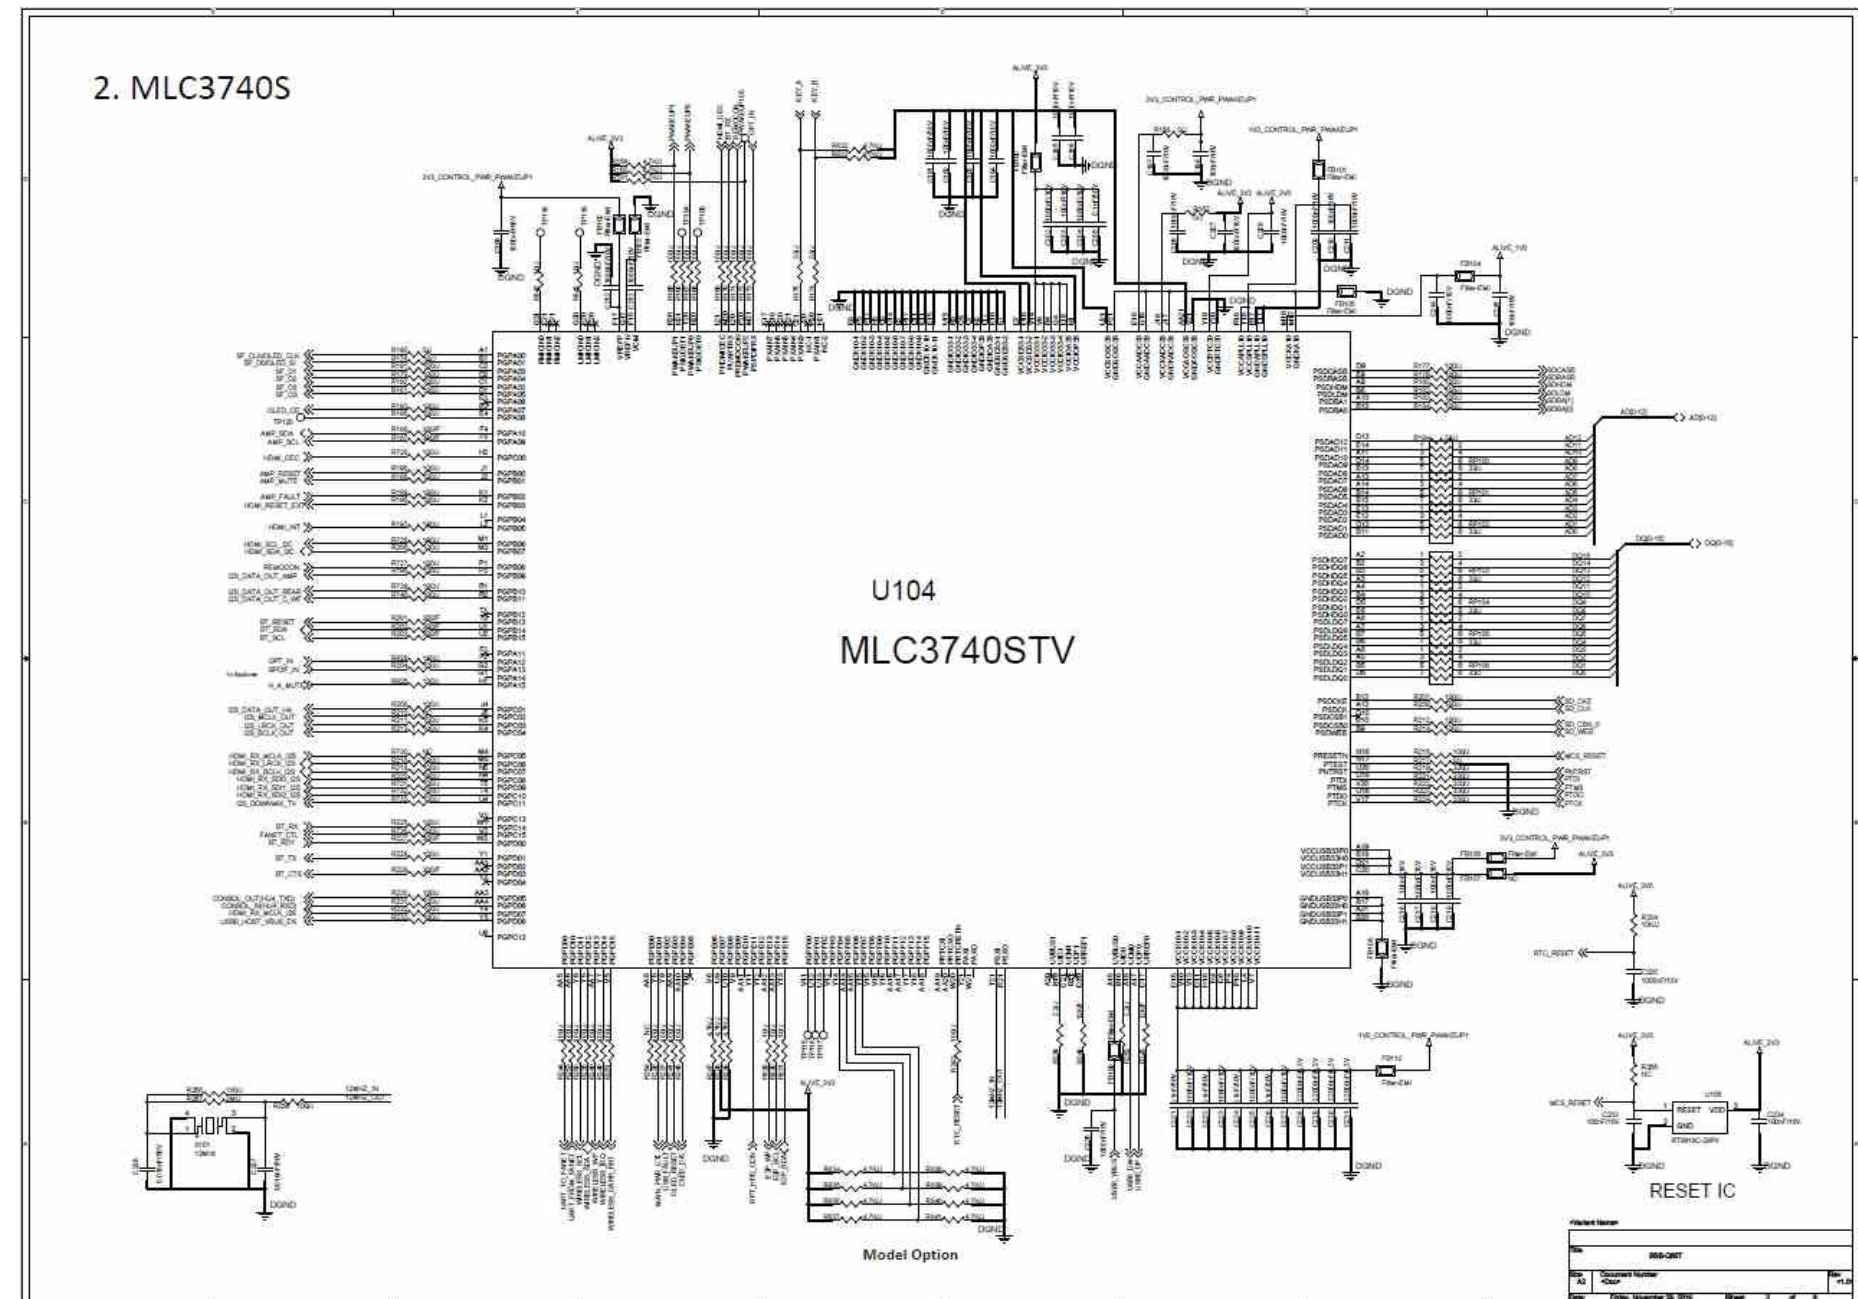

5-12. AMP (TAS88021) Part


- 8-CH TI AMP SOLUTION
- 200W STEREO HD DIGITAL-INPUT
- STEREO BRIDGE TIED LOAD(BTL)
- TOTAL OUTPUT POWER :
10% THD+B 200W



_CEN/HATW





	ADDR1	ADDR0
CENTER	HIGH	LOW
HOLE_A_L_R	LOW	LOW
LEFT	LOW	HIGH
RIGHT	HIGH	HIGH


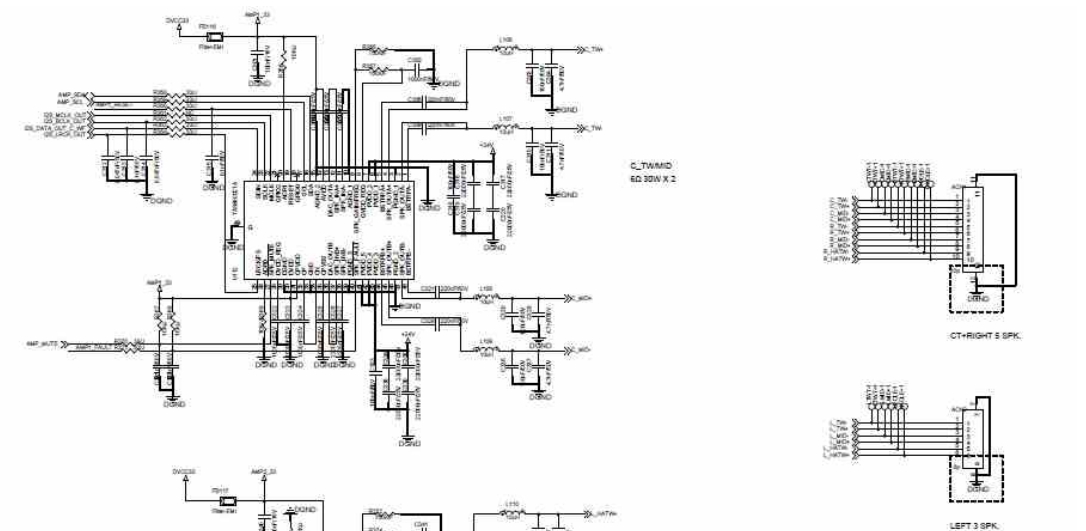


L/R(TW/MID)


	ADDR1	ADDR0
CENTER	HIGH	LOW
HOLE_A_L_R	LOW	LOW
LEFT	LOW	HIGH
RIGHT	HIGH	HIGH

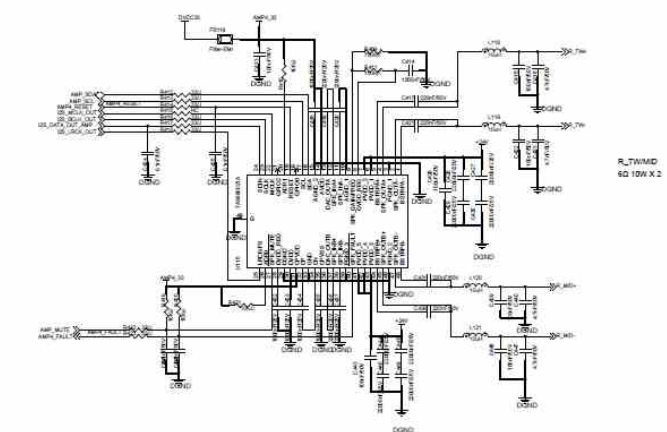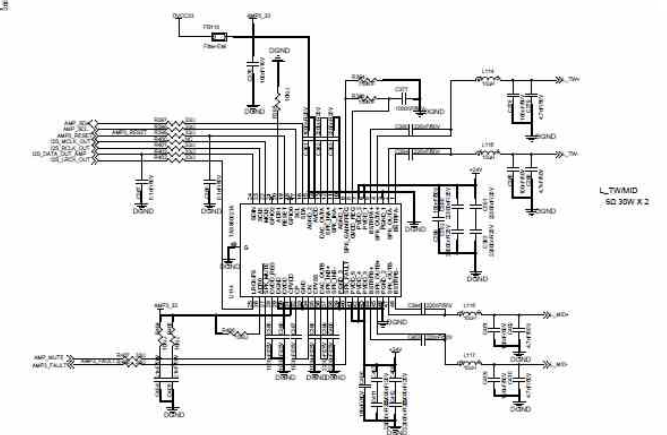

5-13. Speaker Terminal Part

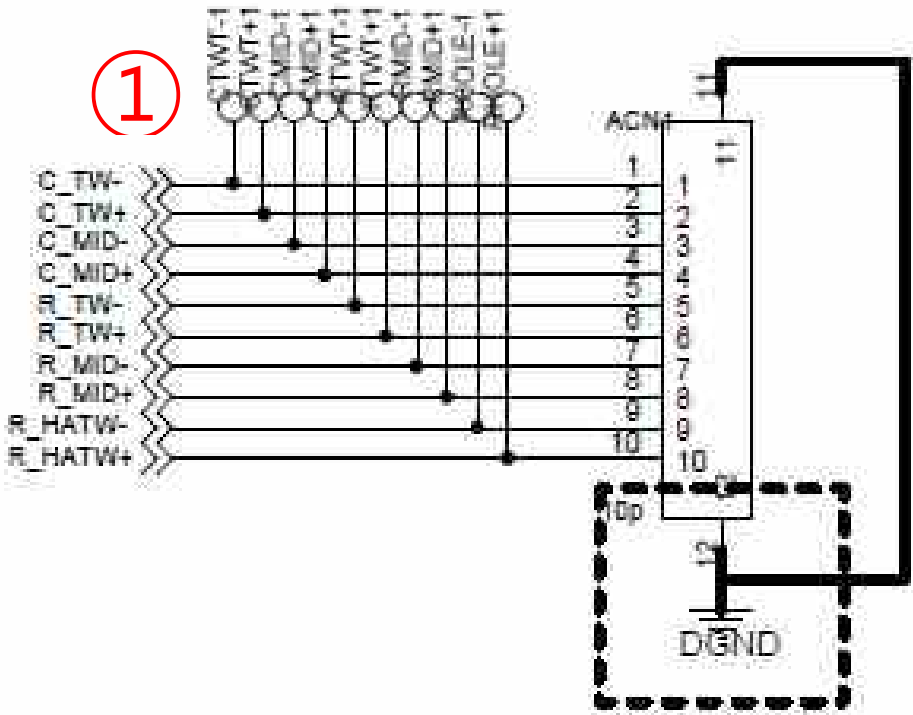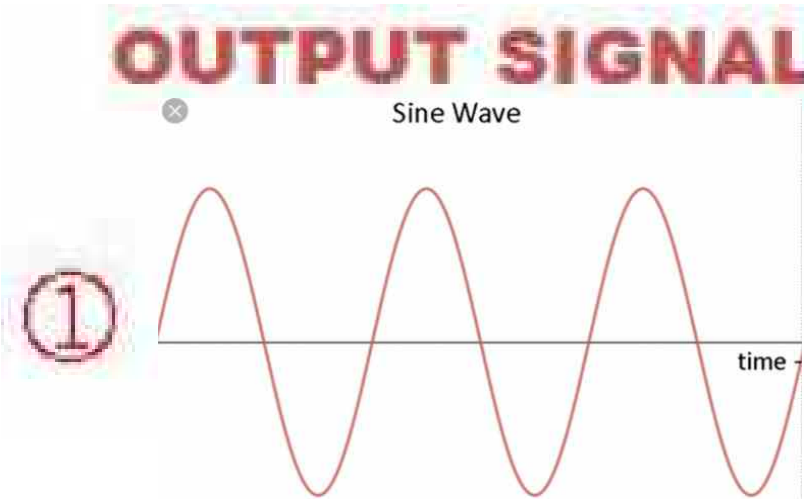

CT+RIGHT 5 SPK.

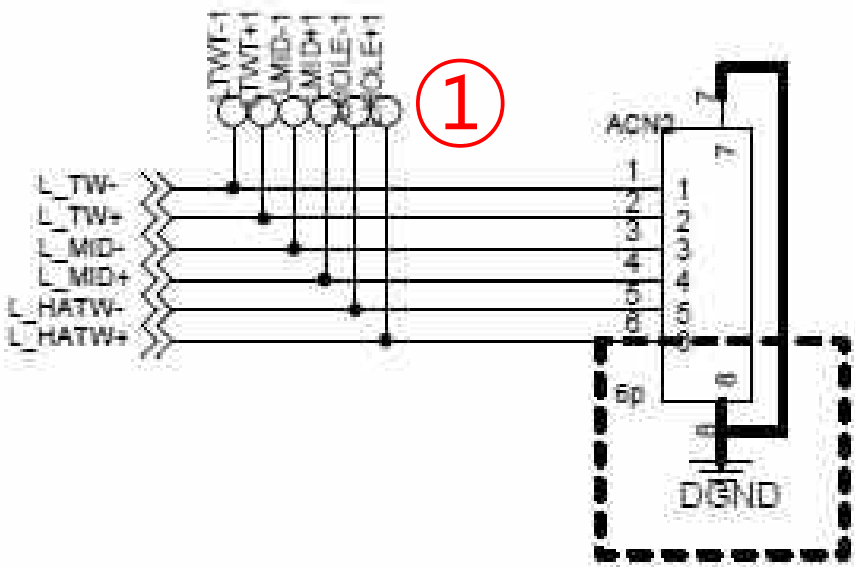

LEFT 3 SPK.

ashakaas