


SAMSUNG

Mobile Device SM-C701F

SERVICE ***Manual***

Mobile Device

CONTENTS

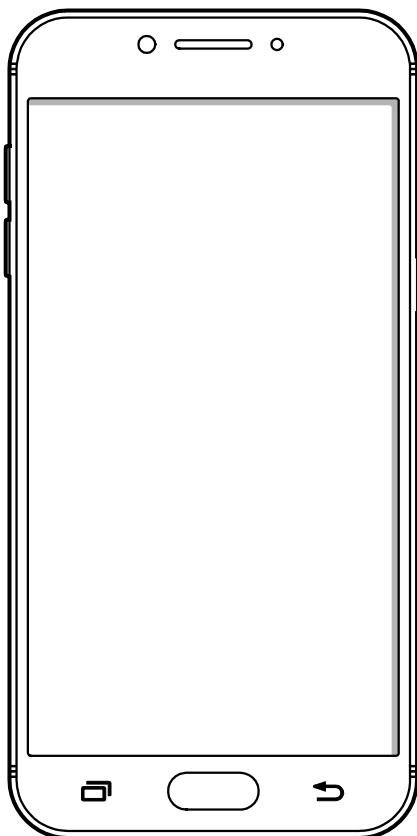

1. Safety Precautions
2. Specification
3. Product Function
4. Exploded View and Parts list
5. MAIN Electrical Parts List
6. Level 1 Repair
7. Level 2 Repair
8. Level 3 Repair
9. Reference data

Notice: All functionality, features, specifications, and other product information provided in this document, including but not limited to, benefits, design, pricing, components, performance, availability, and capabilities of the product are subject to change without notice. Samsung reserves the right to alter this document or the product described herein at anytime, without obligation to provide notification of such changes.

1. Safety Precautions

1-1. Repair Precaution

Before attempting any repair or detailed tuning, shield the device from RF noise or static electricity discharges.

Use only demagnetized tools that are specifically designed for small electronic repairs, as most electronic parts are sensitive to electromagnetic forces.

Use only high quality screwdrivers when servicing products. Low quality screwdrivers can easily damage the heads of screws.

Use only conductor wire of the properly gauge and insulation for low resistance, because of the low margin of error of most testing equipment.

We recommend 22-gauge twisted copper wire.

Hand-soldering is not recommended, because printed circuit boards (PCBs) can be easily damaged, even with relatively low heat. Never use a soldering iron with a power rating of more than 100 watts and use only lead-free solder with a melting point below 250°C (482°F).

Prior to disassembling the battery charger for repair, ensure that the AC power is disconnected. Always use the replacement parts that are registered in the SEC system. Third-party replacement parts may not function properly.

1. Safety Precautions

1-2. ESD(Electrostatically Sensitive Devices) Precaution

Many semiconductors and ESDs in electronic devices are particularly sensitive to static discharge and can be easily damaged by it. We recommend protecting these components with conductive anti-static bags when you store or transport them.

Always use an anti-static strap or wristband and remove electrostatic buildup or dissipate static electricity from your body before repairing ESDs.

Ensure that soldering irons have AC adapter with ground wires and that the ground wires are properly connected.

Use only desoldering tools with plastic tips to prevent static discharge.

Properly shield the work environment from accidental electrostatic discharge before opening packages containing ESDs.

The potential for static electricity discharge may be increased in low humidity environments, such as air-conditioned rooms. Increase the airflow to the working area to decrease the chance of accidental static electricity discharges.

2. Specification

2-1. GSM General Specification

ITEM	GPS
Tx Freq. range	-
Rx Freq. range	1575.42MHz
Channel Bandwidth	2MHz
Channel Spacing	Not Used
Number of Channel	1
Duplex Separation	-
In/Output Impedance	50Ohm
Tx Local Frequency	-
Rx Local Frequency	$F_{RX} * 2$
TCXO Frequency	19.2MHz
Freq. Stability	-
Operating Temperature	-30℃ ~ +60℃

2. Specification

Item		GSM 850	EGSM 900	DCS1800	PCS1900
Freq. Band[MHz] Uplink/Downlink		824~849 869~894	880~915 925~960	1710~1785 1805~1880	1850~1910 1930~1990
ARFCN range		128~251	0~124 & 975~1023	512~885	512~810
Tx/Rx spacing		45MHz	45MHz	95MHz	80MHz
Mod. Bit rate/ Bit Period		270.833kbps 3.692us	270.833kbps 3.692us	270.833kbps 3.692us	270.833kbps 3.692us
Time Slot Period/ Frame Period		576.9us 4.615ms	576.9us 4.615ms	576.9us 4.615ms	576.9us 4.615ms
Modulation	GSM/ GPRS	0.3GMSK	0.3GMSK	0.3GMSK	0.3GMSK
MS Power		33dBm ~5dBm	33dBm ~5dBm	30dBm ~0dBm	30dBm ~0dBm
Power Class		5pcl ~ 19pcl	5pcl ~ 19pcl	0pcl ~ 15pcl	0pcl ~ 15pcl
Sensitivity		-102dBm	-102dBm	-100dBm	-100dBm
TDMA Mux		8	8	8	8
Cell Radius		35Km	35Km	2Km	2Km

2. Specification

2-2. GSM Tx Power Class

TX Power control level	GSM850	TX Power control level	EGSM900	TX Power control level	DCS1800	TX Power control level	PCS1900
5	33±2 dBm	5	33±2 dBm	0	30±3 dBm	0	30±3 dBm
6	31±2 dBm	6	31±2 dBm	1	28±3 dBm	1	28±3 dBm
7	29±2 dBm	7	29±2 dBm	2	26±3 dBm	2	26±3 dBm
8	27±2 dBm	8	27±2 dBm	3	24±3 dBm	3	24±3 dBm
9	25±2 dBm	9	25±2 dBm	4	22±3 dBm	4	22±3 dBm
10	23±2 dBm	10	23±2 dBm	5	20±3 dBm	5	20±3 dBm
11	21±2 dBm	11	21±2 dBm	6	18±3 dBm	6	18±3 dBm
12	19±2 dBm	12	19±2 dBm	7	16±3 dBm	7	16±3 dBm
13	17±2 dBm	13	17±2 dBm	8	14±3 dBm	8	14±3 dBm
14	15±2 dBm	14	15±2 dBm	9	12±4 dBm	9	12±4 dBm
15	13±2 dBm	15	13±2 dBm	10	10±4 dBm	10	10±4 dBm
16	11±3 dBm	16	11±3 dBm	11	8±4 dBm	11	8±4 dBm
17	9±3 dBm	17	9±3 dBm	12	6±4 dBm	12	6±4 dBm
18	7±3 dBm	18	7±3 dBm	13	4±4 dBm	13	4±4 dBm
19	5±3 dBm	19	5±3 dBm	14	2±5 dBm	14	2±5 dBm
				15	0±5 dBm	15	0±5 dBm

2. Specification

2-3. WCDMA General Specification

	WCDMA2100	WCDMA1900	WCDMA850	WCDMA900
Freq. Band[MHz] Uplink/Downlink	1922~1977 2112~2167	1852~1907 1932~1987	824~849 869~894	880~915 925~960
ARFCN range	UL: 9612~9888 DL: 10562~10838	UL: 9262~9538 DL: 9662~9938	UL: 4132~4233 DL: 4357~4458	UL: 2712~2863 DL: 2937~3088
Tx/Rx spacing	190MHz	80MHz	45MHz	45MHz
Mod. Bit rate/ Bit Period	3.84 Mcps	3.84 Mcps	3.84 Mcps	3.84 Mcps
Time Slot Period/Frame Period	FrameLength:10ms Slotlength:0.667ms	FrameLength:10ms Slotlength:0.667ms	FrameLength:10ms Slotlength:0.667ms	FrameLength:10ms Slotlength:0.667ms
Modulation	QPSK/HQPSK	QPSK/HQPSK	QPSK/HQPSK	QPSK/HQPSK
MS Power	24dBm~-50dBm	24dBm~-50dBm	24dBm~-50dBm	24dBm~-50dBm
Power Class	3(max+24dBm)	3(max+24dBm)	3(max+24dBm)	3(max+24dBm)
Sensitivity	-106.7dBm	-106.7dBm	-106.7dBm	-106.7dBm
TDMA Mux	8	8	8	8
Cell Radius	2Km	2Km	2Km	2Km

2. Specification

2-4. LTE General Specification (FDD)

	Band1 (FDD)	Band3 (FDD)	Band5 (FDD)
Freq. Band[MHz] UL/DL	1920~1980 2110~2170	1710~1785 1805~1880	824~849 869~894
ARFCN range UL/DL	18000~18599 0~599	19200~19949 1200~1949	20400~20649 2400~2649
Tx/Rx spacing	190MHz	95MHz	45MHz
TCXO Frequency	19.2MHz	19.2MHz	19.2MHz
Modulation	QPSK/16-QAM/64-QAM	QPSK/16-QAM/64-QAM	QPSK/16-QAM/64-QAM
MS Power	-40dBm~ 25dBm	-40dBm~ 25dBm	-40dBm~ 25dBm
Power Class	3 (max: 23 ±2dBm)	3 (max: 23 ±2dBm)	3 (max: 23 ±2dBm)
Sensitivity	-99.3(BW : 5 MHz) -96.3(BW : 10 MHz) -94.5(BW : 15MHz) -93.3(BW : 20MHz)	-101(BW : 1.4MHz) -98(BW : 3MHz) -96.3(BW : 5 MHz) -93.3(BW : 10 MHz) -91.5(BW : 15MHz) -90.3(BW : 20MHz)	-102.5(BW : 1.4MHz) -99.5(BW : 3MHz) -97.3(BW : 5 MHz) -94.3(BW : 10 MHz)
Cell Radius	>5Km	>5Km	>5Km
In/Output Impedance	50Ω	50Ω	50Ω
Operating Temperature	-30℃ ~ +60℃	-30℃ ~ +60℃	-30℃ ~ +60℃

2. Specification

2-5. LTE General Specification (TDD)

	Band40 (TDD)	Band41 (TDD)
Freq. Band[MHz] Uplink/Downlink	2300~2400	2555~2655
ARFCN range	38650~39649	40240~41240
Tx/Rx spacing	/	/
TCXO Frequency	19.2MHz	19.2MHz
Modulation	QPSK/16-QAM /64-QAM	QPSK/16-QAM /64-QAM
MS Power	-40dBm~ 25dBm	-40dBm~ 25dBm
Power Class	3 (max: 23 ±2dBm)	3 (max: 23 ±2dBm)
Sensitivity	-99.3(BW : 5 MHz) -96.3(BW : 10 MHz) -94.5(BW : 15MHz) -93.3(BW : 20MHz)	-97.3(BW : 5 MHz) -94.3(BW : 10 MHz) -92.5(BW : 15MHz) -91.3(BW : 20MHz)
Cell Radius	>5Km	>5Km
In/Output Impedance	50Ω	50Ω
Operating Temperature	-30℃ ~ +60℃	-30℃ ~ +60℃


3. Operation Instruction and Installation

Main Function

Item	Description
OS	Android V6.0
RF	GSM850 / GSM900 / DCS1800 / PCS1900 WCDMA: B1/ B2/ B5/ B8 LTE: B1/ B3/ B5/ B40/ B41
Battery	3300mAh
Base Band	Octa-Core 2.2Ghz
Other RF	GPS, Glonass, Beidou, BT4.2, USB Type-C, WIFI 802.11 a/b/g/n, NFC,FM
Camera	16MP Main CAM; 16MP Sub CAM
LCD	5.7." super AMOLED, 1920*1080(FHD)
RAM	4GB
Sensor	Accelerometer, Proximity, RGB light sensor, Fingerprint sensor, Geomagnetic sensor
Accessory	Charger: 9V/1.67A Data cable: 2.8pi, 1.2m

4. Exploded View and Parts List

4-1. Cellular phone Exploded View

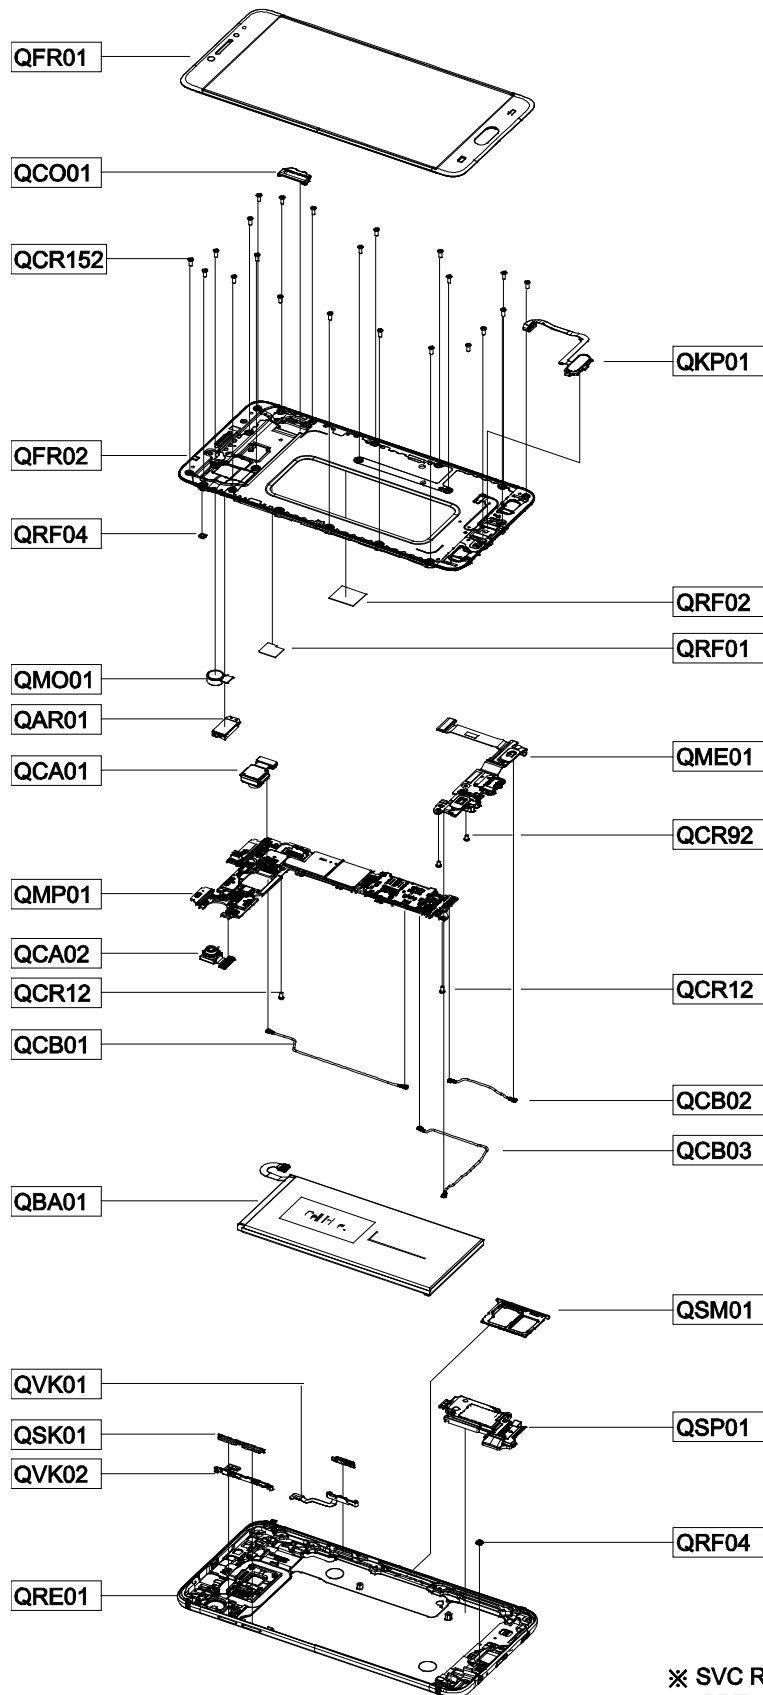

※ SVC REPAIR TAPE
QRT01, QRT02, QRT03
QRT04, QRT05, QRT06

5. MAIN Electrical Parts List

Parts Code	Design Loc	Part Name
0404-001250	D5001	DIODE-SCHOTTKY
0404-001782	D3000	DIODE-SCHOTTKY
0404-001782	D6001	DIODE-SCHOTTKY
0406-001459	ZD5001	DIODE-TVS
0406-001459	ZD5002	DIODE-TVS
0406-001459	ZD5014	DIODE-TVS
0406-001459	ZD5015	DIODE-TVS
0406-001505	ZD5007	DIODE-TVS
0406-001505	ZD5016	DIODE-TVS
0406-001505	ZD5017	DIODE-TVS
0406-001505	ZD5018	DIODE-TVS
0406-001505	ZD5019	DIODE-TVS
0406-001505	ZD5020	DIODE-TVS
0406-001505	ZD5028	DIODE-TVS
0406-001506	ZD4000	DIODE-TVS
0406-001542	ZD5006	DIODE-TVS
0406-001592	ZD5025	DIODE-TVS
0406-001592	ZD5027	DIODE-TVS
0406-001592	ZD6006	DIODE-TVS
0406-001592	ZD6007	DIODE-TVS
0406-001592	ZD7000	DIODE-TVS
0406-001592	ZD7001	DIODE-TVS
0406-001592	ZD7002	DIODE-TVS
0406-001592	ZD7003	DIODE-TVS
0406-001592	ZD7004	DIODE-TVS
0406-001592	ZD7005	DIODE-TVS
0406-001592	ZD7006	DIODE-TVS
0406-001682	ZD6008	DIODE-TVS
0406-001682	ZD6009	DIODE-TVS
0406-001709	ZD6010	DIODE-TVS
0406-001709	ZD7009	DIODE-TVS
0406-001715	ZD6004	DIODE-TVS
0406-001717	ZD5003	DIODE-TVS
0406-001717	ZD5004	DIODE-TVS
0406-001717	ZD5012	DIODE-TVS
0406-001717	ZD5013	DIODE-TVS
0406-001717	ZD5021	DIODE-TVS
0406-001717	ZD5022	DIODE-TVS

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

0406-001717	ZD5023	DIODE-TVS
0406-001717	ZD5024	DIODE-TVS
0406-001717	ZD5026	DIODE-TVS
0406-001717	ZD6002	DIODE-TVS
0406-001717	ZD6003	DIODE-TVS
0406-001717	ZD6013	DIODE-TVS
0406-001717	ZD6014	DIODE-TVS
0406-001728	D5000	DIODE-TVS
0406-001728	ZD5000	DIODE-TVS
0406-001728	ZD6017	DIODE-TVS
0406-001780	ZD6015	DIODE-TVS
0406-001780	ZD6016	DIODE-TVS
0406-001781	ZD6011	DIODE-TVS
0406-001781	ZD6012	DIODE-TVS
0505-002088	Q5001	FET-SILICON
0505-002088	TR6000	FET-SILICON
0505-002088	TR7000	FET-SILICON
0505-002388	Q5000	FET-SILICON
0601-001905	LED5001	LED
0601-003575	LED5000	LED
0903-002171	U7010	IC-MICROCONTROLLER
1001-001655	U5001	IC-ANALOG SWITCH
1001-001911	U1001	IC-RF SWITCH
1001-001992	U1004	IC-RF SWITCH
1001-002030	U1002	IC-RF SWITCH
1003-002415	U7011	IC-MOTOR DRIVER
1108-000624	UME4000	IC-MCP
1201-003786	U3005	IC-GPS AMP
1201-003964	U8000	IC-AUDIO AMP
1201-003964	U8002	IC-AUDIO AMP
1201-003972	F1001	IC-IF/RF AMP
1201-003974	F1000	IC-IF/RF AMP
1201-003978	F1003	IC-RF AMP
1201-003979	F1005	IC-RF AMP
1201-003983	F1004	IC-IF/RF AMP
1201-004106	PAM1000	IC-POWER AMP
1201-004109	PAM1001	IC-POWER AMP
1201-004122	U1007	IC-RF AMP
1203-008249	U6010	IC-POSI.FIXED REG

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

1203-008249	U7007	IC-POSI.FIXED REG
1203-008251	U7000	IC-POSI.FIXED REG
1203-008251	U7012	IC-POSI.FIXED REG
1203-008251	U8001	IC-POSI.FIXED REG
1203-008379	U2000	IC-MODULATOR
1203-008603	U5005	IC-MULTI REG
1203-008700	U5004	IC-BATTERY
1203-008717	U7003	IC-DC/DC CONVERTER
1203-008791	U5002	IC-POWER SUPERVISOR
1203-008819	U5000	IC-POWER SUPERVISOR
1203-008830	U6008	IC-VOL. DETECTOR
1203-008864	U7002	IC-POSI.FIXED REG
1203-008864	U7005	IC-POSI.FIXED REG
1203-008865	U6006	IC-POSI.FIXED REG
1203-008867	U3003	IC-POSI.FIXED REG
1203-008867	U3004	IC-POSI.FIXED REG
1203-008867	U7004	IC-POSI.FIXED REG
1203-008867	U7013	IC-POSI.FIXED REG
1203-008872	U7001	IC-POSI.FIXED REG
1205-005037	U6002	IC-COMM. CONTROLLER
1205-005106	U5006	IC-SWITCH
1205-005142	U3002	IC-WIFI
1205-005228	U1006	IC-TRANSCIEVER
1205-005652	U6009	IC-POWER DRIVER
1205-005680	U3007	IC-NFC/RFID
1205-005750	U8003	IC-CODEC
1205-005808	UCP4000	IC-MODEM
1209-002344	U7006	IC-ACCEL./GYRO SENSOR
1209-002401	U7009	IC-MAGNETIC SENSOR
1209-002474	U7008	IC-OPTICS SENSOR
1404-001664	TH4000	THERMISTOR
1404-001664	TH5000	THERMISTOR
1404-001724	TH2000	THERMISTOR
1405-001395	C3041	VARISTOR
1405-001395	V3000	VARISTOR
1405-001395	V5000	VARISTOR
1405-001395	V5001	VARISTOR
1405-001395	VR2000	VARISTOR
1405-001395	VR2001	VARISTOR

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

1405-001395	VR3000	VARISTOR
1405-001395	VR7000	VARISTOR
1405-001395	VR7001	VARISTOR
1405-001415	V1000	VARISTOR
1405-001415	V1001	VARISTOR
1405-001415	V1002	VARISTOR
1405-001415	V3001	VARISTOR
1405-001415	VR3001	VARISTOR
2007-003015	R6035	R-CHIP
2007-003015	R6036	R-CHIP
2007-007107	R2000	R-CHIP
2007-007136	R3005	R-CHIP
2007-007190	R6027	R-CHIP
2007-007190	R6029	R-CHIP
2007-007741	R4033	R-CHIP
2007-007741	R4038	R-CHIP
2007-007741	R4041	R-CHIP
2007-007741	R4042	R-CHIP
2007-007741	R5025	R-CHIP
2007-007741	R5026	R-CHIP
2007-007741	R5027	R-CHIP
2007-007741	R5035	R-CHIP
2007-007741	R5042	R-CHIP
2007-007741	R5048	R-CHIP
2007-007741	R6026	R-CHIP
2007-007741	R6028	R-CHIP
2007-007741	R6038	R-CHIP
2007-007741	R6039	R-CHIP
2007-007741	R7002	R-CHIP
2007-007741	R7008	R-CHIP
2007-007798	R5057	R-CHIP
2007-008210	R5036	R-CHIP
2007-008420	R4002	R-CHIP
2007-008420	R4030	R-CHIP
2007-008420	R5018	R-CHIP
2007-008486	R5010	R-CHIP
2007-008486	R5023	R-CHIP
2007-008588	R3006	R-CHIP
2007-008588	R3007	R-CHIP

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2007-008588	R7015	R-CHIP
2007-008588	R7016	R-CHIP
2007-008588	R7017	R-CHIP
2007-008588	R7018	R-CHIP
2007-008766	R4004	R-CHIP
2007-008774	R5052	R-CHIP
2007-008774	R5053	R-CHIP
2007-008774	R5054	R-CHIP
2007-009111	R7009	R-CHIP
2007-009155	R5004	R-CHIP
2007-009155	R5013	R-CHIP
2007-009157	R3001	R-CHIP
2007-009157	R4032	R-CHIP
2007-009157	R5012	R-CHIP
2007-009157	R5014	R-CHIP
2007-009157	R5015	R-CHIP
2007-009157	R5016	R-CHIP
2007-009157	R6017	R-CHIP
2007-009157	R6018	R-CHIP
2007-009157	R6019	R-CHIP
2007-009157	R6046	R-CHIP
2007-009157	R7011	R-CHIP
2007-009157	R7020	R-CHIP
2007-009158	R5003	R-CHIP
2007-009182	R7019	R-CHIP
2007-009212	R3000	R-CHIP
2007-009212	R6000	R-CHIP
2007-009212	R6005	R-CHIP
2007-009212	R6009	R-CHIP
2007-009212	R6025	R-CHIP
2007-009212	R8008	R-CHIP
2007-009315	R5006	R-CHIP
2007-009315	R5031	R-CHIP
2007-009315	R5032	R-CHIP
2007-009315	R5033	R-CHIP
2007-009315	R5037	R-CHIP
2007-009315	R5038	R-CHIP
2007-009315	R5039	R-CHIP
2007-009315	R5040	R-CHIP

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2007-009315	R5041	R-CHIP
2007-009315	R5043	R-CHIP
2007-009315	R5044	R-CHIP
2007-009315	R5046	R-CHIP
2007-009352	R4018	R-CHIP
2007-009352	R4021	R-CHIP
2007-009352	R6003	R-CHIP
2007-009352	R7013	R-CHIP
2007-009352	R7014	R-CHIP
2007-009408	R4010	R-CHIP
2007-009408	R4011	R-CHIP
2007-009408	R4012	R-CHIP
2007-009408	R4013	R-CHIP
2007-009408	R4014	R-CHIP
2007-009408	R4015	R-CHIP
2007-009408	R4016	R-CHIP
2007-009408	R4017	R-CHIP
2007-009408	R4019	R-CHIP
2007-009408	R4020	R-CHIP
2007-009408	R4022	R-CHIP
2007-009408	R4023	R-CHIP
2007-009408	R4024	R-CHIP
2007-009408	R4025	R-CHIP
2007-009408	R4028	R-CHIP
2007-009408	R4029	R-CHIP
2007-009408	R4051	R-CHIP
2007-009408	R4052	R-CHIP
2007-009408	R6015	R-CHIP
2007-009408	R6016	R-CHIP
2007-009766	R5000	R-CHIP
2007-009801	R4050	R-CHIP
2007-009801	R7000	R-CHIP
2007-009805	R1000	R-CHIP
2007-009805	R3002	R-CHIP
2007-009920	R4008	R-CHIP
2007-009920	R4046	R-CHIP
2007-009920	R4048	R-CHIP
2007-009969	R8009	R-CHIP
2007-010029	R6022	R-CHIP

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2007-010029	R6023	R-CHIP
2007-010202	R5045	R-CHIP
2007-010202	R6020	R-CHIP
2007-010233	R4031	R-CHIP
2007-010685	R8018	R-CHIP
2007-010685	R8019	R-CHIP
2007-010685	R8020	R-CHIP
2007-010856	R5034	R-CHIP
2007-011648	R8041	R-CHIP
2007-011763	R4026	R-CHIP
2203-000425	C6026	C-CER
2203-000425	C6027	C-CER
2203-000438	C3066	C-CER
2203-000725	C7067	C-CER
2203-000812	C3067	C-CER
2203-000812	C3077	C-CER
2203-000854	C6016	C-CER
2203-001072	C3070	C-CER
2203-001072	C3071	C-CER
2203-001153	C5062	C-CER
2203-001153	C6037	C-CER
2203-001153	C6038	C-CER
2203-001239	C3068	C-CER
2203-001239	C3075	C-CER
2203-005344	C5030	C-CER
2203-005682	C1013	C-CER
2203-005682	C1017	C-CER
2203-005682	C1025	C-CER
2203-005682	C1039	C-CER
2203-005682	C1049	C-CER
2203-005682	C1052	C-CER
2203-005682	C1059	C-CER
2203-005682	C1102	C-CER
2203-005682	C1115	C-CER
2203-005682	C1116	C-CER
2203-005682	C2009	C-CER
2203-005682	C2013	C-CER
2203-005682	C2026	C-CER
2203-005682	C3050	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-005682	C3054	C-CER
2203-005682	C5071	C-CER
2203-005682	C5081	C-CER
2203-005682	C7019	C-CER
2203-005682	C7021	C-CER
2203-005682	C7023	C-CER
2203-005682	C7025	C-CER
2203-005682	C7076	C-CER
2203-005682	C7077	C-CER
2203-005682	C8046	C-CER
2203-005682	L1061	C-CER
2203-005682	L2001	C-CER
2203-005682	L2010	C-CER
2203-005717	C2022	C-CER
2203-005719	C1057	C-CER
2203-005725	C4086	C-CER
2203-005727	C3039	C-CER
2203-005729	C5000	C-CER
2203-005731	C3000	C-CER
2203-005731	C3006	C-CER
2203-005731	C3032	C-CER
2203-005731	C3036	C-CER
2203-005731	C6033	C-CER
2203-005732	C6034	C-CER
2203-005732	C8003	C-CER
2203-005732	C8004	C-CER
2203-005732	C8022	C-CER
2203-005732	C8036	C-CER
2203-005732	C8045	C-CER
2203-005732	C8048	C-CER
2203-005734	C7074	C-CER
2203-005736	C1008	C-CER
2203-005736	C1010	C-CER
2203-005736	C1019	C-CER
2203-005736	C1034	C-CER
2203-005736	C1041	C-CER
2203-005736	C1046	C-CER
2203-005736	C1060	C-CER
2203-005736	C1066	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-005736	C1069	C-CER
2203-005736	C1078	C-CER
2203-005736	C1082	C-CER
2203-005736	C1120	C-CER
2203-005736	C2007	C-CER
2203-005736	C2011	C-CER
2203-005736	C2023	C-CER
2203-005736	C3009	C-CER
2203-005736	C3016	C-CER
2203-005736	C3018	C-CER
2203-005736	C3019	C-CER
2203-005736	C3021	C-CER
2203-005736	C3022	C-CER
2203-005736	C3030	C-CER
2203-005736	C3055	C-CER
2203-005736	C3061	C-CER
2203-005736	C5076	C-CER
2203-005736	C7005	C-CER
2203-005736	C7006	C-CER
2203-005736	L1033	C-CER
2203-005736	L1044	C-CER
2203-005736	L1052	C-CER
2203-005736	L2005	C-CER
2203-005777	C1036	C-CER
2203-005777	C3013	C-CER
2203-005777	C3029	C-CER
2203-005779	C3040	C-CER
2203-005789	C1014	C-CER
2203-005789	C1016	C-CER
2203-005789	C1047	C-CER
2203-005789	C1050	C-CER
2203-005789	C1053	C-CER
2203-005789	C1056	C-CER
2203-005789	C1079	C-CER
2203-005789	C1109	C-CER
2203-005789	L1029	C-CER
2203-005792	C1006	C-CER
2203-005792	C1015	C-CER
2203-005792	C1037	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-005792	C1055	C-CER
2203-005792	C2020	C-CER
2203-005792	C3058	C-CER
2203-005792	C5084	C-CER
2203-005806	C1093	C-CER
2203-005806	C1094	C-CER
2203-005806	C1097	C-CER
2203-005806	C4087	C-CER
2203-005806	C5050	C-CER
2203-006048	C7064	C-CER
2203-006048	C7065	C-CER
2203-006123	L2003	C-CER
2203-006187	C3005	C-CER
2203-006194	C3010	C-CER
2203-006194	C3011	C-CER
2203-006194	C3012	C-CER
2203-006194	C3017	C-CER
2203-006194	C3020	C-CER
2203-006194	C3023	C-CER
2203-006318	C5072	C-CER
2203-006318	L1056	C-CER
2203-006348	C6013	C-CER
2203-006399	C4088	C-CER
2203-006399	C4092	C-CER
2203-006399	C4095	C-CER
2203-006399	C4096	C-CER
2203-006399	C5003	C-CER
2203-006399	C5013	C-CER
2203-006399	C5067	C-CER
2203-006399	C5068	C-CER
2203-006399	C5082	C-CER
2203-006399	C6000	C-CER
2203-006399	C6001	C-CER
2203-006399	C6035	C-CER
2203-006399	C7001	C-CER
2203-006399	C7013	C-CER
2203-006399	C7022	C-CER
2203-006399	C7024	C-CER
2203-006399	C7039	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-006399	C7069	C-CER
2203-006400	C1003	C-CER
2203-006400	C1084	C-CER
2203-006400	C1117	C-CER
2203-006400	C3001	C-CER
2203-006400	C5035	C-CER
2203-006410	C7016	C-CER
2203-006410	C7017	C-CER
2203-006423	C1023	C-CER
2203-006423	C1029	C-CER
2203-006423	C1062	C-CER
2203-006423	C1072	C-CER
2203-006423	C1073	C-CER
2203-006423	C1075	C-CER
2203-006423	C1076	C-CER
2203-006423	C1081	C-CER
2203-006423	C3065	C-CER
2203-006423	C4000	C-CER
2203-006423	C4001	C-CER
2203-006423	C4004	C-CER
2203-006423	C4005	C-CER
2203-006423	C4008	C-CER
2203-006423	C4012	C-CER
2203-006423	C4014	C-CER
2203-006423	C4015	C-CER
2203-006423	C4018	C-CER
2203-006423	C4019	C-CER
2203-006423	C4026	C-CER
2203-006423	C4027	C-CER
2203-006423	C4029	C-CER
2203-006423	C4031	C-CER
2203-006423	C4032	C-CER
2203-006423	C4033	C-CER
2203-006423	C4035	C-CER
2203-006423	C4036	C-CER
2203-006423	C4037	C-CER
2203-006423	C4038	C-CER
2203-006423	C4039	C-CER
2203-006423	C4040	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-006423	C4041	C-CER
2203-006423	C4042	C-CER
2203-006423	C4043	C-CER
2203-006423	C4044	C-CER
2203-006423	C4045	C-CER
2203-006423	C4046	C-CER
2203-006423	C4047	C-CER
2203-006423	C4048	C-CER
2203-006423	C4049	C-CER
2203-006423	C4050	C-CER
2203-006423	C4051	C-CER
2203-006423	C4052	C-CER
2203-006423	C4053	C-CER
2203-006423	C4054	C-CER
2203-006423	C4057	C-CER
2203-006423	C4059	C-CER
2203-006423	C4061	C-CER
2203-006423	C4062	C-CER
2203-006423	C4063	C-CER
2203-006423	C4064	C-CER
2203-006423	C4065	C-CER
2203-006423	C4066	C-CER
2203-006423	C4068	C-CER
2203-006423	C4069	C-CER
2203-006423	C4070	C-CER
2203-006423	C4079	C-CER
2203-006423	C4080	C-CER
2203-006423	C4082	C-CER
2203-006423	C4083	C-CER
2203-006423	C4094	C-CER
2203-006423	C4097	C-CER
2203-006423	C4099	C-CER
2203-006423	C4100	C-CER
2203-006423	C4103	C-CER
2203-006423	C4104	C-CER
2203-006423	C4105	C-CER
2203-006423	C5022	C-CER
2203-006423	C5061	C-CER
2203-006423	C5079	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-006423	C5080	C-CER
2203-006423	C7045	C-CER
2203-006423	C7051	C-CER
2203-006423	C7058	C-CER
2203-006423	C7059	C-CER
2203-006423	C7060	C-CER
2203-006423	C7061	C-CER
2203-006423	C7062	C-CER
2203-006423	C8009	C-CER
2203-006423	C8011	C-CER
2203-006423	C8013	C-CER
2203-006423	C8058	C-CER
2203-006426	C6041	C-CER
2203-006426	C8047	C-CER
2203-006426	C8057	C-CER
2203-006556	C1022	C-CER
2203-006556	C1028	C-CER
2203-006556	C1031	C-CER
2203-006556	C2006	C-CER
2203-006562	C5018	C-CER
2203-006562	C5036	C-CER
2203-006562	C5066	C-CER
2203-006562	C6011	C-CER
2203-006562	C6023	C-CER
2203-006562	C6036	C-CER
2203-006562	C7000	C-CER
2203-006562	C7015	C-CER
2203-006562	C7027	C-CER
2203-006562	C7029	C-CER
2203-006562	C7040	C-CER
2203-006562	C7049	C-CER
2203-006562	C7070	C-CER
2203-006562	C7072	C-CER
2203-006611	C3008	C-CER
2203-006611	L3007	C-CER
2203-006648	C3027	C-CER
2203-006648	C4017	C-CER
2203-006665	C3004	C-CER
2203-006674	C1021	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-006707	C1007	C-CER
2203-006839	C3033	C-CER
2203-006839	C4106	C-CER
2203-006839	C4107	C-CER
2203-006839	C5027	C-CER
2203-006839	C5037	C-CER
2203-006839	C5060	C-CER
2203-006839	C7066	C-CER
2203-006839	C8015	C-CER
2203-006841	C6022	C-CER
2203-006872	C7030	C-CER
2203-006872	C7041	C-CER
2203-007143	C6008	C-CER
2203-007194	C7026	C-CER
2203-007194	C7050	C-CER
2203-007235	C6020	C-CER
2203-007235	C6021	C-CER
2203-007240	C4024	C-CER
2203-007240	C4025	C-CER
2203-007240	C4071	C-CER
2203-007240	C4075	C-CER
2203-007240	C4077	C-CER
2203-007240	C4078	C-CER
2203-007269	C7032	C-CER
2203-007269	C7034	C-CER
2203-007270	C7007	C-CER
2203-007271	C5045	C-CER
2203-007271	C5053	C-CER
2203-007271	C5056	C-CER
2203-007271	C7012	C-CER
2203-007317	C2000	C-CER
2203-007317	C3028	C-CER
2203-007317	C4093	C-CER
2203-007317	C4102	C-CER
2203-007317	C5019	C-CER
2203-007317	C5023	C-CER
2203-007317	C5025	C-CER
2203-007317	C7044	C-CER
2203-007317	C7054	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-007317	C7063	C-CER
2203-007317	C8028	C-CER
2203-007317	C8030	C-CER
2203-007317	C8033	C-CER
2203-007317	C8035	C-CER
2203-007317	C8037	C-CER
2203-007317	C8038	C-CER
2203-007317	C8039	C-CER
2203-007317	C8042	C-CER
2203-007317	C8043	C-CER
2203-007391	C1077	C-CER
2203-007391	C3024	C-CER
2203-007391	C3025	C-CER
2203-007391	C4090	C-CER
2203-007391	C4101	C-CER
2203-007393	C6018	C-CER
2203-007449	C4006	C-CER
2203-007449	C4007	C-CER
2203-007449	C4013	C-CER
2203-007449	C4020	C-CER
2203-007449	C4028	C-CER
2203-007449	C4030	C-CER
2203-007449	C4055	C-CER
2203-007449	C4073	C-CER
2203-007449	C4084	C-CER
2203-007449	C4089	C-CER
2203-007449	C4091	C-CER
2203-007449	C4098	C-CER
2203-007449	C5006	C-CER
2203-007449	C5008	C-CER
2203-007449	C5024	C-CER
2203-007449	C5026	C-CER
2203-007449	C8024	C-CER
2203-007449	C8025	C-CER
2203-007449	C8029	C-CER
2203-007449	C8031	C-CER
2203-007449	C8032	C-CER
2203-007449	C8034	C-CER
2203-007456	C1095	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-007456	C1096	C-CER
2203-007474	C3003	C-CER
2203-007474	C3015	C-CER
2203-007474	C3026	C-CER
2203-007474	C4058	C-CER
2203-007474	C7057	C-CER
2203-007634	C6014	C-CER
2203-007693	C5001	C-CER
2203-007775	C2003	C-CER
2203-007775	C3031	C-CER
2203-007775	C3034	C-CER
2203-007775	C3035	C-CER
2203-007775	C5034	C-CER
2203-007775	C5039	C-CER
2203-007775	C5040	C-CER
2203-007775	C5041	C-CER
2203-007775	C5043	C-CER
2203-007775	C5044	C-CER
2203-007775	C5046	C-CER
2203-007775	C5047	C-CER
2203-007781	C7033	C-CER
2203-007795	C1064	C-CER
2203-007795	C1065	C-CER
2203-007795	C7020	C-CER
2203-007795	C7047	C-CER
2203-007796	C1018	C-CER
2203-007796	C1067	C-CER
2203-007796	C3042	C-CER
2203-007796	C3043	C-CER
2203-007796	C3045	C-CER
2203-007796	C3047	C-CER
2203-007796	C3048	C-CER
2203-007796	C3049	C-CER
2203-007796	C3063	C-CER
2203-007796	C3064	C-CER
2203-007796	C4060	C-CER
2203-007796	C4067	C-CER
2203-007796	C5004	C-CER
2203-007796	C5005	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-007796	C5010	C-CER
2203-007796	C5011	C-CER
2203-007796	C5012	C-CER
2203-007796	C5014	C-CER
2203-007796	C5020	C-CER
2203-007796	C5021	C-CER
2203-007796	C5031	C-CER
2203-007796	C5049	C-CER
2203-007796	C5058	C-CER
2203-007796	C5070	C-CER
2203-007796	C6012	C-CER
2203-007796	C6028	C-CER
2203-007796	C6029	C-CER
2203-007796	C6030	C-CER
2203-007796	C6031	C-CER
2203-007796	C6040	C-CER
2203-007796	C7011	C-CER
2203-007796	C7014	C-CER
2203-007796	C7028	C-CER
2203-007796	C7038	C-CER
2203-007796	C7046	C-CER
2203-007796	C7052	C-CER
2203-007796	C7068	C-CER
2203-007796	C7071	C-CER
2203-007796	C8005	C-CER
2203-007854	C3069	C-CER
2203-007854	C3073	C-CER
2203-008097	C1030	C-CER
2203-008097	C1032	C-CER
2203-008123	C4034	C-CER
2203-008123	C5054	C-CER
2203-008123	C5055	C-CER
2203-008242	C4056	C-CER
2203-008243	C5059	C-CER
2203-008394	C1005	C-CER
2203-008394	C2008	C-CER
2203-008572	C5057	C-CER
2203-008860	C3052	C-CER
2203-008860	C3053	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-008860	C3057	C-CER
2203-008860	C7008	C-CER
2203-008860	C8008	C-CER
2203-008876	C1024	C-CER
2203-008876	C5073	C-CER
2203-008876	C5074	C-CER
2203-008876	C8017	C-CER
2203-008876	C8023	C-CER
2203-008876	C8027	C-CER
2203-009328	C3002	C-CER
2203-009618	C5064	C-CER
2203-009618	C8006	C-CER
2203-009618	C8040	C-CER
2203-009732	C5028	C-CER
2203-009732	C5029	C-CER
2203-009732	C5069	C-CER
2203-009732	C7031	C-CER
2203-009732	C7037	C-CER
2203-009733	C1033	C-CER
2203-009733	C2001	C-CER
2203-009733	C3051	C-CER
2203-009733	C5032	C-CER
2203-009733	C5033	C-CER
2203-009733	C5042	C-CER
2203-009733	C5083	C-CER
2203-009733	C6015	C-CER
2203-009733	C6019	C-CER
2203-009733	C7009	C-CER
2203-009733	C7010	C-CER
2203-009733	C7042	C-CER
2203-009733	C7043	C-CER
2203-009733	C8000	C-CER
2203-009733	C8001	C-CER
2203-009733	C8007	C-CER
2203-009733	C8010	C-CER
2203-009733	C8012	C-CER
2203-009733	C8014	C-CER
2203-009733	C8016	C-CER
2203-009733	C8019	C-CER

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2203-009733	C8021	C-CER
2203-009733	C8041	C-CER
2203-009738	C4076	C-CER
2203-009812	C5002	C-CER
2703-002900	L5011	INDUCTOR
2703-002953	L5010	INDUCTOR
2703-002958	L1028	INDUCTOR
2703-002958	L1031	INDUCTOR
2703-002958	L1034	INDUCTOR
2703-002958	L1042	INDUCTOR
2703-002958	L3008	INDUCTOR
2703-002959	R7004	INDUCTOR
2703-002959	R7007	INDUCTOR
2703-003205	L7008	INDUCTOR
2703-003205	L7009	INDUCTOR
2703-004012	C1063	INDUCTOR
2703-004012	C1113	INDUCTOR
2703-004012	C2012	INDUCTOR
2703-004012	L1017	INDUCTOR
2703-004012	L2004	INDUCTOR
2703-004012	L2008	INDUCTOR
2703-004013	C1061	INDUCTOR
2703-004013	C1088	INDUCTOR
2703-004013	L1001	INDUCTOR
2703-004014	C1071	INDUCTOR
2703-004014	C3007	INDUCTOR
2703-004014	C3037	INDUCTOR
2703-004018	L1005	INDUCTOR
2703-004018	L1041	INDUCTOR
2703-004018	L2011	INDUCTOR
2703-004034	C1058	INDUCTOR
2703-004034	C3014	INDUCTOR
2703-004034	L1000	INDUCTOR
2703-004034	L1022	INDUCTOR
2703-004034	L2006	INDUCTOR
2703-004035	C1114	INDUCTOR
2703-004035	C2019	INDUCTOR
2703-004035	L1012	INDUCTOR
2703-004035	L1062	INDUCTOR

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2703-004035	L2009	INDUCTOR
2703-004036	C1090	INDUCTOR
2703-004037	C2018	INDUCTOR
2703-004037	C2021	INDUCTOR
2703-004037	L1004	INDUCTOR
2703-004037	L1009	INDUCTOR
2703-004037	L1015	INDUCTOR
2703-004037	L1030	INDUCTOR
2703-004038	C2014	INDUCTOR
2703-004038	C2016	INDUCTOR
2703-004038	L1007	INDUCTOR
2703-004038	L1032	INDUCTOR
2703-004286	C3038	INDUCTOR
2703-004287	L3003	INDUCTOR
2703-004295	L3013	INDUCTOR
2703-004295	L6000	INDUCTOR
2703-004295	L6001	INDUCTOR
2703-004328	C1035	INDUCTOR
2703-004328	L1019	INDUCTOR
2703-004328	L1020	INDUCTOR
2703-004328	L1060	INDUCTOR
2703-004366	C1020	INDUCTOR
2703-004366	L1003	INDUCTOR
2703-004367	L1011	INDUCTOR
2703-004367	L1047	INDUCTOR
2703-004408	L1008	INDUCTOR
2703-004408	L1021	INDUCTOR
2703-004408	L1025	INDUCTOR
2703-004408	L3002	INDUCTOR
2703-004763	L2002	INDUCTOR
2703-004764	C1026	INDUCTOR
2703-004764	C1068	INDUCTOR
2703-004764	C3056	INDUCTOR
2703-004764	L1010	INDUCTOR
2703-004764	L1016	INDUCTOR
2703-004862	L1018	INDUCTOR
2703-004976	C2024	INDUCTOR
2703-005066	L8000	INDUCTOR
2703-005066	L8005	INDUCTOR

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2703-005073	L3014	INDUCTOR
2703-005073	L3015	INDUCTOR
2703-005087	C1112	INDUCTOR
2703-005087	C2010	INDUCTOR
2703-005087	C2017	INDUCTOR
2703-005087	L1024	INDUCTOR
2703-005089	L1023	INDUCTOR
2703-005089	L1026	INDUCTOR
2703-005089	L1038	INDUCTOR
2703-005100	L8007	INDUCTOR
2703-005100	U8006	INDUCTOR
2703-005101	L2000	INDUCTOR
2703-005117	L7001	INDUCTOR
2703-005117	L7003	INDUCTOR
2703-005118	L7002	INDUCTOR
2703-005136	L5001	INDUCTOR
2703-005136	L5009	INDUCTOR
2703-005219	L8001	INDUCTOR
2703-005219	L8002	INDUCTOR
2703-005339	L5004	INDUCTOR
2703-005339	L5005	INDUCTOR
2703-005339	L5008	INDUCTOR
2703-005505	L5002	INDUCTOR
2703-005505	L5003	INDUCTOR
2703-005509	L5006	INDUCTOR
2703-005509	L5007	INDUCTOR
2801-005300	OSC5000	CRYSTAL
2801-005323	OSC3000	CRYSTAL
2901-001690	C4023	FILTER-EMI
2901-001690	C4074	FILTER-EMI
2901-001786	F7000	FILTER-EMI
2901-001786	F7001	FILTER-EMI
2901-001786	F7002	FILTER-EMI
2901-001786	F7003	FILTER-EMI
2901-001786	F7004	FILTER-EMI
2901-001786	F7005	FILTER-EMI
2901-001786	F7006	FILTER-EMI
2901-001786	F7007	FILTER-EMI
2901-001786	F7008	FILTER-EMI

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

2901-001786	F7009	FILTER-EMI
2901-001786	F7010	FILTER-EMI
2901-001786	F7011	FILTER-EMI
2901-001786	F7012	FILTER-EMI
2901-001786	F7013	FILTER-EMI
2901-001786	F7014	FILTER-EMI
2903-001535	F1009	FILTER-CERAMIC
2904-002269	F2003	FILTER-SAW
2904-002349	U2001	FILTER-SAW
2904-002350	F1014	FILTER-SAW
2904-002355	F3003	FILTER-SAW
2904-002355	U3006	FILTER-SAW
2904-002358	F1010	FILTER-SAW
2904-002360	F3002	FILTER-SAW
2911-000308	U3000	DUPLEXER FEM
2911-000407	F1002	DUPLEXER FEM
2911-000429	F2000	DUPLEXER FEM
3003-001236	AU8000	MIC MEMS
3301-001787	L3006	BEAD-SMD
3301-002078	L8009	BEAD-SMD
3301-002122	L6006	BEAD-SMD
3301-002223	L7000	BEAD-SMD
3301-002223	L7007	BEAD-SMD
3301-002228	L8003	BEAD-SMD
3301-002228	L8004	BEAD-SMD
3301-002235	L6008	BEAD-SMD
3301-002235	L8010	BEAD-SMD
3301-002235	L8011	BEAD-SMD
3301-002236	L6003	BEAD-SMD
3301-002236	L6004	BEAD-SMD
3301-002236	L8008	BEAD-SMD
3301-002238	L3012	BEAD-SMD
3301-002312	L7004	BEAD-SMD
3301-002312	L7005	BEAD-SMD
3301-002312	L7006	BEAD-SMD
3301-002331	L5000	BEAD-SMD
3301-002331	L6002	BEAD-SMD
3301-002335	L6011	BEAD-SMD
3705-001937	CN1000	CONNECTOR-COAXIAL

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

3705-001937	CN1005	CONNECTOR-COAXIAL
3705-001937	CN1006	CONNECTOR-COAXIAL
3705-001937	CN1007	CONNECTOR-COAXIAL
3705-001937	RFS1000	CONNECTOR-COAXIAL
3709-001891	CN5000	CONNECTOR-CARD EDGE
3711-007107	HEA7000	SOCKET-BOARD TO BOARD
3711-008508	HDC7001	SOCKET-BOARD TO BOARD
3711-008847	BTC5000	CONNECTOR-BATTERY
3711-008995	HDC7000	HEADER-BOARD TO BOARD
3711-009058	HEA5000	HEADER-BOARD TO BOARD
3711-009073	HEA6000	HEADER-BOARD TO BOARD
3712-001604	ANT3007	CONNECTOR-TERMINAL
3712-001604	ANT3008	CONNECTOR-TERMINAL
3712-001604	ANT8000	CONNECTOR-TERMINAL
3712-001604	ANT8001	CONNECTOR-TERMINAL
3712-001626	ANT7000	CONNECTOR-TERMINAL
3712-001626	ANT7001	CONNECTOR-TERMINAL
3712-001694	ANT1000	CONNECTOR-TERMINAL
3712-001694	ANT1001	CONNECTOR-TERMINAL
3712-001694	ANT2000	CONNECTOR-TERMINAL
3712-001694	ANT2001	CONNECTOR-TERMINAL
3712-001694	ANT2002	CONNECTOR-TERMINAL
3712-001694	ANT2004	CONNECTOR-TERMINAL
3712-001694	ANT2005	CONNECTOR-TERMINAL
3712-001694	ANT3000	CONNECTOR-TERMINAL
3712-001694	ANT3001	CONNECTOR-TERMINAL
3712-001694	ANT3002	CONNECTOR-TERMINAL
3712-001694	ANT3003	CONNECTOR-TERMINAL
3712-001694	ANT3004	CONNECTOR-TERMINAL
3712-001694	ANT3005	CONNECTOR-TERMINAL
3712-001694	ANT6000	CONNECTOR-TERMINAL
3712-001694	ANT6001	CONNECTOR-TERMINAL
3712-001694	ANT6002	CONNECTOR-TERMINAL
3712-001694	ANT6003	CONNECTOR-TERMINAL
3712-001694	ANT6004	CONNECTOR-TERMINAL
3712-001694	ANT8002	CONNECTOR-TERMINAL
3712-001694	ANT8003	CONNECTOR-TERMINAL
4709-002150	F3001	COUPLER-DIRECTION
4709-002278	F1012	BALUN

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5. MAIN Electrical Parts List

4709-002285	F3000	FREQ-DISTRIBUTER
4709-002351	U3001	FREQ-DISTRIBUTER
4709-002412	U1003	COUPLER-DIRECTION
4709-002416	F1007	FREQ-DISTRIBUTER
4709-002416	F2002	FREQ-DISTRIBUTER
4709-002452	F1008	FREQ-DISTRIBUTER
4709-002464	F1006	FREQ-DISTRIBUTER
4709-002484	F2001	FREQ-DISTRIBUTER
GH02-14178A	SC800UP1	THERMAL CONDUCTIVE SHEET
GH02-14179A	SC800UP2	THERMAL CONDUCTIVE SHEET
GH60-00009A	CN1002	CLIP
GH60-00009A	CN1003	CLIP
GH60-00009A	CN1004	CLIP
GH61-07836A	CN1001	CLIP
GH61-09798A	SUS2000	PLATE-PCB
GH62-00040A	CN7000	PAD GAP-SMD GASKET
GH62-00040A	CN7001	PAD GAP-SMD GASKET
GH63-12874A	SC3000	SHIELD-CAN
GH63-13767A	SC8007	SHIELD-CAN
GH63-13768A	SC8006	SHIELD-CAN
GH63-13769A	SC8005	SHIELD-CAN
GH63-13771A	SC8004	SHIELD-CAN
GH63-13772A	SC8000	SHIELD-CAN
GH63-13773A	SC8003	SHIELD-CAN
GH63-13774A	SC8002	SHIELD-CAN
GH63-14340A	SC8001	SHIELD-CAN

Please consult the GSPN website (Samsung Portal) for the most recent version of the product's part list.


6. Level 1 Repair

6-1. S/W installation

6-1-1. Required items in order to install S/W

- Installation program: Downloader Program ([Odin3 v3.12.7.exe](#))
- SM-C701F set
- Data Cable
- Mobile device specific S/W: Binary files

✕ Settings

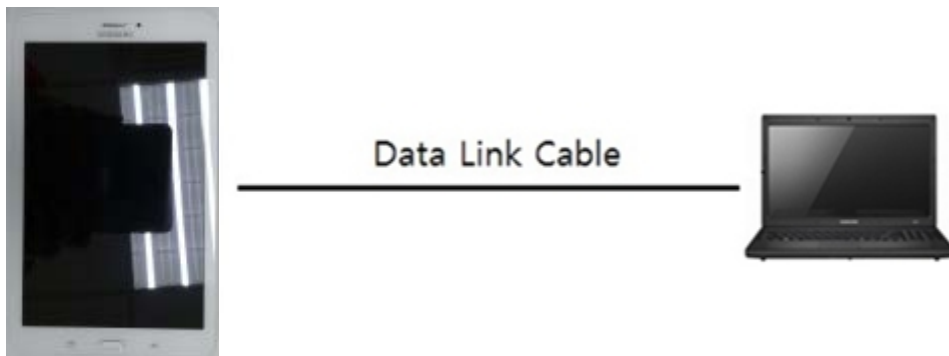


Data Cable : GH39-01886A

6. Level 1 Repair

6-1-2. S/W Installation Program (Downloader program)

- Open up the S/W Installation Program by executing the "**Odin3 v3.12.7.exe**"

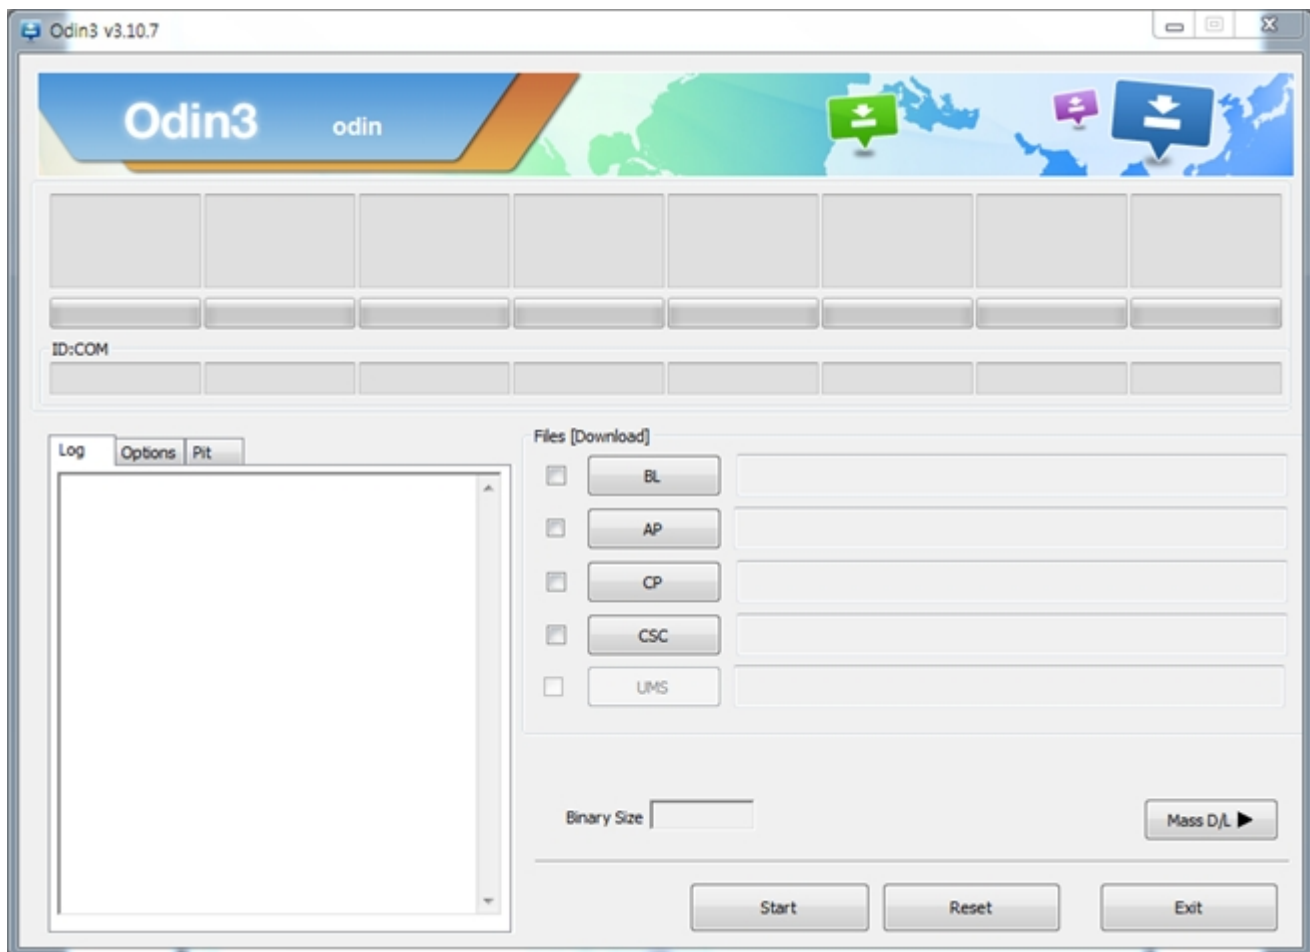


6. Level 1 Repair

1. Enable the check mark by click on the following options,

- Check Auto Reboot, Re-Partition, and F. Reset Time
- Check PIT
- Check BL, AP, CP, and CSC Files


* Note : "Odin v3.12 or above" checks MD5 checksum just after file selection.

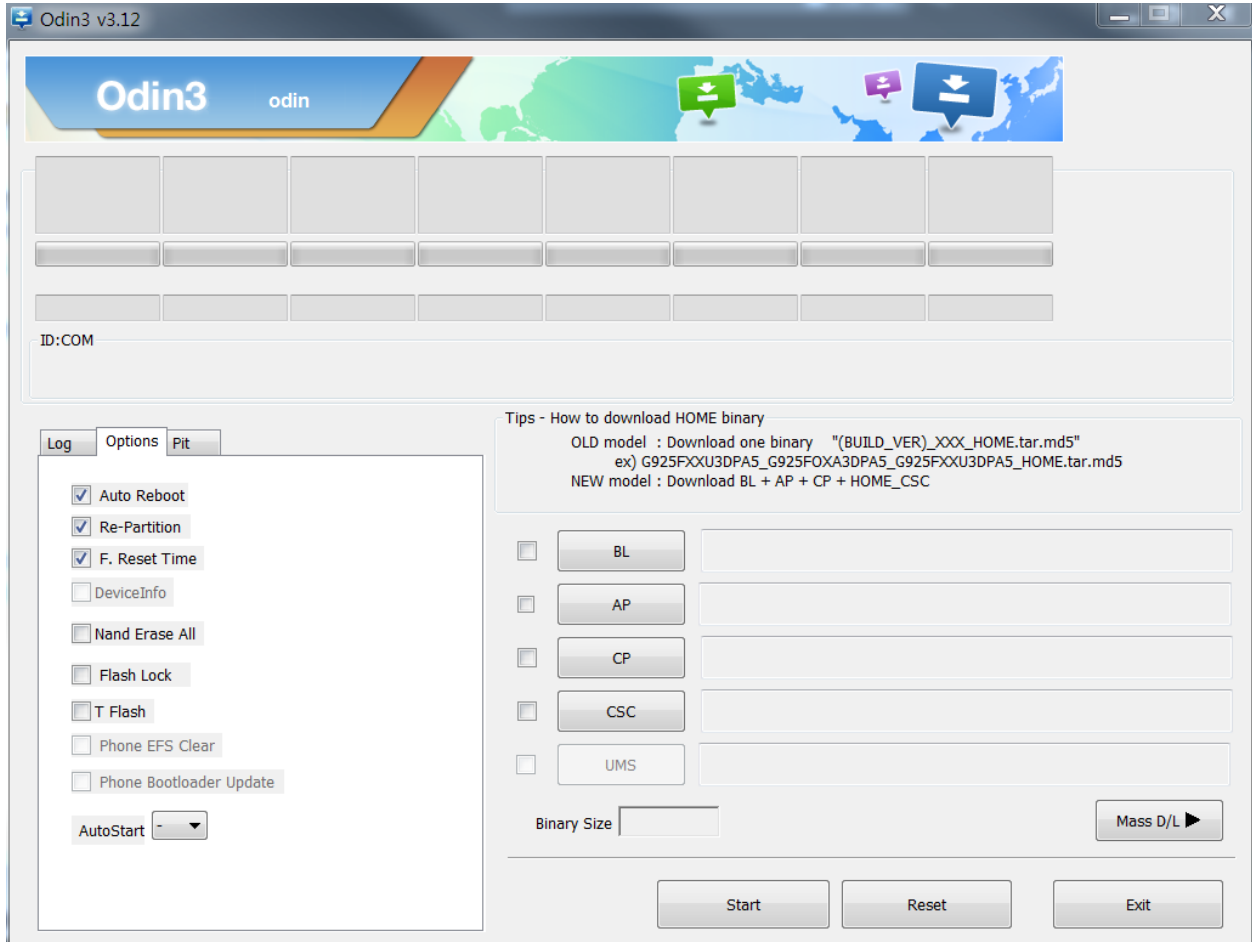

6. Level 1 Repair

2. Enter into Download Mode


- Enter into Download Mode by pressing Home button, Volume Down button and Power On/Off Button simultaneously followed by pressing Volume up button as a direction of the phone.

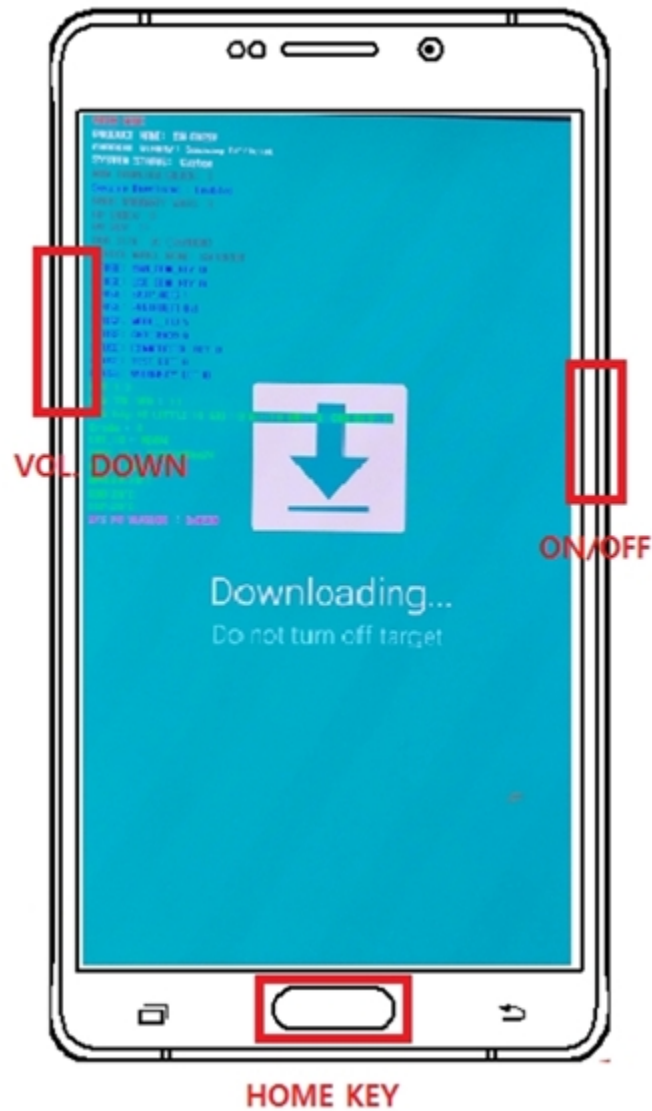

6. Level 1 Repair


3. Connect the device to PC via Data Cable.

Make sure that the one of communication ports [ID:COM] box is highlighted in sky blue. The device is now connected with the PC and ready to download the binary files in it.

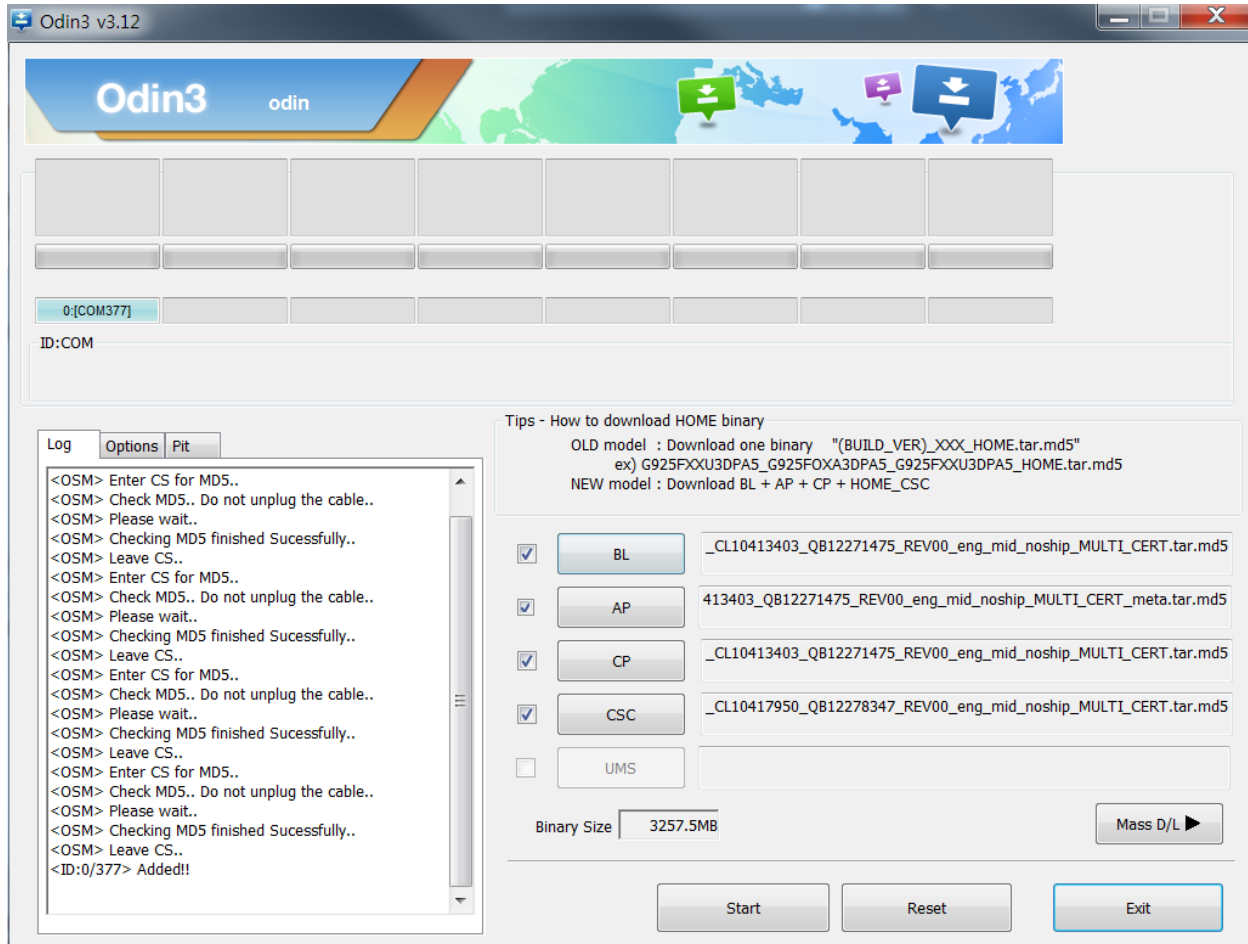

6. Level 1 Repair

4. Start downloading the binary files into the device by clicking Start button on the screen. The green colored "PASS!" sign will appear on the upper-left box if the binary files have been successfully downloaded into the device.

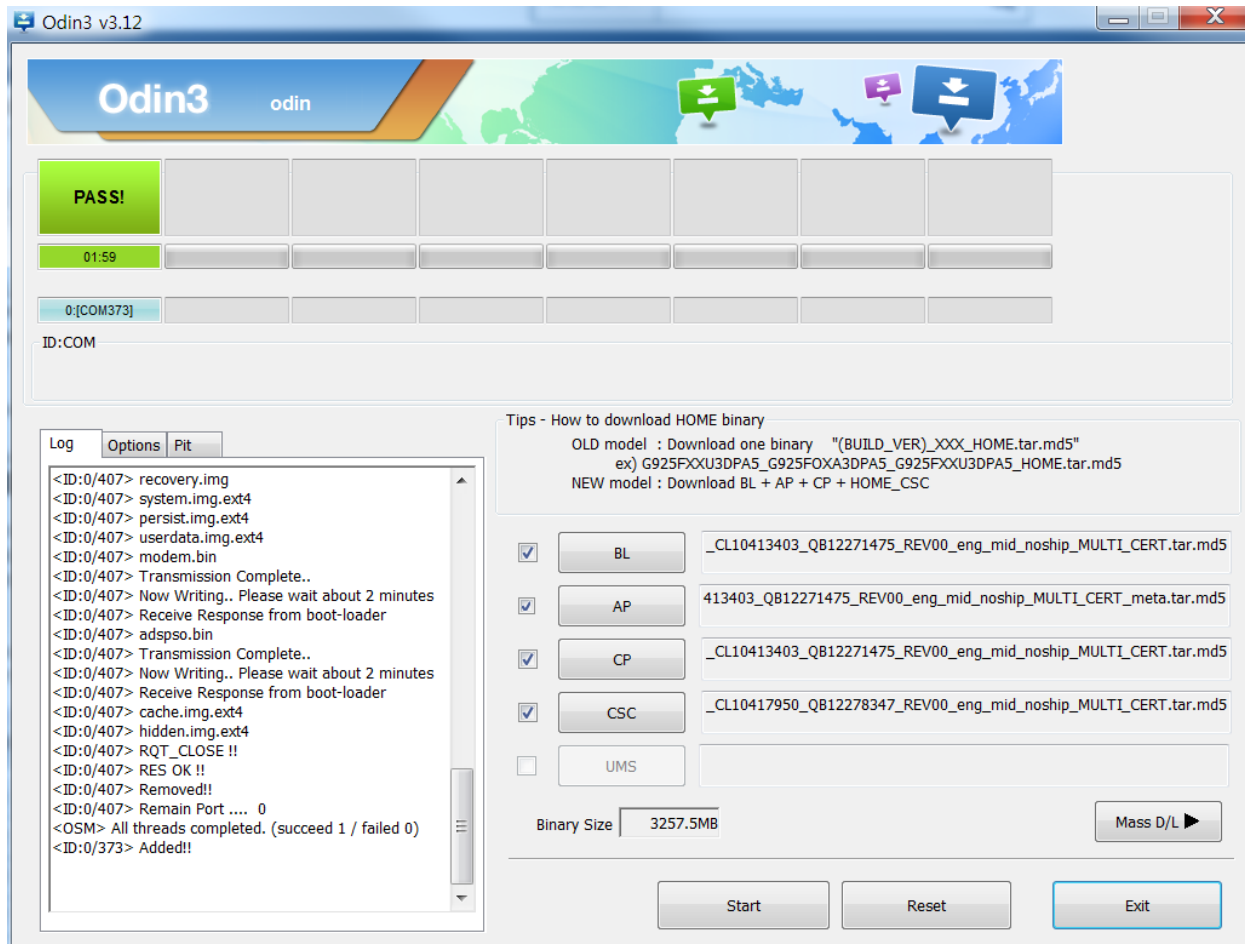

5. Disconnect the device from the Data cable.
6. Once the device boots up, you can check the version of the binary file or name by pressing the following code in sequence;
***#1234#**

You can perform Factory Reset by Settings → Accounts → Backup and reset


6. Level 1 Repair

6-2 IMEI writing

6-2-1 Preparation

- New IMEI writing Program has been released.
- Supported Model : Models which CAB files are uploaded on HHPsvc INI File category, instead of ini file.
- Refer to below IMEI writing procedure.

- H/W

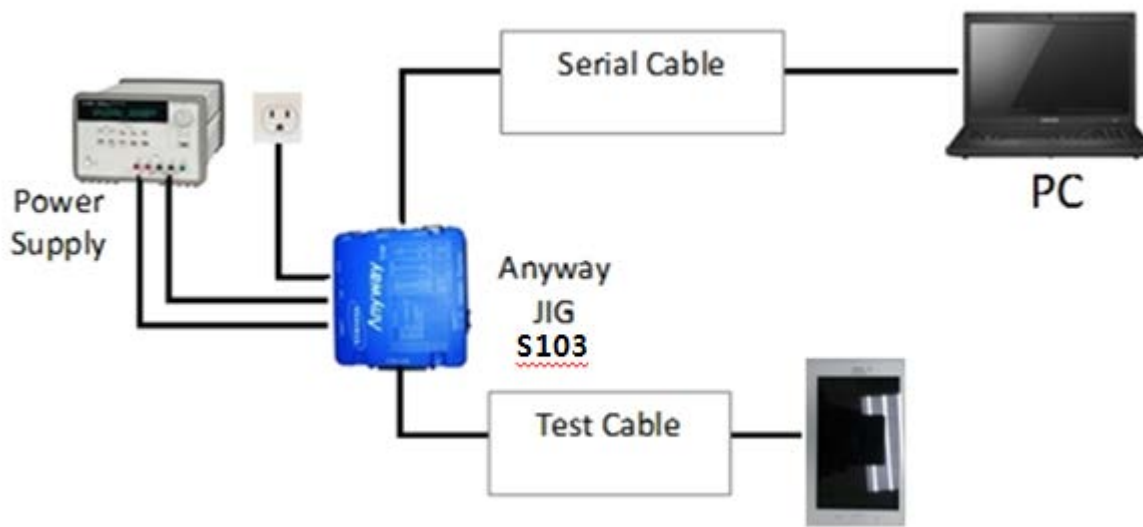

- S/W

① Library Install	To use Daseul, library files should be installed. Refer to SVC Bulletin “(11-82) Daseul (New IMEI writing Program) Library Install guide_rev1.0”
② Launcher	DASEUL_SVC_Launcher_v3_0_25 or higher -Uploaded on HHPsvc Notice
③ Runtime File	1. DASEUL_Runtime_Ver_3.1.139.0.CAB or higher -Uploaded on HHPsvc Notice 2. Make 'ModelName' folder at the same position with launcher & Runtime file.
④ Model File	Copy Model File under the 'Model Name' folder


6. Level 1 Repair

6-2-2 IMEI writing Process


1. Run DASEUL_SVC_Launcher_v3.0.10.exe

 DASEUL_SVC_Launcher_v3.0.10.exe

2. Select Service Mode

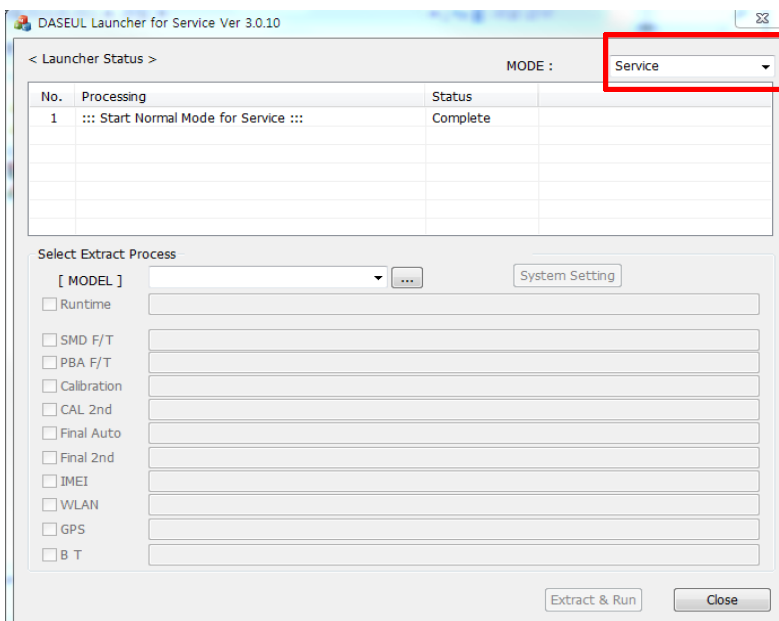


3. Click and Select folder where the Launcher exists

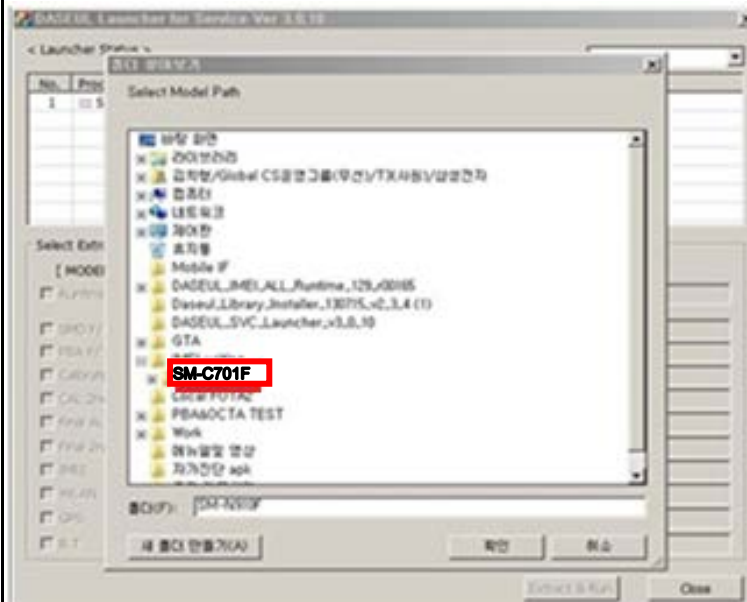


6. Level 1 Repair

4. Select Model

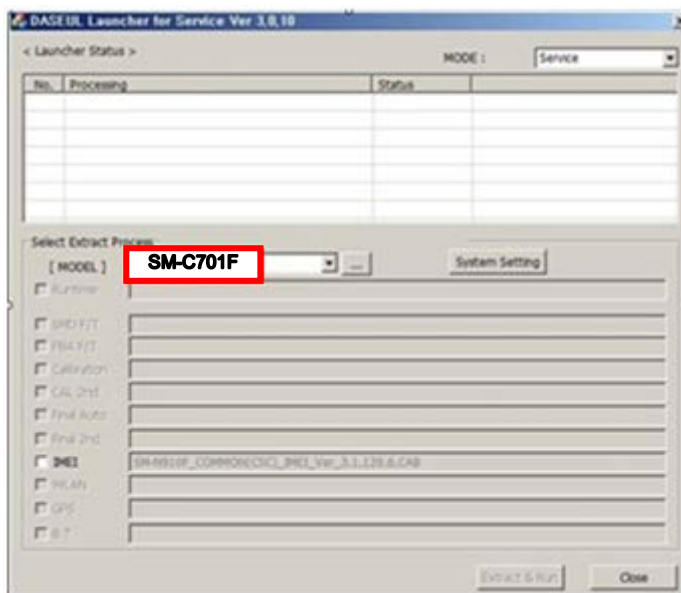


5. Check IMEI and click System Setting

※Once you setup the setting, you don't have to do it again, unless there is change. From second run of the IMEI program, check IMEI and click Extract & Run.

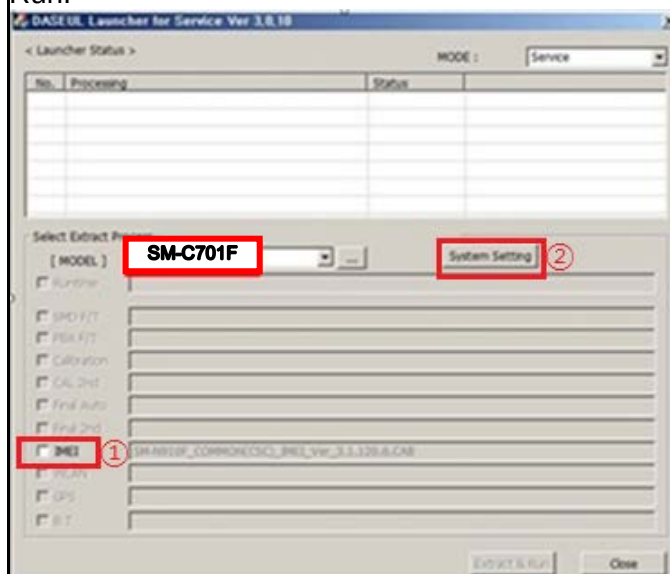


6. Level 1 Repair

6. Check IMEI Write / IMEI Check and click IMEI SVC & Repair Option.

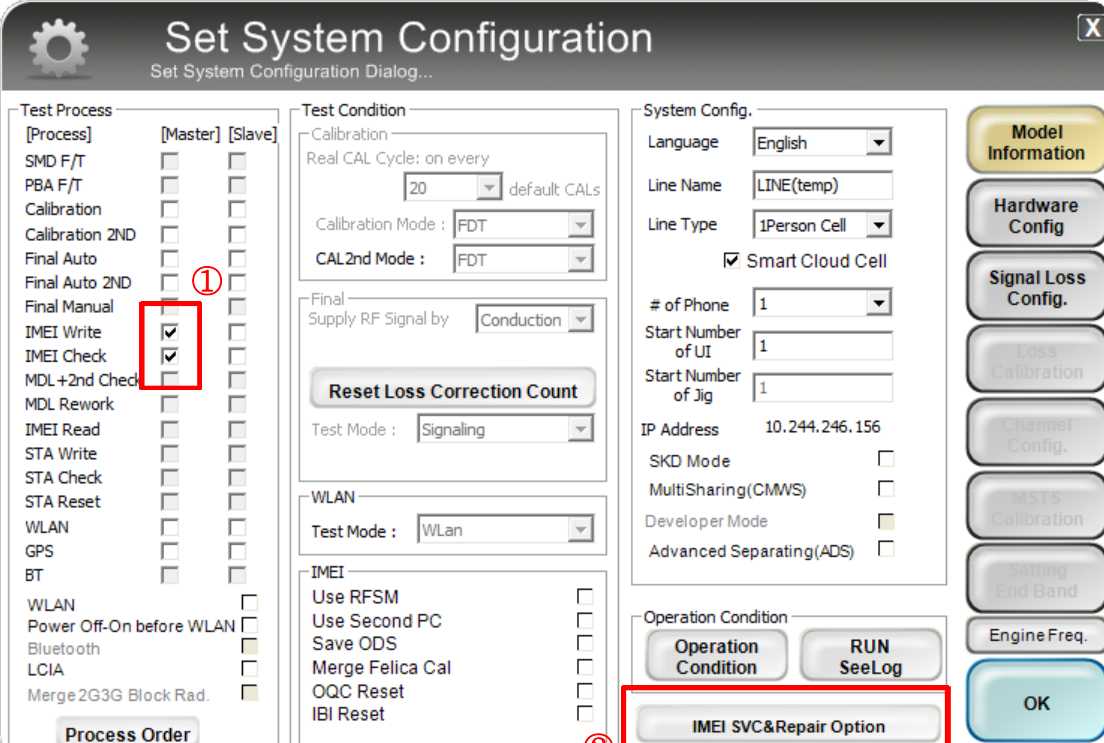

The 'Set System Configuration' dialog box is shown. It has three main sections: 'Test Process', 'Test Condition', and 'System Config.'. In the 'Test Process' section, under the '[Master]' column, 'IMEI Write' and 'IMEI Check' are checked, and a red circle with the number '1' is next to 'Final Auto 2ND'. In the 'Test Condition' section, 'CAL2nd Mode' is set to 'FDT', 'Test Mode' is 'Signaling', and 'WLAN' 'Test Mode' is 'Wlan'. In the 'System Config.' section, 'Language' is 'English', 'Line Name' is 'LINE(temp)', 'Line Type' is '1Person Cell', and 'Smart Cloud Cell' is checked. On the right side, there is a vertical stack of buttons: 'Model Information', 'Hardware Config', 'Signal Loss Config.', 'Loss Calibration', 'Channel Config.', 'MSTS Calibration', 'Setting End Band', 'Engine Freq.', and 'OK'. At the bottom, there are buttons for 'Operation Condition', 'RUN SeeLog', and 'IMEI SVC&Repair Option', which is highlighted with a red box and a red circle with the number '2'.


7. Check SVC , User Ticket No and click OK

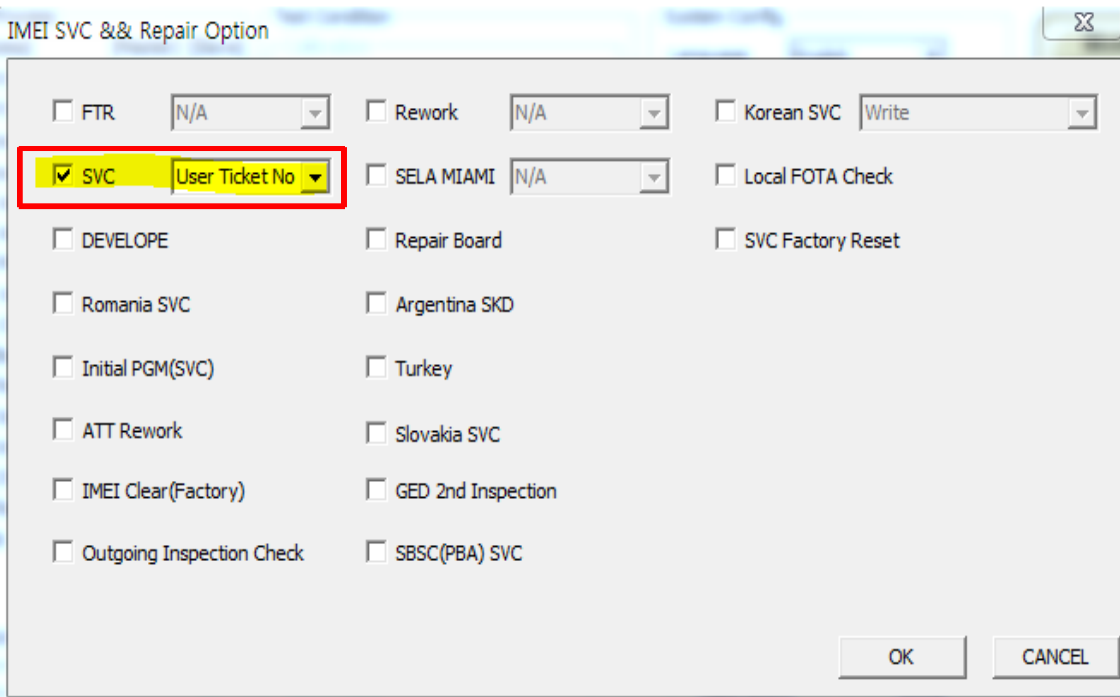

The 'IMEI SVC && Repair Option' dialog box is shown. It contains several checkboxes and dropdown menus. The 'SVC' checkbox is checked, and the 'User Ticket No' dropdown menu is selected, both highlighted with a red box. Other options include 'FTR' (N/A), 'Rework' (N/A), 'Korean SVC' (Write), 'SELA MIAMI' (N/A), 'Local FOTA Check', 'SVC Factory Reset', 'DEVELOPE', 'Romania SVC', 'Argentina SKD', 'Initial PGM(SVC)', 'Turkey', 'ATT Rework', 'Slovakia SVC', 'IMEI Clear(Factory)', 'GED 2nd Inspection', 'Outgoing Inspection Check', and 'SBSC(PBA) SVC'. At the bottom, there are 'OK' and 'CANCEL' buttons.


6. Level 1 Repair

8. Click Hardware Config

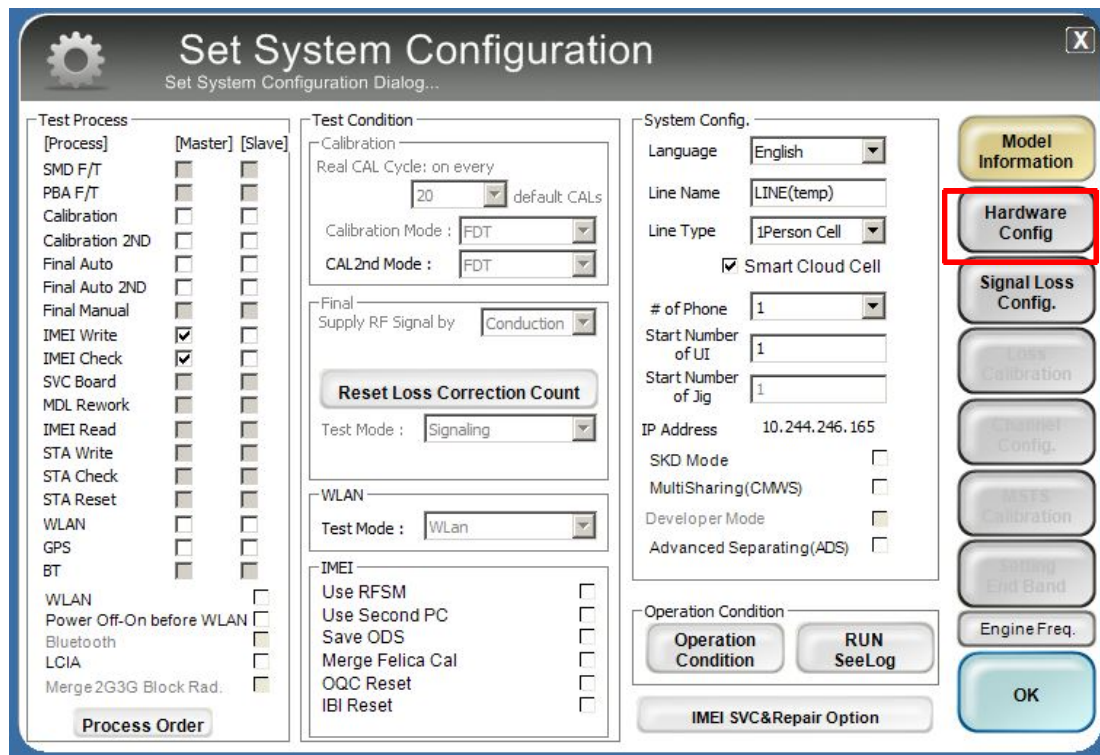

The 'Set System Configuration' dialog box is shown with the 'Hardware Config' button highlighted in red. The dialog is divided into several sections: 'Test Process' with a list of test items and checkboxes for Master/Slave; 'Test Condition' with calibration settings and a 'Reset Loss Correction Count' button; 'System Config.' with language, line name, line type, and various mode checkboxes; and a right-hand sidebar with buttons for 'Model Information', 'Hardware Config' (highlighted), 'Signal Loss Config.', 'Loss Calibration', 'Channel Config.', 'MSTS Calibration', 'Setting End Band', 'Engine Freq.', and 'OK'. At the bottom are 'Operation Condition', 'RUN SeeLog', and 'IMEI SVC&Repair Option' buttons.


9. Click Port Setting

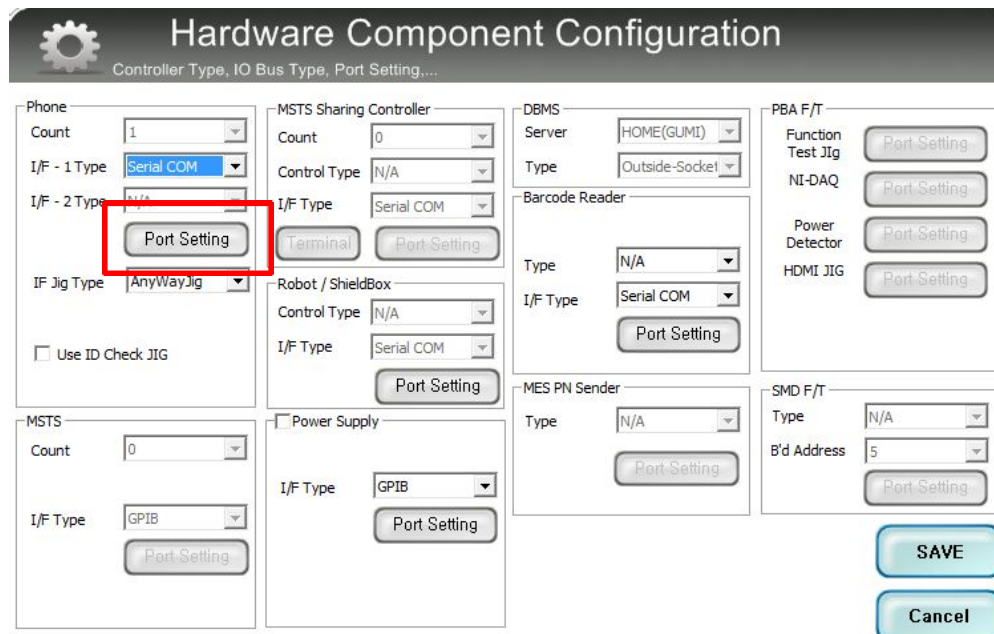

The 'Hardware Component Configuration' dialog box is shown with the 'Port Setting' button highlighted in red. The dialog is divided into several sections: 'Phone' with count and I/F type settings; 'MSTS Sharing Controller' with count, control type, and I/F type settings; 'DBMS' with server and type settings; 'Barcode Reader' with type and I/F type settings; 'MES PN Sender' with type settings; 'SMD F/T' with type and B'd address settings; and 'PBA F/T' with function test jig, NI-DAQ, power detector, and HDMI jig settings. Each section has a 'Port Setting' button. At the bottom are 'SAVE' and 'Cancel' buttons.

6. Level 1 Repair


10. Select Port Number and SAVE

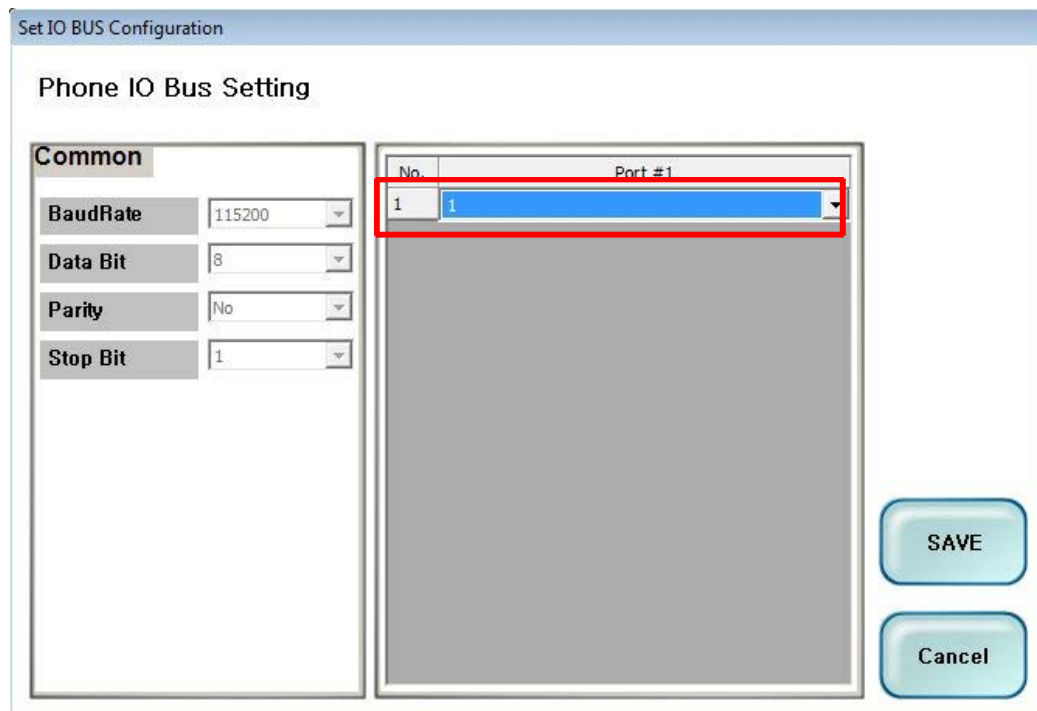

The image shows a 'Set IO BUS Configuration' dialog box with a 'Phone IO Bus Setting' section. On the left, under the 'Common' tab, are four settings: BaudRate (115200), Data Bit (8), Parity (No), and Stop Bit (1). On the right, there is a table with two columns: 'No.' and 'Port #1'. The first row of the table is highlighted with a red rectangle, showing '1' in the 'No.' column and '1' in the 'Port #1' column. Below the table are two buttons: 'SAVE' and 'Cancel'.

No.	Port #1
1	1

11. Click OK to proceed

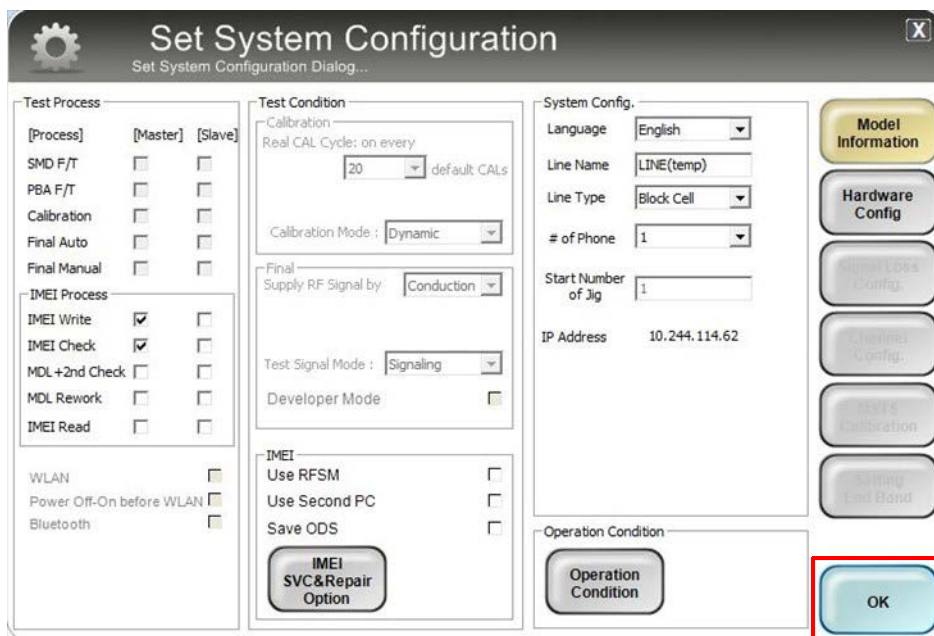


The image shows a 'Set System Configuration' dialog box. It has several sections: 'Test Process' with checkboxes for SMD F/T, PBA F/T, Calibration, Final Auto, Final Manual, IMEI Write, IMEI Check, MDL +2nd Check, MDL Rework, IMEI Read, WLAN, Power Off-On before WLAN, and Bluetooth; 'Test Condition' with a 'Real CAL Cycle' dropdown set to 20, 'Calibration Mode' set to Dynamic, 'Final Supply RF Signal by' set to Conduction, 'Test Signal Mode' set to Signaling, and 'Developer Mode' checkbox; 'System Config.' with 'Language' set to English, 'Line Name' set to LINE(temp), 'Line Type' set to Block Cell, '# of Phone' set to 1, 'Start Number of Jig' set to 1, and 'IP Address' set to 10.244.114.62; and 'Operation Condition' with an 'Operation Condition' button. On the right side, there is a vertical stack of buttons: 'Model Information', 'Hardware Config', 'Signal Loss Config.', 'Line Config.', 'MMS Calibration', and 'Setting End Band'. At the bottom right, the 'OK' button is highlighted with a red rectangle.

6. Level 1 Repair

12. Click Model Info and OK when pop-up shows




13. Click OK

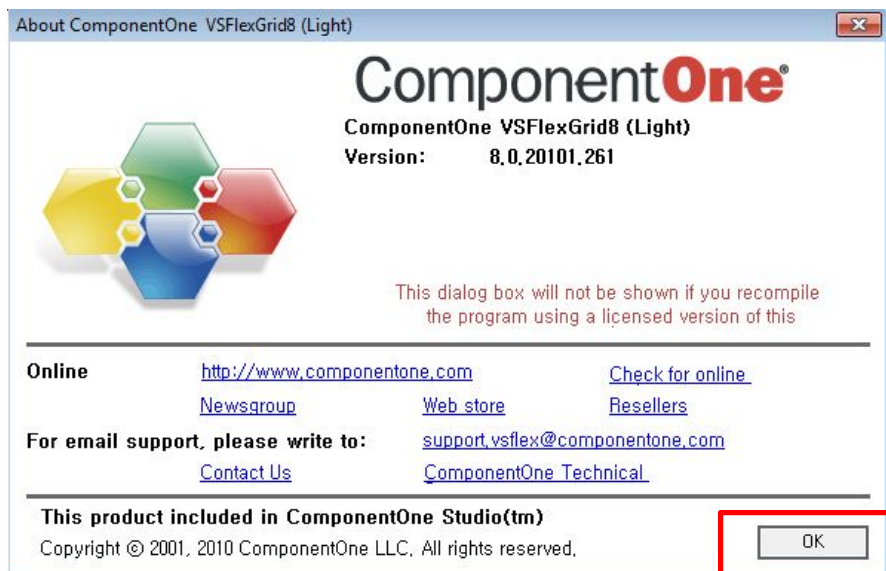

6. Level 1 Repair

14. Input SKU_CODE and BUYER, then click Save button.

※ Refer to HHPsvc→IMEI Review to check SKU Code and buyer

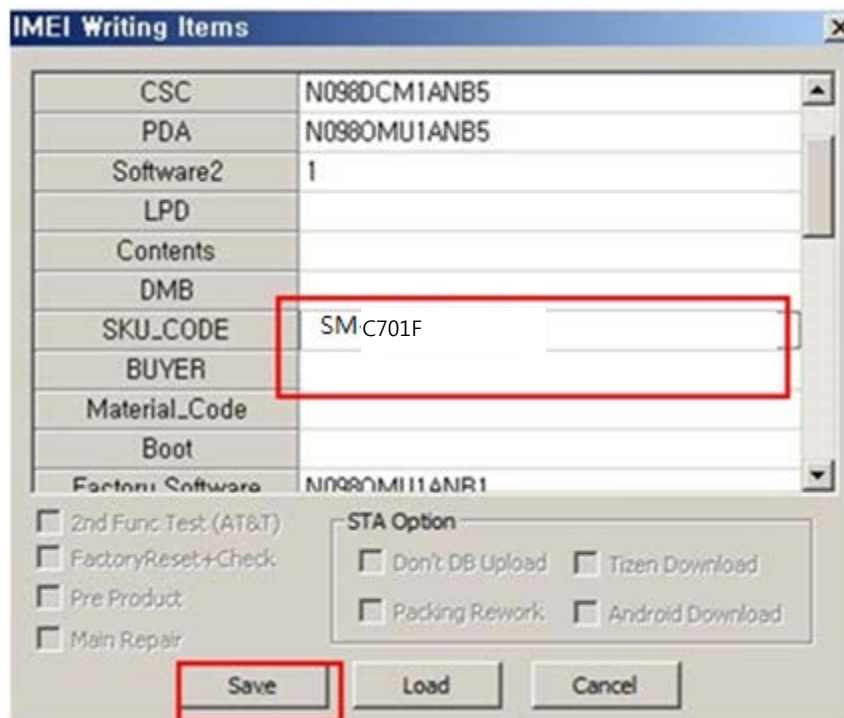

The 'IMEI Writing Items' dialog box contains a list of fields for writing IMEI data. The 'SKU_CODE' field is highlighted with a red box and contains the text 'SM-C701F'. The 'BUYER' field is also highlighted with a red box and is currently empty. The 'Save' button at the bottom left is also highlighted with a red box. Other fields include CSC (N0980CM1ANB5), PDA (N0980MU1ANB5), Software2 (1), LPD, Contents, DMB, Material_Code, Boot, and Factory Software (N0980MI11&NR1). There are also checkboxes for '2nd Func. Test (AT&T)', 'Factory Reset+Check', 'Pre Product', 'Main Repair', and 'STA Option' (Don't DB Upload, Tizen Download, Packing Rework, Android Download).


CSC	N0980CM1ANB5
PDA	N0980MU1ANB5
Software2	1
LPD	
Contents	
DMB	
SKU_CODE	SM-C701F
BUYER	
Material_Code	
Boot	
Factory Software	N0980MI11&NR1

☐ 2nd Func. Test (AT&T)
☐ Factory Reset+Check
☐ Pre Product
☐ Main Repair

STA Option
☐ Don't DB Upload
☐ Tizen Download
☐ Packing Rework
☐ Android Download

Save Load Cancel

15. Input IMEI Number and click Apply

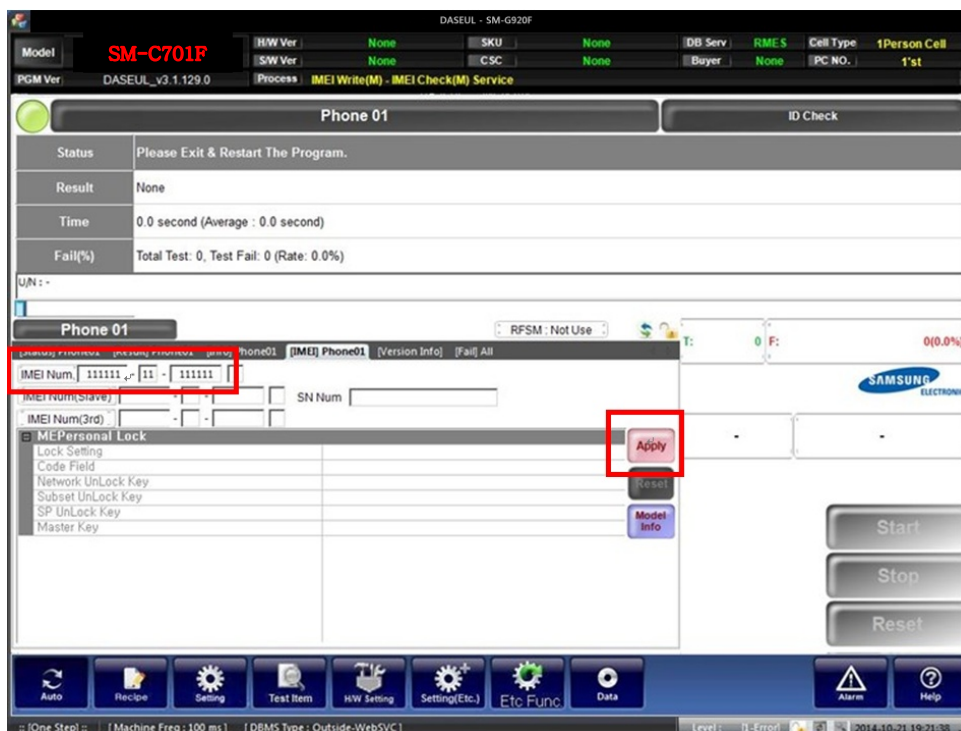

The 'Phone 01' screen shows the 'IMEI Write(M) - IMEI Check(M) Service' interface. The 'IMEI Num' field is highlighted with a red box and contains the text '111111'. The 'Apply' button is also highlighted with a red box. The screen displays various status information, including 'Status: Please Exit & Restart The Program.', 'Result: None', 'Time: 0.0 second (Average : 0.0 second)', and 'Fail(%): Total Test: 0, Test Fail: 0 (Rate: 0.0%)'. The 'Phone 01' tab is selected, and the 'IMEI Write(Shave)' option is chosen. The 'IMEI Num(3rd)' field is also visible. The 'Apply' button is located next to the 'IMEI Num' field. The 'Start', 'Stop', and 'Reset' buttons are at the bottom right. The 'Auto', 'Recipe', 'Setting', 'Test Item', 'HW Setting', 'Setting(Etc.)', 'Etc Func', and 'Data' buttons are at the bottom left. The 'Alarm' and 'Help' buttons are at the bottom right.

Model: **SM-C701F** HW Ver: None SKU: None DB Serv: RME S Cell Type: 1Person Cell
RGM Ver: DASEUL_V3.1.129.0 Process: IMEI Write(M) - IMEI Check(M) Service Buyer: None PC NO.: 1'st

Phone 01 ID Check

Status: Please Exit & Restart The Program.
Result: None
Time: 0.0 second (Average : 0.0 second)
Fail(%): Total Test: 0, Test Fail: 0 (Rate: 0.0%)

U/N: -

Phone 01 RFSM: Not Use T: 0 F: 0(0.0%)

IMEI Num: 111111 - 111111

IMEI Write(Shave) SN Num

IMEI Num(3rd)

IMEI Personal Lock
Lock Setting
Code Field
Network UnLock Key
Subset UnLock Key
SP UnLock Key
Master Key

Apply Reset Model Info


Start Stop Reset

Auto Recipe Setting Test Item HW Setting Setting(Etc.) Etc Func Data

[One Step] [Machine Freq: 100 ms] [DBMS Type: Outside-WebSVC] Level: [Error] 2014.10.21 19:21:38

6. Level 1 Repair

16. ① Click Start, and input IMEI writing ID and Password → ② input Ticket No

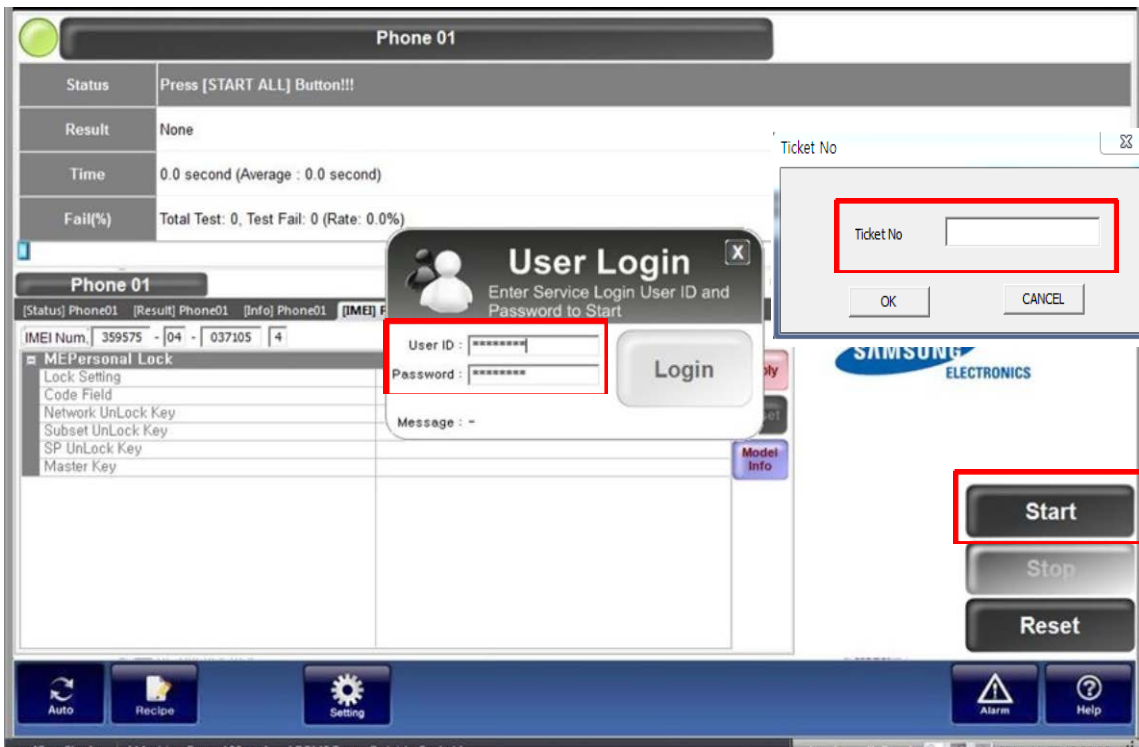


17. Connect the phone to Anyway JIG

※ When you connect the phone, the phone should be turned off.


After connecting the phone, the phone will be booted automatically.

18. IMEI Writing Proceeding

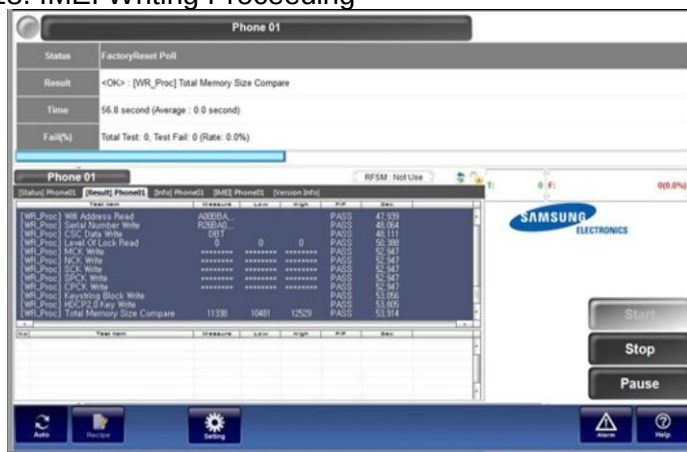

6. Level 1 Repair

19. IMEI Writing Success

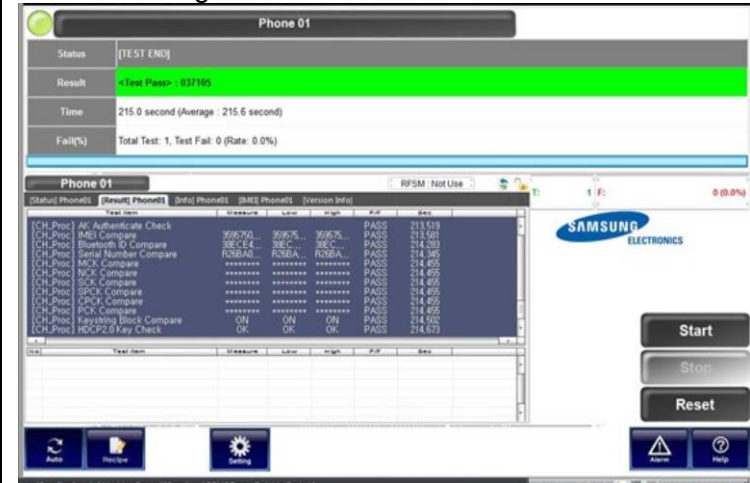

6. Level 1 Repair

6-3. RF Calibration

6-3-1. Required items in order to calibrate RF


- Installation program: RF Calibration Program
 - Daseul_Launcher_vx.x.xx.exe
 - Daseul_CAL_ALL_Runtime_x.x.xxx.x.CAB
 - Model File (SM-C701F_OPEN_CALIBRATION_VER_x.x.xxx.xx.CAB)
- ※ It is required to use the latest program.
- SM-C701F Mobile Phone
- R&S CMW500
- E3632A Power Supply
- GPIB Cable (2ea)
- JIG BOX (Anyway S103, GH81-12520B)
- F Cable (GH81-11962W, USB 3.1 C Type)
- Adapter (GH81-11888K)
- UART Serial Cable
- RF Cable (GH81-11962U, 1EA)
- 1.35ΦRF Cable (GH81-11962M, 3EA)
- 4Port Divider(GH81-11962A 1EA)
- Divider Cable(GH81-11962B 1EA)

6. Level 1 Repair

• Table of test cables

IF Cable	GH81-11962W			
	USB C type			
RF Cable (Manual)	GH81-11962M	GH81-11962U		
	1.2T, 102mm 3ea 	SMAP, 300mm 3ea 		
4 Port Divider	GH81-11962A	GH81-11962B	GH81-11962E	
	Divider 1ea 	Divider Cable 1ea 	50Ω terminator 1ea 	

※ Setting

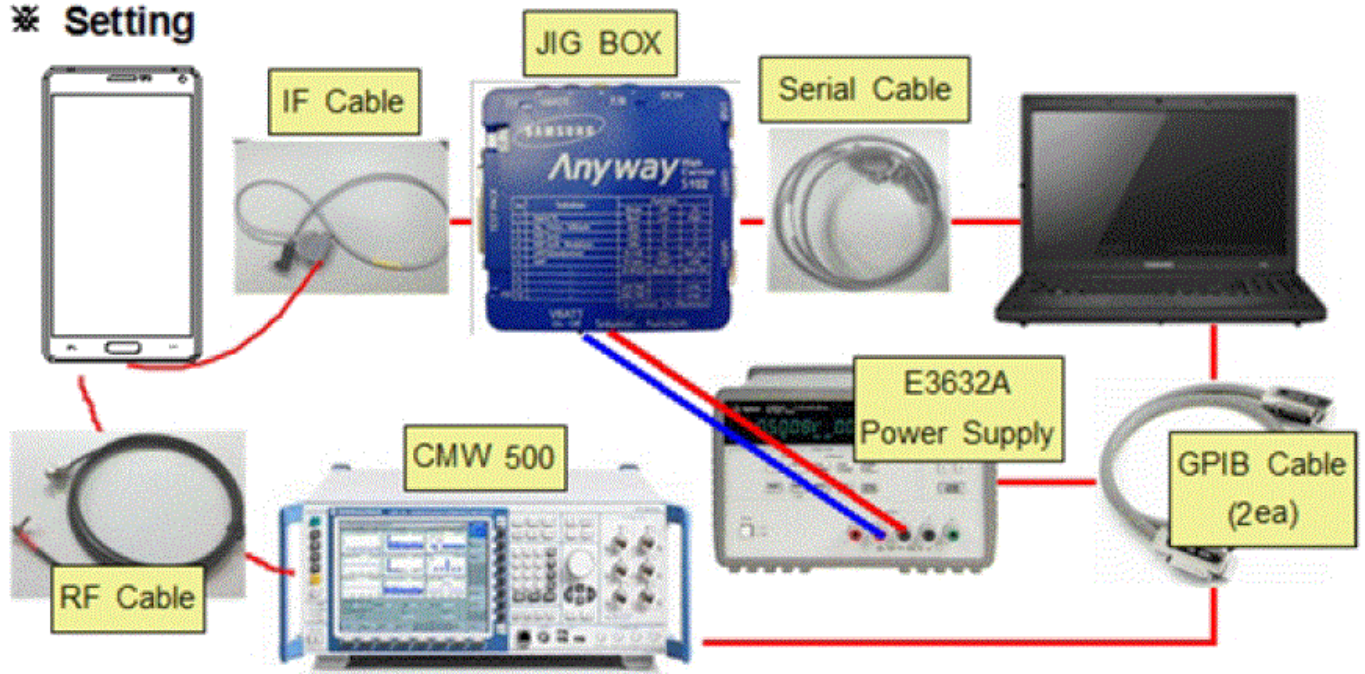

6. Level 1 Repair

6-3-2. RF Calibration Program


1. Run the RF Calibration Program Launcher, '[DASEUL_Launcher_vx.x.xx.exe](#)'.

 SM-T677A_OPEN_CALIBRATION_Ver_3.1.172.3.CAB

 DASEUL_CAL_ALL_Runtime_3.1.170.1_r00313.CAB


 DASEUL_Launcher_v3.0.27.exe

2. Check the '[Calibration](#)' menu, and select '[Extract & Run](#)'.

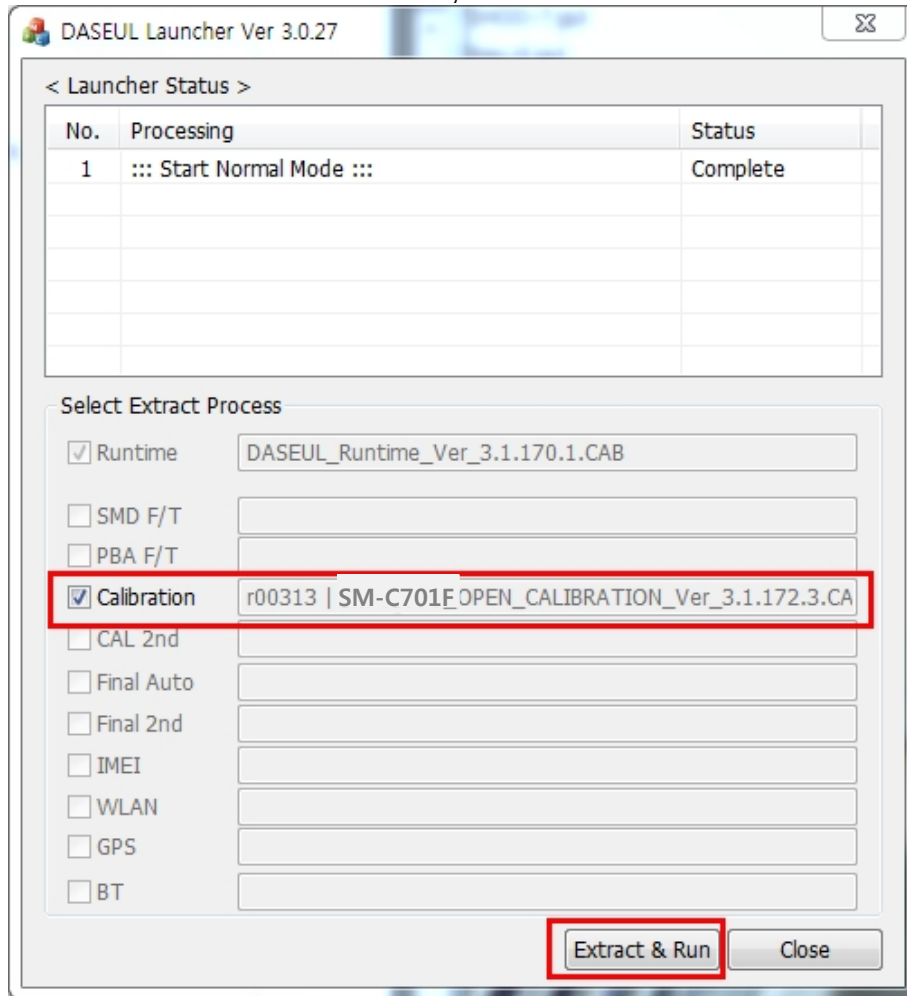

6. Level 1 Repair

3. Check the 'CAL' and open the [model file](#), then select 'Start' button.

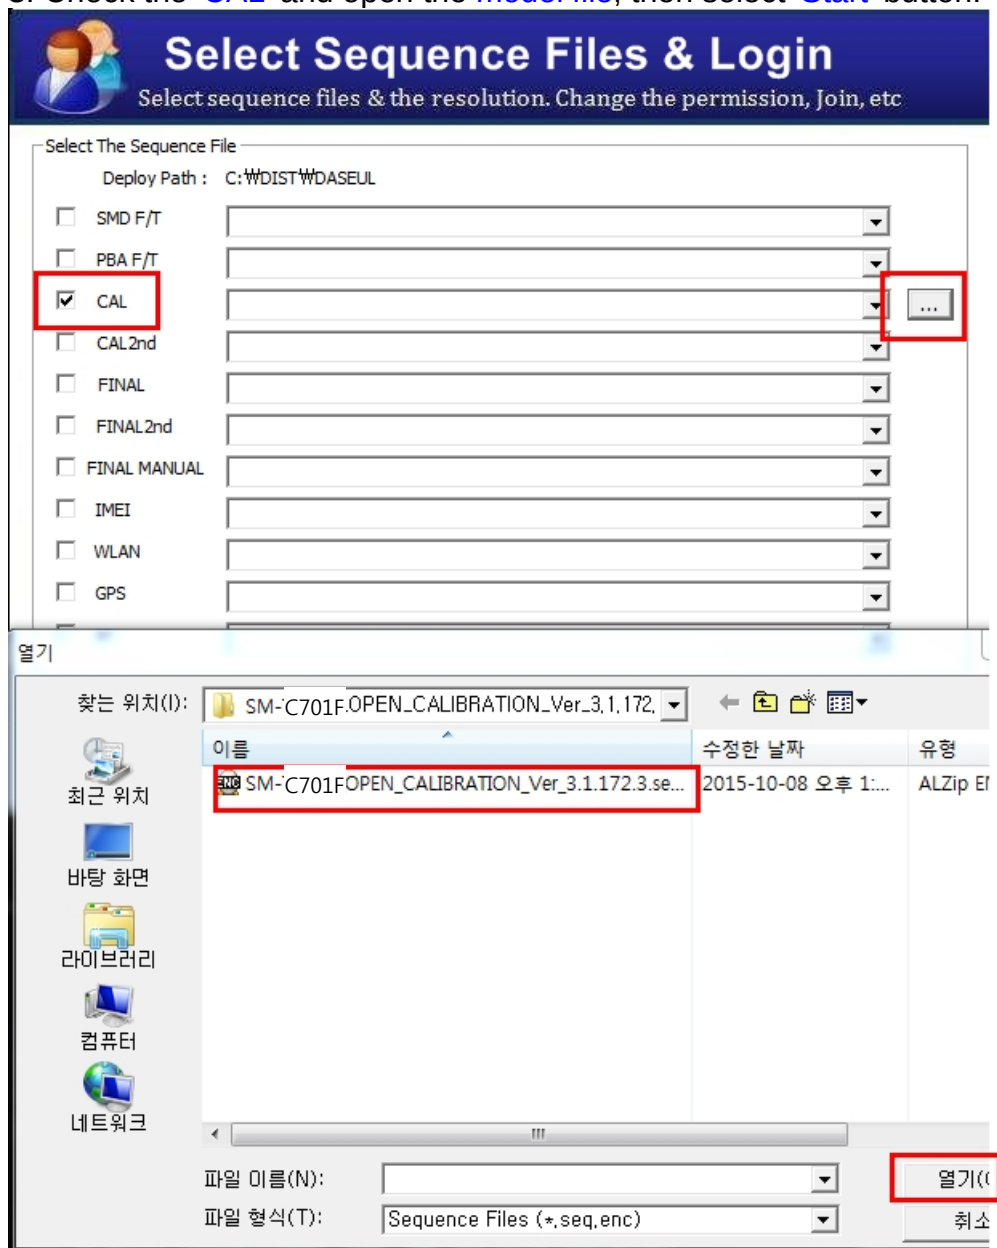

6. Level 1 Repair

4. Change the Line Type to 'Block Cell' and disable 'Smart Cloud Cell'.


The image shows the 'Set System Configuration' dialog box. The 'System Config.' tab is selected. The 'Language' is set to 'English'. The 'Line Name' is 'LINE(temp)'. The 'Line Type' is set to 'Block Cell'. The 'Smart Cloud Cell' checkbox is unchecked. The 'Test Process' tab is also visible, showing various test options like SMD F/T, PBA F/T, Calibration, etc. The 'Test Condition' tab shows 'Calibration' settings like 'Real CAL Cycle: on every 20 default CALs', 'Calibration Mode: FDT', and 'CAL2nd Mode: FDT'. The 'WLAN' tab shows 'Test Mode: WLAN'. The 'IMEI' tab shows 'Use RFSM', 'Use Second PC', 'Save ODS', 'Merge Felica Cal', 'OQC Reset', and 'IBI Reset'. The 'Operation Condition' tab shows 'Operation Condition' and 'RUN SeeLog' buttons. The 'Model Information' tab is also visible on the right side of the dialog box.

5. Set the GPIB address of MSTs(CMW500) and Power Supply(E3632A) to enter 'Hardware Config' and 'Save'. (Check the GPIB address of equipments in advance)


The image shows the 'Set System Configuration' dialog box. The 'Hardware Config' button is highlighted with a red box and a circled '1'. The 'System Config.' tab is selected. The 'Language' is set to 'English'. The 'Line Name' is 'LINE(temp)'. The 'Line Type' is set to 'Block Cell'. The 'Smart Cloud Cell' checkbox is unchecked. The 'Test Process' tab is also visible, showing various test options like SMD F/T, PBA F/T, Calibration, etc. The 'Test Condition' tab shows 'Calibration' settings like 'Real CAL Cycle: on every 20 default CALs', 'Calibration Mode: FDT', and 'CAL2nd Mode: FDT'. The 'WLAN' tab shows 'Test Mode: WLAN'. The 'IMEI' tab shows 'Use RFSM', 'Use Second PC', 'Save ODS', 'Merge Felica Cal', 'OQC Reset', and 'IBI Reset'. The 'Operation Condition' tab shows 'Operation Condition' and 'RUN SeeLog' buttons. The 'Model Information' tab is also visible on the right side of the dialog box.

6. Level 1 Repair

6. Press 'OK' to start RF Calibration after completing all settings.

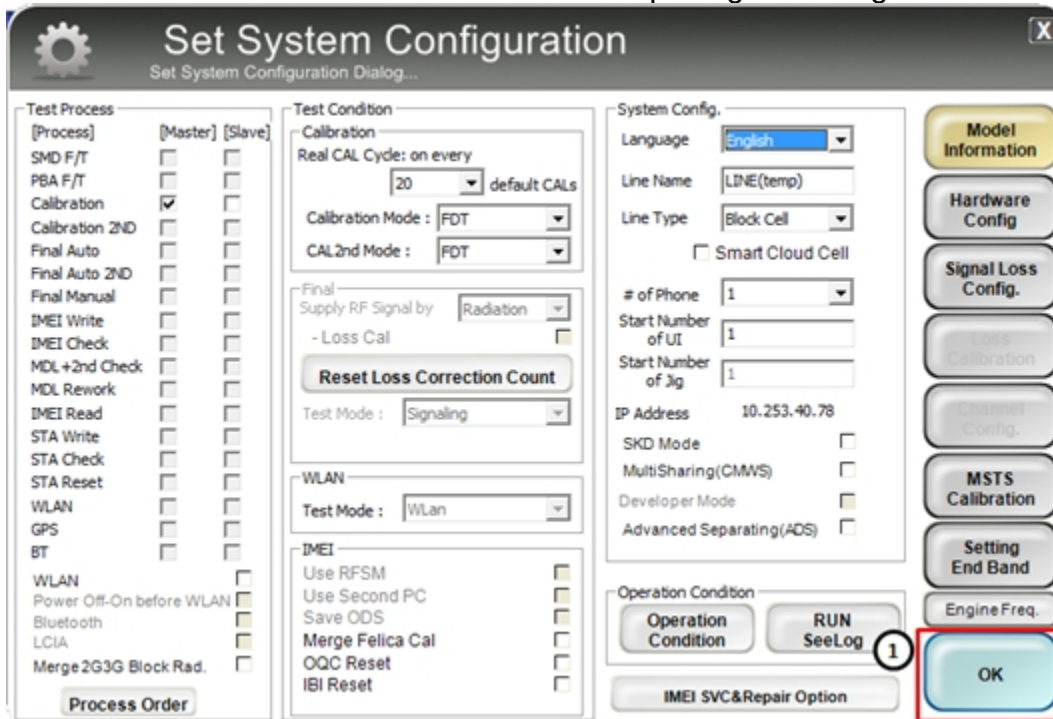


The 'Set System Configuration' dialog box is shown with various tabs and settings. The 'Test Process' tab is active, showing a list of test items with checkboxes for 'Master' and 'Slave' modes. The 'Test Condition' tab is also visible, showing settings for Calibration, Final, and WLAN. The 'System Config.' tab is active, showing settings for Language, Line Name, Line Type, # of Phone, Start Number of UI, Start Number of Jig, IP Address, SKD Mode, MultiSharing(CMWS), Developer Mode, and Advanced Separating(ADS). The 'Model Information' tab is also visible, showing settings for Hardware Config, Signal Loss Config, Loss Calibration, Channel Config, MSTs Calibration, Setting End Band, and Engine Freq. The 'OK' button is highlighted with a red box and a circled '1'.

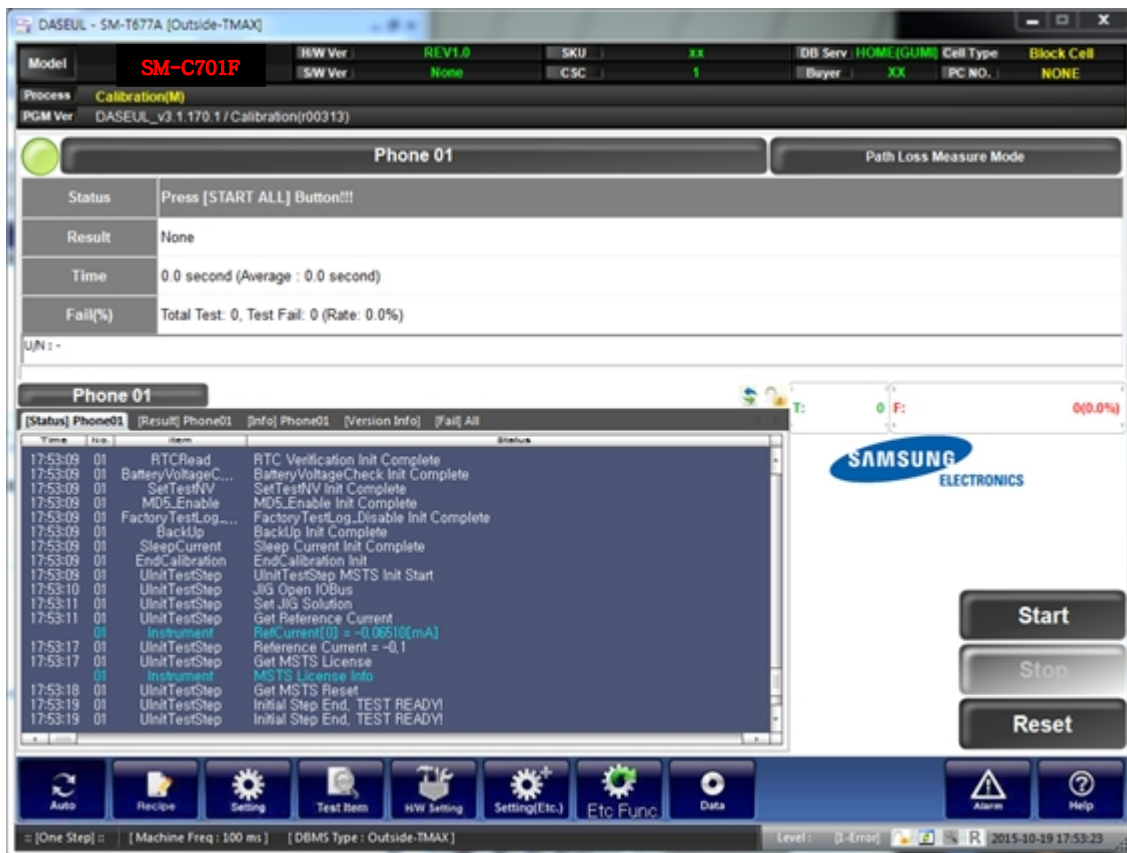

The 'DASEUL - SM-T677A [Outside-TMAX]' interface is shown. It displays various system information and test results. The 'Model' is SM-C701F, HW Ver is REV1.0, SKU is XX, DB Serv is HOME(GUM), Cell Type is Block Cell, Process is Calibration(M), and PGM Ver is DASEUL_v3.1.170.1 / Calibration(r00313). The 'Phone 01' section shows a status of 'Press [START ALL] Button!!!', Result of 'None', Time of '0.0 second (Average : 0.0 second)', and Fail(%) of 'Total Test: 0, Test Fail: 0 (Rate: 0.0%)'. The 'Phone 01' section also shows a list of test steps and their results. The 'Start', 'Stop', and 'Reset' buttons are visible. The 'SAMSUNG ELECTRONICS' logo is also present.

7. Level 2 Repair

7-1. Components on the Rear Case

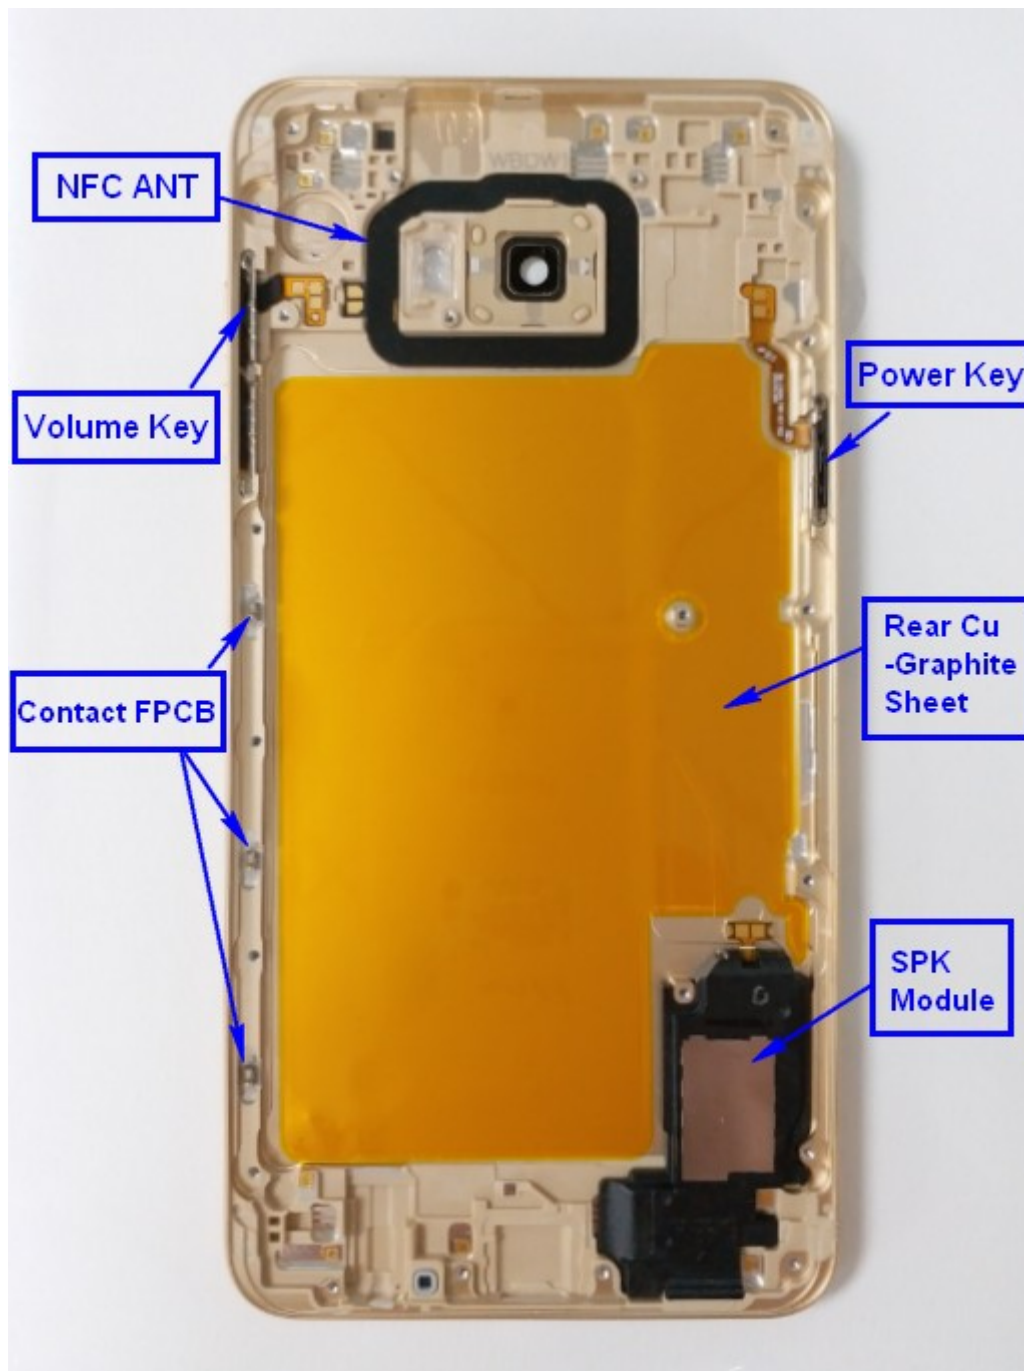


7. Level 2 Repair

7-2. Pre-requisite

	
Plastic Tweezers / Disass'y Stick / Screw Driver	Anti-static Gloves
	
Clean Swab	Ethyl Alcohol
	
OCTA Disassembly Holder	OCTA Disassembly Upper
	
OCTA Attach JIG(1N for 1 minute)	Mobile Dryer

7. Level 2 Repair

7-3. Parts which must be changed after repair

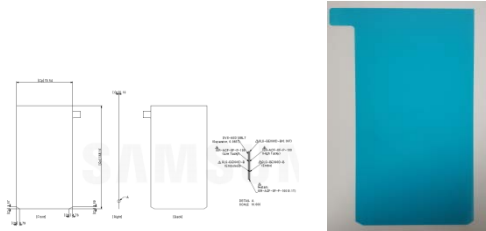
BOM discription & part code	Image	Remarks
A/S-TAPE_ MAIN_WINDOW_SVC [GH02-13819A] [GH02-13818A]	 [TOP_GH02-13819A]  [BOT_GH02-13818A]	Replace when repair Front part
A/S-OCTA_CU SHEET_SVC [GH02-14091A]		
A/S-OCTA SCF TAPE [GH81-14369A]		
A/S-TAPE HOTMELT-HR_SVC [GH02-13827A]	 	
A/S-DOUBLE TAPE ASSY [GH81-14457A]	 <u>DOUBLE TAPE ASS'Y</u>	

7. Level 2 Repair

7-4. Disassembly

1

After heating for 15~30 minutes at 70~80℃, take out the device from Mobile dryer.

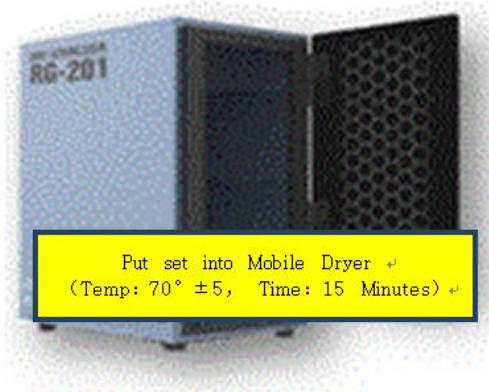

2

Detach the Back Cover from SET using Back Cover Disassembly Holder.



※ Caution

※ Caution


3

Loosen 22ea of SCREW on rear.



4

Disassemble rear from bracket assy. (from top to bottom).

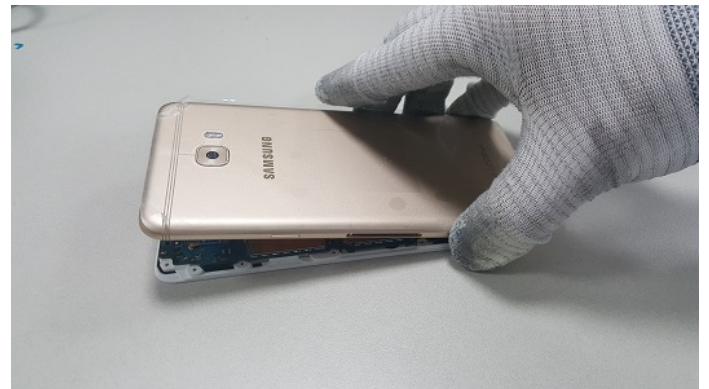

※ Caution
Take care of scratch and damage.

※ Caution
Be careful not to Damage

7. Level 2 Repair

5

Detach Battery Connector.



6

- 1) Detach Home Key Connector.
 - 2) Detach the coaxial cable, SUB PBA connector using Disassy stick.
- And Separate PBA from Brocket.




※ Caution

※ Caution

- 1) Be careful not to damage.
- 2) Separate PBA after detach the PBA Conn.
- 3) Using disassy stick.

7

Detach Mega Cam and Front Cam on PBA.

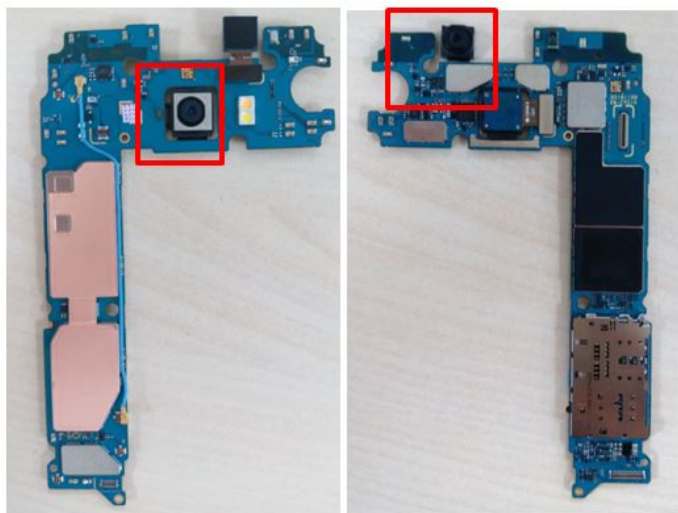

8

Detach RCV, Motor, Battery.



※ Caution
Be careful not to Damage

※ Caution

7. Level 2 Repair

9

- 1) Loosen 2 screws.
- 2) Detach the Touch key and Sub PBA from Bracket



※ Caution


Be careful not to Damage

7. Level 2 Repair

7-5. Aassembly

1

- 1) Assemble the Home key.
- 2) Assemble SUB PBA and Screw 1 Point.

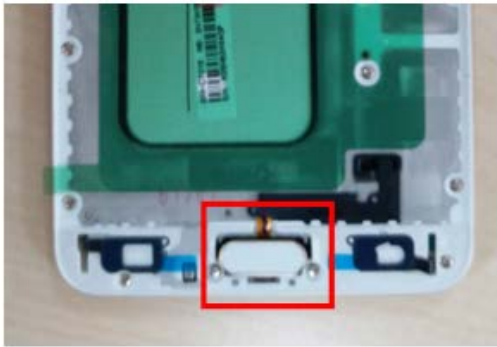

※ Caution

2



- 1) Assemble Motor, RCV.
- 2) Press Battery using Battery Press JIG



※ Caution

3

- 1) Assemble Mega CAM and Front Cam

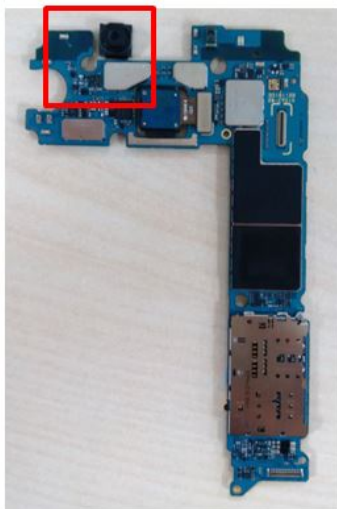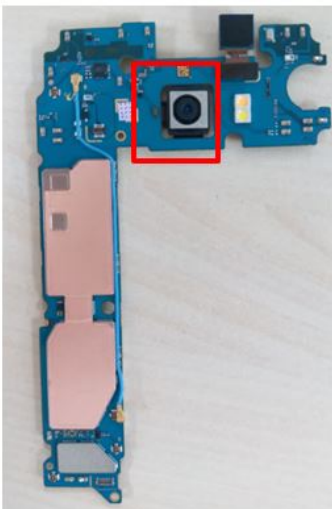

※ Caution

4

- 1) Assemble SUB PBA Connctor.
- 2) Put PBA ass'y on Bracket.
- 3) Assemble the battery connector.



※ Caution

Confidential and proprietary-the contents in this service guide subject to change without prior notice

Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

7. Level 2 Repair

5

Assemble homekey connector.



※ Caution
Be careful not to Damage

6


Assmeble Coaxial Cable.



※ Caution

7

Assemble Rear to Bracket assy (from bottom to Top).

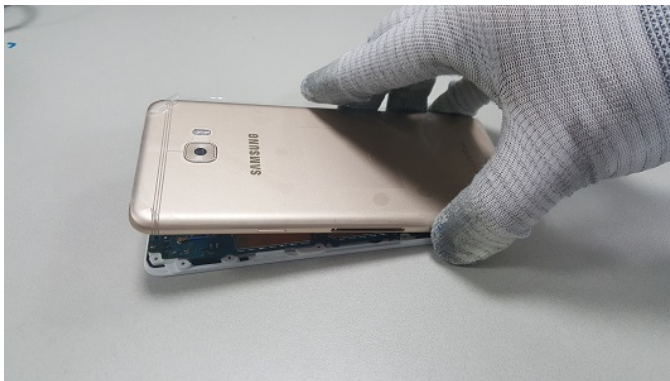

※ Caution

8

Screw 22 Point.



※ Caution

7. Level 2 Repair

9

Detach the tape on Bracket.



10

- 1) Assemble OCTA connector.
- 2) Assemble OCTA.



※ Caution

※ Caution


11


Press SET using OCTA PRESS Jig (1N for 1 minute).




※ Caution

SM-C701F Block Diagram

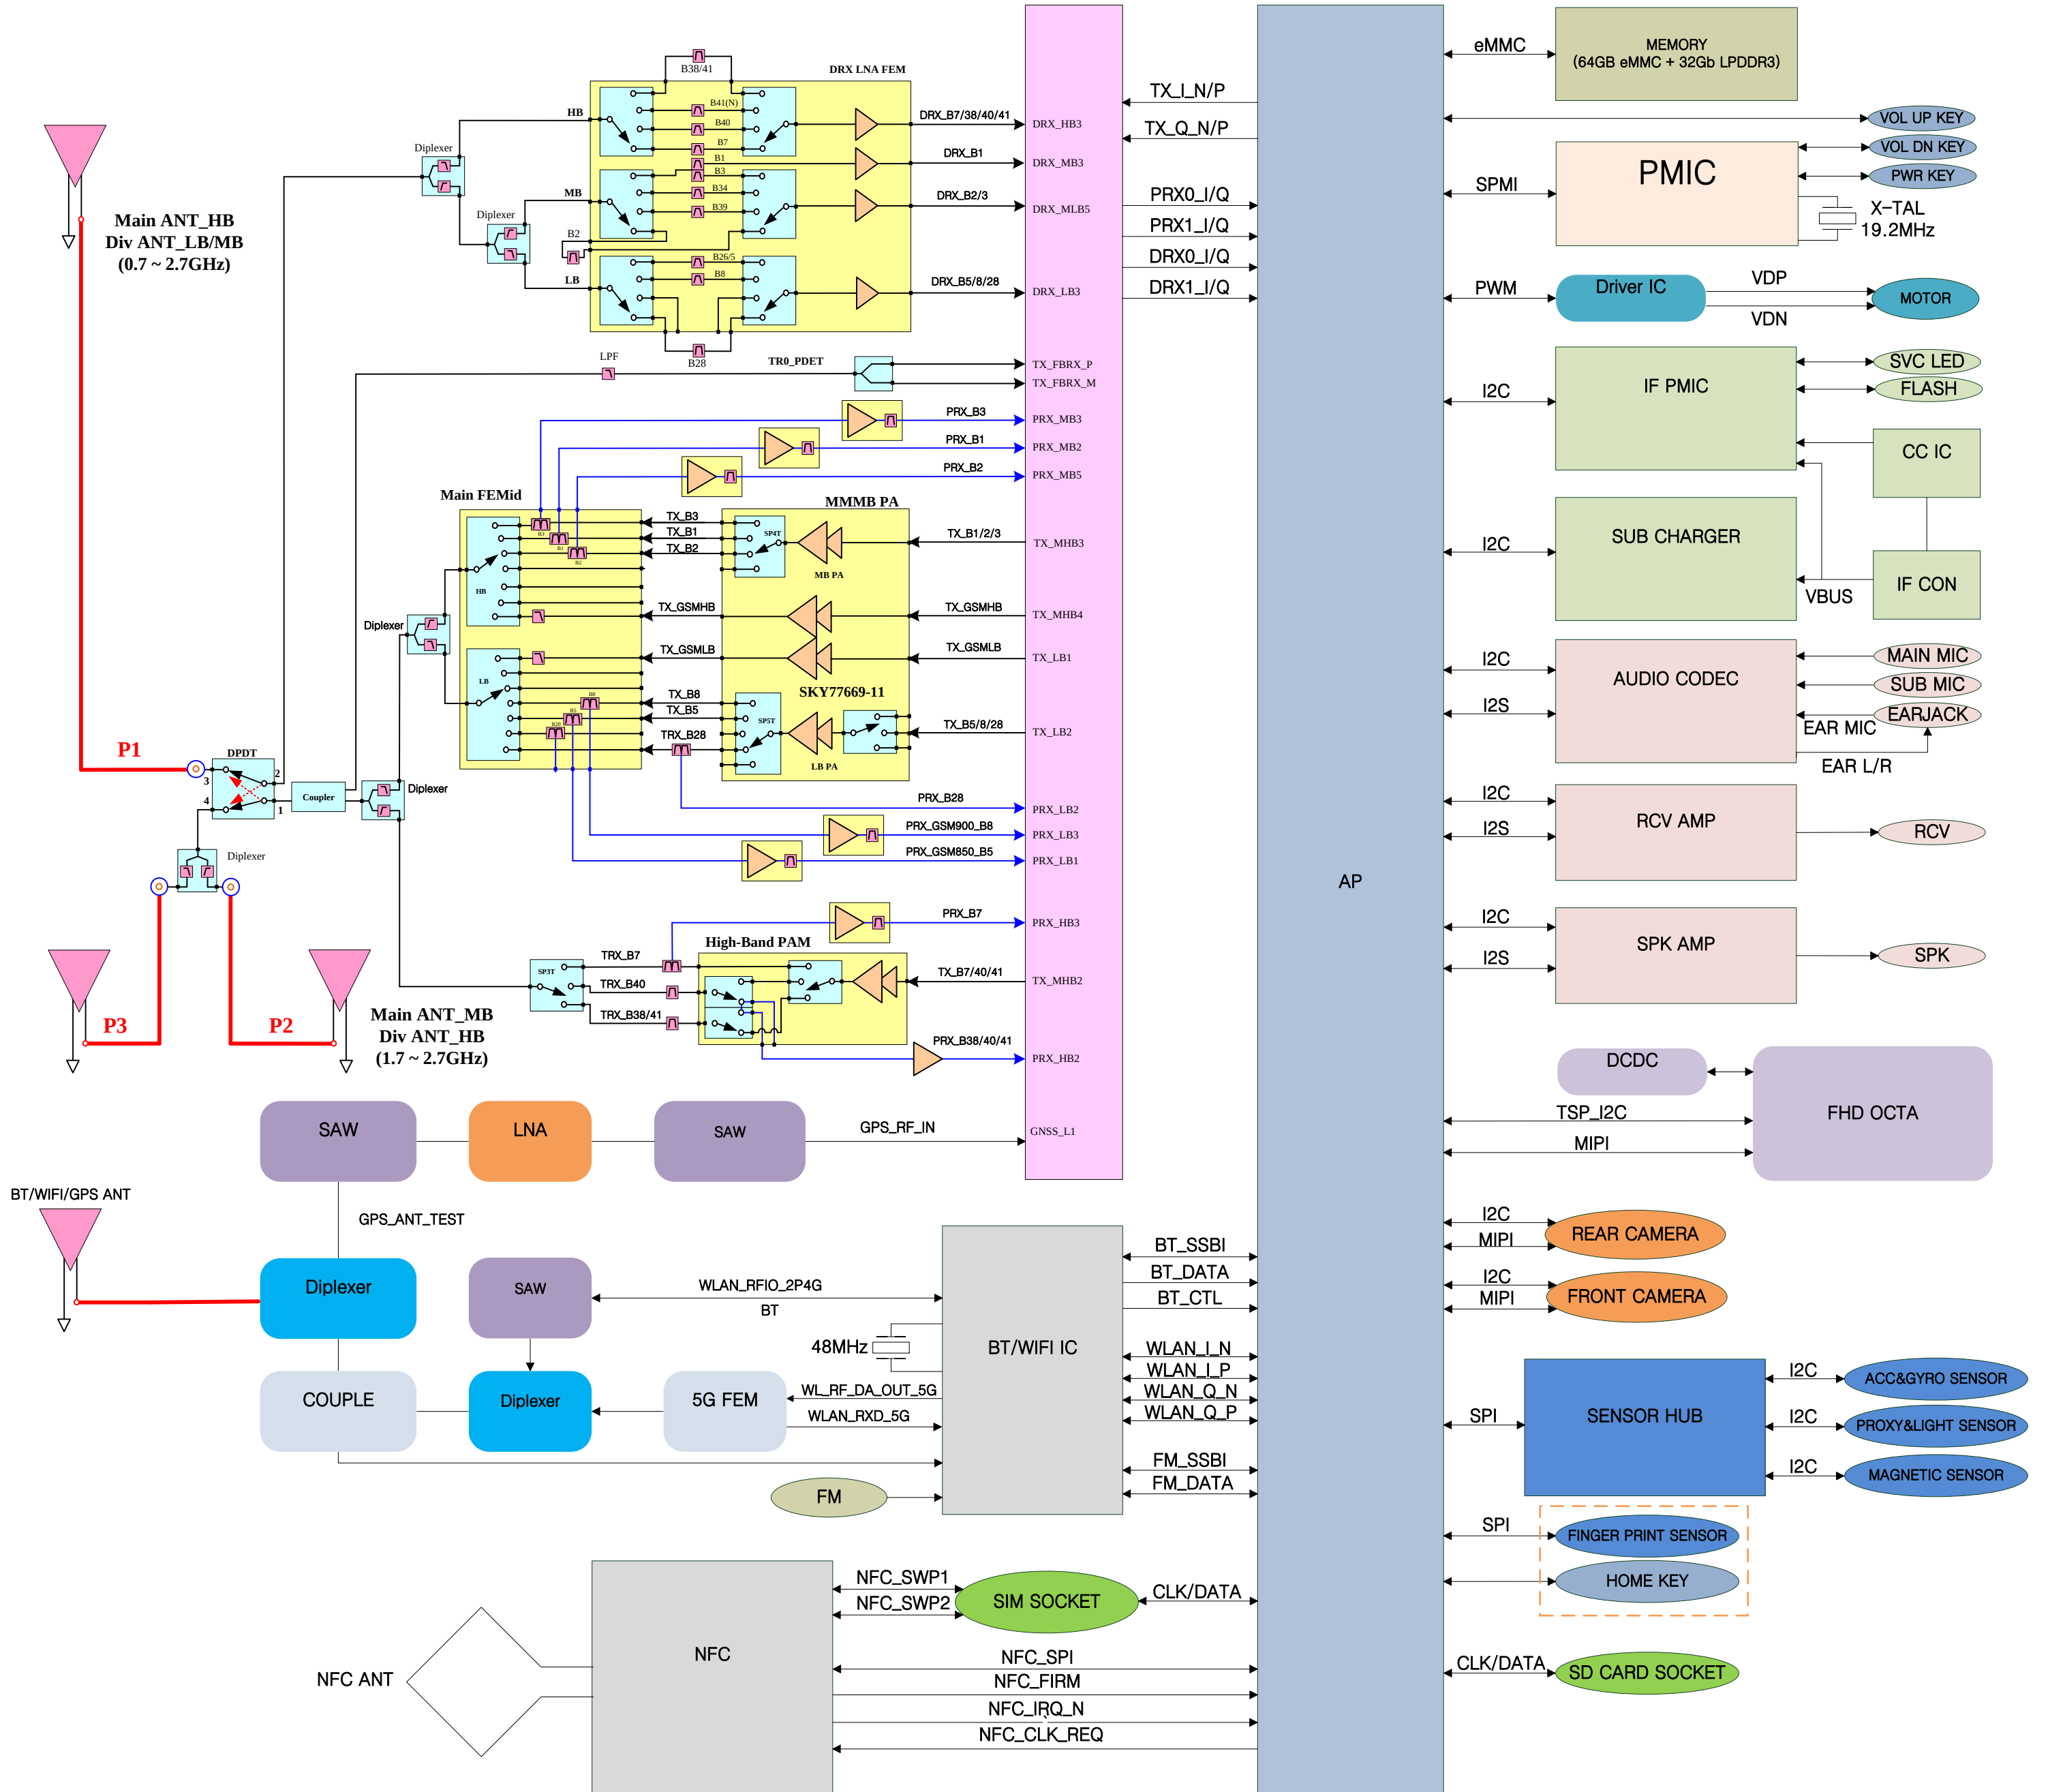


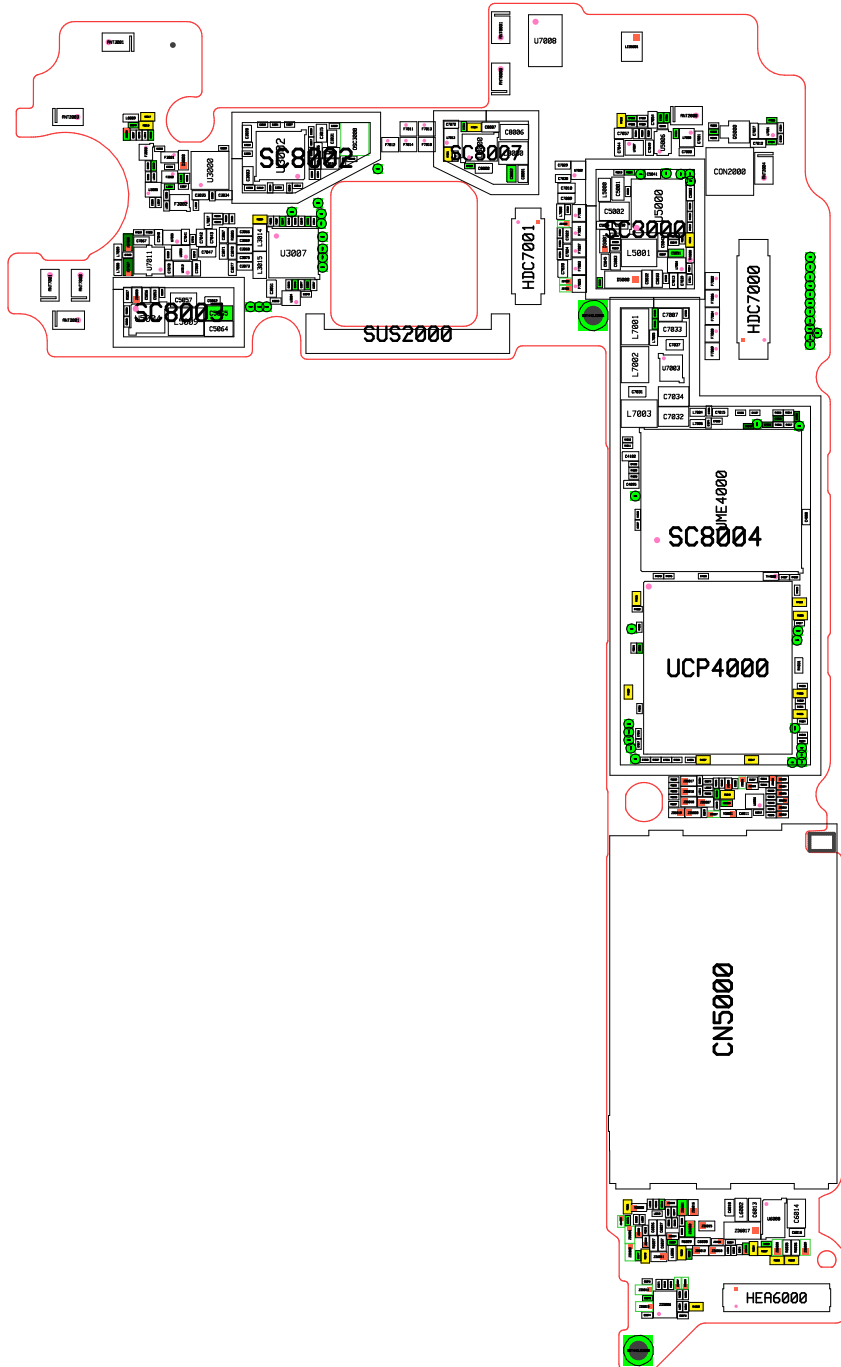

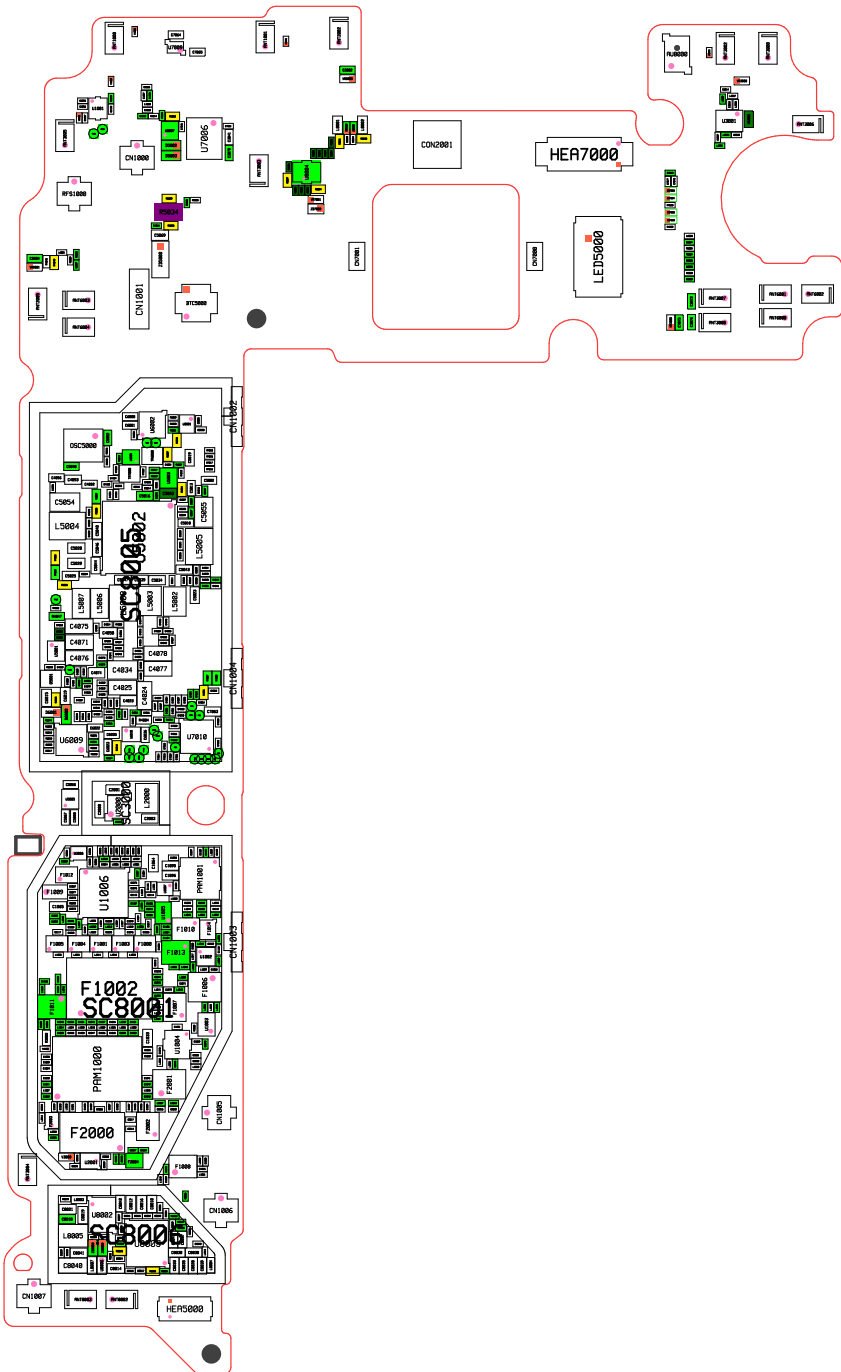

8. Level 3 Repair

8-3. Flow Chart of Troubleshooting

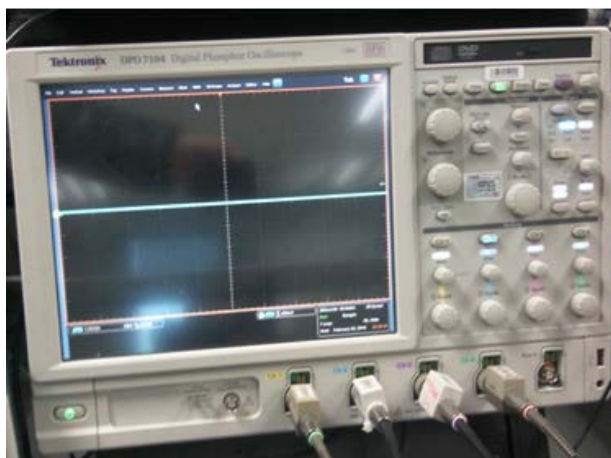

Oscilloscope




Digital Multimeter



Power Supply



+ driver, ESD Safe Tweezer

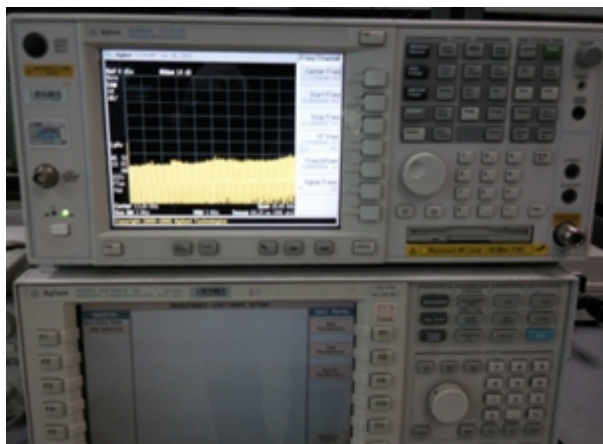


8960 & Spectrum Analyzer



Soldering iron


8. Level 3 Repair

8-3-1. Power On

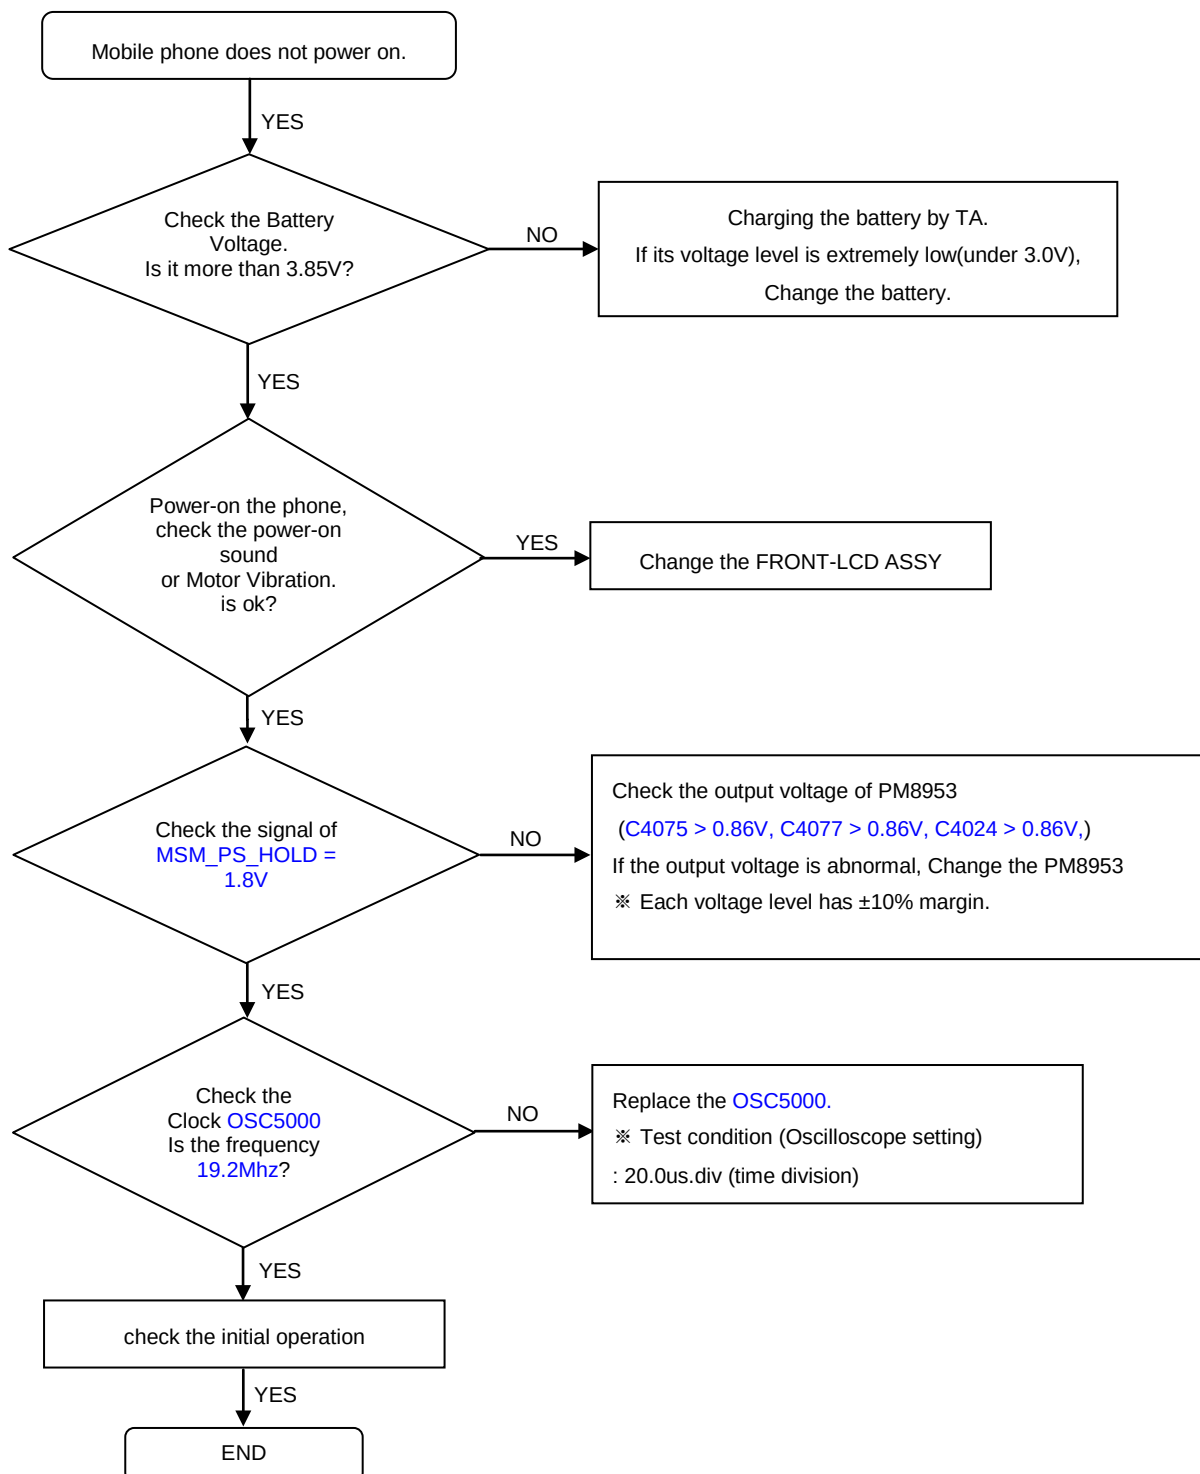


8. Level 3 Repair

8-3-2. Initial

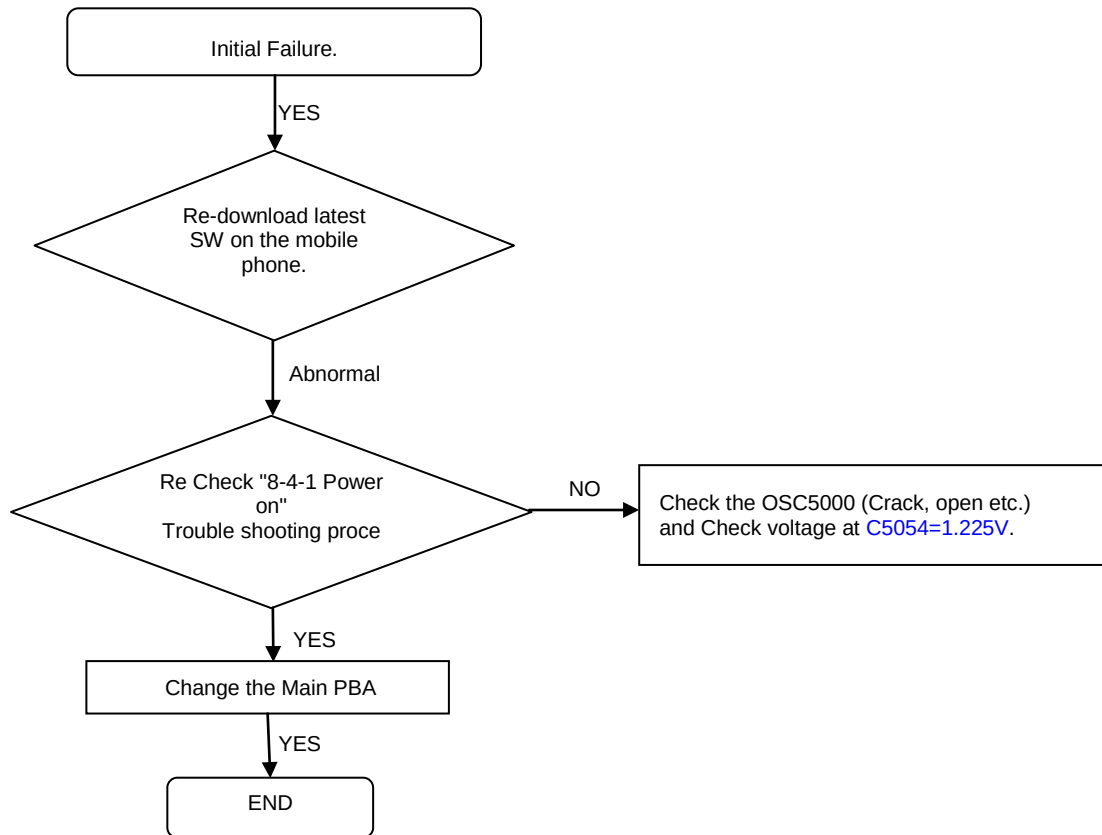


8. Level 3 Repair

8-3-3. No Service

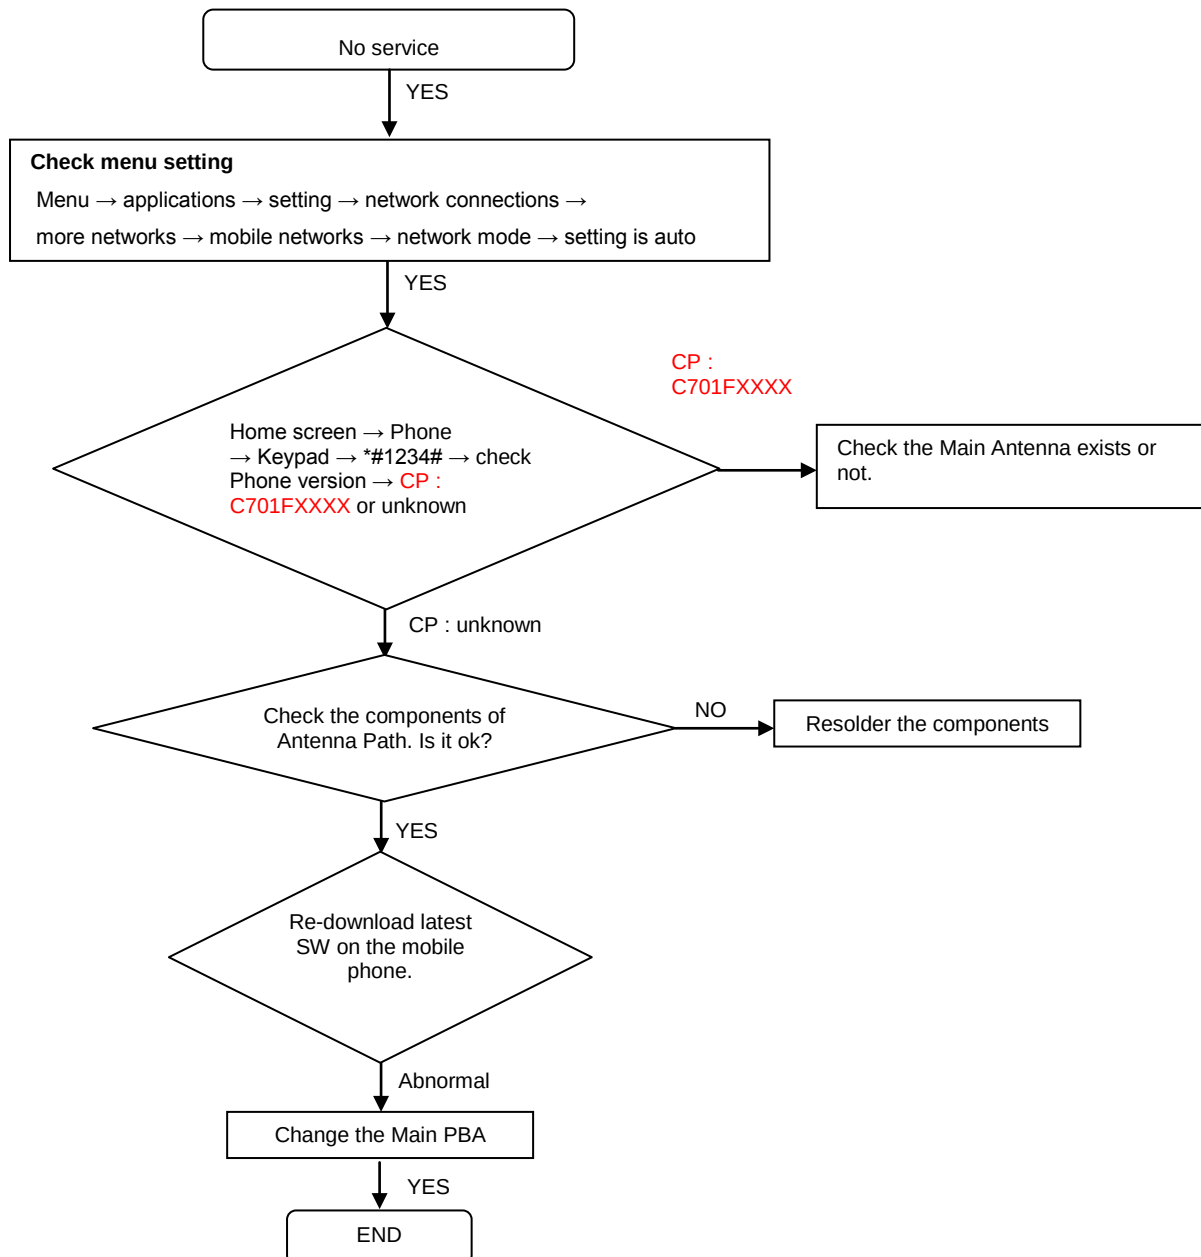

8. Level 3 Repair


8-3-4. Sim Part

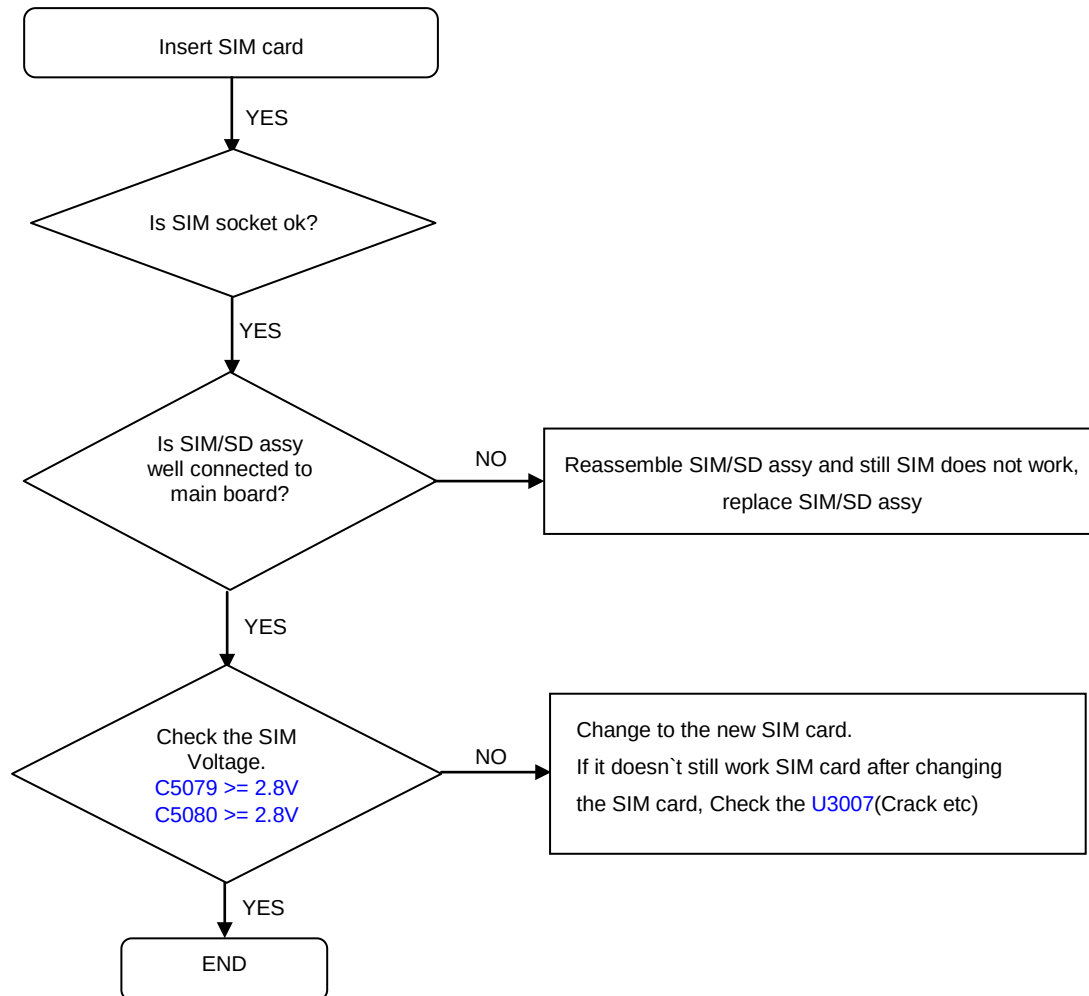

8. Level 3 Repair


8-3-5. Charging Part

- First of all, Please check the battery status.

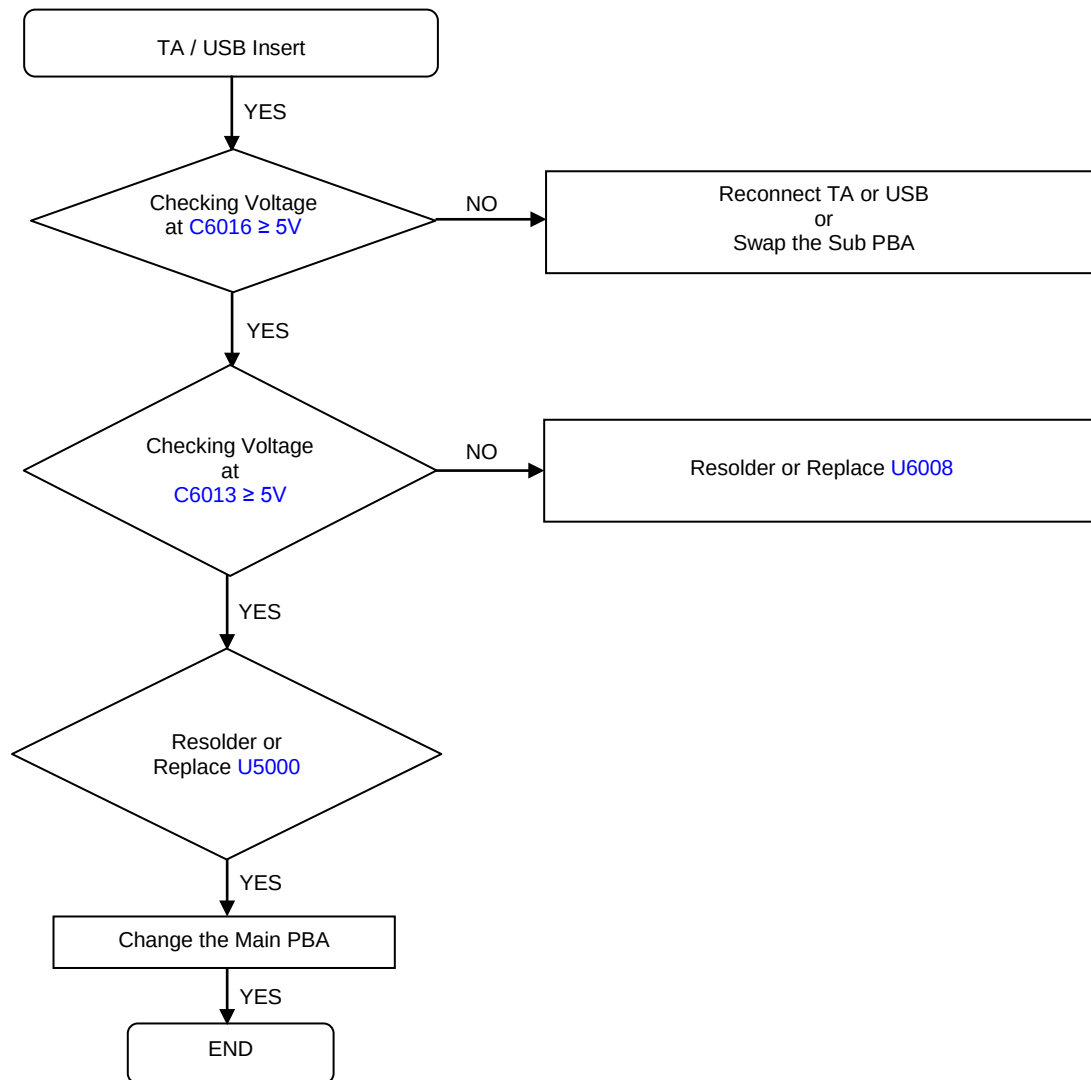


8. Level 3 Repair

8-3-6. Microphone Part

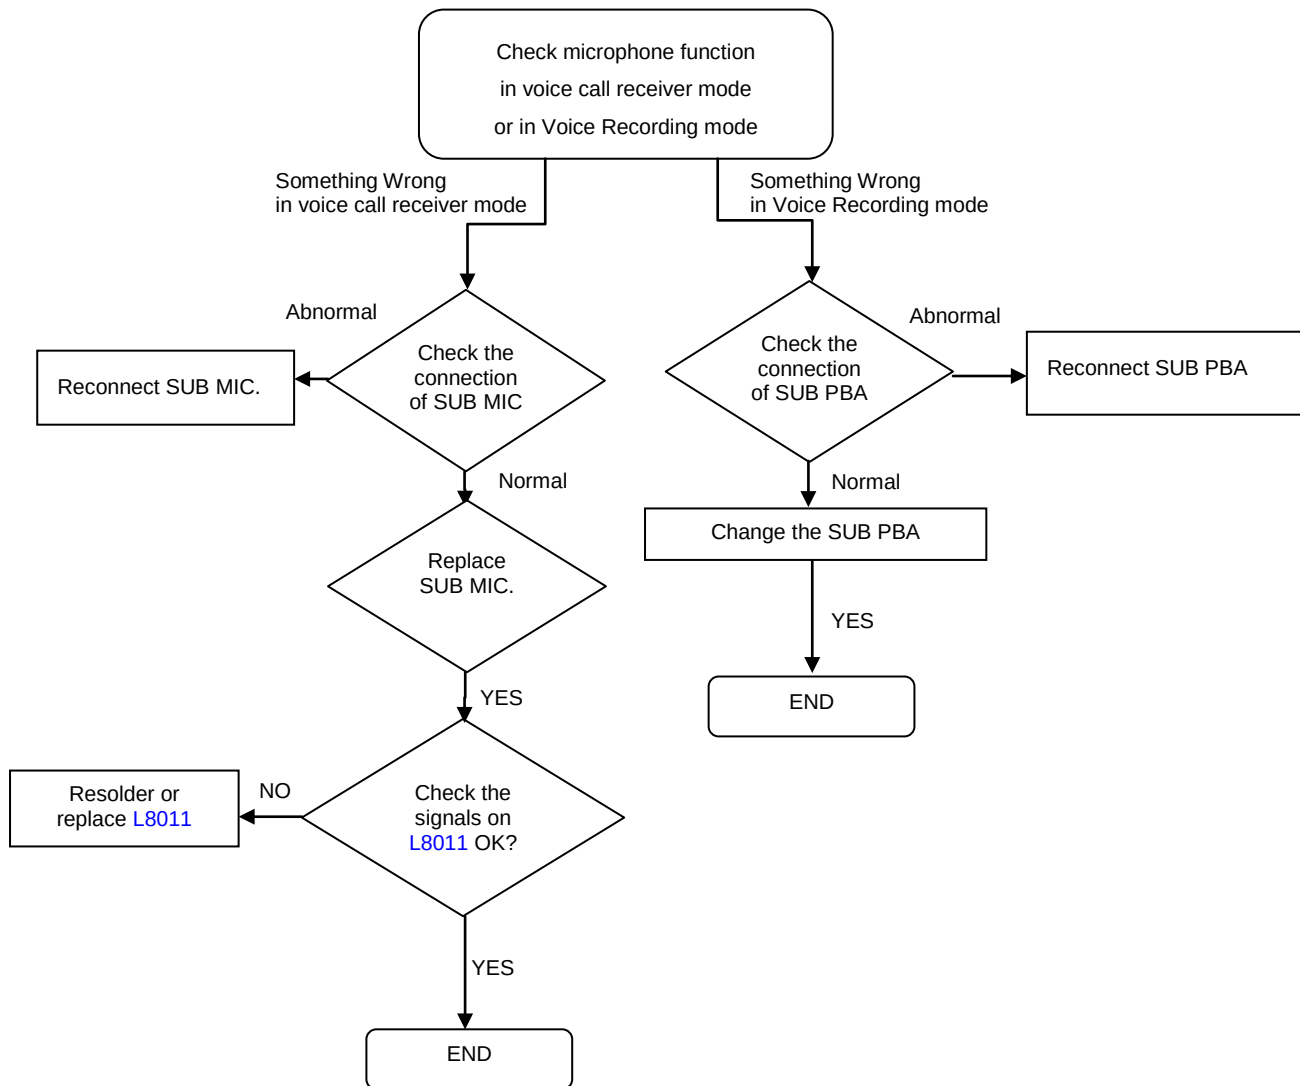


8. Level 3 Repair

8-3-7. Speaker Part

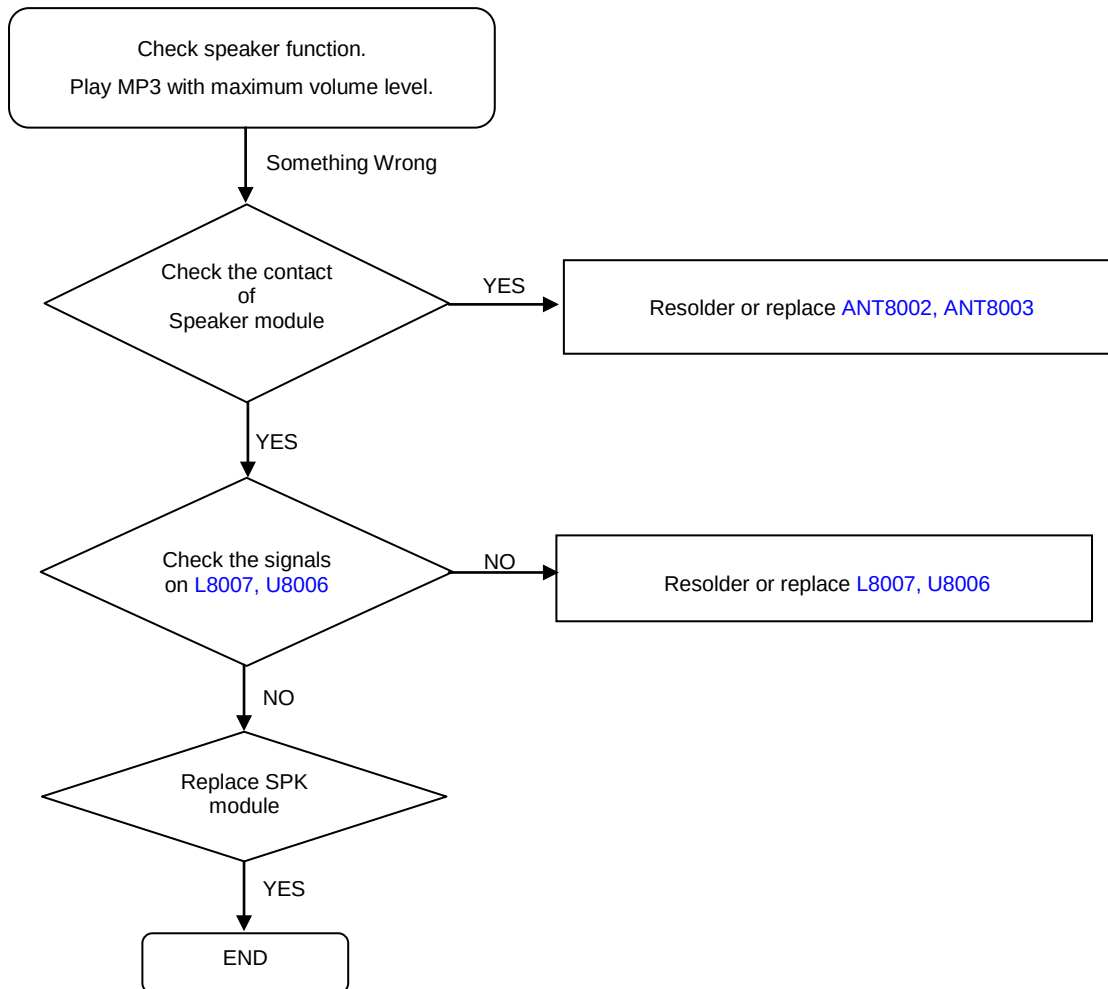


8. Level 3 Repair

8-3-8. Receiver Part

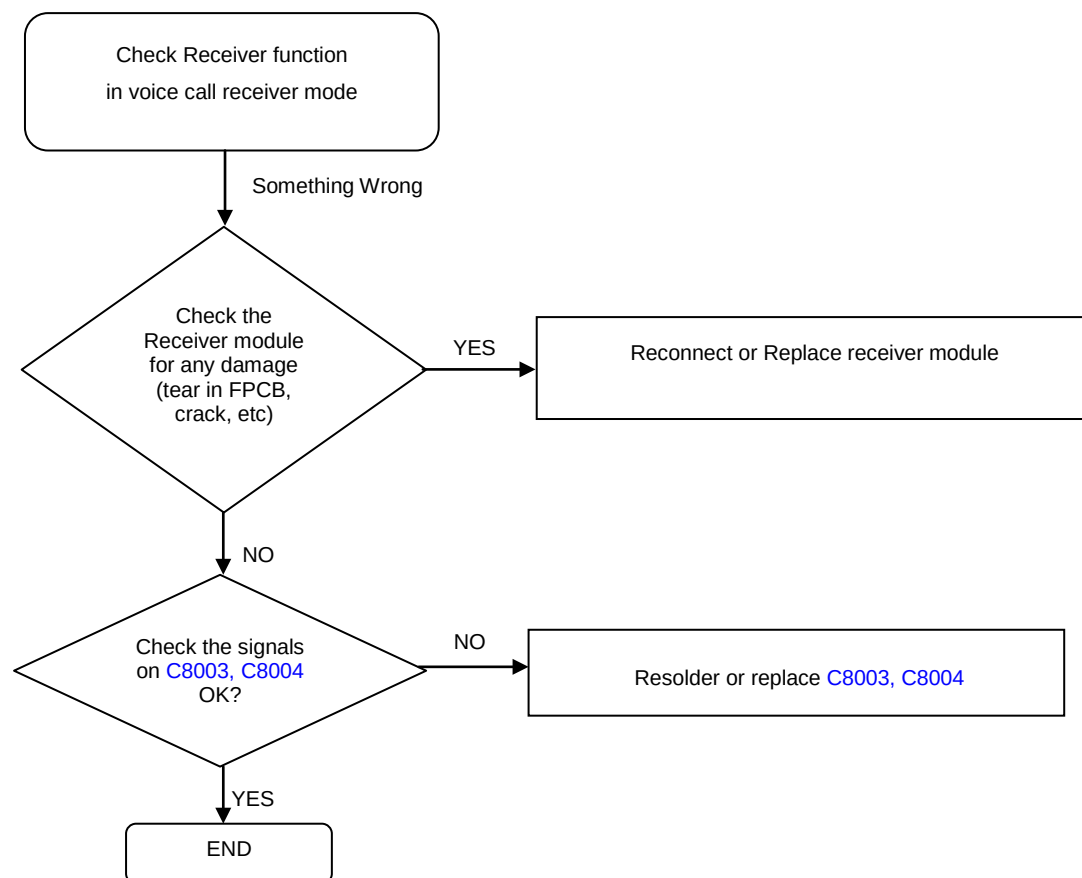


8. Level 3 Repair

8-3-9. OCTA

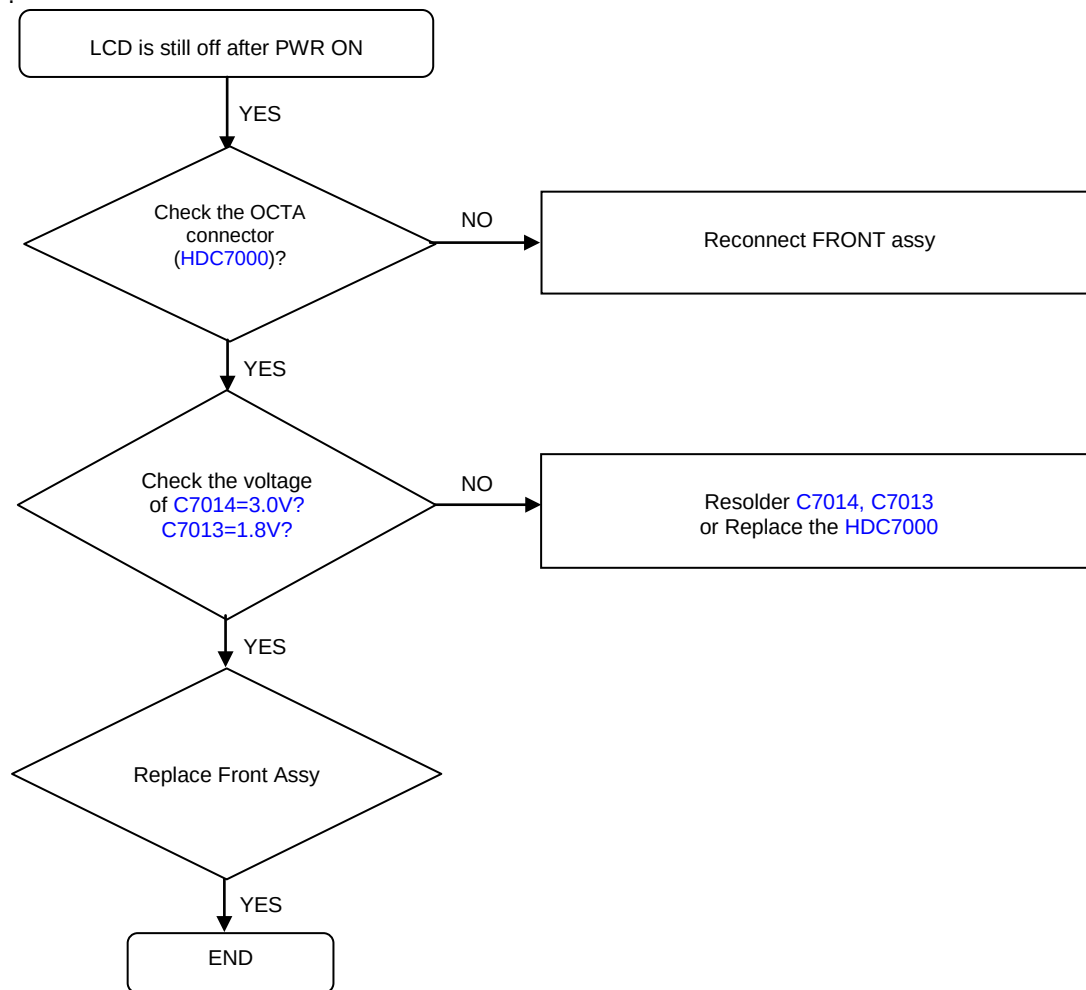


8. Level 3 Repair

8-3-10. 16M CAMERA

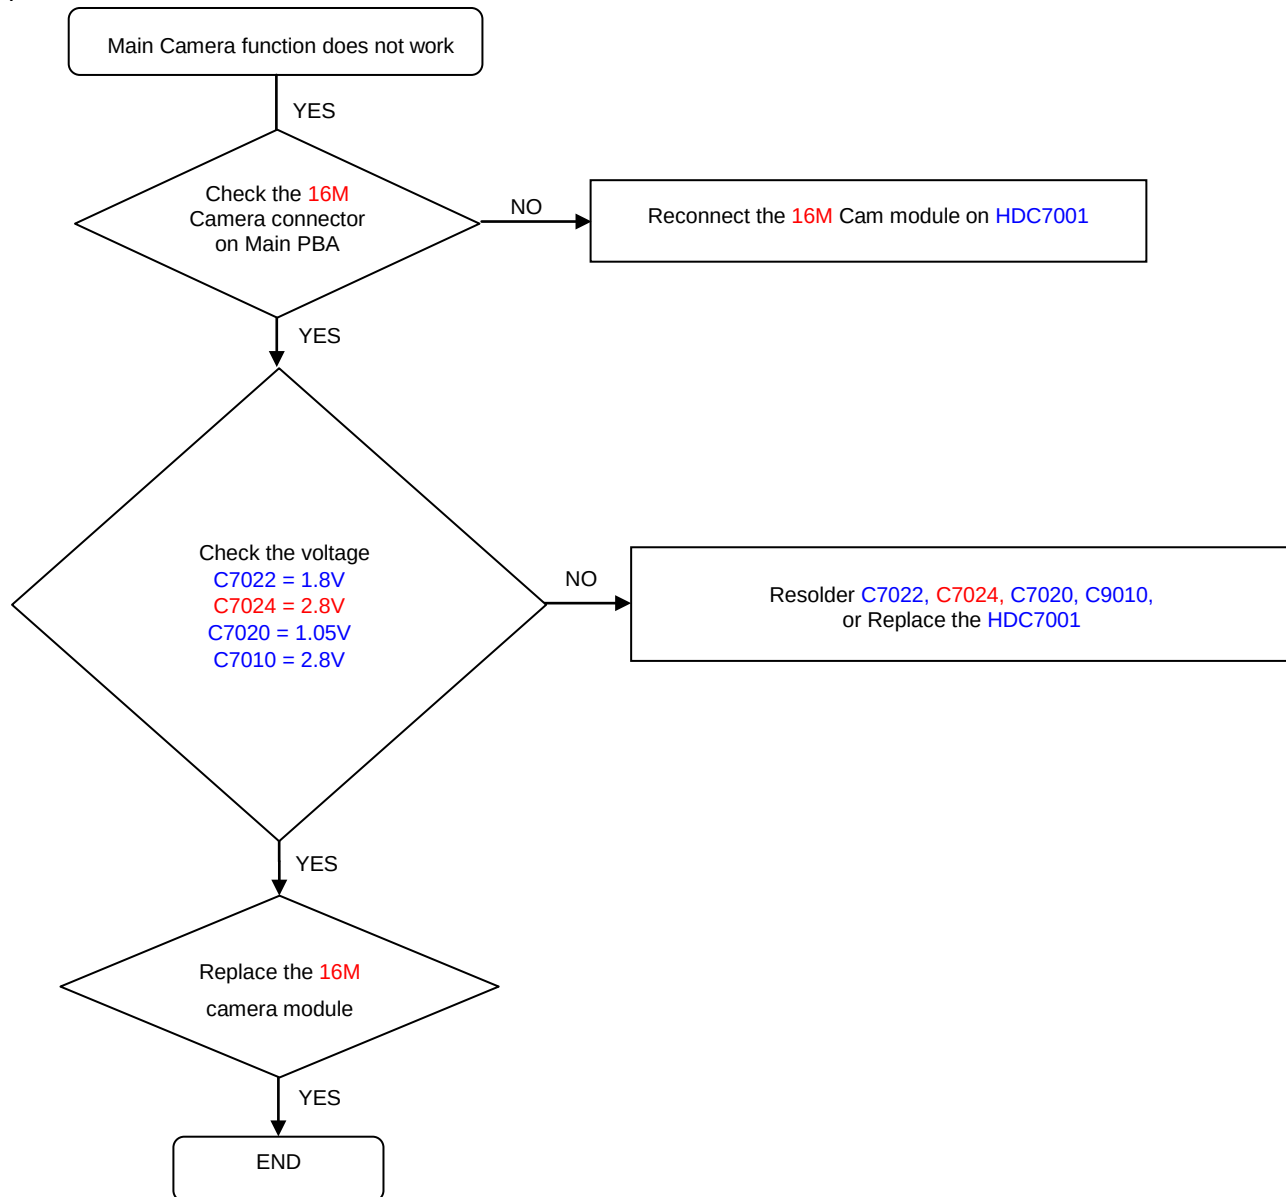


8. Level 3 Repair

8-3-11. 16M CAMERA

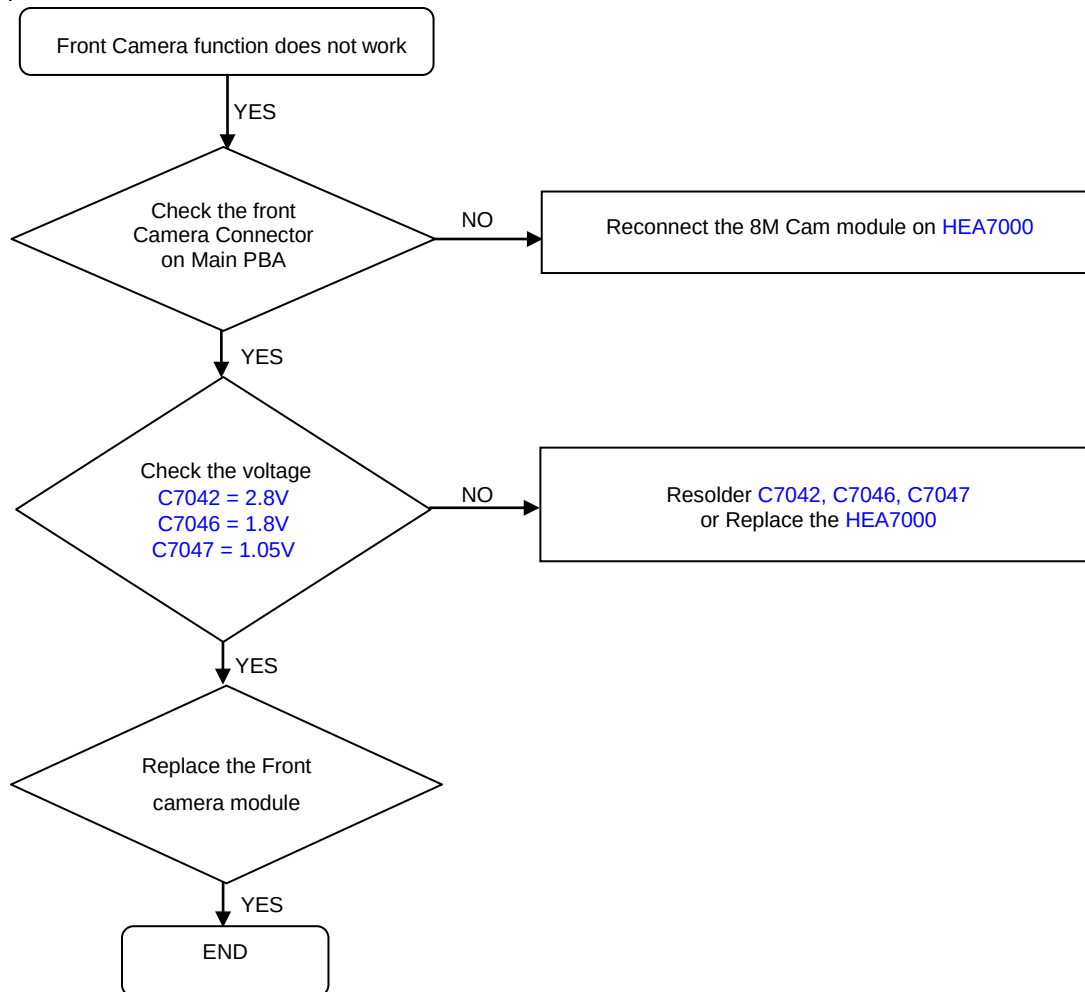

8. Level 3 Repair


8-3-12. RF Section(LTE,WCDMA,GSM)

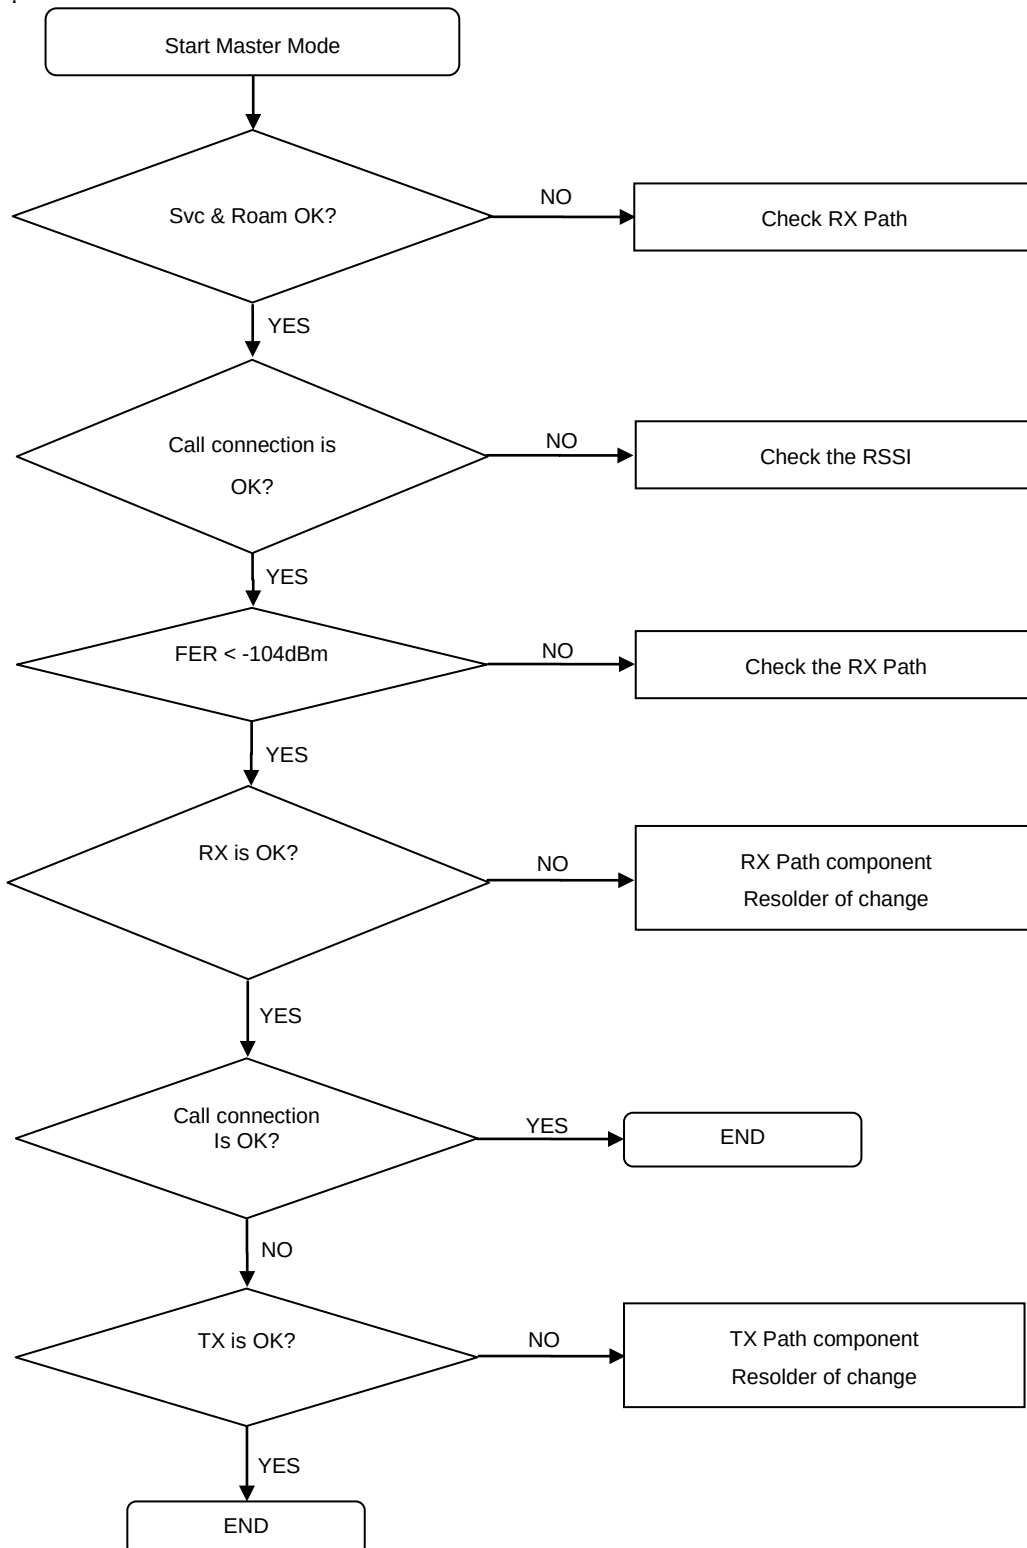


8. Level 3 Repair

8-3-13. RF Section(WLAN,BT)

-WLAN RX

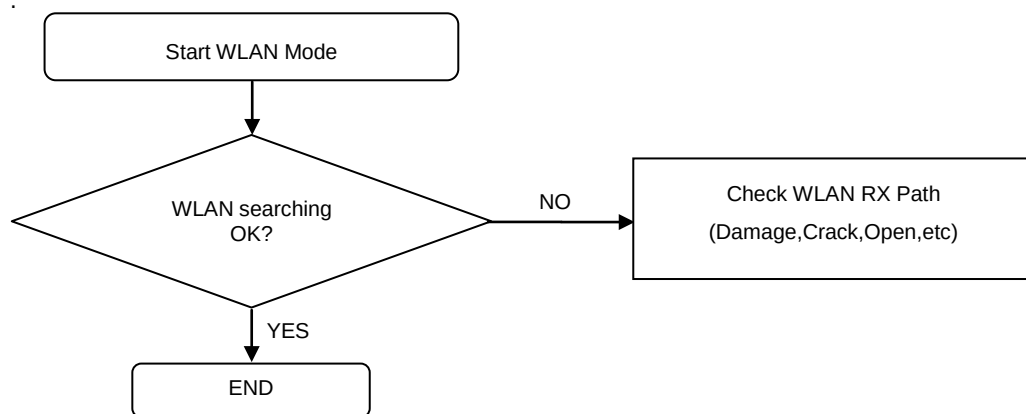


-WLAN TX

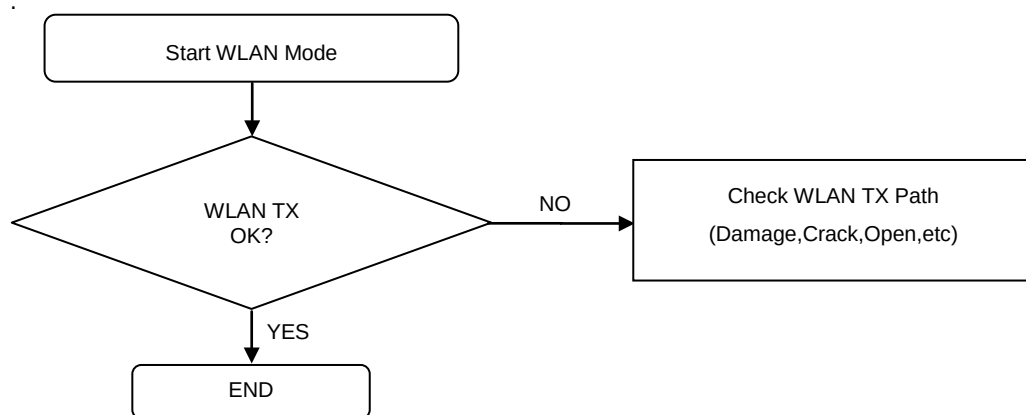


8. Level 3 Repair

-BT

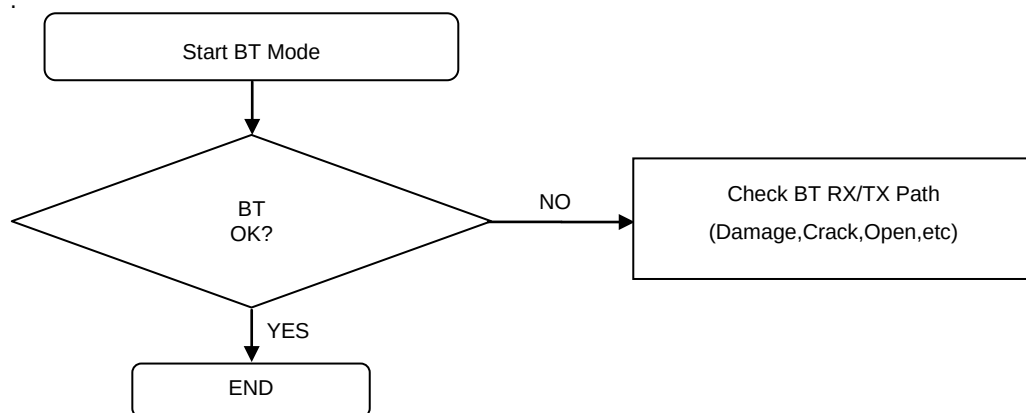


-GPS

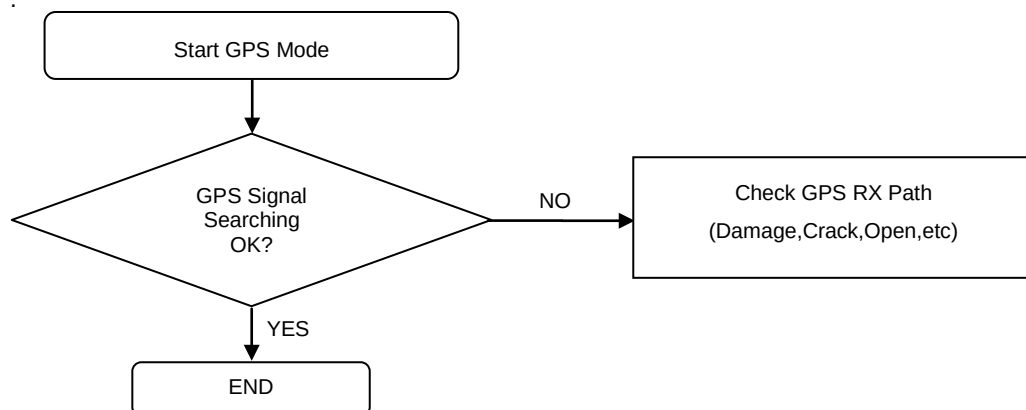


8. Level 3 Repair

8-3-14. FM RADIO

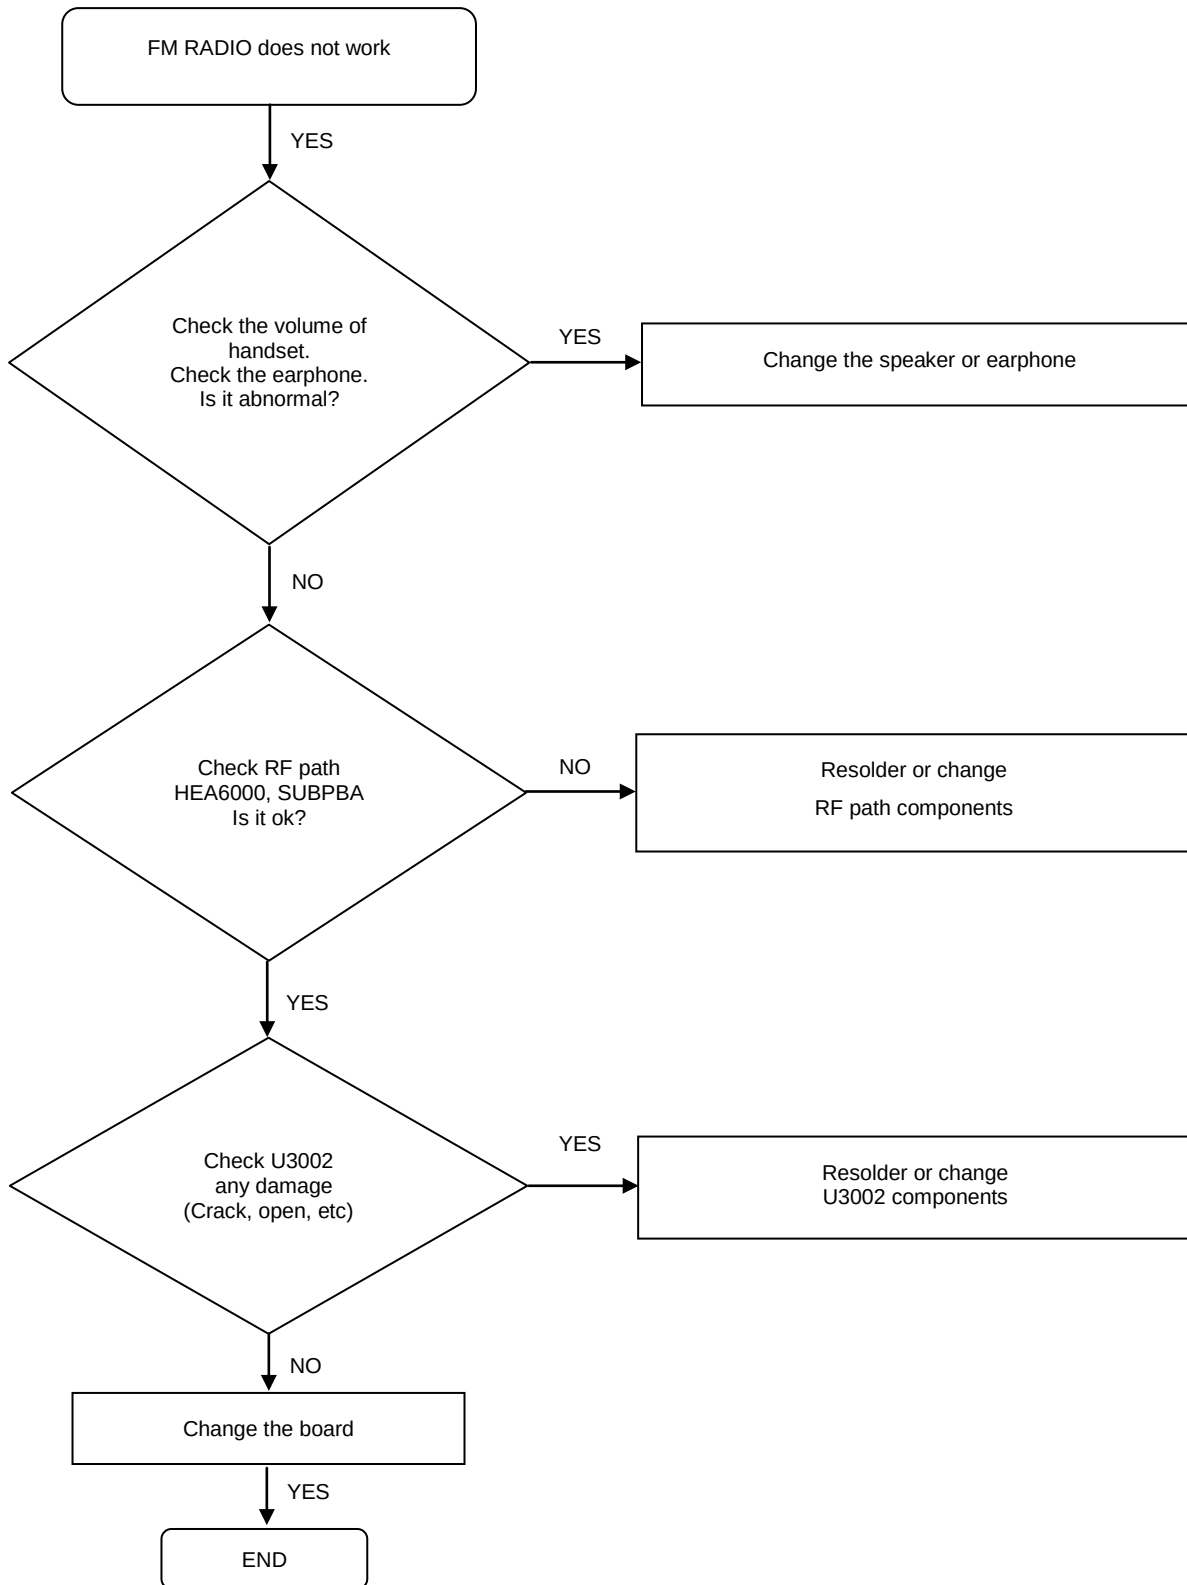

8-3-15. NFC



9. Reference Abbreviate

Reference Abbreviate

- **AAC**: Advanced Audio Coding.
- **AVC** : Advanced Video Coding.
- **BER** : Bit Error Rate
- **BPSK**: Binary Phase Shift Keying
- **CA** : Conditional Access
- **CDM** : Code Division Multiplexing
- **C/I** : Carrier to Interference
- **DMB** : Digital Multimedia Broadcasting
- **EN** : European Standard
- **ES** : Elementary Stream
- **ETSI**: European Telecommunications Standards Institute
- **MPEG**: Moving Picture Experts Group
- **PN** : Pseudo-random Noise
- **PS** : Pilot Symbol
- **QPSK**: Quadrature Phase Shift Keying
- **RS** : Reed-Solomon
- **SI** : Service Information
- **TDM** : Time Division Multiplexing
- **TS** : Transport Stream

SAMSUNG