

I2C	Sub SYS	Function	Part Number	I2C Spec.		I2C Slave Address / Write / Read (7-bit mode)	
I2C-0	AP	Flash LED driver	AW36413			0x6B	
I2C-1 (I3C)	AP Sensor Hub	Magnetic Sensor	AK09918C	400 Kbps		0x0C	Write:0x18 / Read:0x19
		Ambient Light Sensor	STK33562	400 Kbps		0x46	Write:0x8C / Read:0x8D
		Proximity Sensor					
		SAR Sensor	SX9328	400 Kbps		0x28	
I2C-2 (I3C)	AP	Rear Camera					
I2C-3	AP	LCM BIAS	SM5109C			0x3E	Write:0x7C / Read:0x7D
		Audio Smart PA	AW87339				
I2C-4 (I3C)	AP	Front Camera					
I2C-5	AP	Charger IC	BQ25601	400Kbps		0x6B	Write:0xD6 / Read:0xD7
I2C-6	AP	BUCK LP4X					

Note : I2C Spec. : Standard mode (100 kbps) and Fast mode (400 kbps), Fast mode Plus (1 Mbps) and High-speed mode (3.4 Mbps)

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 02_I2C_ID_Overview

Size C	Project PA5905_MB_V1	Rev V1
-----------	-------------------------	-----------

Date: Wednesday, July 27, 2022 Sheet 2 of 37

					华勤通讯 Huaqin Telecom Technology Com.,Ltd					
					Title 03_Change_Notice					
					Size C			Project PA5905_MB_V1		Rev V1
					Date: Wednesday, July 27, 2022				Sheet 3 of 37	

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 04_CHANGELIST		
Size D	Project PA5905_MB_V1	Rev V1
Date: Wednesday, July 27, 2022		Sheet 4 of 37

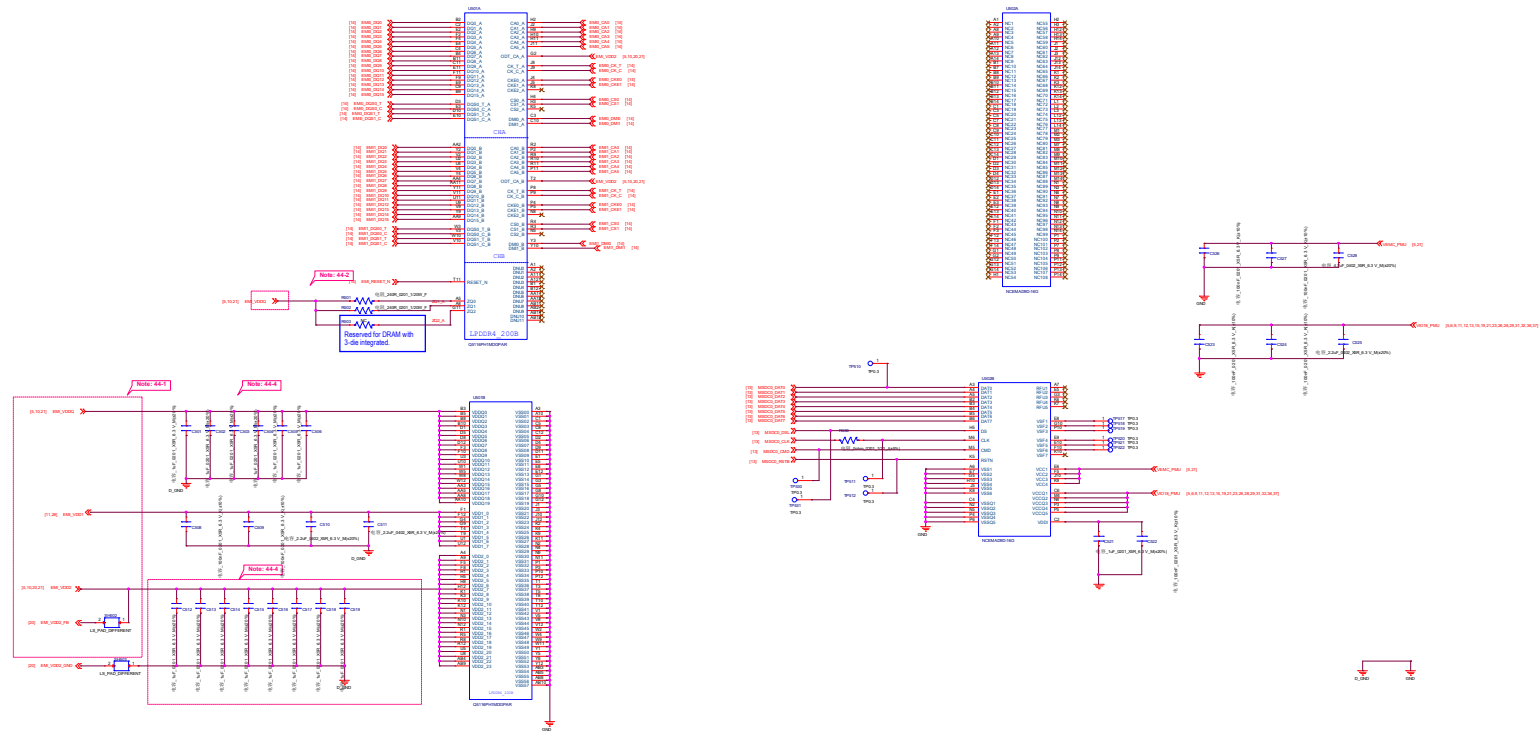

Schematic design notice of "44_Memory_eMMC_LPDDR4"

Note 44-1: Please refer to power supply related page select output voltage properly for LPDDR4

Note 44-2: DRAM ZQx resistor = 240ohm (1%) that must be connected to VDDQ.

Note 44-4: VDD2 VDDQ decoupling cap: closed to DRAM ball.
For other cap for PMIC >10uF, at PMIC page;
please also refer to MMD and layout guide for placement.

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 05_Memory_eMMC_LPDDR4

Size E Project PA5905_MB_V1

Rev V1


Date: Wednesday, July 27, 2022 Sheet 5 of 37

One Microphone

FM_N connect to main ground directly

[illegible]


AUDIO PA FS1512N-M

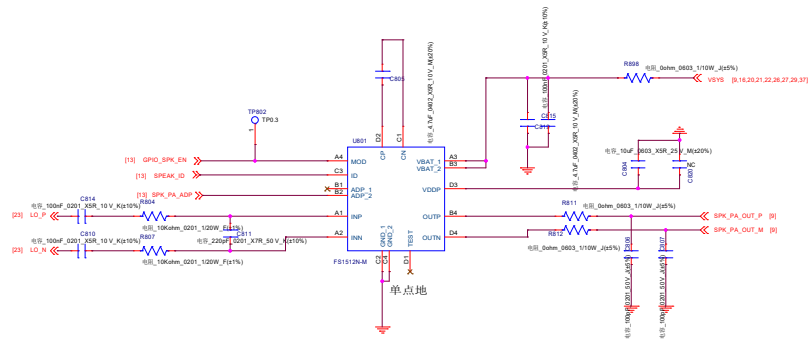



华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 08_AUDIO_SPEAKER_AMP		
Size D	Project PA5905_MB_V1	Rev v1
Date: Friday, September 02, 2022	Sheet 8 of 37	

60	Powerpin GND	Powerpin GND
61	Powerpin GND	Powerpin GND
1	LEDA	MIPI_LANE0_P
2	NC	MIPI_LANE0_N
3	LCM_LED_K_1	GND
4	LCM_LED_K_2	MIPI_LANE1_P
5	TP	MIPI_LANE1_N
6	LCM_RST	GND
7	CANC/PMW	MIPI_CLK_P
8	Error Flag PIN	MIPI_CLK_N
9	ENTN CTP	GND
10	SCL	MIPI_LANE2_P
11	MISO	MIPI_LANE2_N
12	MOSI	GND
13	CS	MIPI_LANE3_P
14	GPIO CTP_RSTB	MIPI_LANE3_N
15	LCM_VDDH	GND
16	LCM_VDDH	LCM_NTC
17	LCM_RSTB	GND
18	NC	PMU_TMON_RPT_R550
19	VDDH_PMI	PMU_TMON_RPT_RST2
20	VDDH_CTP	PMU_TMON_RPT_R550
21	GND	ANT_CHECK
22	NC	Y01018
23	TP_SPL_CLK	TP_SPL_CLK
24	TP_SPL_MISO	TP_SPL_MISO
25	TP_SPL_MOSI	TP_SPL_MOSI
26	TP_SPL_CS	TP_SPL_CS
27	TP_SPL_RSTB	TP_SPL_RSTB
28	TP_SPL_RSTB	TP_SPL_RSTB
29	TP_SPL_RSTB	TP_SPL_RSTB
30	TP_SPL_RSTB	TP_SPL_RSTB
31	TP_SPL_RSTB	TP_SPL_RSTB
32	TP_SPL_RSTB	TP_SPL_RSTB
33	TP_SPL_RSTB	TP_SPL_RSTB
34	TP_SPL_RSTB	TP_SPL_RSTB
35	TP_SPL_RSTB	TP_SPL_RSTB
36	TP_SPL_RSTB	TP_SPL_RSTB
37	TP_SPL_RSTB	TP_SPL_RSTB
38	TP_SPL_RSTB	TP_SPL_RSTB
39	TP_SPL_RSTB	TP_SPL_RSTB
40	TP_SPL_RSTB	TP_SPL_RSTB
41	TP_SPL_RSTB	TP_SPL_RSTB
42	TP_SPL_RSTB	TP_SPL_RSTB
43	TP_SPL_RSTB	TP_SPL_RSTB
44	TP_SPL_RSTB	TP_SPL_RSTB
45	TP_SPL_RSTB	TP_SPL_RSTB
46	TP_SPL_RSTB	TP_SPL_RSTB
47	TP_SPL_RSTB	TP_SPL_RSTB
48	TP_SPL_RSTB	TP_SPL_RSTB
49	TP_SPL_RSTB	TP_SPL_RSTB
50	TP_SPL_RSTB	TP_SPL_RSTB
51	TP_SPL_RSTB	TP_SPL_RSTB
52	TP_SPL_RSTB	TP_SPL_RSTB
53	TP_SPL_RSTB	TP_SPL_RSTB
54	TP_SPL_RSTB	TP_SPL_RSTB
55	TP_SPL_RSTB	TP_SPL_RSTB
56	TP_SPL_RSTB	TP_SPL_RSTB
57	TP_SPL_RSTB	TP_SPL_RSTB
58	TP_SPL_RSTB	TP_SPL_RSTB
59	TP_SPL_RSTB	TP_SPL_RSTB
60	TP_SPL_RSTB	TP_SPL_RSTB


OVP

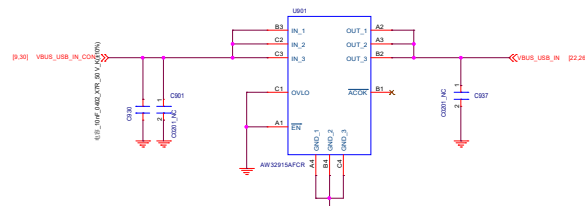

LCD-BACKLIGHT

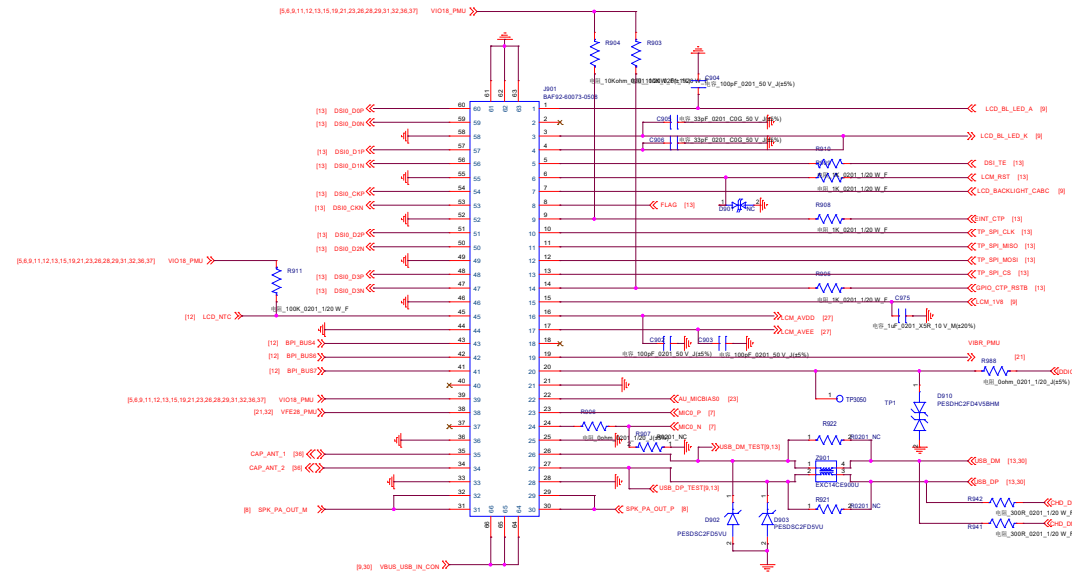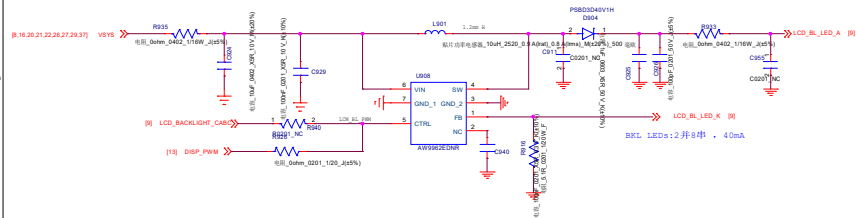

Schematic design notice of "10_BB_POWER_PDN" page:

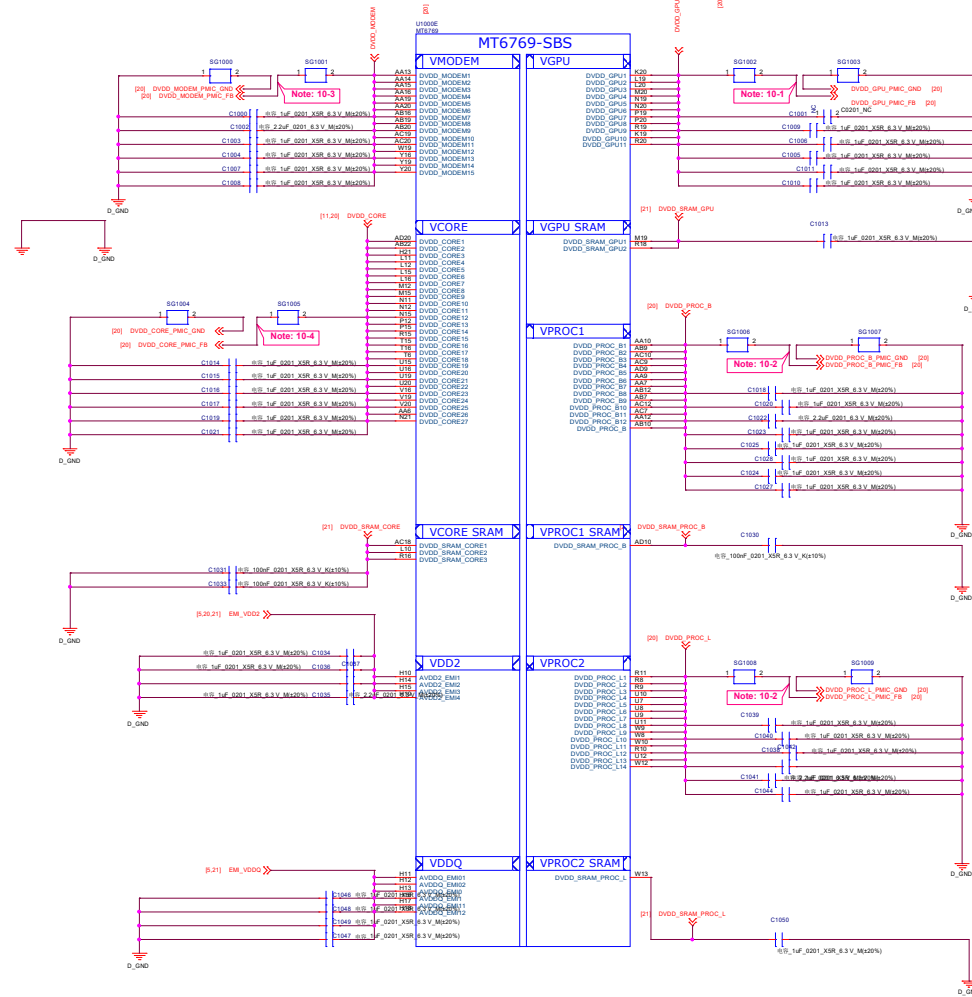

Note 10-1: Differential pair of DVDD_GPU remote sense must be close to BB's ball.
Remote sense trace with GND shielding to PMIC (Differential)

Note 10-2: Differential pair of DVDD_PROC remote sense must be close to BB's ball.
Remote sense trace with GND shielding to PMIC (Differential)

Note 10-3: Differential pair of DVDD_MODEM remote sense must be close to BB's ball.
Remote sense trace with GND shielding to PMIC (Differential)


Note 10-4: Differential pair of DVDD_CORE remote sense must be close to BB's ball.
Remote sense trace with GND shielding to PMIC (Differential)


华勤通讯 Huaqin Telecom Technology Com., Ltd

Title 09_LCD_CTP_BL

Size D	Project PA5905_MB_V1	Rev V1
--------	----------------------	--------

Date: Wednesday, July 27, 2022	Sheet 10 of 37
--------------------------------	----------------



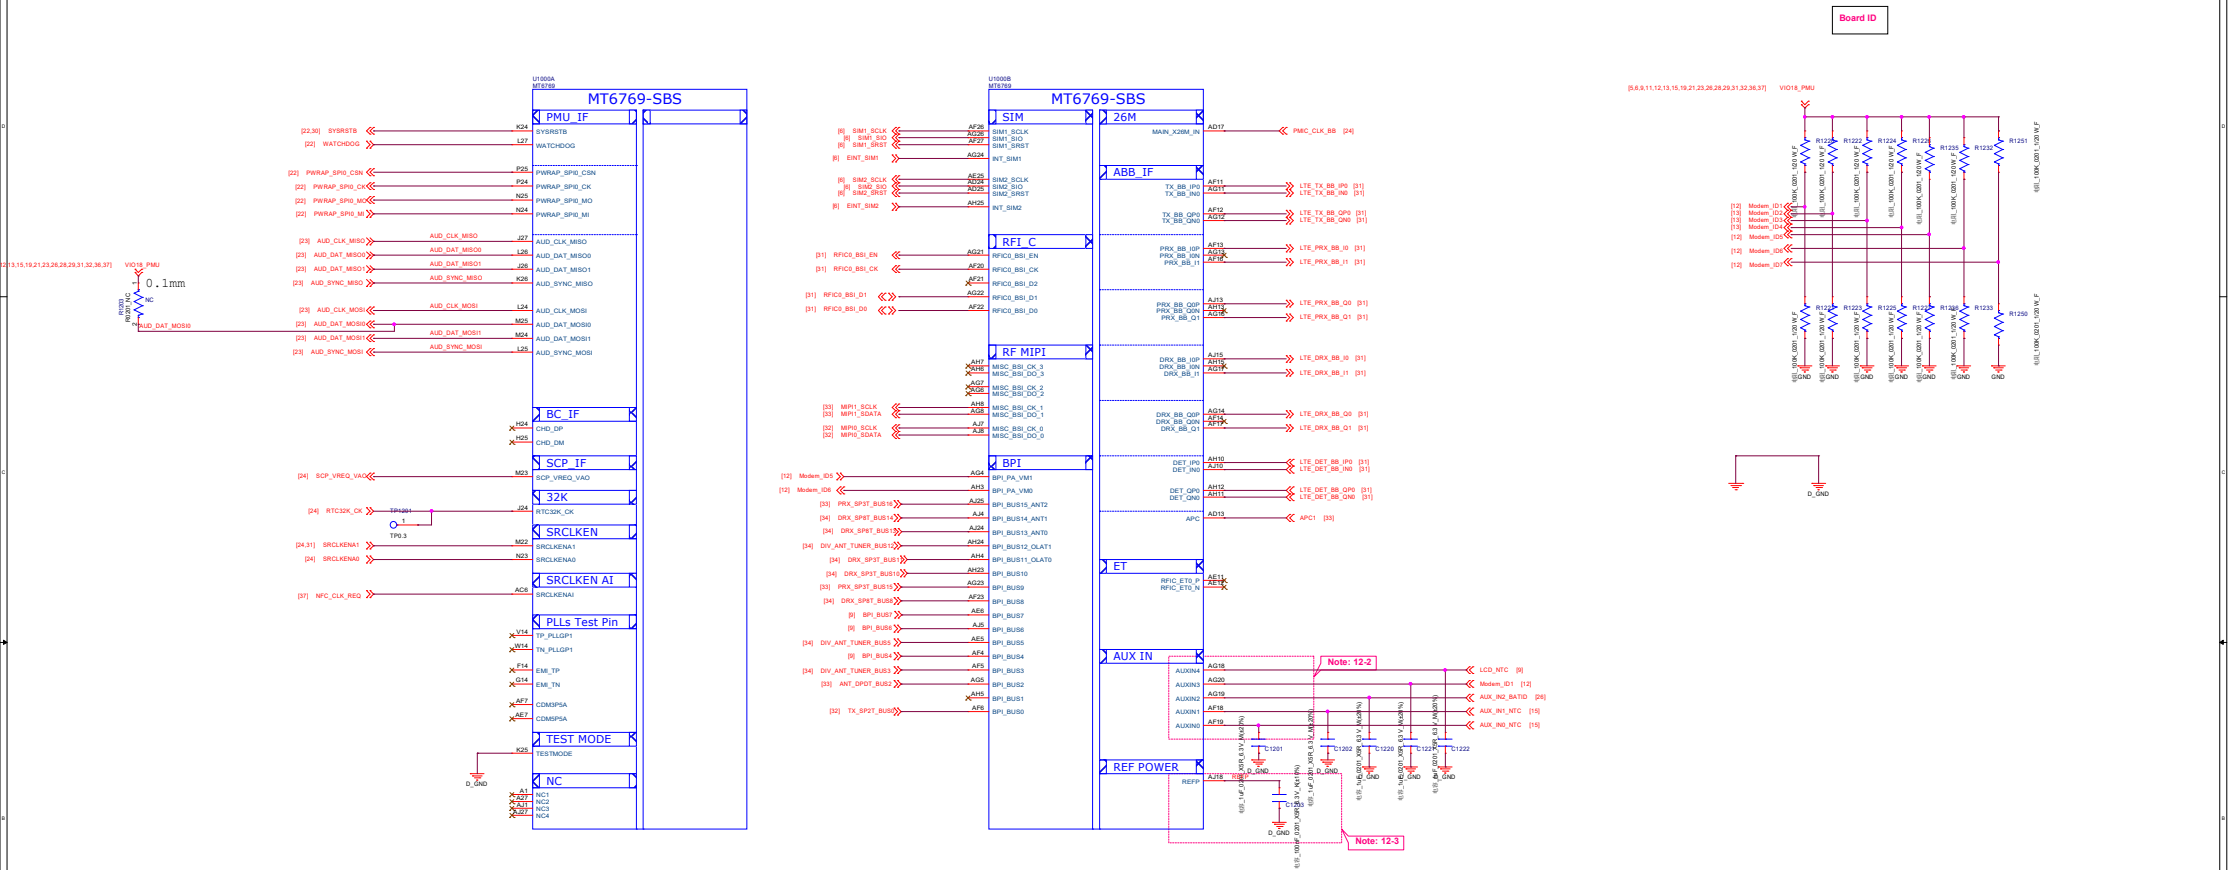

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 09_LCD_CTP_BL			
Size D	Project PA5905_MB_V1		Rev V1
Date: Wednesday, July 27, 2022		Sheet 12 of 37	

Schematic design notice of "12_BB_1" page:

Note 12-1: PWRAP_SPIO_CSN" and "AUD_DAT_MOSIO" are bootstrap pins to select which interface will be the JTAG pin out

PWRAP_SPIO_CSN	AUD_DAT_MOSIO	AP_JTAG	MD_JTAG
default=PU	default=PD	N/A	N/A
HI	LO	N/A	N/A
HI	HI	SPIO + EINT8	SPI2 + SPI3
LO	LO	SPIO + EINT8	N/A
LO	HI	N/A	N/A


Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 12-3: The de-coupling cap. for REFP (AJ18 ball) have to be placed as close to BB as possible.

Note 12-4: HW pin for DDR type feature in bootstrap (refer to BB HW design Notice)

AUD_SYNC_MISO	AUD_CLK_MISO	CAM_PDN3	PMIC 6358 voltage	DDR Type
default=PD	default=PD	default=PD	VDRAM1 / VDRAM2	DDR
No ext. pull	No ext. pull	No ext. pull	1.125v / 0.6v	LP4X eMCP
No ext. pull	12K pull to VIO18	No ext. pull	OFF / 1.8v	Reserved
12K pull to VIO18	No ext. pull	No ext. pull	1.225v / OFF	LP3 eMCP
12K pull to VIO18	12K pull to VIO18	No ext. pull	1.125v / 1.8v	Reserved


Note 12-5: Charger must have D+/D- pin for charger type USB detection. Charger must have at least 500mA USB current for All charger type.

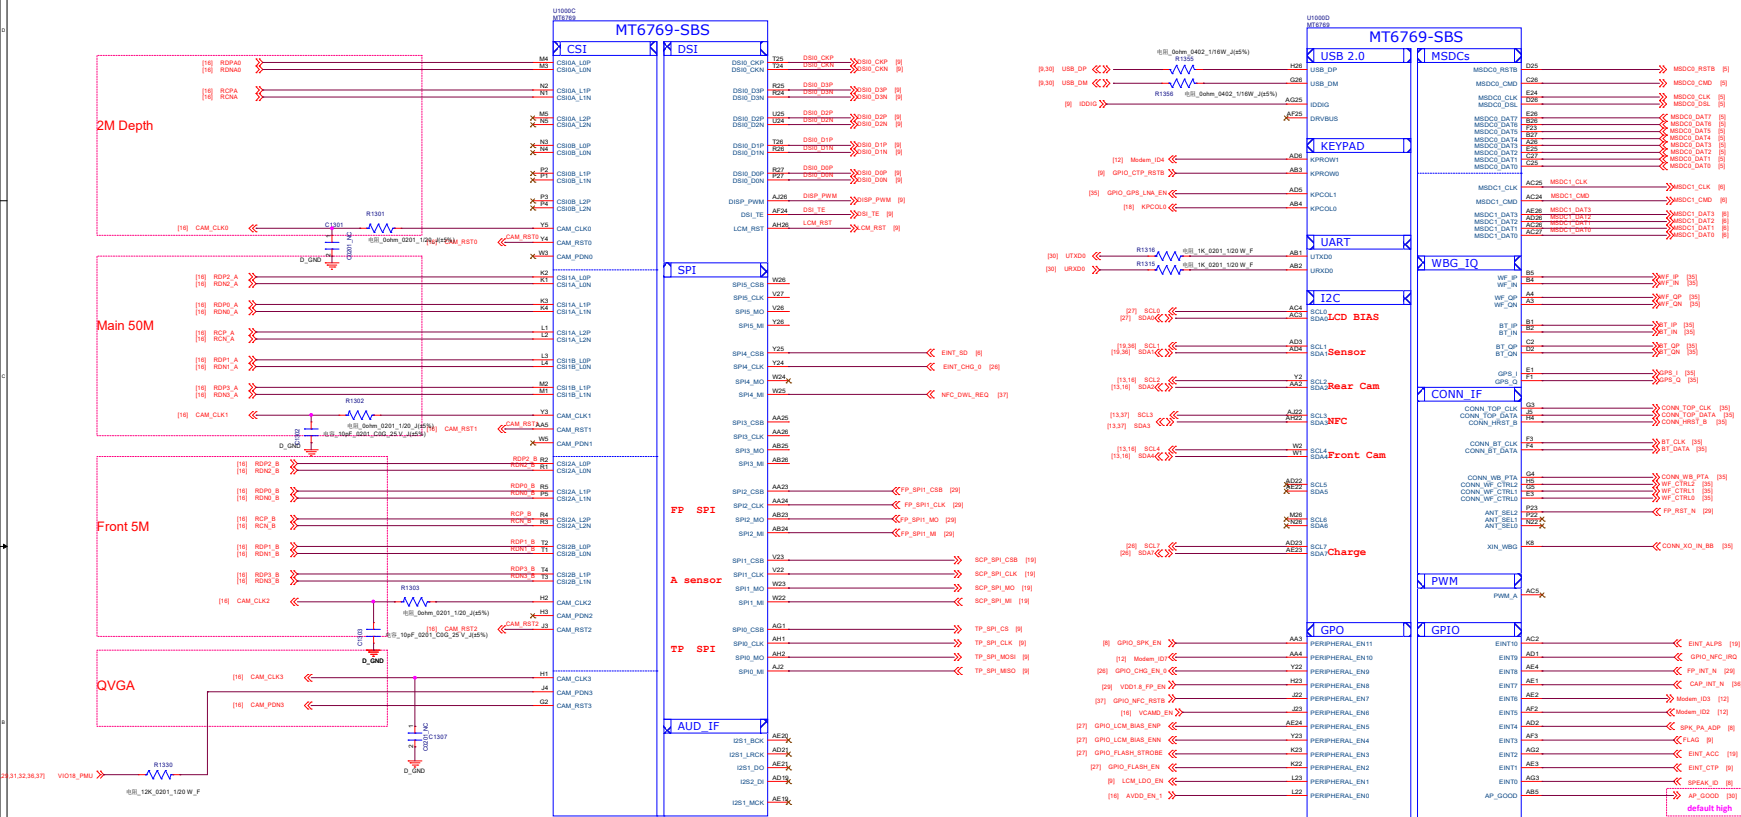

Design Notice: Boot mode

MT6768/67 DDR trapping table

	MT6768 / MT6767		PMIC MT6358	
	AUD_SYNC_MISO (ball : K26)	AUD_CLK_MISO (ball : J27)	CAM_PDN3 (ball : J4)	VDRAM1 VDRAM2
EMCP LP4X (254 b)	No ext. pull	No ext. pull	No ext. pull	1.125V
Reserved	No ext. pull	12K to VIO18	No ext. pull	0V
EMCP LP3 (221 b)	12K to VIO18	No ext. pull	No ext. pull	1.225V
Reserved	12K to VIO18	12K to VIO18	No ext. pull	1.125V
Discrete LP4X (200 b)	No ext. pull	No ext. pull	12K to VIO18	1.125V
Reserved	No ext. pull	12K to VIO18	12K to VIO18	0V
Reserved	12K to VIO18	No ext. pull	12K to VIO18	1.225V
Reserved	12K to VIO18	12K to VIO18	12K to VIO18	1.125V

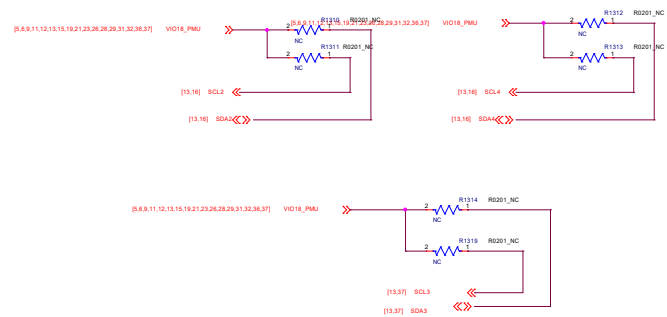

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 09_LCD_CTP_BL

Size D Project PA5905_MB_V1

Rev v1

Date: Wednesday, July 27, 2022


Sheet 13 of 37

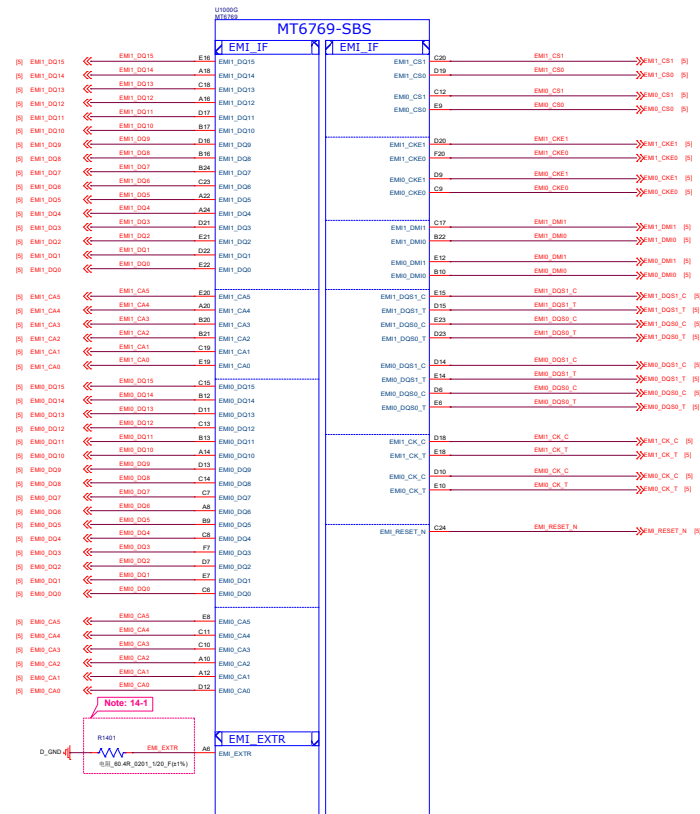

Schematic design notice of "14_BB_3" page.

Note 14-1: R1401 please select 60.4 ohm (1%) resistor

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 09_LCD_CTP_BL		
Size D	Project PA5905_MB_V1	Rev V1
Date: Wednesday, July 27, 2022	Sheet 14 of 37	

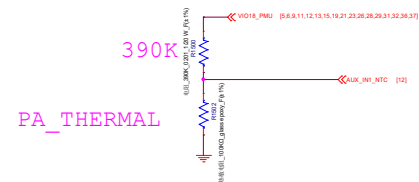


change to NCP03WF104F05RL Murata

Thermistor to sense RF PA temperature

1. NTC1502 must close to LTK Band * PA or the hottest PA <2mm.
2. The distance is the shortest distance from package edge to edge.


Thermistor / To sense board level temperature

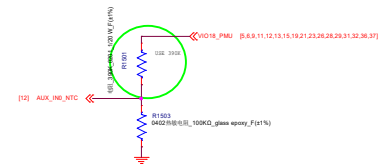


Distance to AP is 5-7mm and away from other heat resource 10mm-12mm

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 15_BB_AUXADC_Thermal		
Size D	Project PA5905_MB_V1	Rev v1
Date: Wednesday, July 27, 2022	Sheet 15 of 37	


Main Rear Camera - 50M

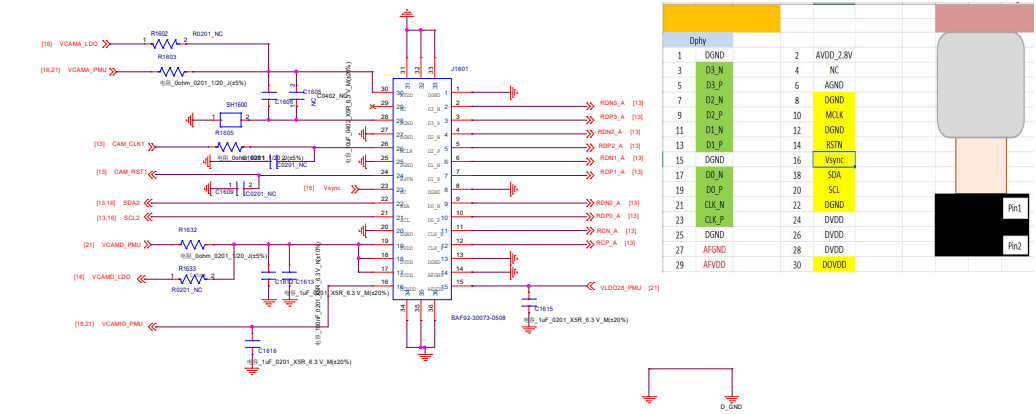


Front Camera 5M/8M

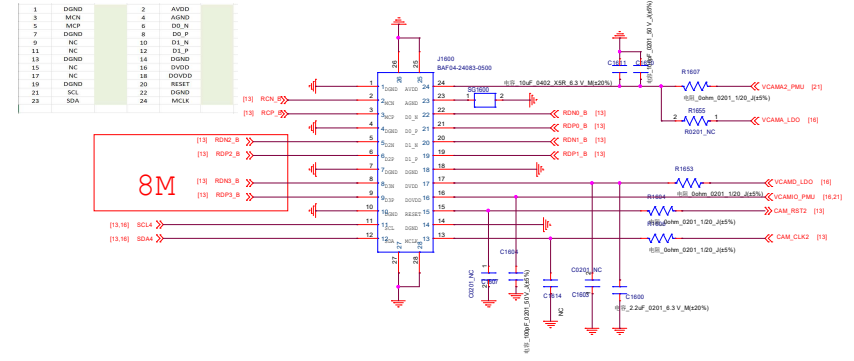


2M (Depth)

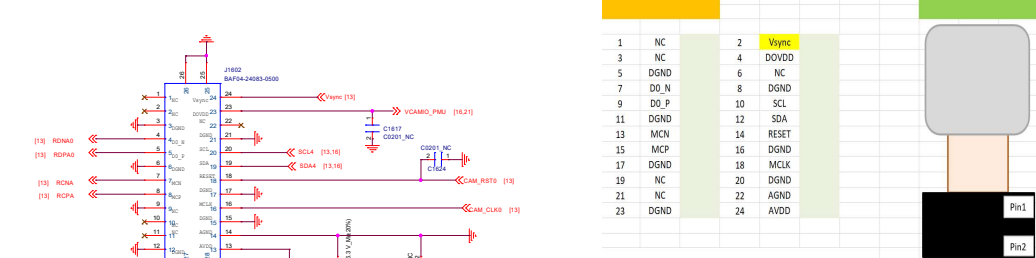

QVGA

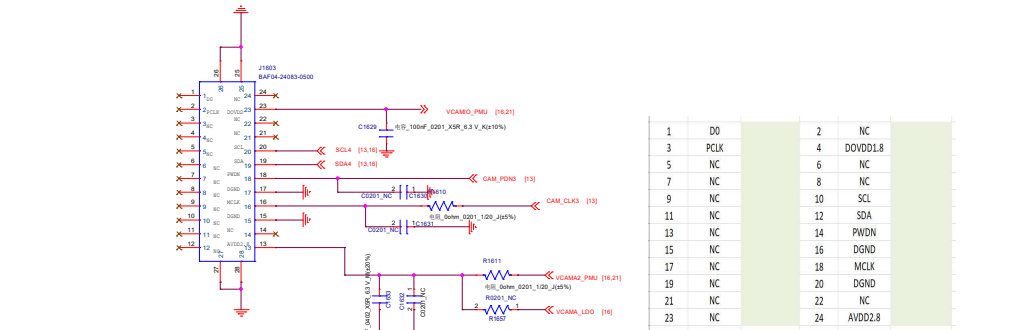


VS1	1.86 ~ 2.2 (12.5mV/step)	2
VS2	1.25 ~ 1.5 (12.5mV/step)	1.35

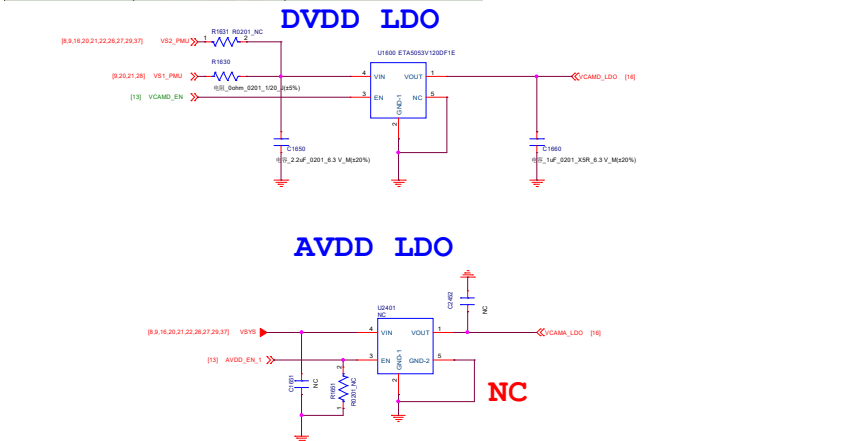

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 16_CAMERA_INTERFACE		
Size D	Project PA5905_MB_V1	Rev v1
Date: Wednesday, July 27, 2022		Sheet 16 of 37

Power Key / Key Pad

DO NOT put pull-up resistor on PWRKEY

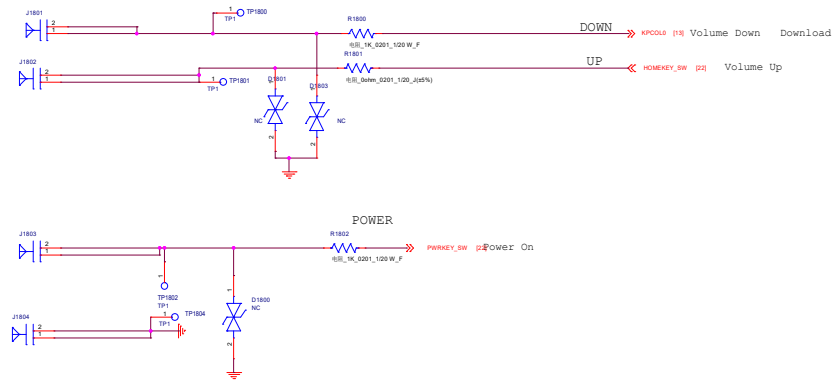

Schematic design notice of "65_PERI_Dual_SIM_ICUSB_KEYPAD" page.


Note 75-1: DO NOT put pull-up resistor on PWRKEY

Note 75-2: Volume Up : HOME Key / GND
Volume Down : KPROW/KPCOL0


Note 75-3: For better ESD performance, please select suitable components for system protection.

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 18_KEYPAD_INTERFACE		
Size D	Project PA5905_MB_V1	Rev v1
Date: Wednesday, July 27, 2022	Sheet 18 of 37	

A SENSOR


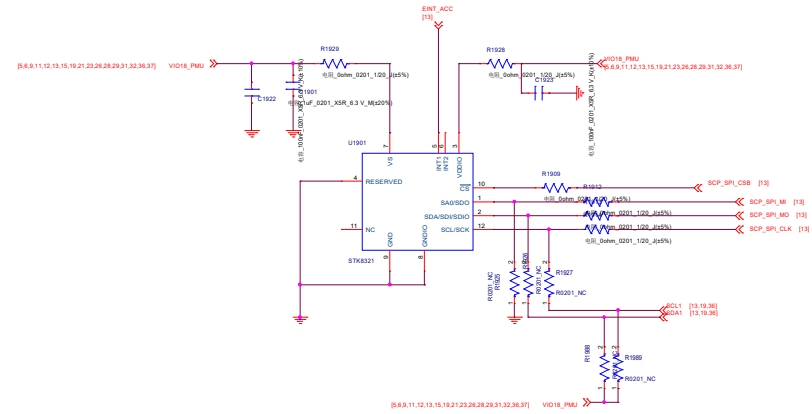


ALS PS 预留 (国内配置贴)

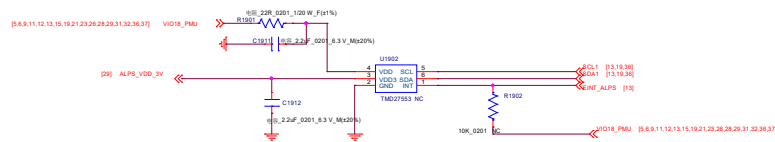


华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 19_SENSORS_ALS_PS_A		
Size D	Project PA5905_MB_V1	Rev v1
Date: Wednesday, July 27, 2022	Sheet 19 of 37	

Sheet 20 of 37

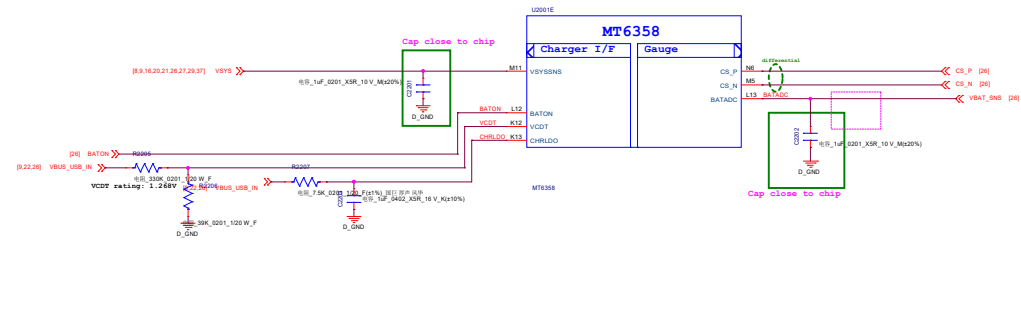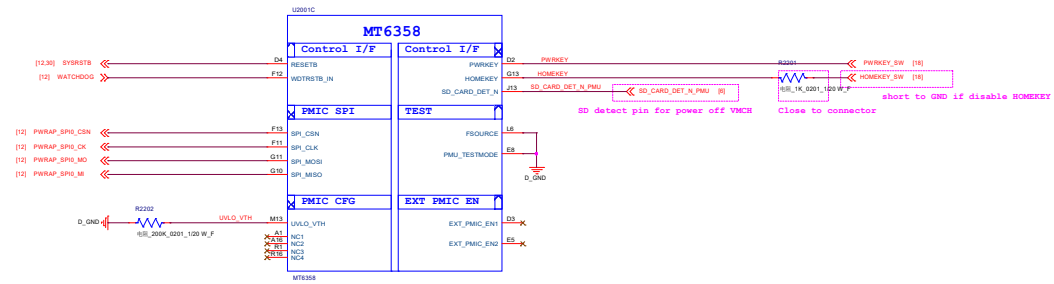


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 09_LCD_CTP_BL		
Size D	Project PA5905_MB_V1	Rev V1
Date: Wednesday, July 27, 2022	Sheet 22 of 37	

SGM41513D Charger

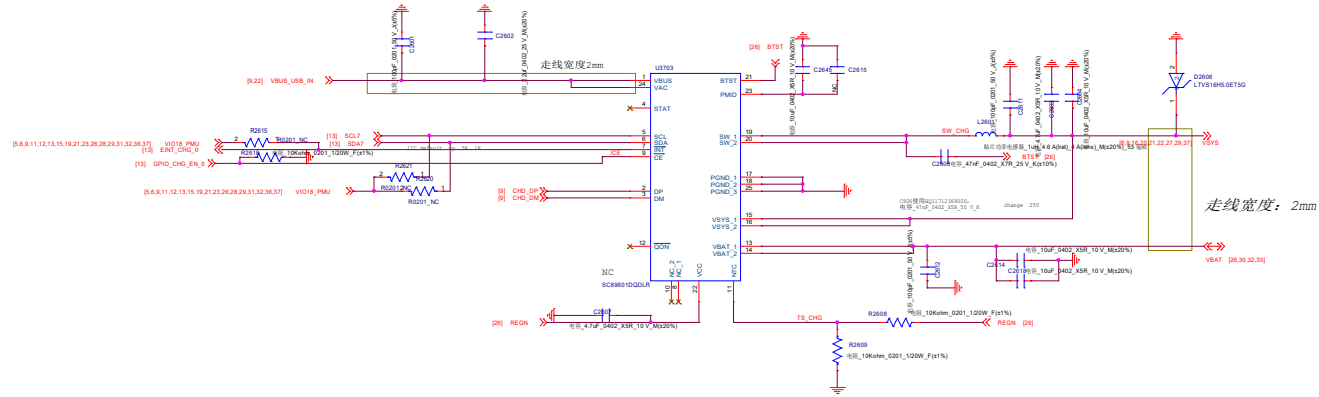


BATTERY CONNECTOR

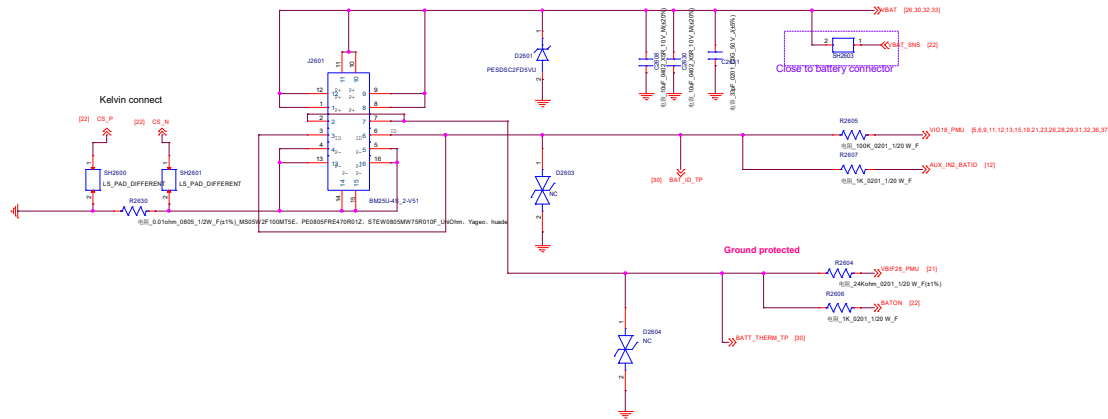

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 26_POWER_SubPMIC-Charger+CONN			
Size D	Project PA5905_MB_V1		Rev V1
Date: Friday, September 02, 2022		Sheet 26 of 37	


Rear Camera Flash

Flash LED for Camera

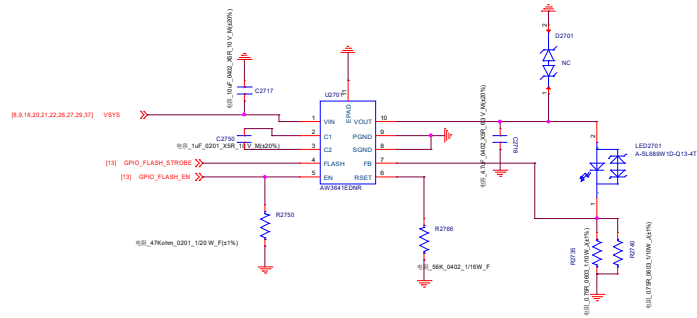

Display BIAS

SM5109C I2C Address : 0x3E Write:0x7C / Read:0x7D

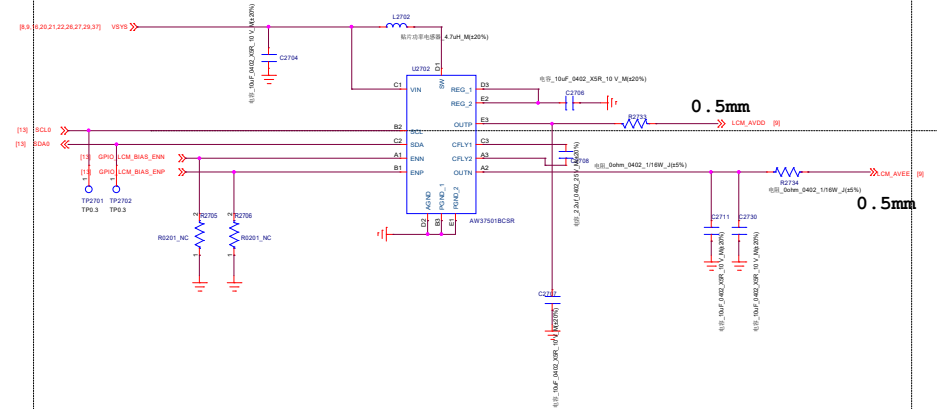


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 27_CAMERA_INTERFACE

Size D	Project PA5905_MB_V1	Rev v1
--------	----------------------	--------

Date: Wednesday, July 27, 2022 Sheet 27 of 37

Note: 28-5



Note 28-3: VCN33 LDO Layout placement please close to MT6631

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 28_POWER_ThirdParty_Powers			
Size D	Project PA5905_MB_V1		Rev V1
Date: Wednesday, July 27, 2022		Sheet 28 of 37	

The diagram shows a voltage divider circuit. A red input signal labeled [B, 9, 16, 20, 25, 26, 27, 37] VSW is connected to a resistor R201 (NC). The other end of R201 is connected to node 2, which is also connected to a resistor R203. Node 1 is connected to node 2 through a capacitor C201. Node 1 is also connected to a blue output signal labeled [18] VDD1_8_PP_PN. Node 2 is connected to a blue output signal labeled [19] VDD1_8_PP_PN. Node 2 is also connected to a blue output signal labeled [19] VDD1_8_PP_PN. Node 2 is also connected to a blue output signal labeled [19] VDD1_8_PP_PN. Node 2 is also connected to a blue output signal labeled [19] VDD1_8_PP_PN.

The schematic diagram illustrates the internal components of the FP-BP11 module and its connections to the VIO18_P4U module. The FP-BP11 module contains a Z2901 88294-1083433 component, which is connected to the VIO18_P4U module via a series of resistors (R2001, R2002, R2003, R2004, R2005, R2006, R2007, R2008, R2009, R2010, R2011, R2012, R2013, R2014, R2015, R2016, R2017, R2018, R2019, R2020, R2021, R2022, R2023, R2024, R2025, R2026, R2027, R2028, R2029, R2030, R2031, R2032, R2033, R2034, R2035, R2036, R2037, R2038, R2039, R2040, R2041, R2042, R2043, R2044, R2045, R2046, R2047, R2048, R2049, R2050, R2051, R2052, R2053, R2054, R2055, R2056, R2057, R2058, R2059, R2060, R2061, R2062, R2063, R2064, R2065, R2066, R2067, R2068, R2069, R2070, R2071, R2072, R2073, R2074, R2075, R2076, R2077, R2078, R2079, R2080, R2081, R2082, R2083, R2084, R2085, R2086, R2087, R2088, R2089, R2090, R2091, R2092, R2093, R2094, R2095, R2096, R2097, R2098, R2099, R2100, R2101, R2102, R2103, R2104, R2105, R2106, R2107, R2108, R2109, R2110, R2111, R2112, R2113, R2114, R2115, R2116, R2117, R2118, R2119, R2120, R2121, R2122, R2123, R2124, R2125, R2126, R2127, R2128, R2129, R2130, R2131, R2132, R2133, R2134, R2135, R2136, R2137, R2138, R2139, R2140, R2141, R2142, R2143, R2144, R2145, R2146, R2147, R2148, R2149, R2150, R2151, R2152, R2153, R2154, R2155, R2156, R2157, R2158, R2159, R2160, R2161, R2162, R2163, R2164, R2165, R2166, R2167, R2168, R2169, R2170, R2171, R2172, R2173, R2174, R2175, R2176, R2177, R2178, R2179, R2180, R2181, R2182, R2183, R2184, R2185, R2186, R2187, R2188, R2189, R2190, R2191, R2192, R2193, R2194, R2195, R2196, R2197, R2198, R2199, R2200, R2201, R2202, R2203, R2204, R2205, R2206, R2207, R2208, R2209, R2210, R2211, R2212, R2213, R2214, R2215, R2216, R2217, R2218, R2219, R2220, R2221, R2222, R2223, R2224, R2225, R2226, R2227, R2228, R2229, R2230, R2231, R2232, R2233, R2234, R2235, R2236, R2237, R2238, R2239, R2240, R2241, R2242, R2243, R2244, R2245, R2246, R2247, R2248, R2249, R2250, R2251, R2252, R2253, R2254, R2255, R2256, R2257, R2258, R2259, R2260, R2261, R2262, R2263, R2264, R2265, R2266, R2267, R2268, R2269, R2270, R2271, R2272, R2273, R2274, R2275, R2276, R2277, R2278, R2279, R2280, R2281, R2282, R2283, R2284, R2285, R2286, R2287, R2288, R2289, R2290, R2291, R2292, R2293, R2294, R2295, R2296, R2297, R2298, R2299, R2300, R2301, R2302, R2303, R2304, R2305, R2306, R2307, R2308, R2309, R2310, R2311, R2312, R2313, R2314, R2315, R2316, R2317, R2318, R2319, R2320, R2321, R2322, R2323, R2324, R2325, R2326, R2327, R2328, R2329, R2330, R2331, R2332, R2333, R2334, R2335, R2336, R2337, R2338, R2339, R2340, R2341, R2342, R2343, R2344, R2345, R2346, R2347, R2348, R2349, R2350, R2351, R2352, R2353, R2354, R2355, R2356, R2357, R2358, R2359, R2360, R2361, R2362, R2363, R2364, R2365, R2366, R2367, R2368, R2369, R2370, R2371, R2372, R2373, R2374, R2375, R2376, R2377, R2378, R2379, R2380, R2381, R2382, R2383, R2384, R2385, R2386, R2387, R2388, R2389, R2390, R2391, R2392, R2393, R2394, R2395, R2396, R2397, R2398, R2399, R2400, R2401, R2402, R2403, R2404, R2405, R2406, R2407, R2408, R2409, R2410, R2411, R2412, R2413, R2414, R2415, R2416, R2417, R2418, R2419, R2420, R2421, R2422, R2423, R2424, R2425, R2426, R2427, R2428, R2429, R2430, R2431, R2432, R2433, R2434, R2435, R2436, R2437, R2438, R2439, R2440, R2441, R2442, R2443, R2444, R2445, R2446, R2447, R2448, R2449, R2450, R2451, R2452, R2453, R2454, R2455, R2456, R2457, R2458, R2459, R2460, R2461, R2462, R2463, R2464, R2465, R2466, R2467, R2468, R2469, R2470, R2471, R2472, R2473, R2474, R2475, R2476, R2477, R2478, R2479, R2480, R2481, R2482, R2483, R2484, R2485, R2486, R2487, R2488, R2489, R2490, R2491, R2492, R2493, R2494, R2495, R2496, R2497, R2498, R2499, R2500, R2501, R2502, R2503, R2504, R2505, R2506, R2507, R2508, R2509, R2510, R2511, R2512, R2513, R2514, R2515, R2516, R2517, R2518, R2519, R2520, R2521, R2522, R2523, R2524, R2525, R2526, R2527, R2528, R2529, R2530, R2531, R2532, R2533, R2534, R2535, R2536, R2537, R2538, R2539, R2540, R2541, R2542, R2543, R2544, R2545, R2546, R2547, R2548, R2549, R2550, R2551, R2552, R2553, R2554, R2555, R2556, R2557, R2558, R2559, R2560, R2561, R2562, R2563, R2564, R2565, R2566, R2567, R2568, R2569, R2570, R2571, R2572, R2573, R2574, R2575, R2576, R2577, R2578, R2579, R2580, R2581, R2582, R2583, R2584, R2585, R2586, R2587, R2588, R2589, R2590, R2591, R2592, R2593, R2594, R2595, R2596, R2597, R2598, R2599, R2600, R2601, R2602, R2603, R2604, R2605, R2606, R2607, R2608, R2609, R2610, R2611, R2612, R2613, R2614, R2615, R2616, R2617, R2618, R2619, R2620, R2621, R2622, R2623, R2624, R2625, R2626, R2627, R2628, R2629, R2630, R2631, R2632, R2633, R2634, R2635, R2636, R2637, R2638, R2639, R2640, R2641, R2642, R2643, R2644, R2645, R2646, R2647, R2648, R2649, R2650, R2651, R2652, R2653, R2654, R2655, R2656, R2657, R2658, R2659, R2660, R2661, R2662, R2663, R2664

序号	引脚 PIN Define
1	MOSI
2	AVDD3.0V (NC)
3	CS
4	DVDD1.8V
5	CLK
6	INT
7	MISO
8	OTP (NC)
9	RST
10	GND

Title	29_Fingerprint
-------	----------------

Size D	Project PA5905_MB_V1	Rev v1
-----------	-------------------------	-----------

Date: Wednesday, July 27, 2022 Sheet 29 of 37

VCHG





VBAT TEST POINT



UART



RF_PCB TO A-COVER




光学定位孔




华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 30_DEBUG_IO		
Size D	Project PA5905_MB_V1	Rev V1
Date: Friday, September 02, 2022 Sheet 30 of 37		

PRX/DRX 1-8 For LB/MB:600M-2025M
PRX/DRX 9-12 For HB/MB:1805M-2690M

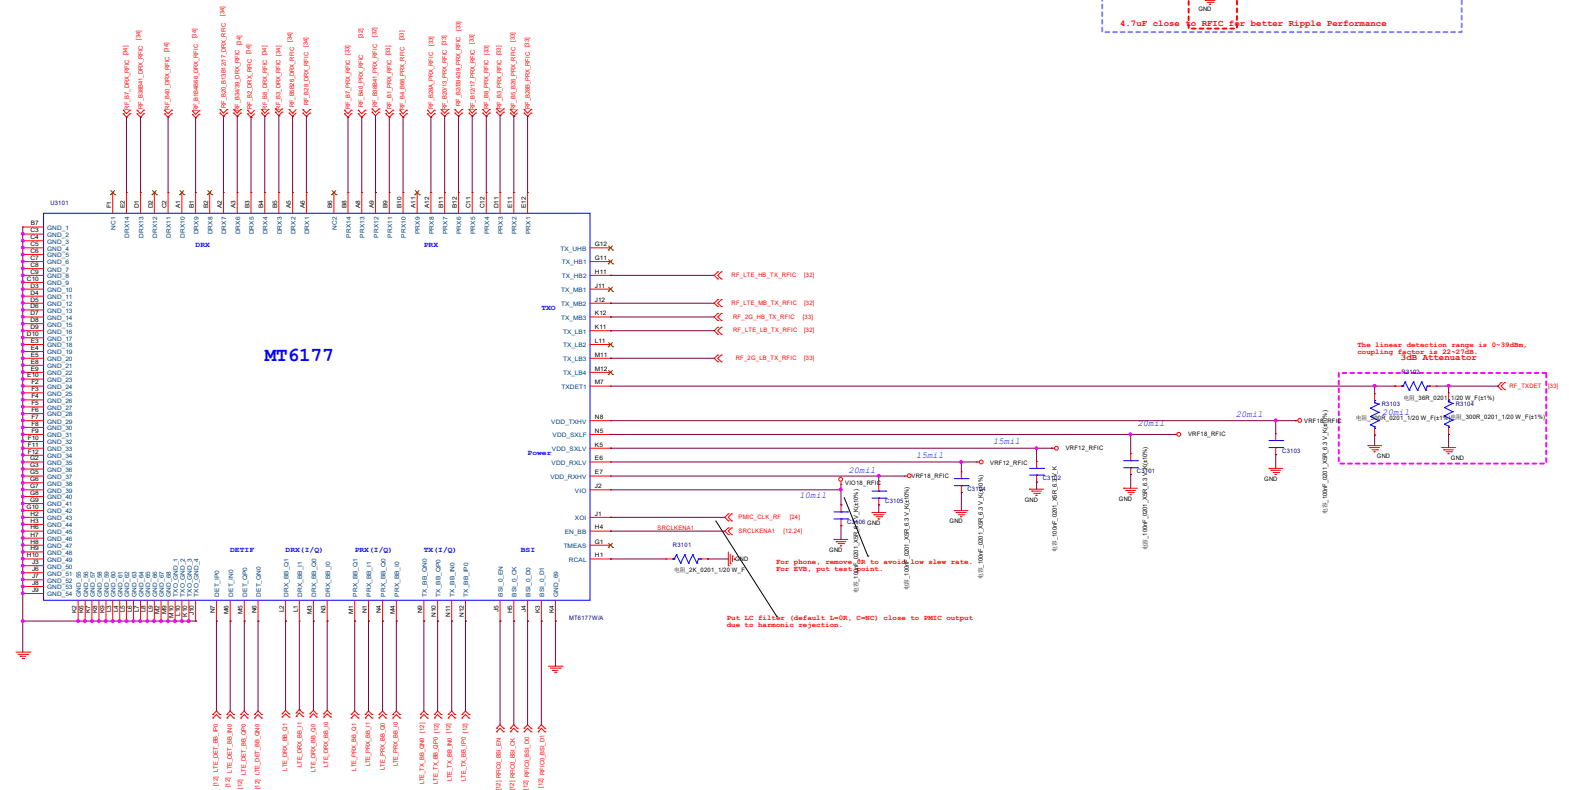


Power domain of MT6177

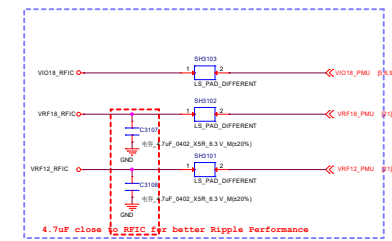


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title		31_RF_MT6177_Pin_Out	
Size	Project	PA5905_MB_V1	Rev
D			V1
Date:	Sunday, August 14, 2022	Sheet	31 of 36

TXM_GSM




DPDT SWITCH


优先保证射频走线, 接零通路, 不要有断头线




TRX SP3T

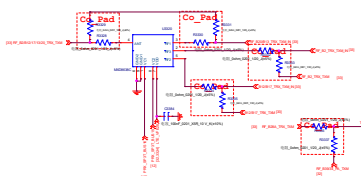


ASM SWITCH

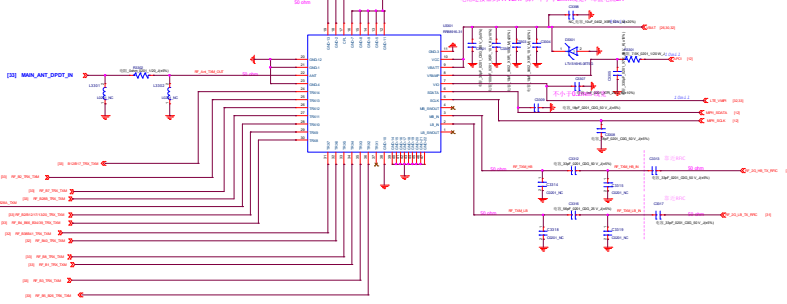


B2/PCS (拉美/国际POCO) DPX




B3 DPX




B5/B26 DPX

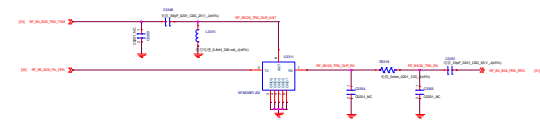


B8 DPX

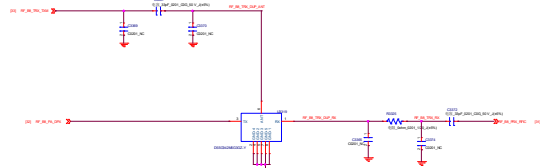


B13/20 DPX

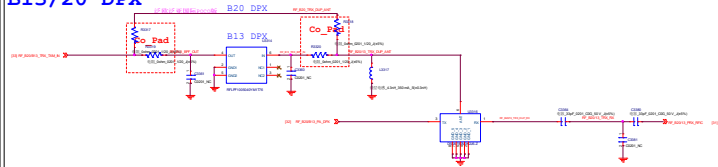


B12/B17 PRX

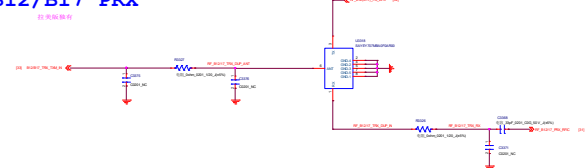


B1 DPX




B7 PRX

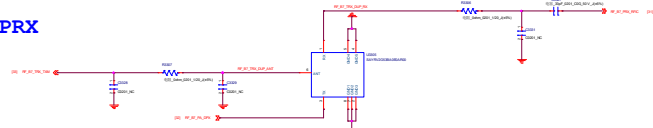


B4/B66 B34/39/PCS DPX

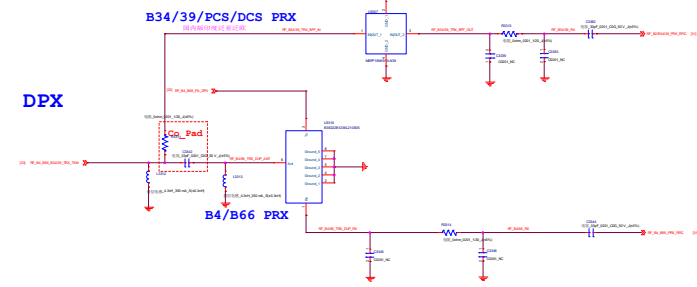

B28A DPX

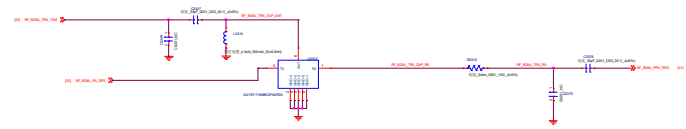


B28B DPX




华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 33_RF_MT6177_RF_PRX		
Size	Project	Rev
Custom	PA5905_MB_V1	v1
Date: Friday, September 02, 2022		Sheet 33 of 37

DIV_ANT

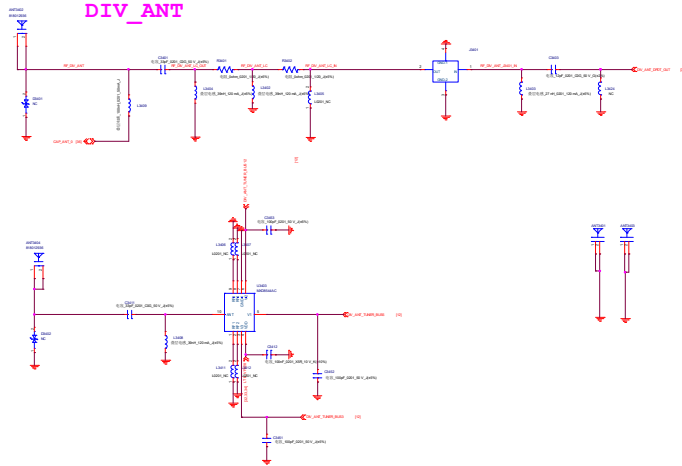


B28 DRX




B2 (拉美)/B34/B39 DRX


B34/39 DRX

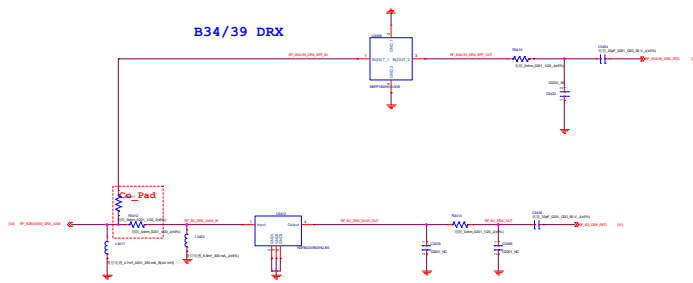


B20/B12 (B17)/B13 DRX



B1/B4/B66 DRX




DRX Switch

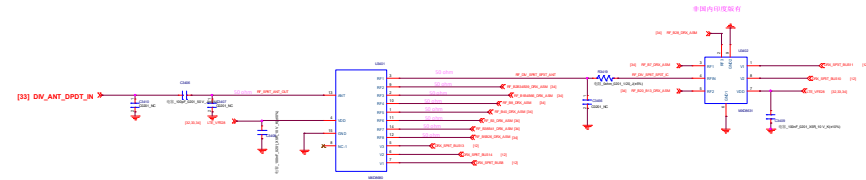


B38/B41 DRX




B5/B26 DRX




B8 DRX




B40 DRX



B7 DRX



B3 DRX




华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 34_RF_MT6177_RF_DRX

Size Project
Custom PA5905_MB_V1

Rev
v1

Date: Wednesday, July 27, 2022 Sheet 34 of 37

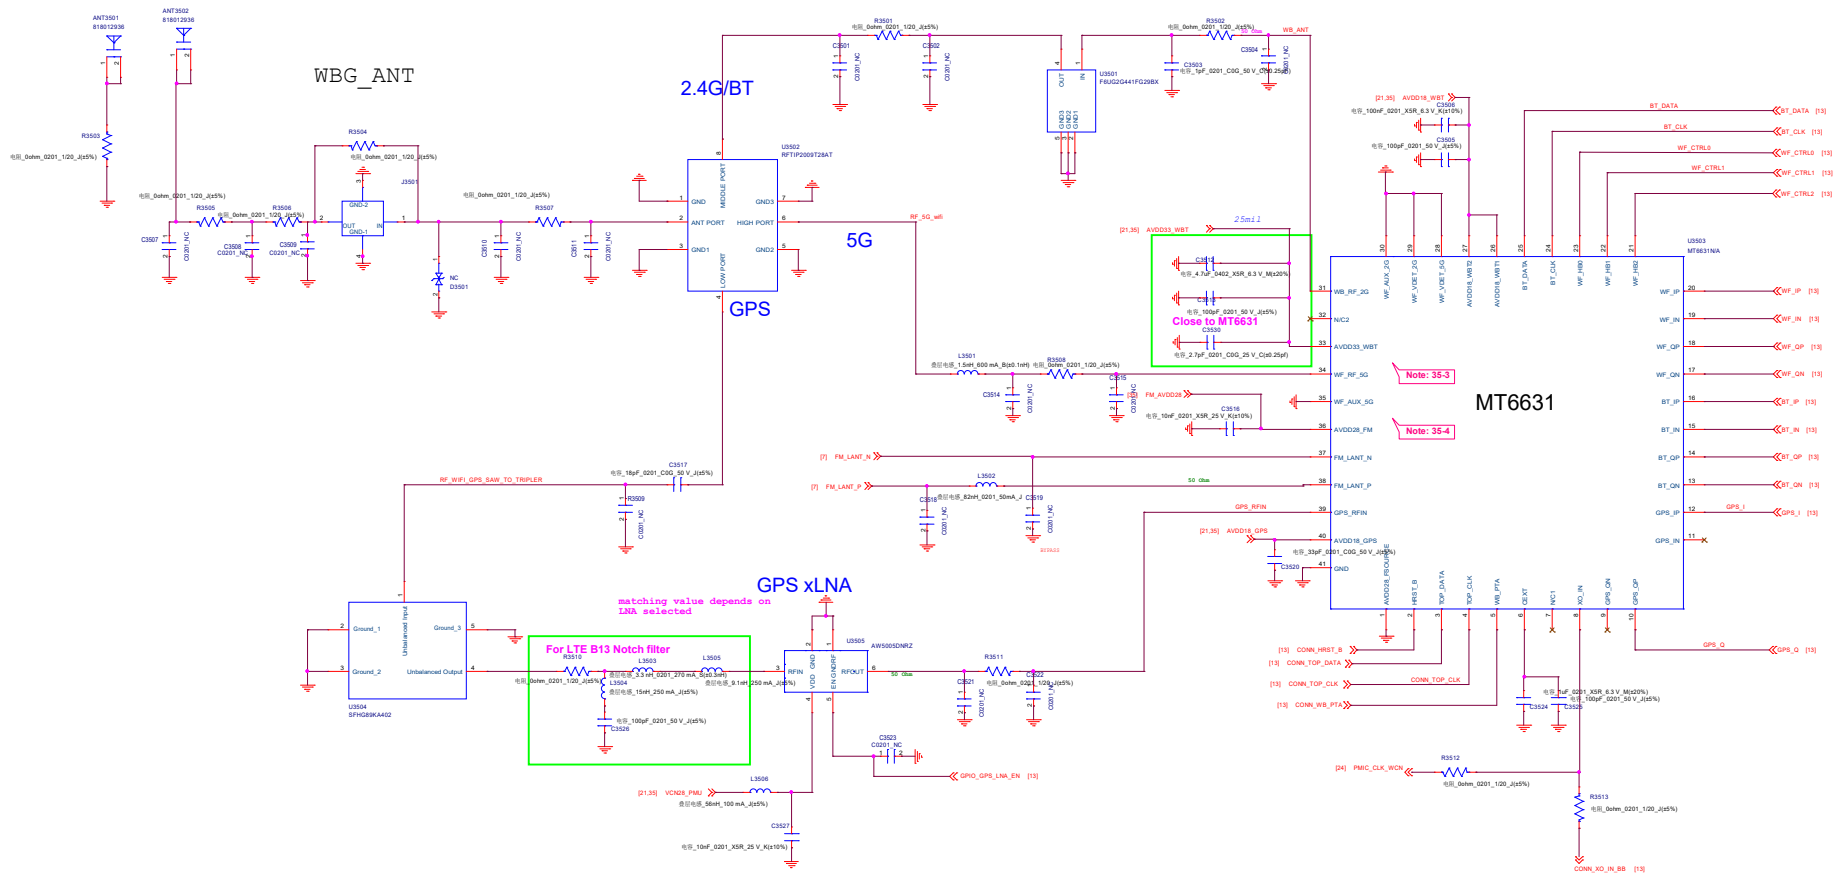


Schematic design notice of "51_CONNECTIVITY_CONSYS_MT6631"

Note 35-1: For R5015 size, please select 0402 size or larger one

Note 35-2: Please refer to MT6765 Baseband design notice for VCN33 LDO selection guide

WCN Power Supply

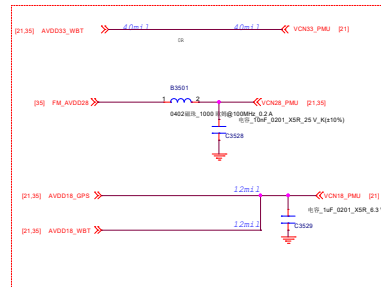


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 35_CONNECTIVITY_CONSYS_MT6631

Size	Project	Rev
D	PA5905_MB_V1	V1


Date: Wednesday, July 27, 2022

Sheet 35 of 37

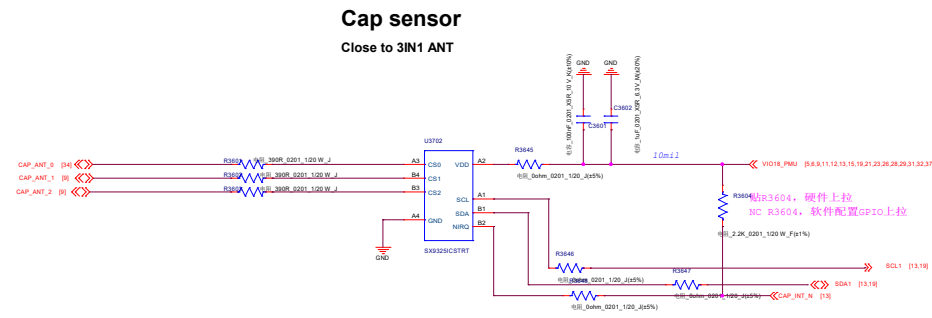

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 36_CAP_Sensor			
Size D	Project PA5905_MB_V1		Rev V1
Date: Wednesday, July 27, 2022		Sheet 36 of 37	

RF_NFC

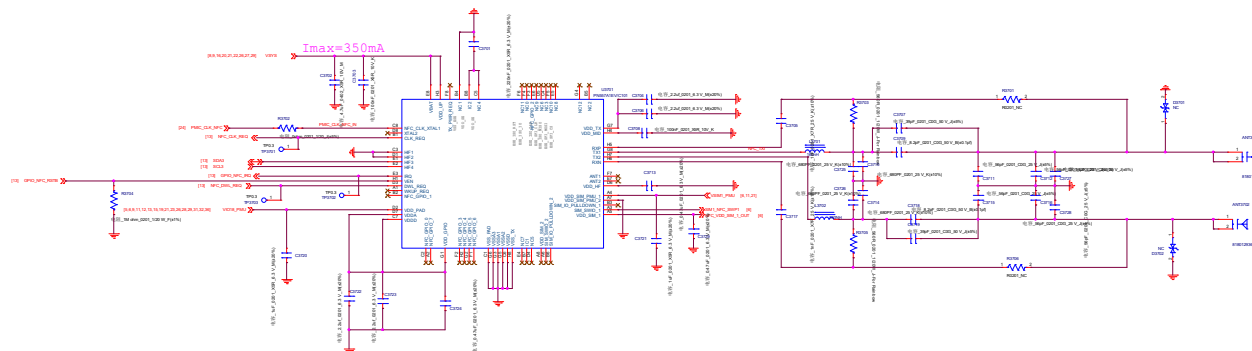

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 37_NFC			
Size E	Project	PA5905_MB_V1	Rev v1
Date: Wednesday, July 27, 2022	Sheet 37 of 37		