

Service Manual

LG-VS880

Table Of Contents

1. INTRODUCTION.....	3	4. DOWNLOAD.....	127
1.1 Purpose	3	5. BLOCK DIAGRAM.....	144
1.2 Regulatory Information	3	6. CIRCUIT DIAGRAM	155
1.3 Specifications.....	5	7. BGA PIN MAP	182
2. PERFORMANCE.....	9	8. PCB LAYOUT.....	194
2.1 Product Name.....	9	9. CALIBRATION.....	200
2.2 Supporting Standard.....	9	10. DISASSEMBLE GUIDE.....	219
2.3 Functions of Major Semi-Conductors.....	9	11. EXPLODED VIEW & REPLACEMENT PART LIST	225
2.4 HW Features	10	11.1 EXPLODED VIEW	225
2.5 SW Features	12	11.2 Replacement Parts	228
2.6 VS880 Figures.....	15	11.3 Accessory	274
3. TROUBLE SHOOTING	16		
3.1 CDMA RF Rx Part.....	16		
3.2 CDMA RF TX Part	38		
3.3 BT/Wifi Part	64		
3.4 GPS Part.....	68		
3.5 LTE RF(Power supply, XO) Part.....	71		
3.6 LTE RF RX Part.....	79		
3.7 LTE RF TX Part.....	87		
3.8 Power	91		
3.9 Audio Part.....	95		
3.10 USB	103		
3.11 Camera	106		
3.12 LCD	112		
3.13 Touch	116		
3.14 Sensor.....	118		
3.15 NFC Part.....	124		

1. INTRODUCTION

1. 1 Purpose

This manual provides the information necessary to repair, calibration, description and download the features of this model.

1. 2 Regulatory Information

A. Security

Toll fraud, the unauthorized use of telecommunications system by an unauthorized part (for example, persons other than your company's employees, agents, subcontractors, or person working on your company's behalf) can result in substantial additional charges for your telecommunications services. System users are responsible for the security of own system. There are may be risks of toll fraud associated with your telecommunications system. System users are responsible for programming and configuring the equipment to prevent unauthorized use. The manufacturer does not warrant that this product is immune from the above case but will prevent unauthorized use of common carrier telecommunication service of facilities accessed through or connected to it. The manufacturer will not be responsible for any charges that result from such unauthorized use.

B. Incidence of Harm

If a telephone company determines that the equipment provided to customer is faulty and possibly causing harm or interruption in service to the telephone network, it should disconnect telephone service until repair can be done. A telephone company may temporarily disconnect service as long as repair is not done.

C. Changes in Service

A local telephone company may make changes in its communications facilities or procedure. If these changes could reasonably be expected to affect the use of the phones or compatibility with the net work, the telephone company is required to give advanced written notice to the user, allowing the user to take appropriate steps to maintain telephone service.

D. Maintenance Limitation

Maintenance limitations on the phones must be performed only by the manufacturer or its authorized agent. The user may not make any changes and/or repairs except as specifically noted in this manual. Therefore, note that unauthorized alternations or repair may affect the regulatory status of the system and may void any remaining warranty.

E. Notice of Radiated Emission

This model complies with rules regarding radiation and radio frequency emission as defined by local regulatory agencies. In accordance with these agencies, you may be required to provide information such as the following to the end user.

F. Pictures

The pictures in this manual are for illustrative purposes only; your actual hardware may look slightly different.

G. Interference and Attenuation

A phone may interfere with sensitive laboratory equipment, medical equipment, etc. Interference from unsuppressed engines or electric motors may cause problems.

H. Electrostatic Sensitive Devices

ATTENTION

Boards, which contain Electrostatic Sensitive Device (ESD), are indicated by the sign. information is ESD handling: Following



- Service personnel should ground themselves by using a wrist strap when exchange system boards.
- When repairs are made to a system board, they should spread the floor with anti-static mat which is also grounded.
- Use a suitable, grounded soldering iron.
- Keep sensitive parts in these protective packages until these are used.
- When returning system boards or parts like EEPROM to the factory, use the protective package as described.

1. 3 Specifications

KEY FEATURES

- Android 4.4.2-Powered Smartphone (KITKAT)
- Up to 7 Customizable Home Screens
- 5.7" Touch Screen
- 8MP AF with flash, 1.3MP VT Image sensor
- 4G Mobile Hotspot
- DivX® H.264, H.263 Capable

ENHANCED USER EXPERIENCE

- Android 4.4.2
- Home Screens – customize 5 or 7 screens with shortcuts to apps, favorites, and widgets
- Virtual QWERTY Keyboard with Swype® – use one continuous finger motion to input text when composing a message
- Exchange Support – improved security, remote wipe capability for Exchange administrators, support for Exchange calendars in the Calendar application, auto-discovery for easy setup and syncing of an Exchange account,* and Global Address Lists lookup in the Email / Contacts / Calendar application
- Proximity Sensor – locks the touch screen and buttons while talking on the phone
- Motion Sensor – Digital compass , Accelerometer
- USB Charging via Computer
- Airplane Mode (RF Off)

*Available for Exchange 2007 and higher.

DESIGN

- Sleek and Stylish Design
- 5.7" HD Display
- Capacitive Touch Screen – Glass with fast and accurate response
- Touch Vibration for Tactile Feedback*
- Micro USB Charging Port

*Only available on certain interactions with the touch screen.

MOBILE MEDIA

- Android Market™ – browse and download thousands of free and paid apps from around the world
- Live Wallpaper – dynamic, animated backgrounds

- Full Web Browsing
- Connect to Social Networks – send quick updates to Twitter™, Facebook®, MySpace™,* or added social networks
- Mobile Instant Messaging – Google Talk™, AIM®,* Yahoo!® Messenger,* Windows Live™*
- Gmail™ and Email – mobile personal and corporate email
- Visual Voice Mail
- Text, Picture, Video, and Voice Messaging
- Flash 10.1 for Mobile Devices
- Java Support

*Applications downloaded from Android Market.

CAMERA/VIDEO

- 8MP AF with flash, 1.3MP VT CMOS Image sensor and Camcorder*
- Camera Resolutions: 8M(3264 x 2448), W6M(3264 x 1836), 5M(2448 x 2448), 3M(2048 x 1536)
- Camera and Video Zoom: up to 4x
- Image Editor: rotate, crop images
- Brightness, ISO, White Balance,* Color Effects,* Shot Mode, Self-Timer
- Continuous Shot – take 5 shots in quick succession
- Video Resolutions: Full HD(1920 x 1080), HD(1280 x 720)
- Video Recording Time: up to 60 seconds (sending) or 120 minutes (saving)**
- Audio Recording – choose between unmute and mute to record video with or without sound.

*Available in both video and camera modes.

**Depends on available memory.

MULTIMEDIA

- DivX® Video Playback
- Video Player for AVI, WMV, MP4, MKV, 3GP, and 3G2 Formats
- V CAST Videos
- Music Player for MP3, WMA, and Unprotected AAC
- Stereo Sound via Headset or *Bluetooth*
- Multitask While Playing Music in the Background
- Music Library – Organized by Artists, Albums, Songs, and Playlists
- Repeat and Shuffle Music Playback Modes

- microSD Memory Slot with Support for up to 64GB Storage
- USB Mass Storage – transfer files between microSD™ card and PC*

*USB cable (sold separately) and microSD card (included) required.

BLUETOOTH®

- Version: 4.0
- Save up to 100 *Bluetooth* Pairings*
- Supported Profiles: headset, hands-free, object push, advanced audio distribution (stereo), audio/video remote control, file transfer, phone book access, message access, serial port, Personal Area Networking
- Listen to Music with Optional Stereo *Bluetooth* Headset**
- Send User-Generated Pictures (JPEG) and Videos via *Bluetooth* Wireless Technology

*Depends on available memory.

**Accessories sold separately.

VOICE/AUDIO

- One-Touch Speakerphone*
- Speaker-Independent Voice Commands
- Voice-Activated Dialing
- Text to Speech
- MP3 Music Ringer Support (clips from hit songs)†
- Voice Memo Recording
- 31 Unique Ringtones + Vibrate and Silent Modes
- Set Voice Memos as Ringtones
- TTY/TDD Support
- Hearing Aid Compatible T4

*Only available during a call.

TOOLS & DATA

- Android Apps: Browser, Calculator, Calendar (Corporate or Google), Camera, Clock, Contacts, Email, Gallery, Gmail, Market, Messaging, Music, Phone, Settings, Voice Dialer, Voice Recorder, Voice Search
- Wi-Fi Connectivity – IEEE 802.11a/b/g/n

- Phone Book – unlimited fields* for numbers, emails, physical addresses, IM screen names, notes, nickname, web addresses, special dates, and a picture ID**
- FOTA Capable – upgrade firmware over the air†
- S-GPS and A-GPS Support for Enhanced Location Accuracy

*Depends on available memory.

**Dependent on photos stored in your gallery.

SPECIFICATIONS

- Technology: CDMA /LTE
- Frequencies:

Band	Tx (MHz)	Rx (MHz)
DCN	824~849	869~894
PCS	1850~1910	1930~1990
LTE B13	777~787	746~756
LTE B4	1710~1755	2110~2155
GPS	1575.42	
BT	24~2485	

- Data Transmission: 1xRTT(0,1), 1xEVDO(0,1), LTE(4,13)
- Dimensions: 152.1(H) x 79.2(W) x 9.1(D) (mm)
- Weight: 168g(with Battery)
- Display: 5.7", HD 1280 x 720 pixels, TFT
- Standard Battery: 3200[mAh]
- Internal Memory Size: 8 GB
- MicroSD™ Memory Slot: up to 64GB memory card*

ACCESSORIES

- Standard Battery*
- Travel Adapter and USB Data Cable*
- Bluetooth Headset (Optional)
- Bluetooth Hands-free kit (Optional)
- Stereo Headset (Optional)
- Vehicle Power Charger (VPC) (Optional)
- Portable Stereo Speaker (Optional)
- Desk Top Cradle (Optional)
- Car Mount(Optional)

2. PERFORMANCE

2.1 Product Name

LGV5880 : LTE/US Cellular/US PCS + GPS (EVDO Rev_0 / EVDO Rev_A)

2.2 Supporting Standard

Item	Feature	Comment
Supporting Standard	LTE/US Cellular / US PCS/GPS	
Frequency Range	US Cellular TX : 824.82 ~ 848.19 MHz US Cellular RX : 869.82~893.19 MHz US PCS TX : 1850~1910 MHz US PCS RX : 1930~1990 MHz LTE B13 TX : 777~787 MHz LTE B13 RX : 746~756 MHz LTE B4 TX : 1710~1755 MHz LTE B4 RX : 2110~2155 MHz GPS : 1575.42 MHz GNSS : 1601.72 MHz	

2.3 Functions of Major Semi-Conductors

Classification	Function
MSM8926	Terminal operation control and digital signal processing
PM8926	Power management of terminal
Memory (H9TKNNNAADMPLR-NGM)	12Gb(LPDDR2)
eMMC (THGBMBG6D1KBAIL)	8GB eMMC
WTR1625	Converts Rx and Tx RF signal to baseband signal
WTR1625L	Converts Rx and Tx RF signal to baseband signal

2.4 HW Features

Item	Feature	Comment
Form Factor	DOP	
Battery	1) Capacity Standard : Li-Ion, 3200mAh	
	2) Packing Type : Soft Pack	
Size	Standard : 152.1 x 79.2 x 9.1 mm	
Weight	168g (with Battery)	
Volume	TBD	
PCB	FR-4 Staggered 10, 0.8T	
Stand by time	LTE over 500 hrs	GSMATS09
Charging time	Within 300 min	
Talk time	CDMA over 900 mins	CCF89
LCD	5.7" HD (1280 x 720) TFT	
Built-in Camera	8 Mega Auto Focus	8 M AF
Keypad	Function Key : 3 Back Key : 3	Function Key : Back, Home, Menu Back Key : PWR, Volume up/down
ANT	Main Antenna(LTE/CDMA) - LDS LTE Sub Antenna – FPCB BT/WIFI Antenna – FPCB GPS - FPCB CDMA Sub Antenna- FPCB	
System connector	5 Pin	
Ear Phone Jack	4pole, 3.5Φ Ear Jack	
Memory	eMMC :8GB SDRAM : 12Gbit LPDDR2	
Speech coding	EVRC, QCELP, AMR	
Data & Fax	Built in Data support	
Vibrator	Q-coin Vibrator	
Blue Tooth	Bluetooth 4.0LE	
MIDI(for Buzzer)	SW decoded	

2. PERFORMANCE

Function)		
Music Player	MP3, AAC, AAC+, WMA, OGG	
Video Player	H.263, H.264, MPEG-4, WMV	
Camcorder	MPEG-4	
Voice Recording	Yes	
Speaker Phone mode Support	Yes	
Travel Adapter	Yes	
CDROM	No	
Stereo Headset	No	
Data Cable	Yes	
T-Flash (External Memory)	Yes	

2.5 SW Features

Item	Feature	Comment
RSSI	Yes	
Battery Charging	Yes	
Key Volume	Yes	
Audio Volume	Yes	
Time / Date Display	Yes	
Multi-Language	Yes	Supported the total 15 languages (English, Espanol, Franch, Korea, Chinese, etc...)
Quick Access Mode	Yes	
PC Sync	No	
Speed Dial	Yes	Phone / Richnote/ Voice Mate / Email / Videos / File Manager / Calendar / Calculator
Profile	Yes	
CLIP / CLIR	Yes	
Phone Book	Name Prefix/First Name/Middle Name/Last Name/Name suffix Phone: Mobile/Work/Home/Main/Work Fax/Home Fax/Pager/Other/Custom Email: Home/Work/Other/Custom Address: Home/Work/Other/Custom Groups: Business/Colleagues/Family/Friends /School Ringtone: Organization: Company/Title IM: AIM / Windows Live / Yahoo / Skype	There is no limitation on the number of items. It depends on Available memory amount.

2. PERFORMANCE

	/ QQ / Google Talk / ICQ / Jabber / Custom Notes Nickname Website Events: Birthday/Anniversary/Other/Custom	
Last Dial Number	Yes	Last Dial Number, Last Received Number and Last Missed Number can store.
Last Received Number	Yes	Last Dial Number, Last Received Number and Last Missed Number can store .
Last Missed Number	Yes	Last Dial Number, Last Received Number and Last Missed Number can store.
Search by Number / Name	Yes	
Group	Yes	There is no limitation on the number of items. It depends on available memory amount. Group features can not be added or edited by user.
Fixed Dial Number	No	
Service Dial Number	No	
Own Number	Yes	
Voice Memo	Yes	Support voice recorder
Call Reminder	No	
Network Selection	No	
Mute	Yes	
Call Divert	No	
Call Barring	No	
Call Charge (AoC)	No	
Call Duration	YES	

2. PERFORMANCE

SMS (EMS)	Yes	EMS does not support.
SMS Over GPRS	No	
EMS Melody / Picture Send / Receive / Save	No	
MMS MPEG4 Send / Receive / Save	Yes	
Long Message	No	
Cell Broadcast	Yes	
Download	Yes	
Game	No	
Calendar	Yes	
Memo	Yes	
World Clock	Yes	
Unit Convert	No	
Stop Watch	Yes	
Wall Paper	Yes	
WAP Browser	No	Support HTML Browser
Download Melody / Wallpaper	Yes	Android Market
SIM Lock	No	
SIM Toolkit	Yes	Class 1, 2, 3, C, D
MMS	Yes	
EONS	Yes	
CPHS	Yes	
Camera	Yes	8M AF
JAVA	No	
Voice Dial	Yes	
IrDa	No	
Bluetooth	Yes	Ver. 4.0 (HSP,HFP, A2DP, AVRCP1.4, OPP, FTP(Server only), PBAP, MAP,PAN,HOGP,HID,HDP)
FM radio	No	
Hold / Retrieve	Yes	

2. PERFORMANCE

Conference Call	Yes	Max. 3
DTMF	Yes	
Memo pad	Yes	Quick Memo+
TTY	Yes	
AMR	Yes	
SyncML	Yes	OMA DM 1.2
IM	Yes	
Email	Yes	POP3/IMAP4/SMTP/EAS


2.6 VS880 Figures



3. TROUBLE SHOOTING

3.1 CDMA RF Rx Part


3.1.1 DCN Rx

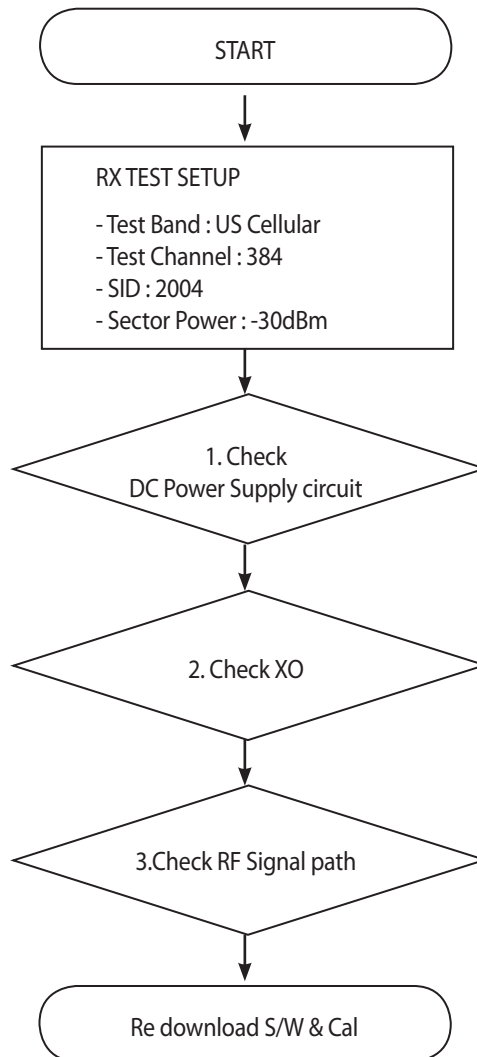


*There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form

3. TROUBLE SHOOTING



DCN RX RF PATH


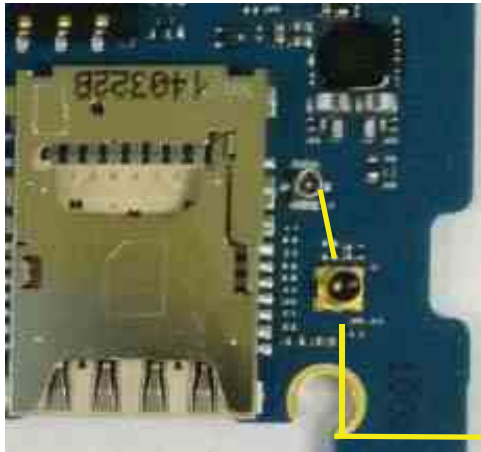


BOT

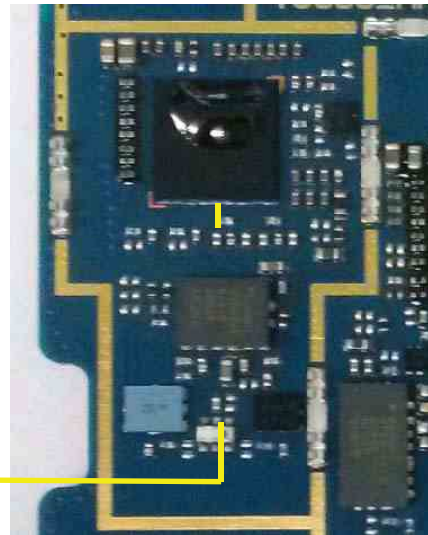


TOP

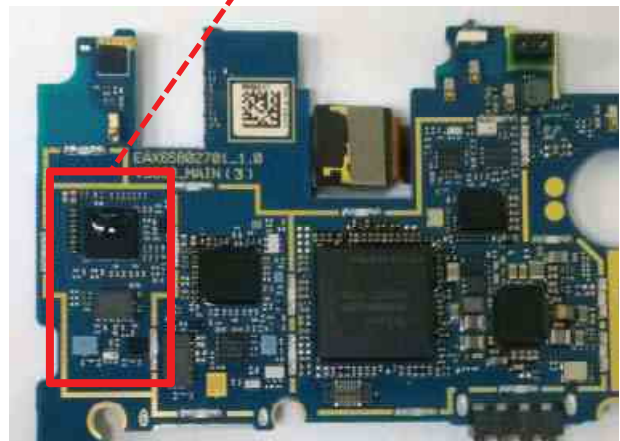
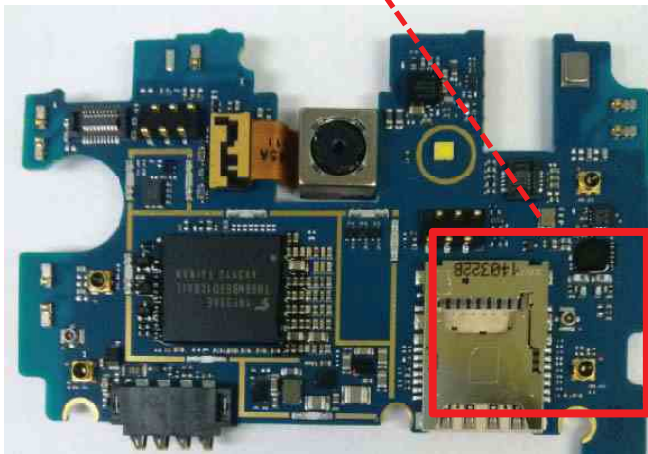


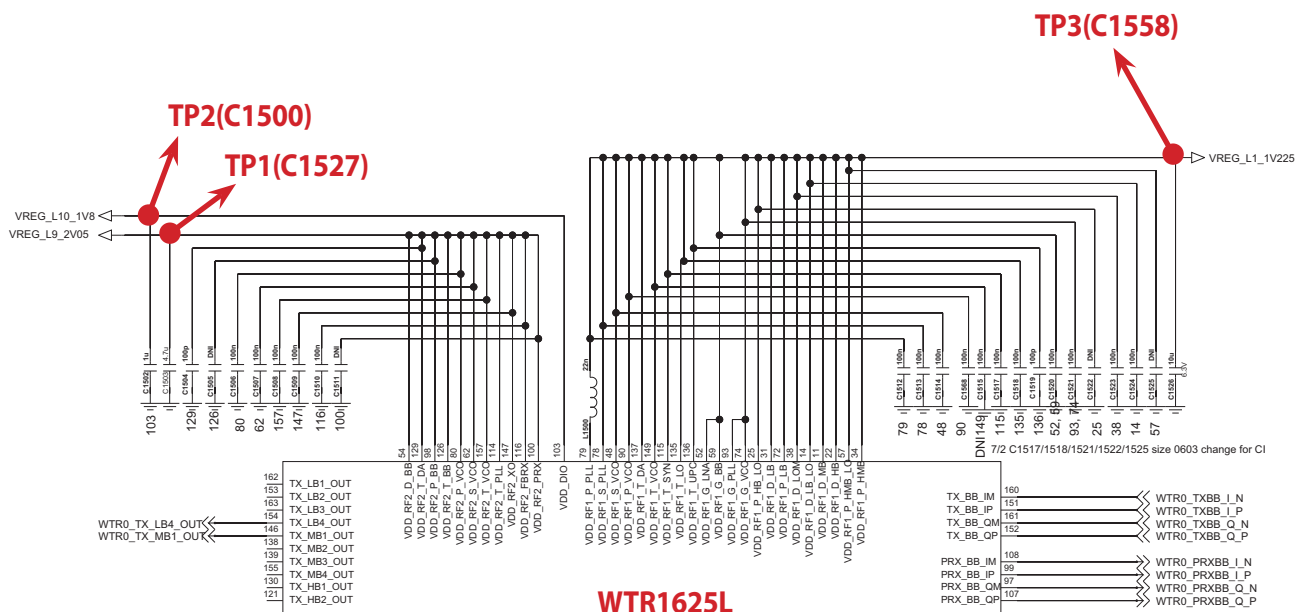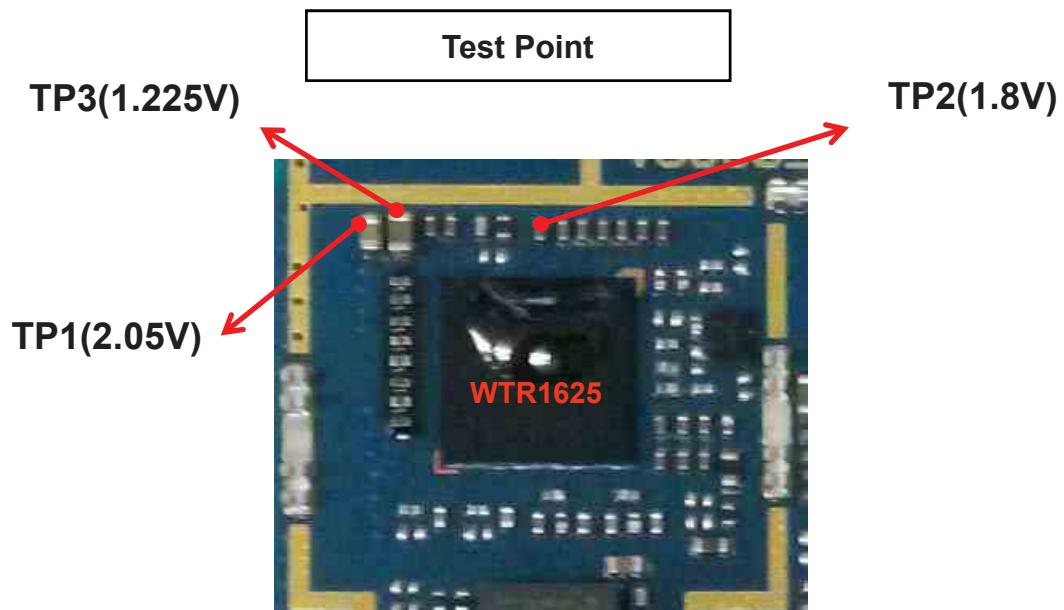


3. TROUBLE SHOOTING

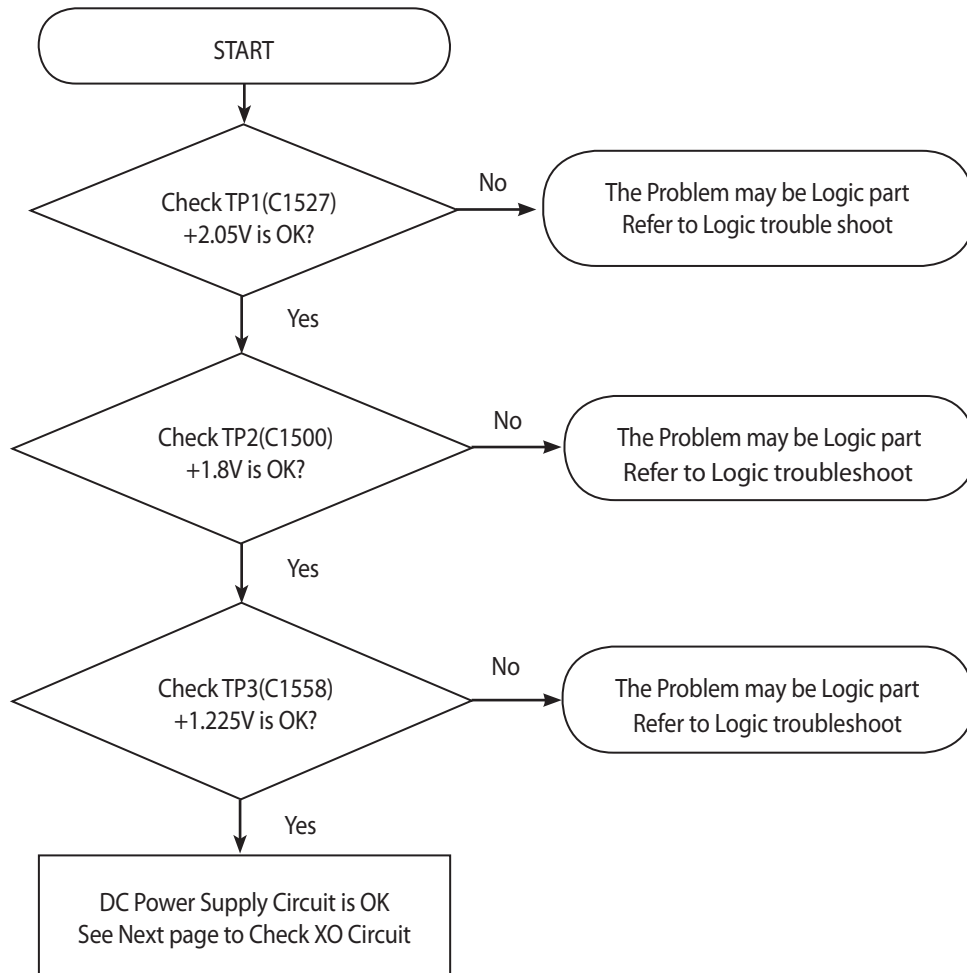



3.1.1.2 Checking WTR XO circuit (WTR1625)

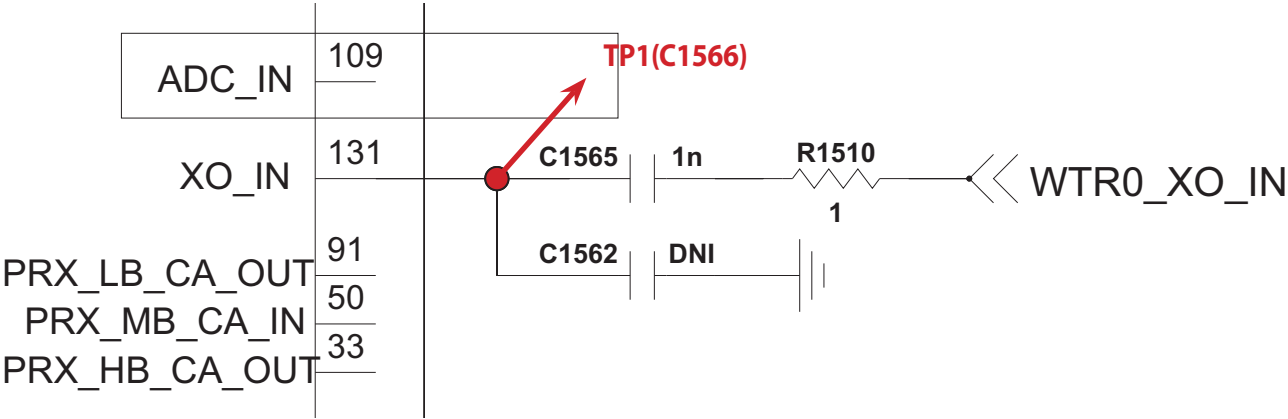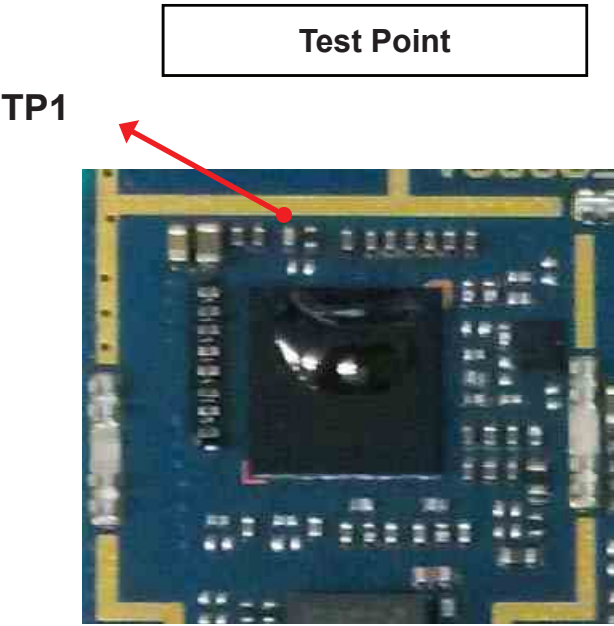


3. TROUBLE SHOOTING

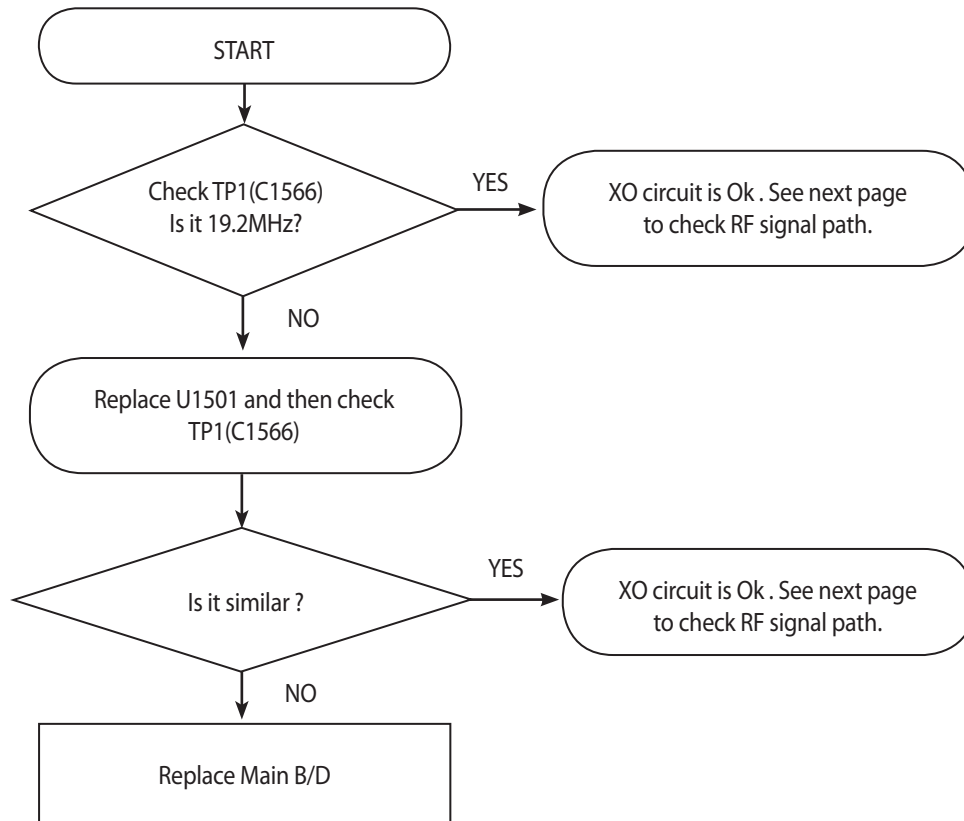



3.1.1.3 Checking RF signal path (SW)

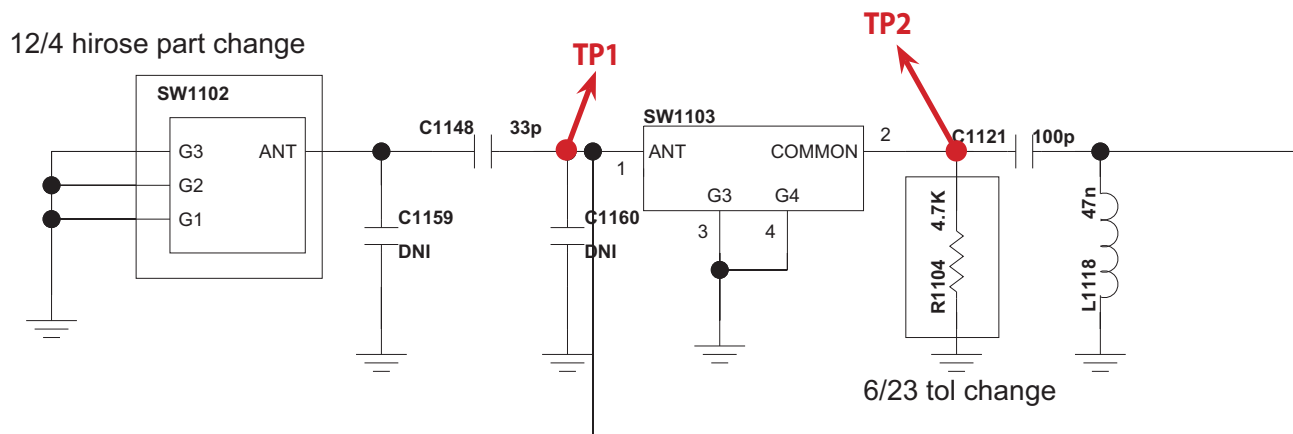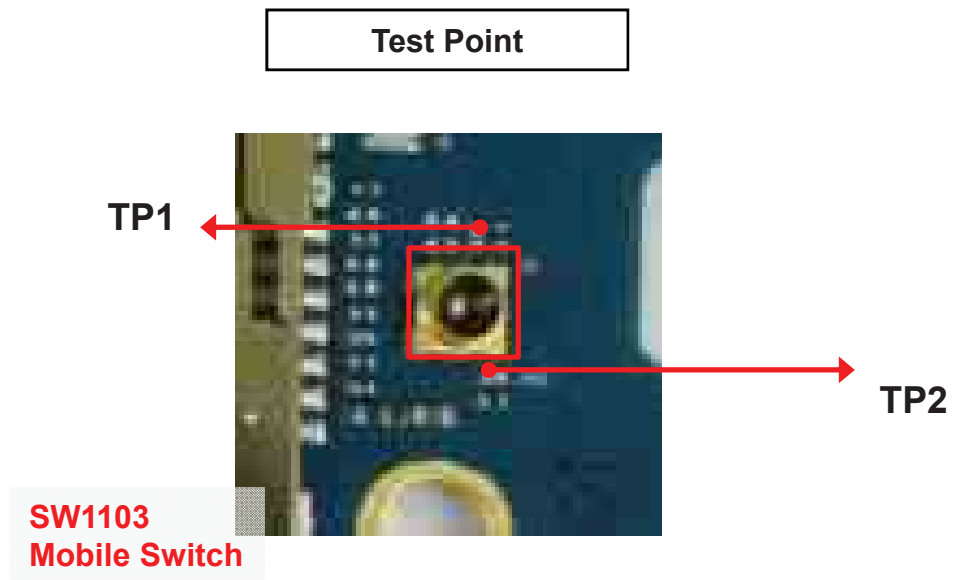


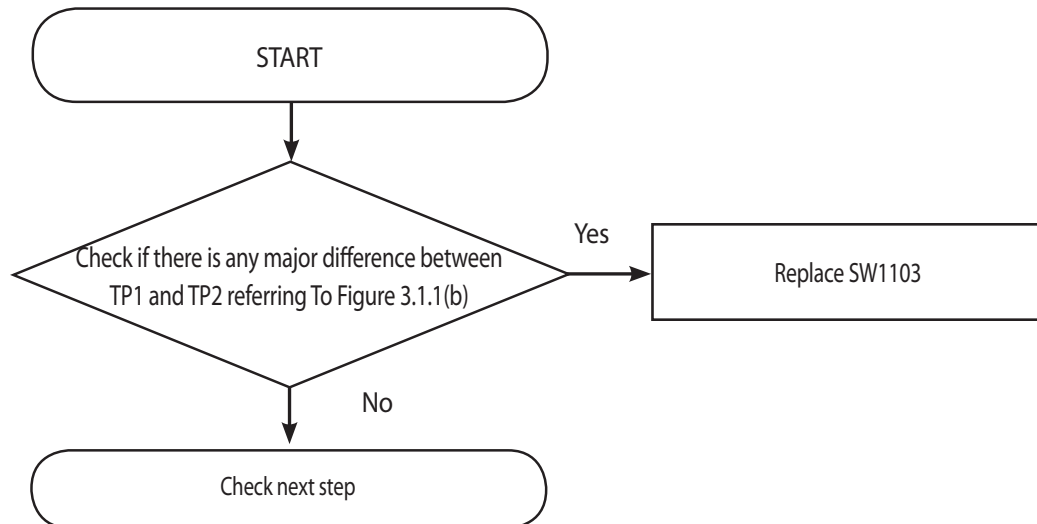

3.1.1.4 Checking RF signal path (Duplexer, Duplexer)

Test Point

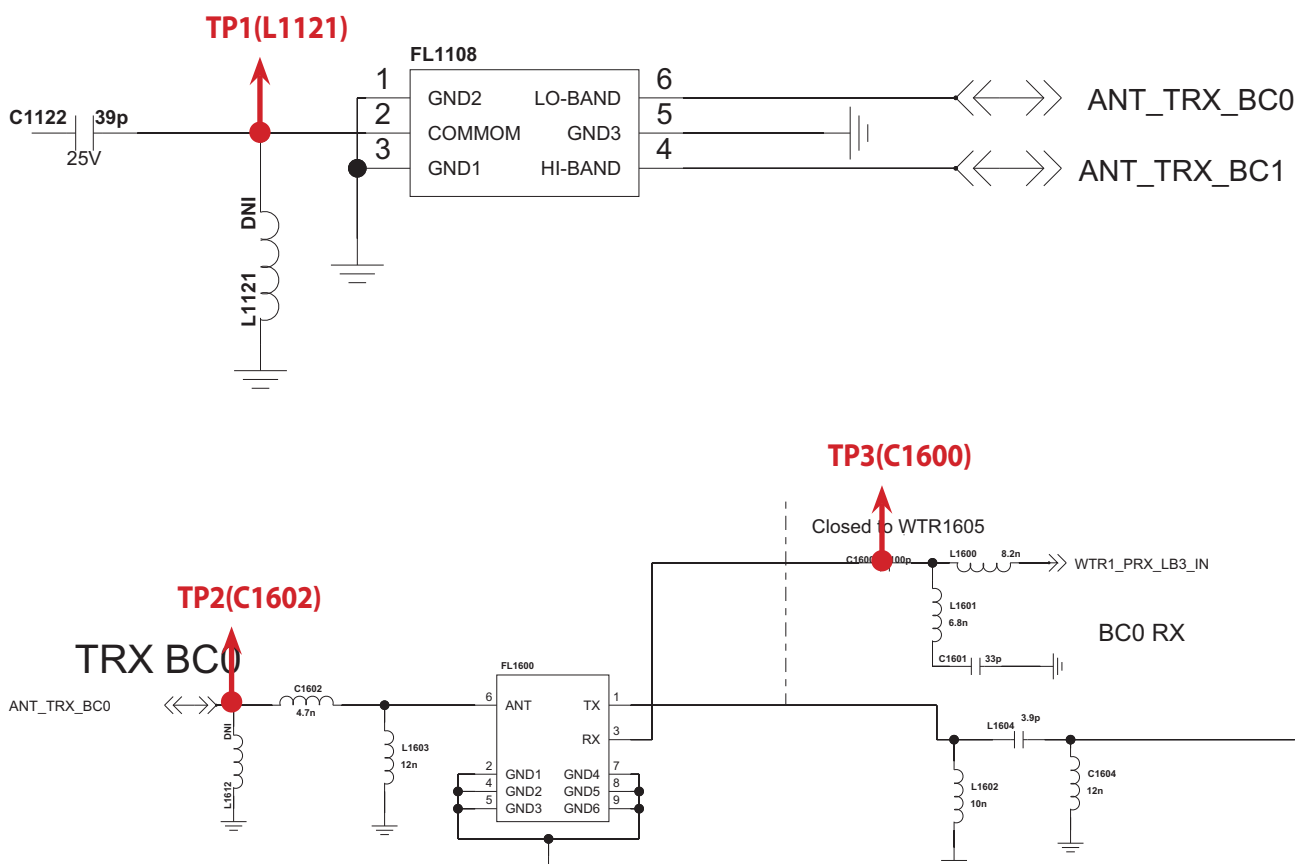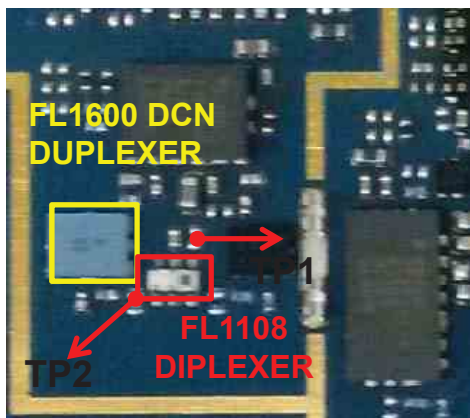

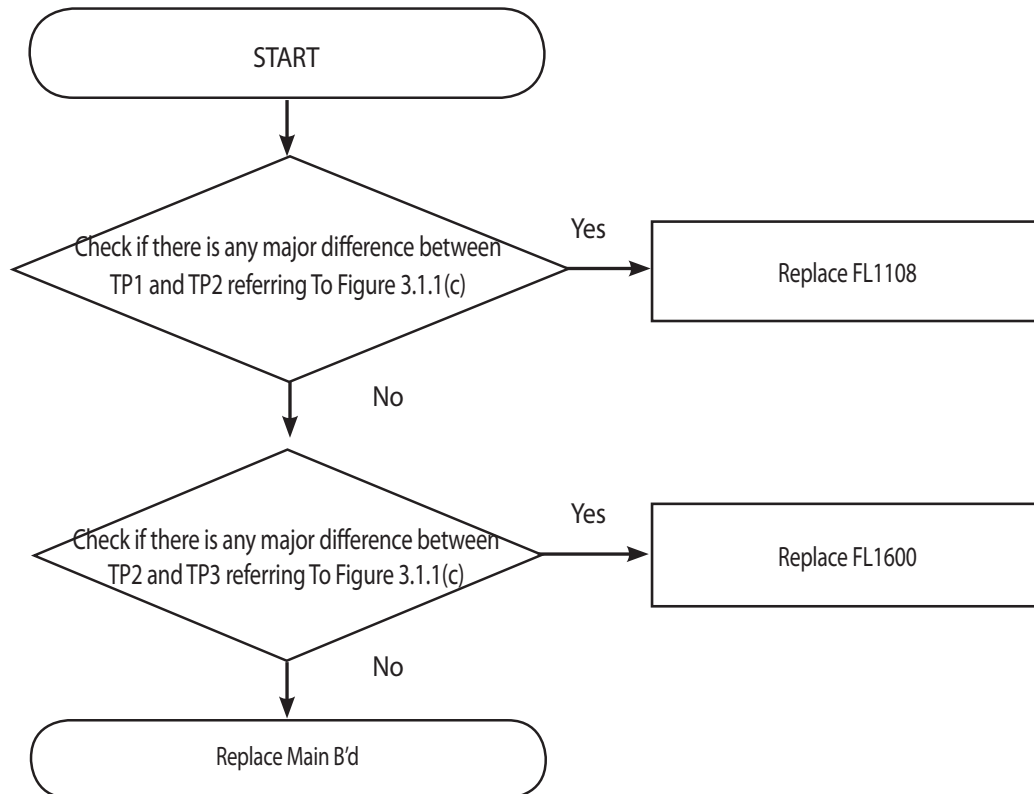

3. TROUBLE SHOOTING

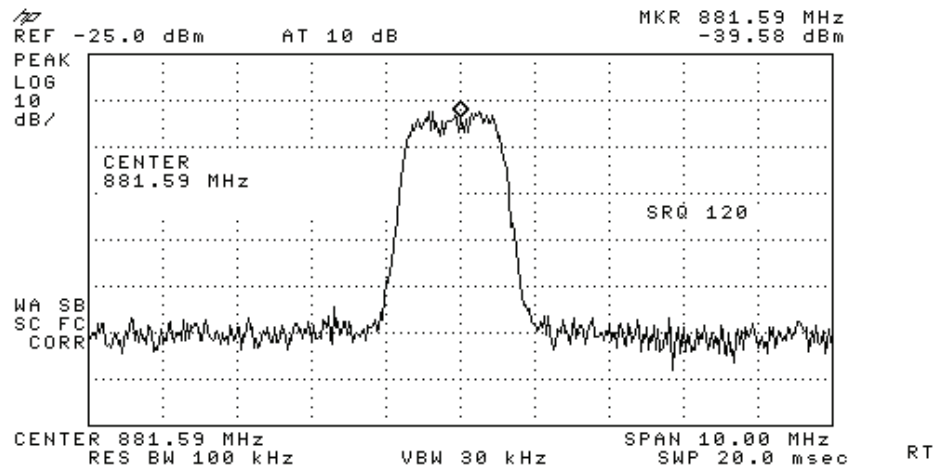


Figure 3.1.1 (b)


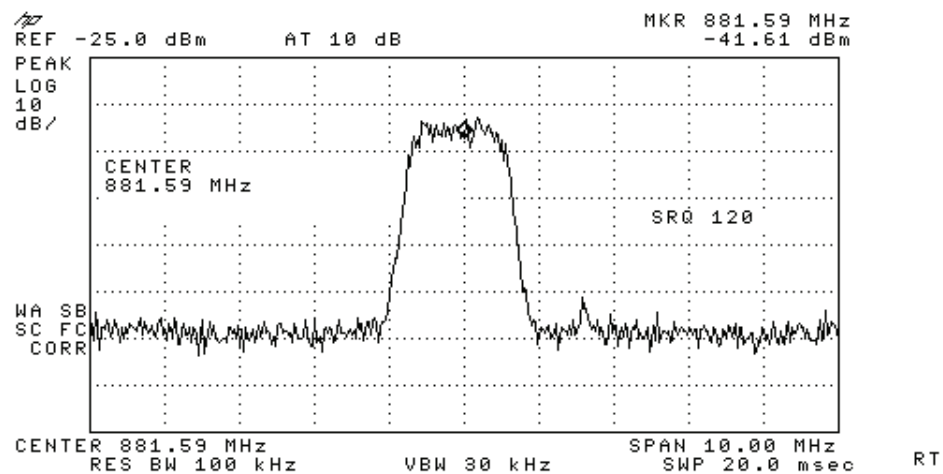


Figure 3.1.1 (c)


3.1.2 PCS Rx

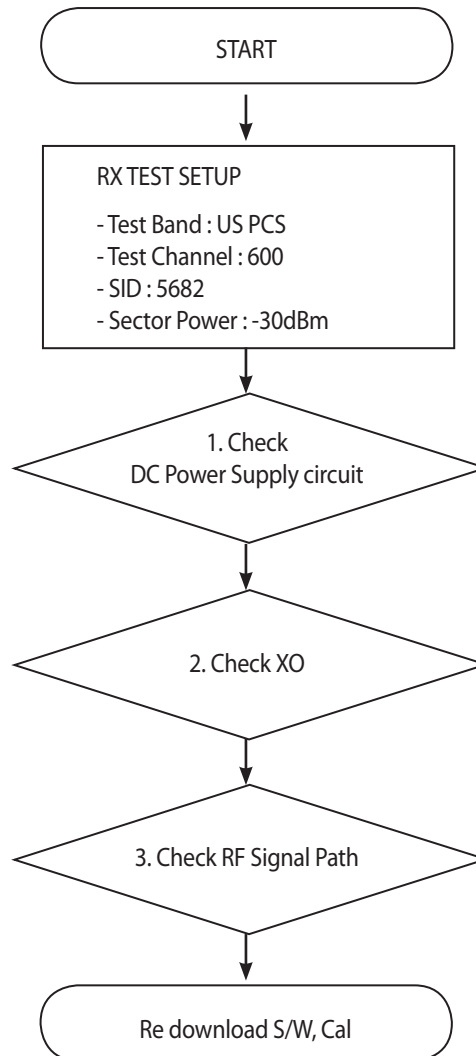



* There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form

3. TROUBLE SHOOTING


PCS RX PATH

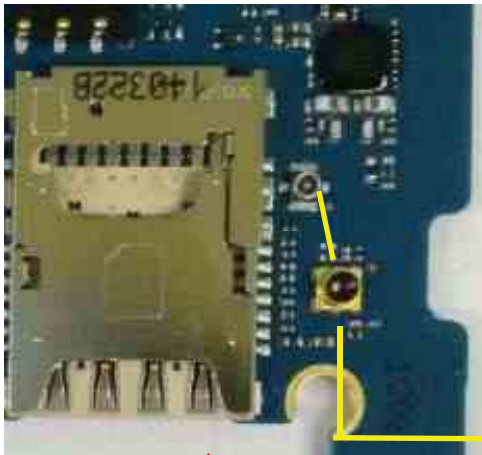



BOT

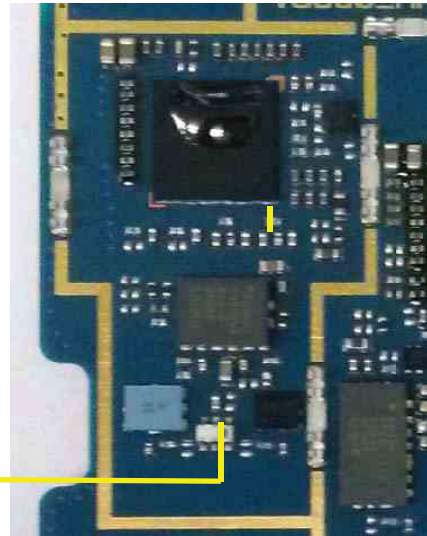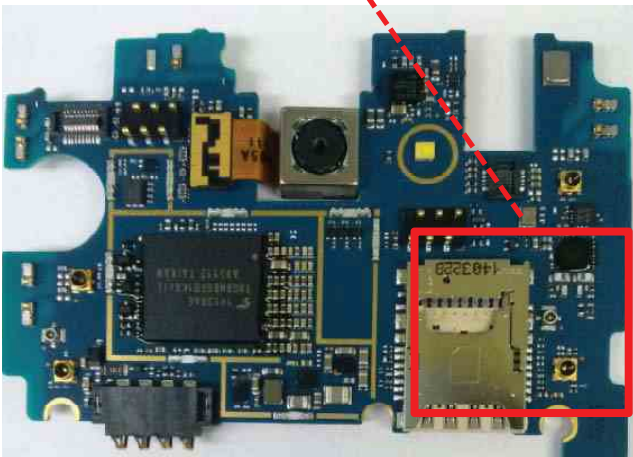


TOP

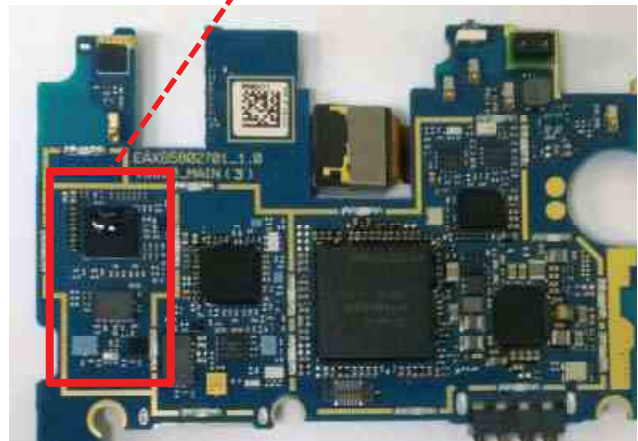



3.1.2.1 Checking DC Power supply circuit (WTR1625)

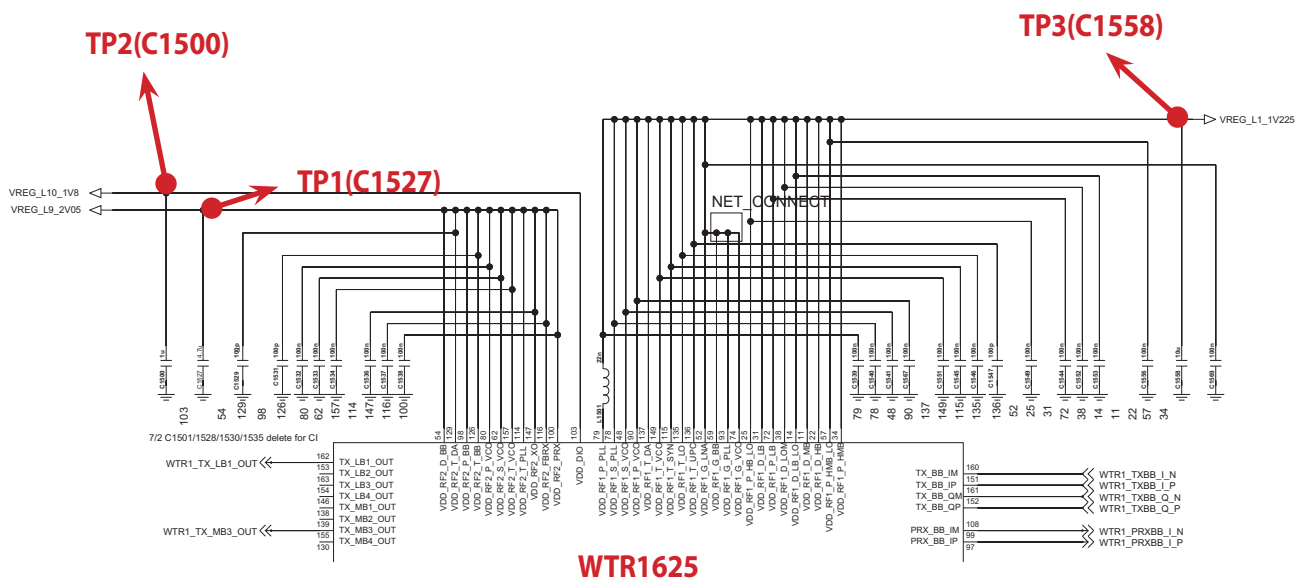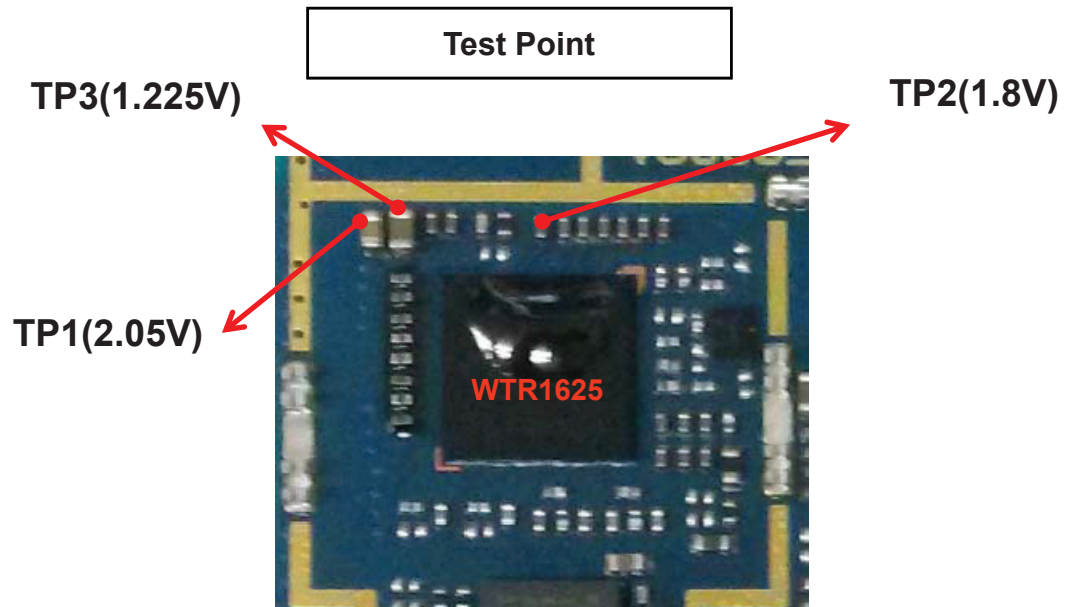


3. TROUBLE SHOOTING

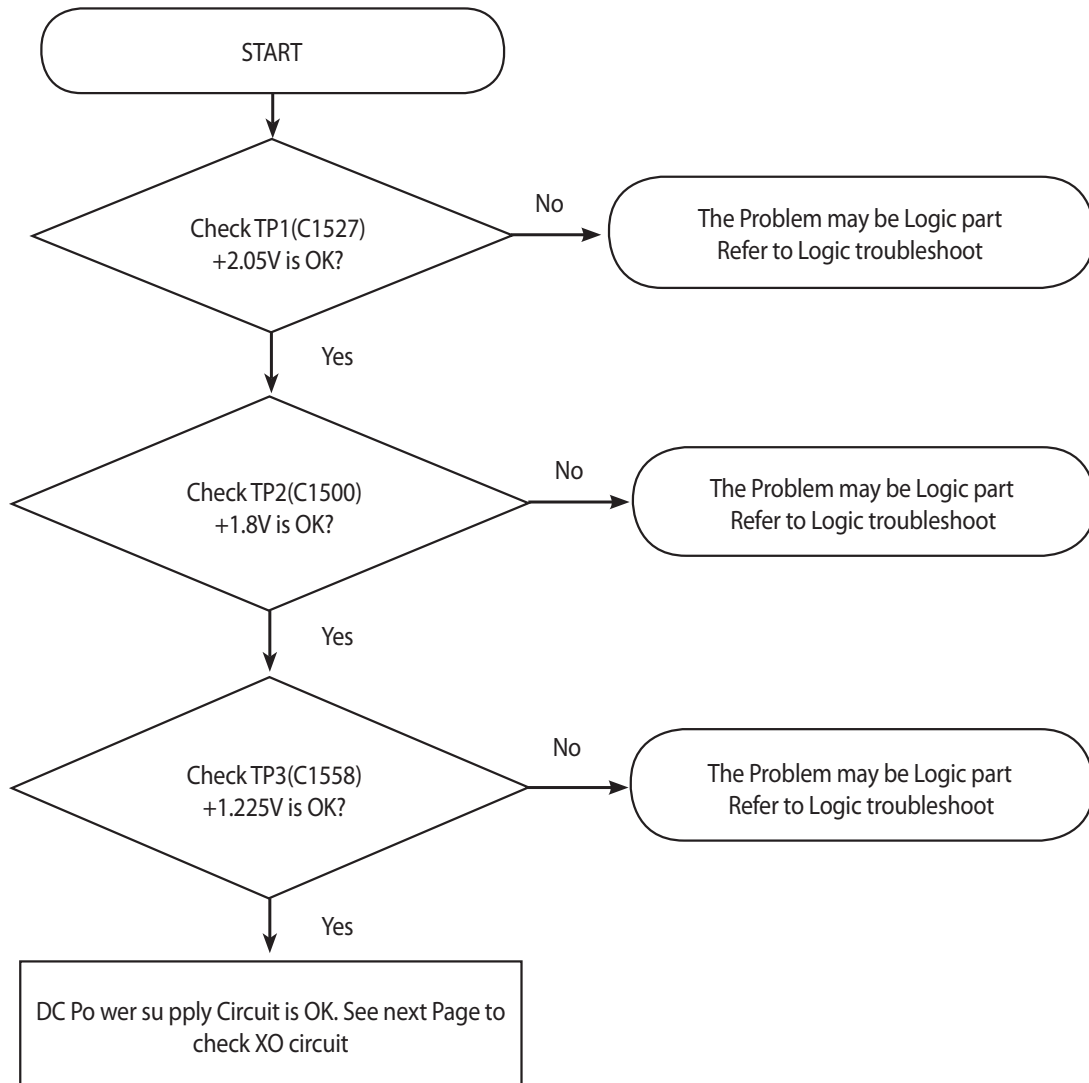


3.1.2.2 Checking WTR XO circuit (WTR1625)

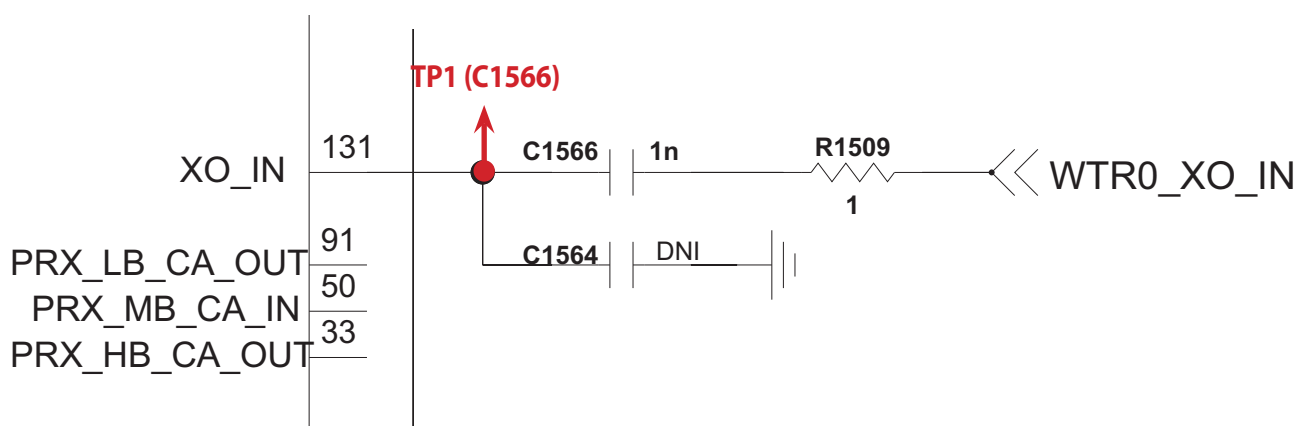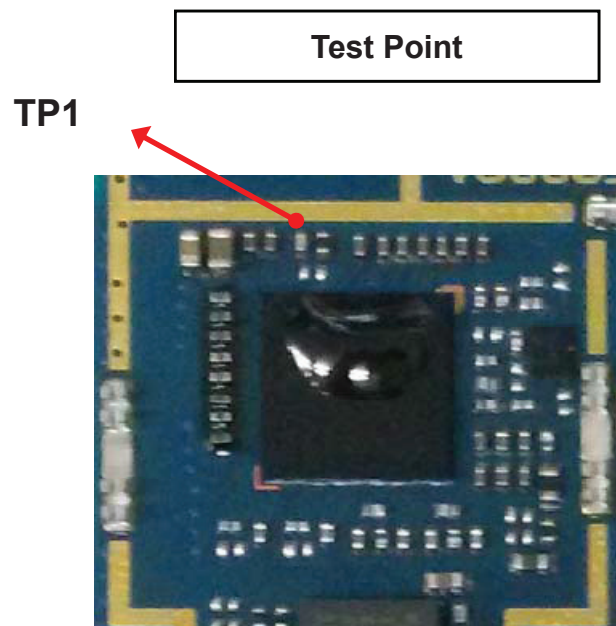


3. TROUBLE SHOOTING

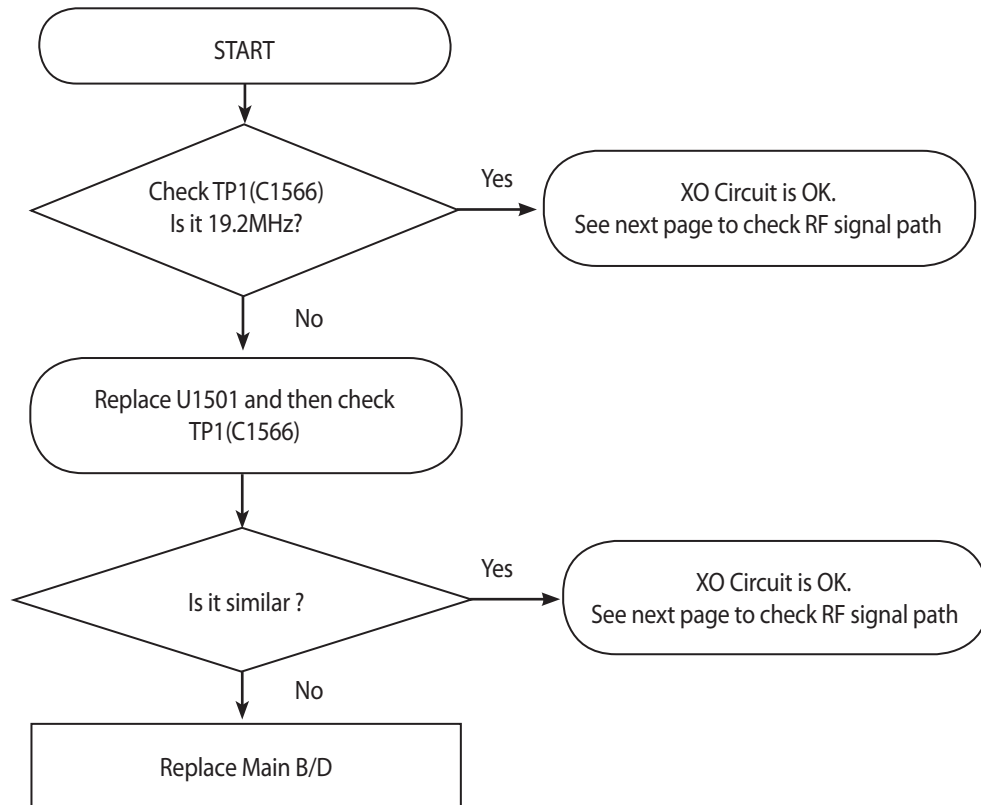


3.1.2.3 Checking RF signal path (SW)

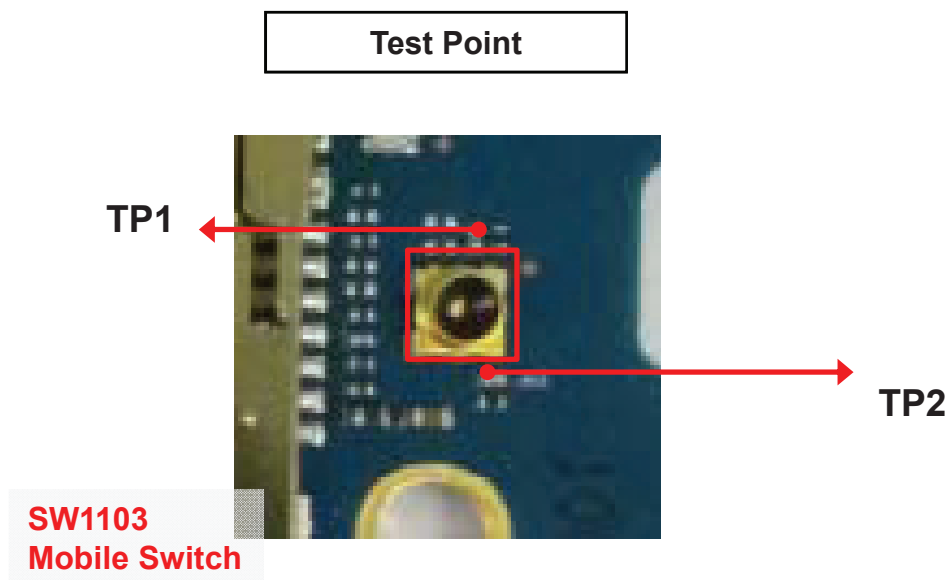




12/4 hirose part change

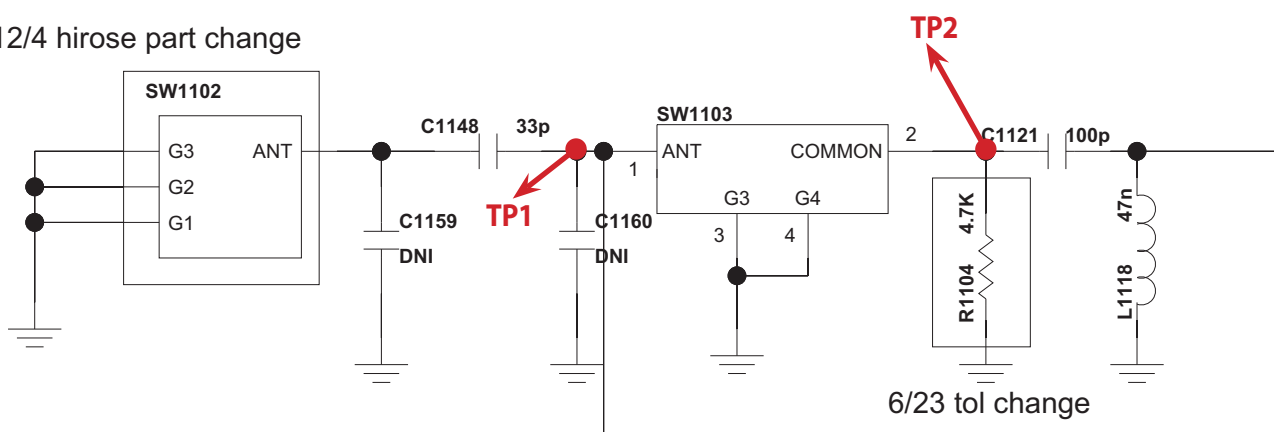


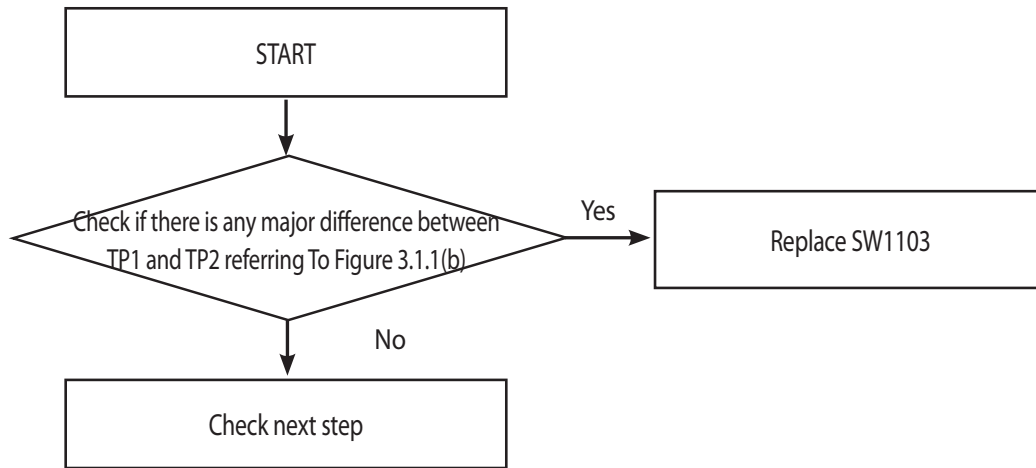

3.1.2.4 Checking RF signal path (Duplexer, Duplexer)

Test Point

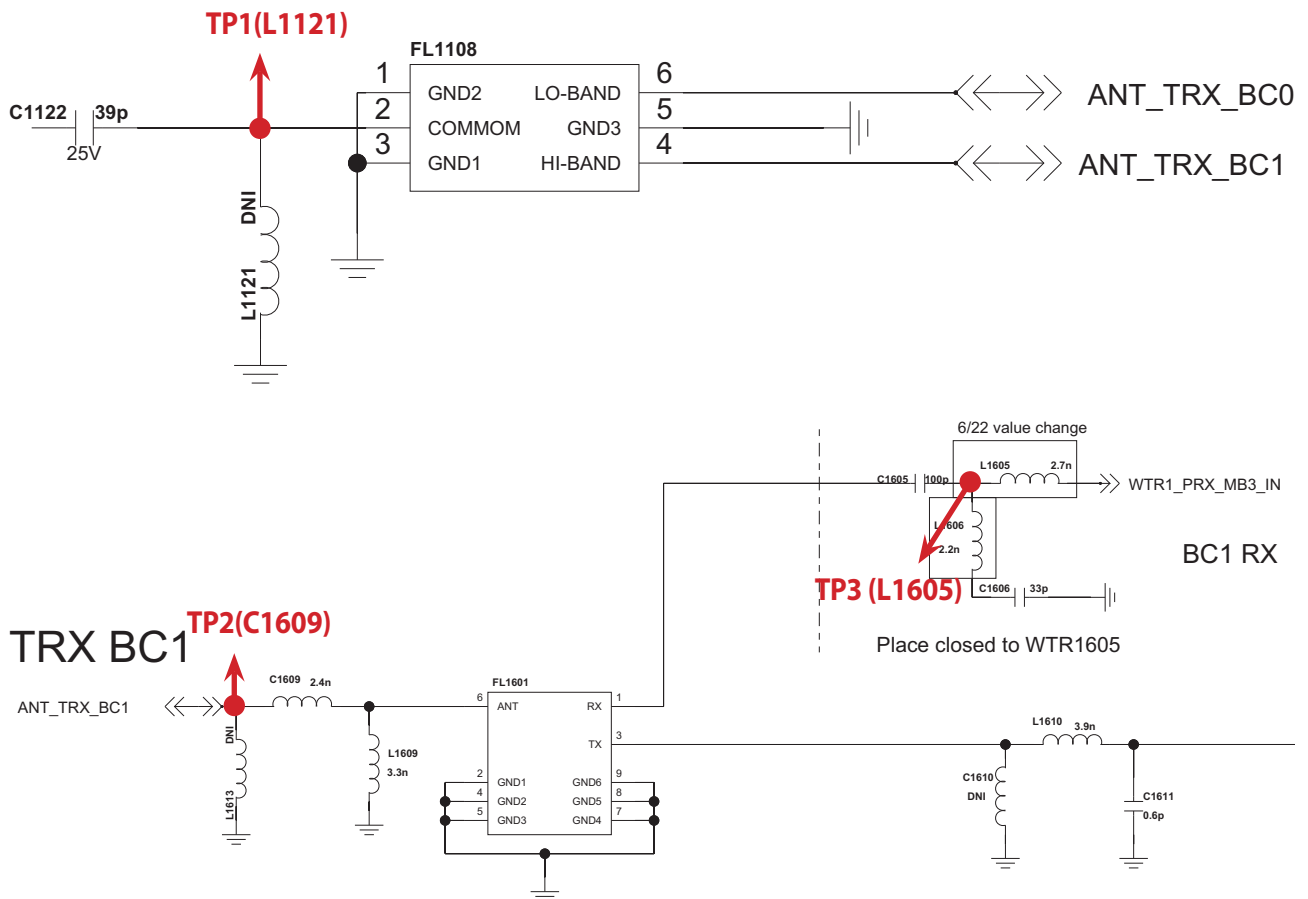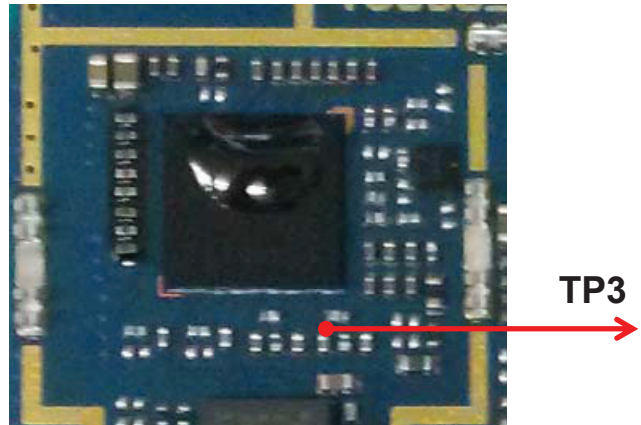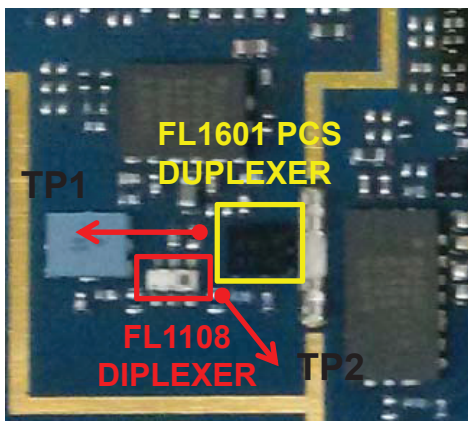

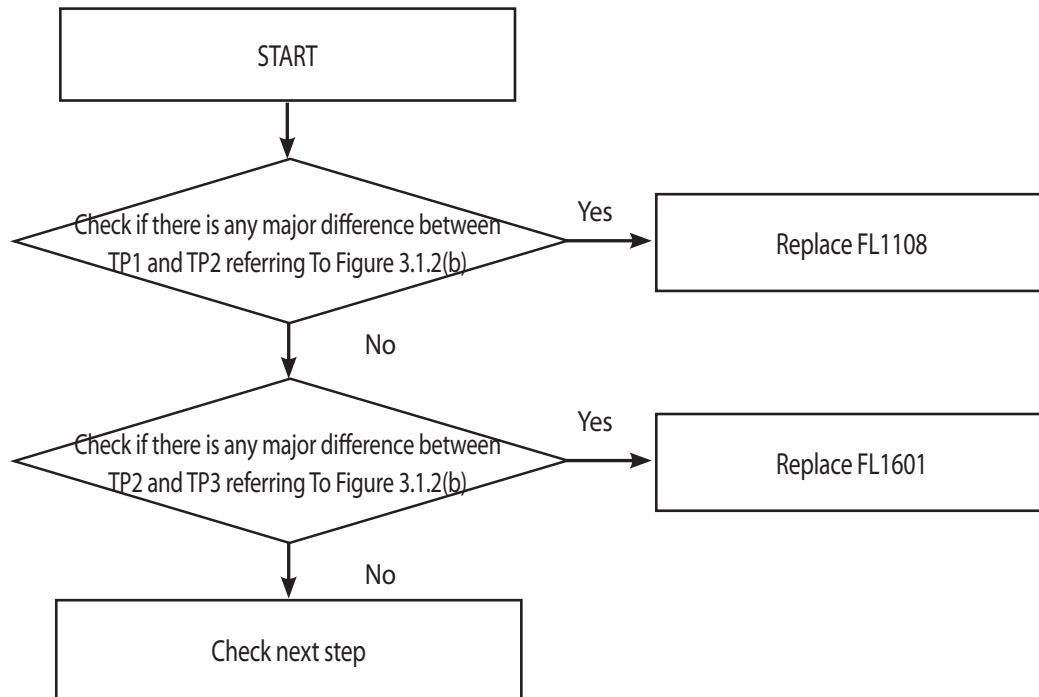

3. TROUBLE SHOOTING

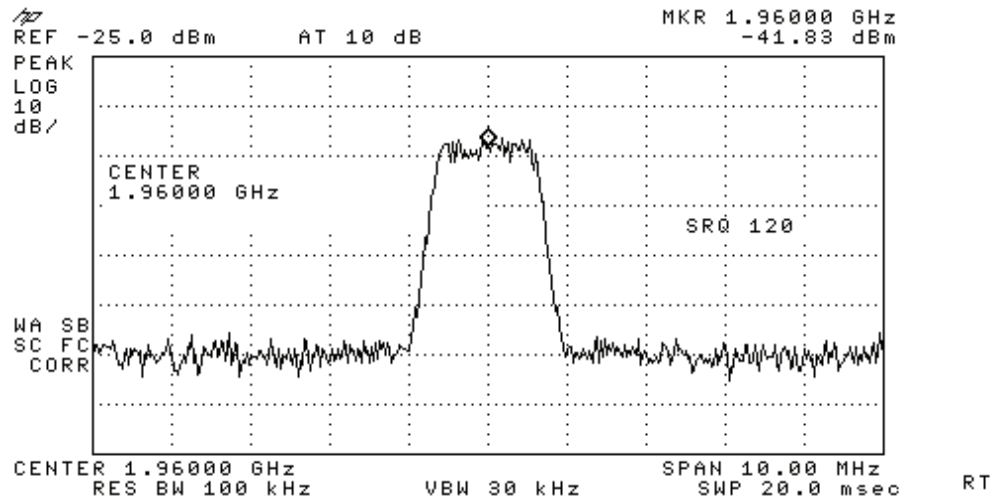


Figure 3.1.2 (b)


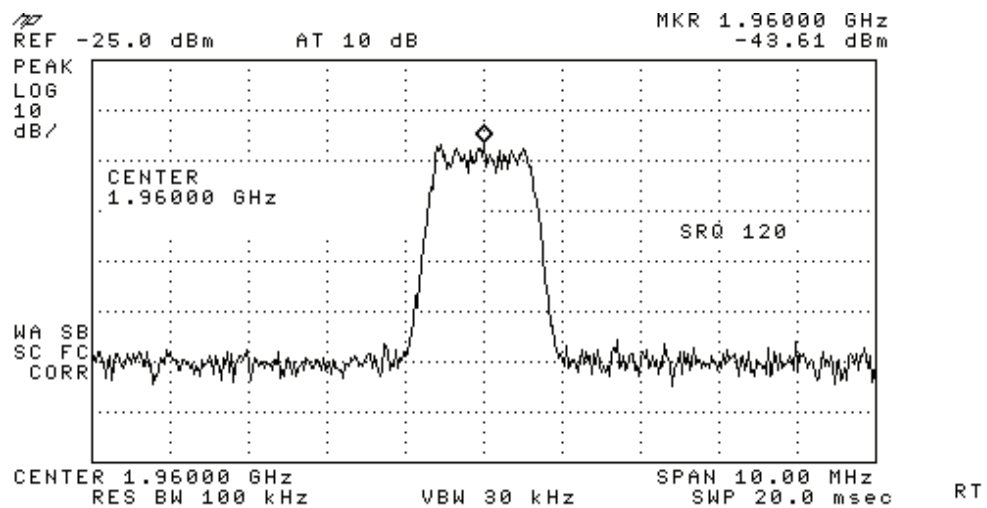


Figure 3.1.2 (c)

3.2 CDMA RF TX Part



3.2.1 DCN Tx

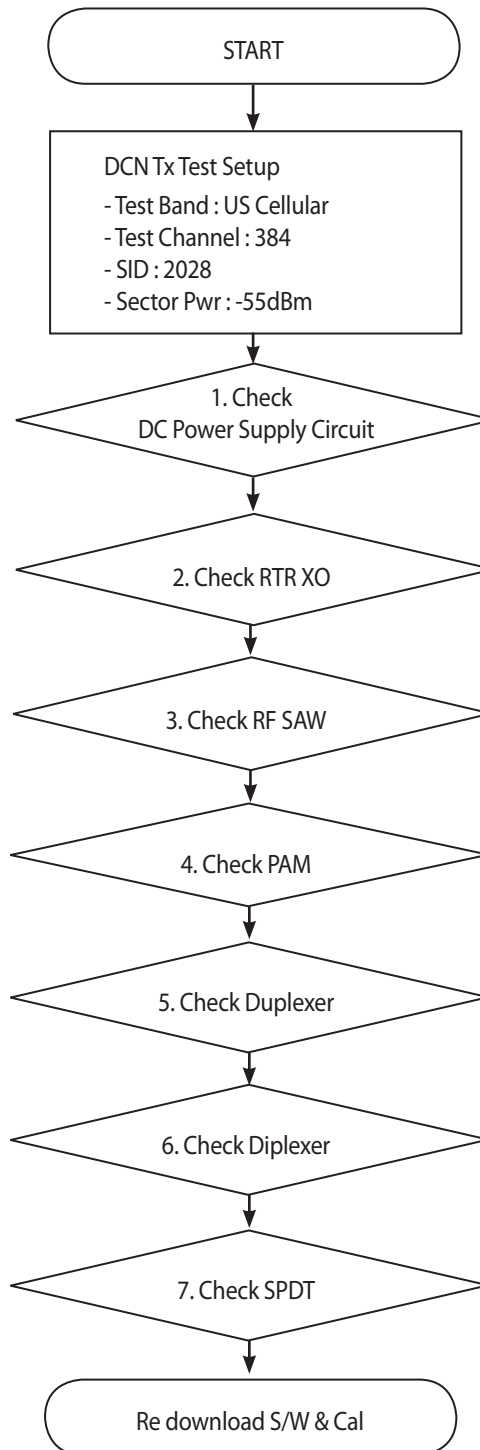


* There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form

3. TROUBLE SHOOTING


DCN TX RF PATH

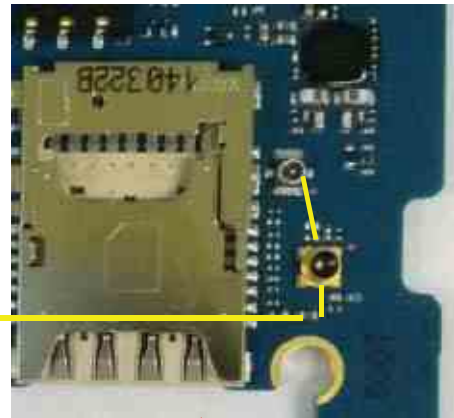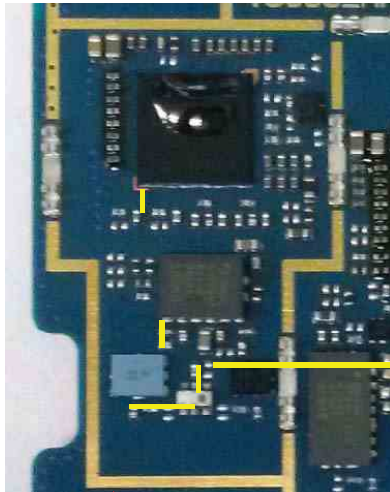



TOP

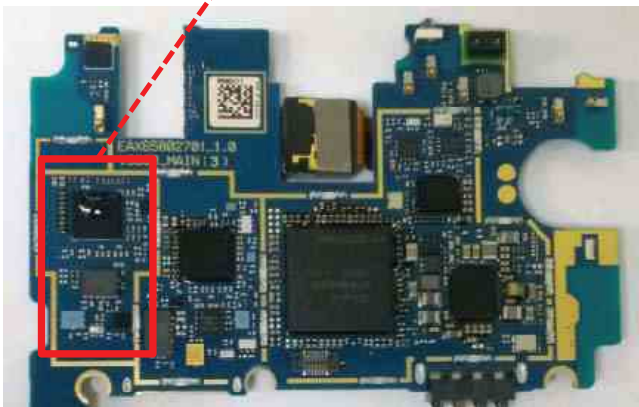


BOT

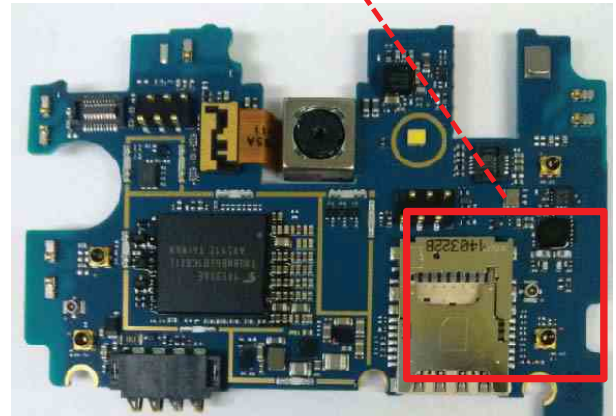



3.2.1.1 Checking DC Power supply circuit (WTR1625)

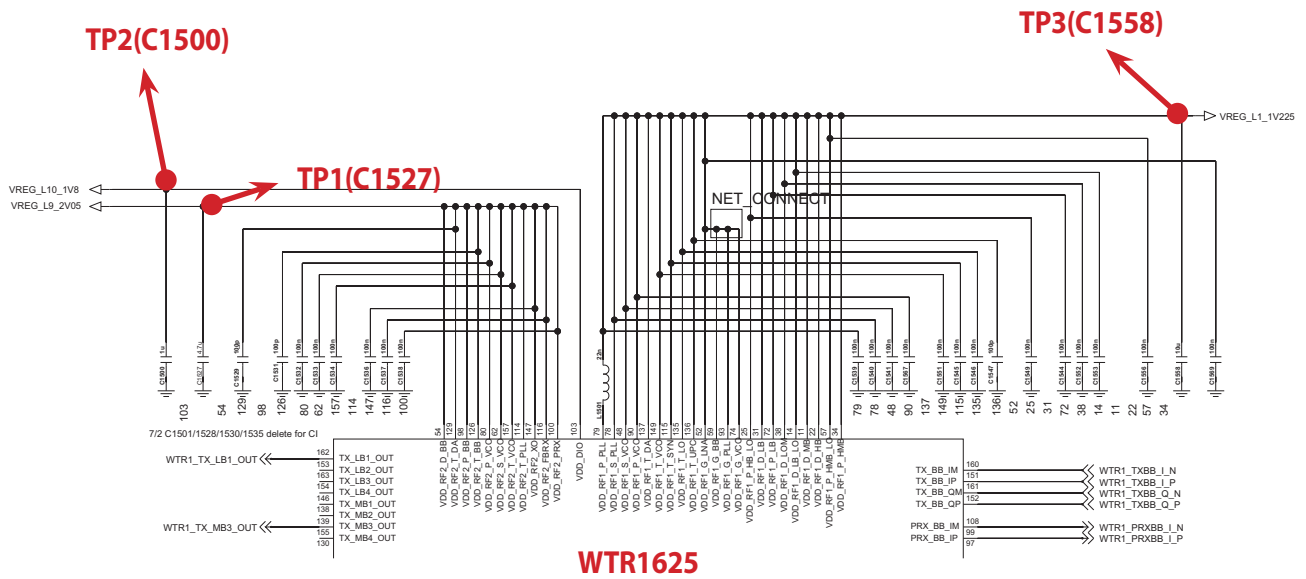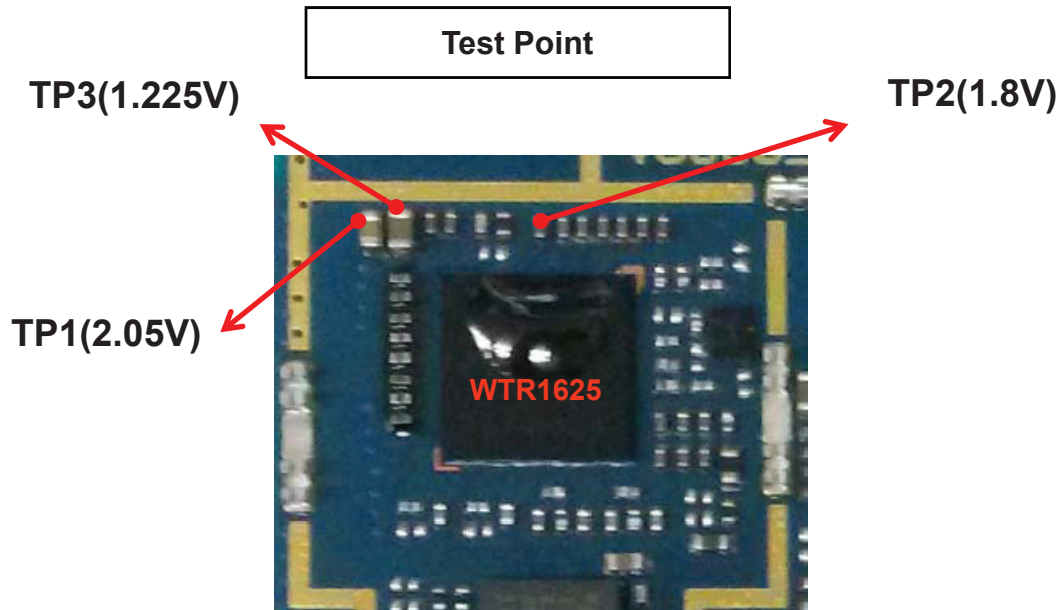


3. TROUBLE SHOOTING

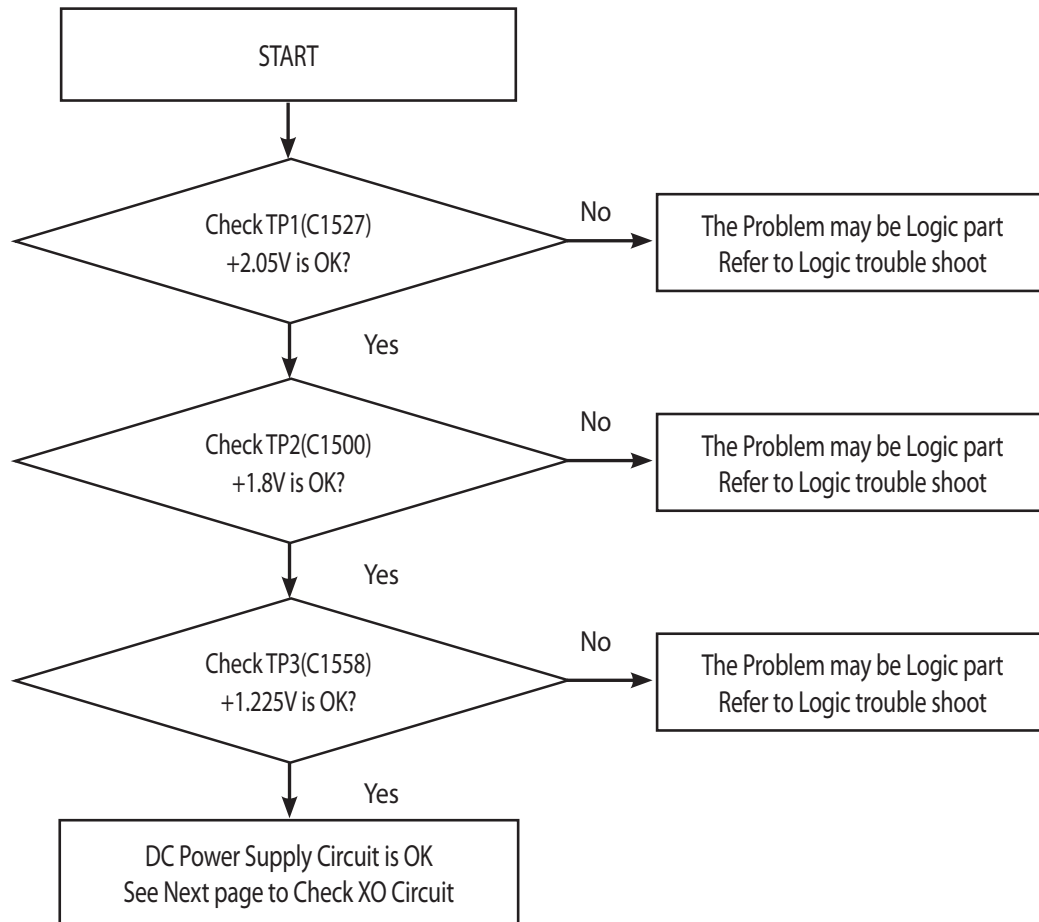

3.2.1.2 Checking WTR XO circuit (WTR1625)

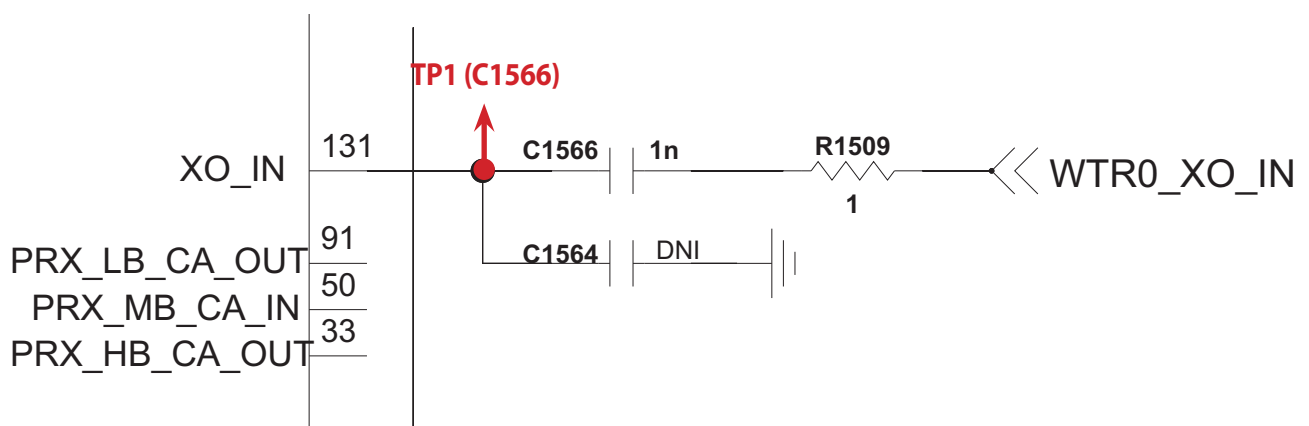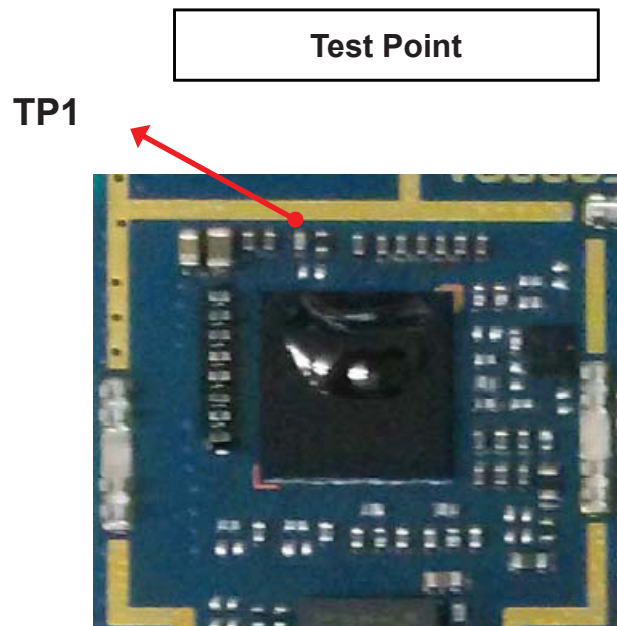



3. TROUBLE SHOOTING

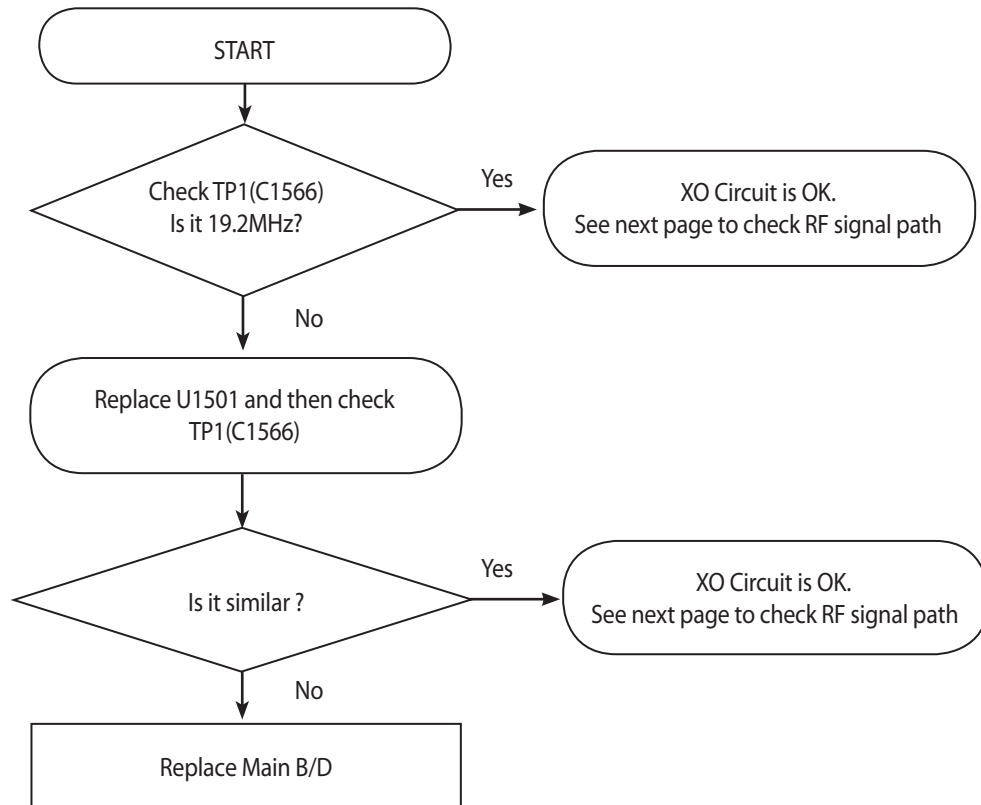

3.2.1.3 Checking DCN TX (Main Tx Path)

Test Point

TP1

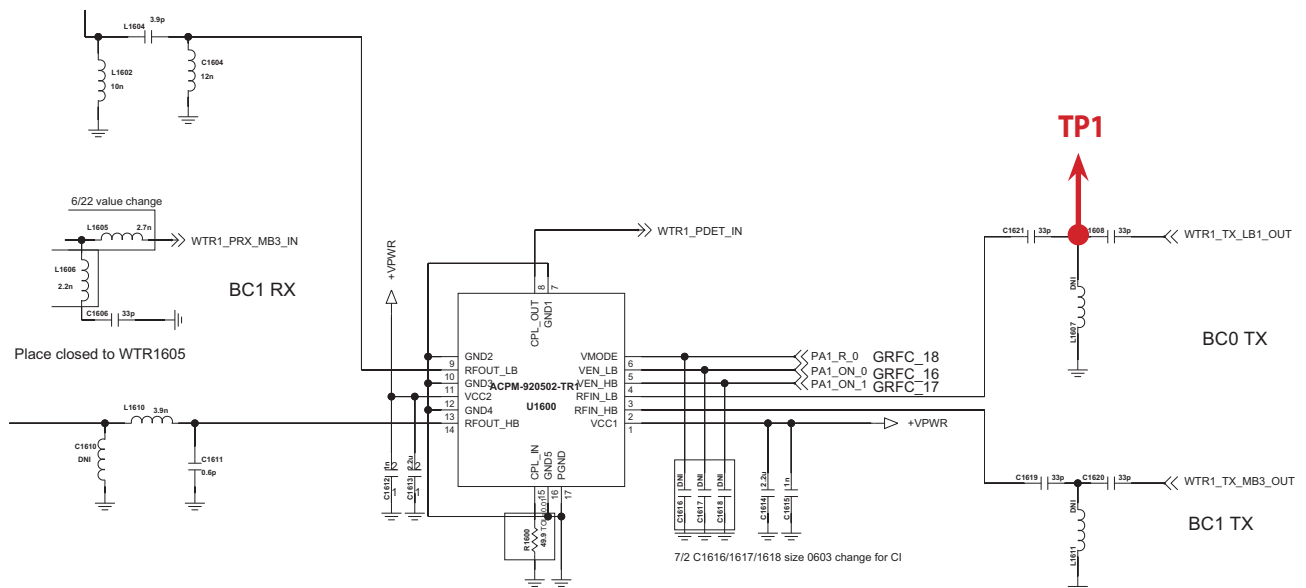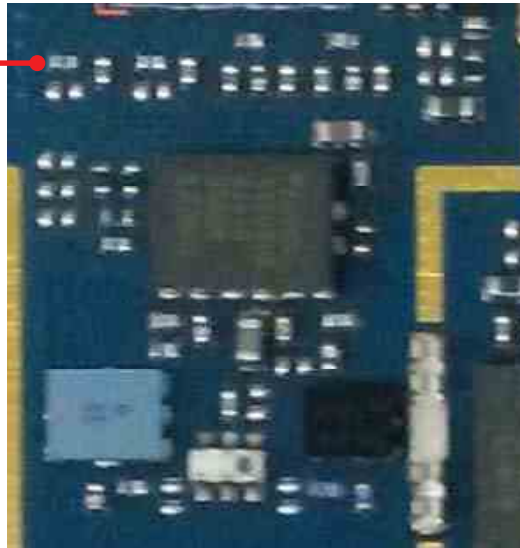

3. TROUBLE SHOOTING





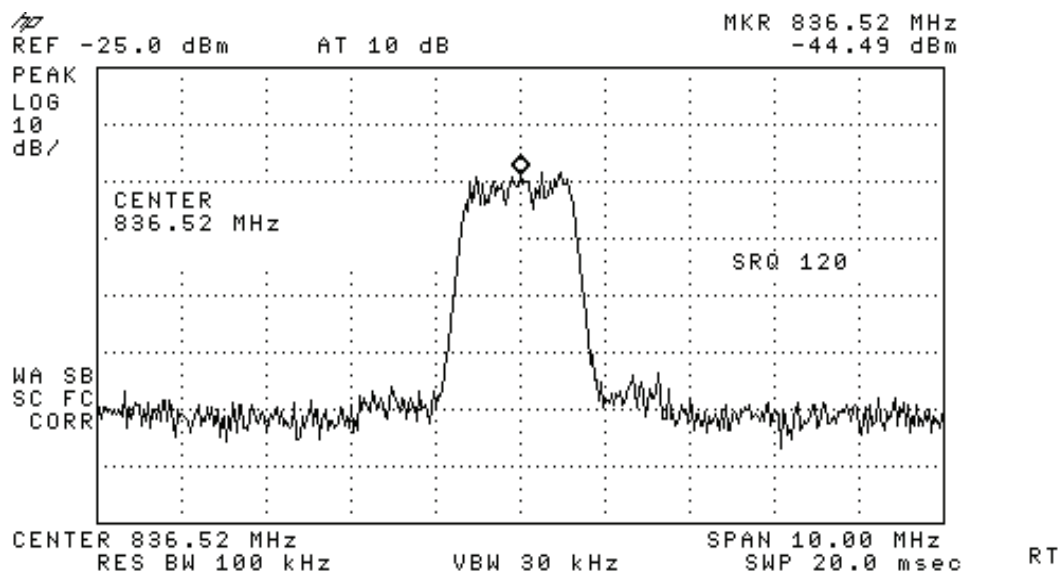


Figure 3.2.1.3(a)



Test Point

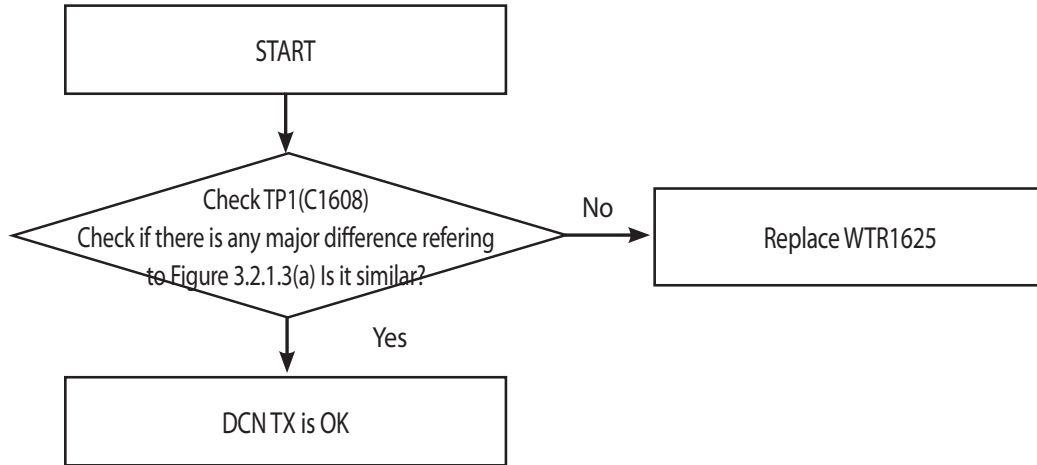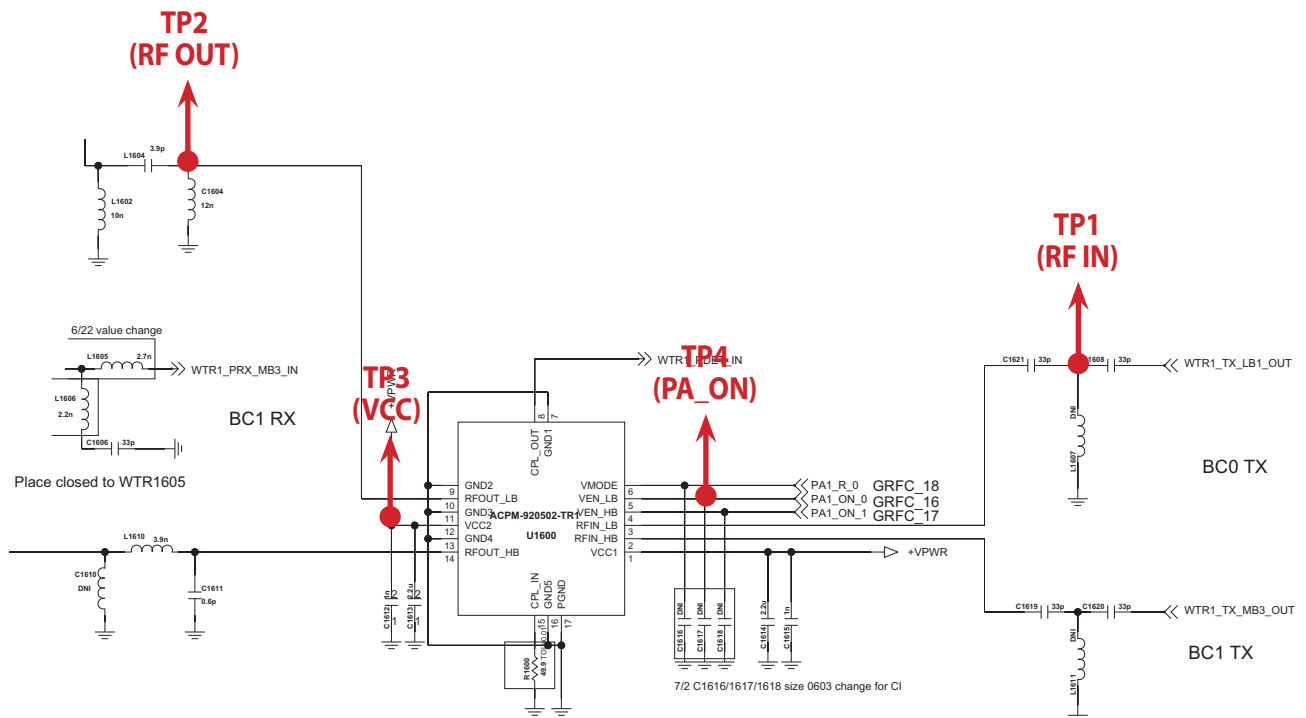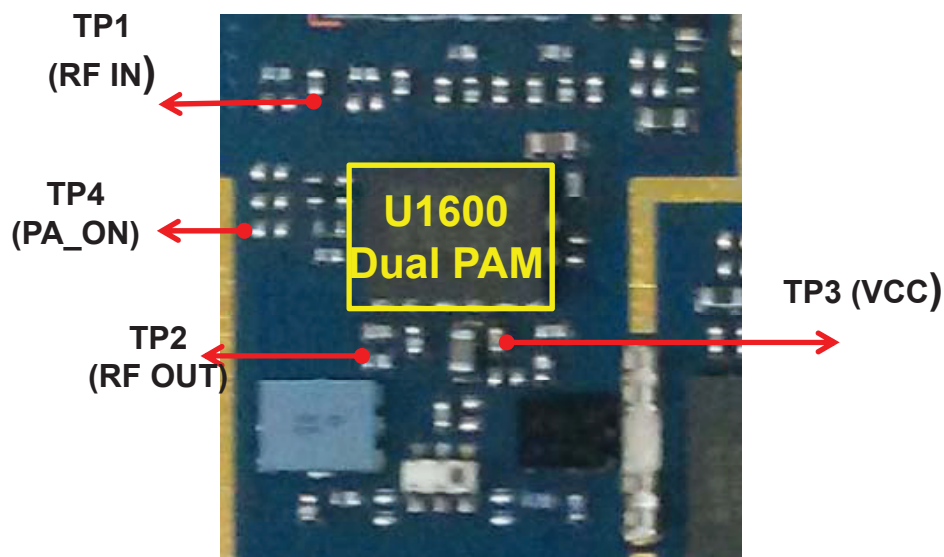


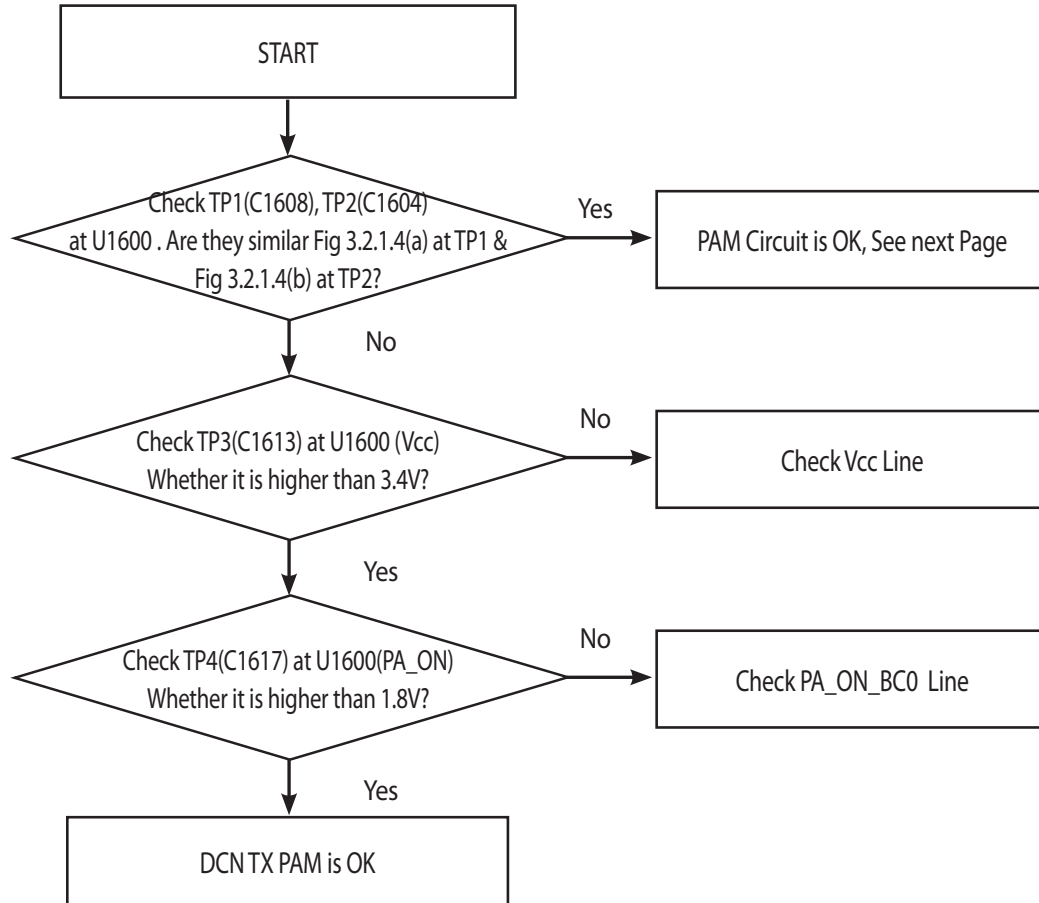

3.2.1.5 Checking RF signal path (Duplexer, Diplexer)

Test Point

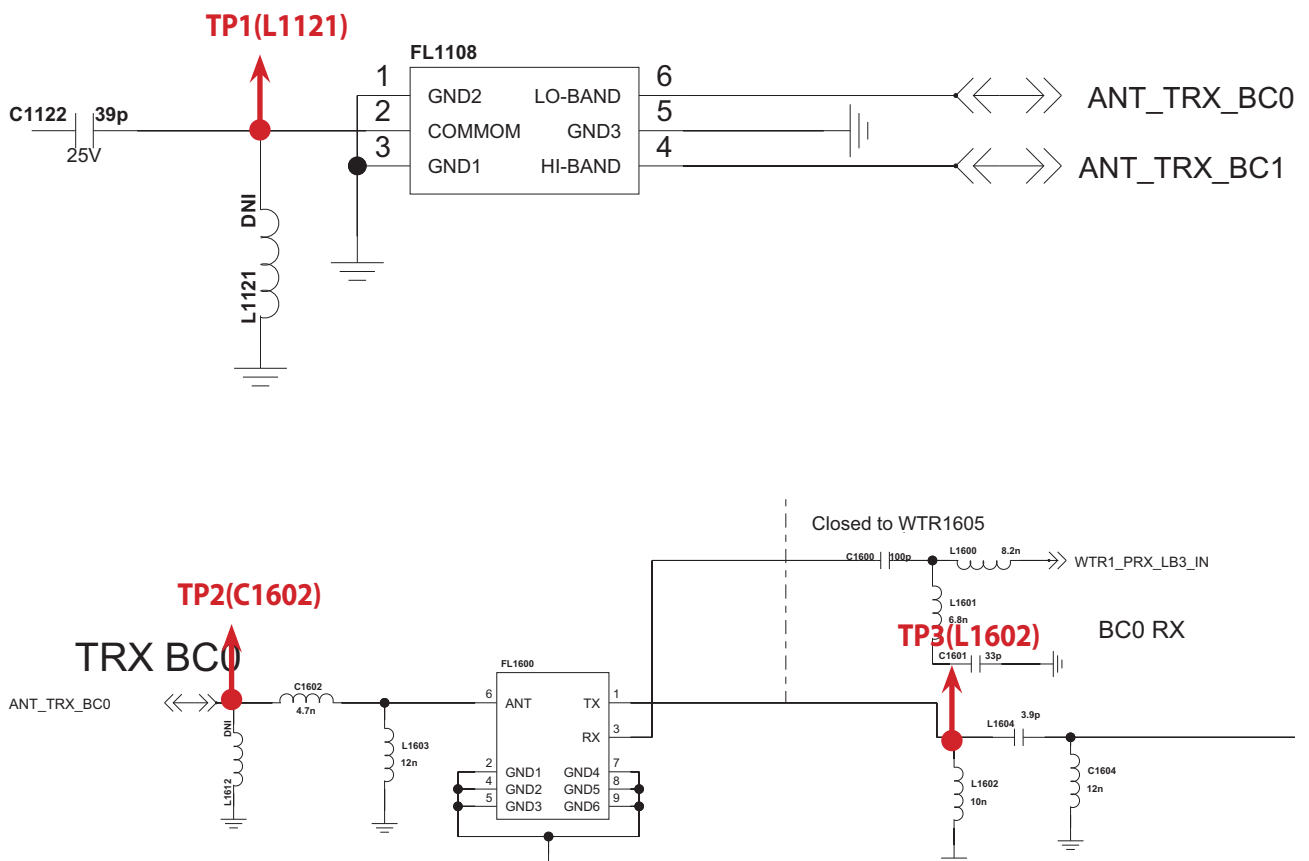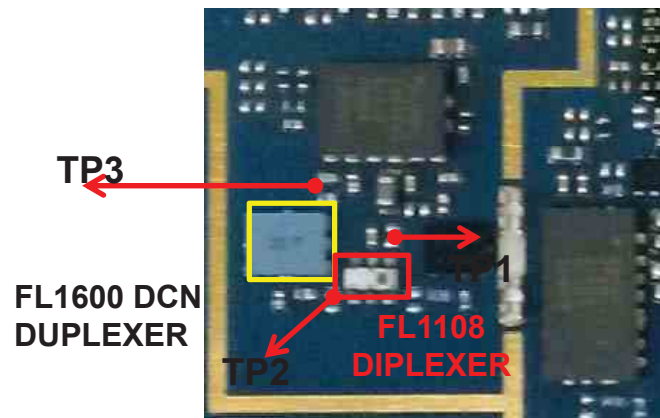

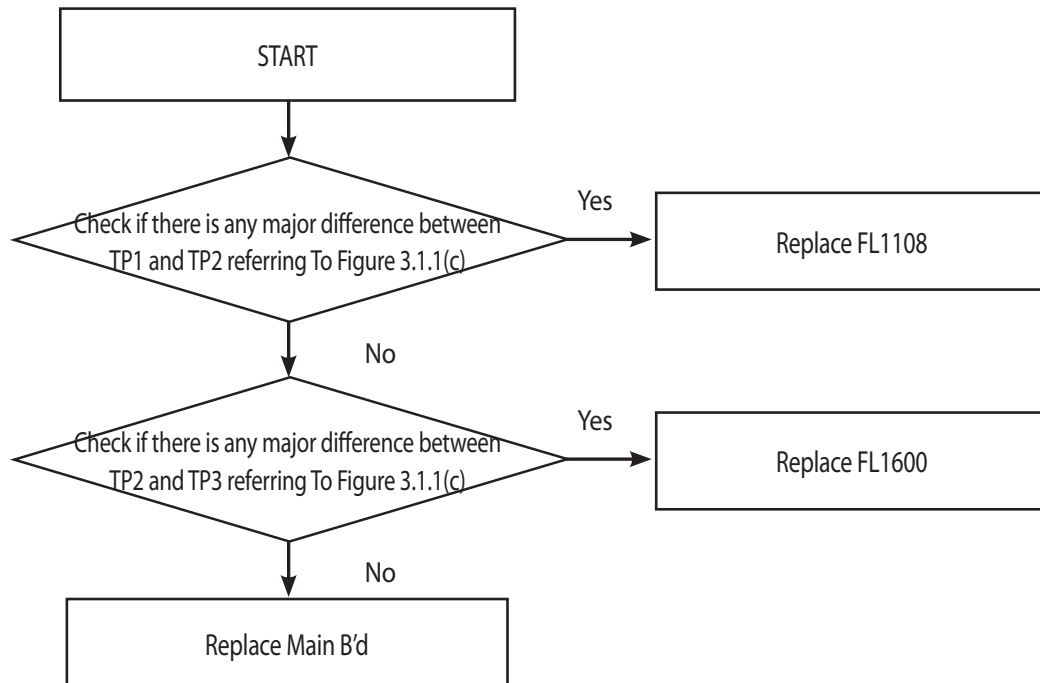

3. TROUBLE SHOOTING

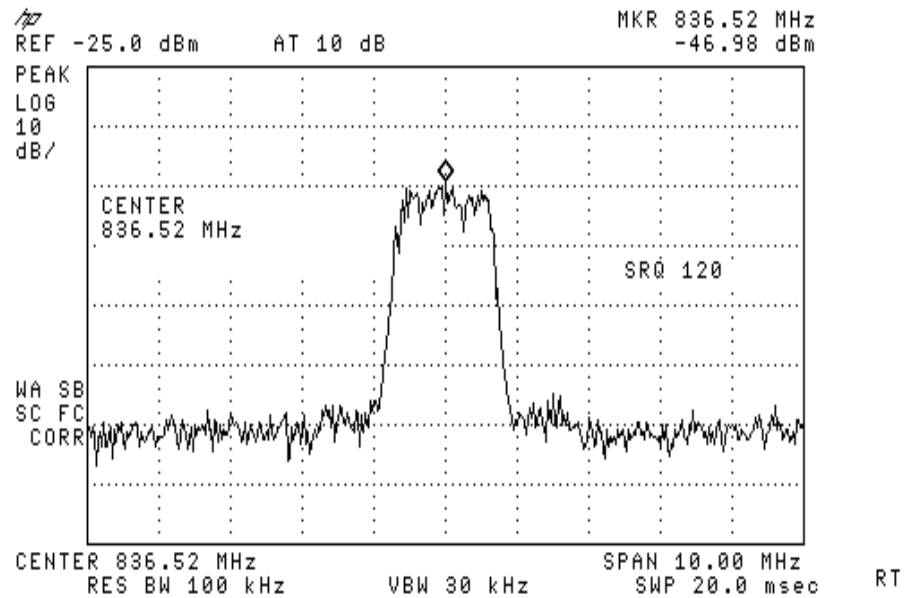


Figure 3.2.1.4 (a)


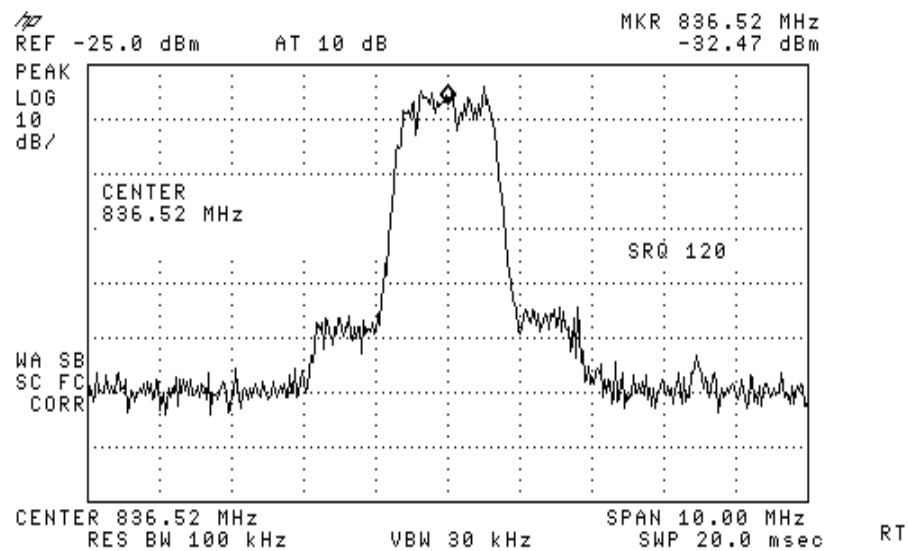


Figure 3.2.1.4 (b)



3.2.2 PCS Tx

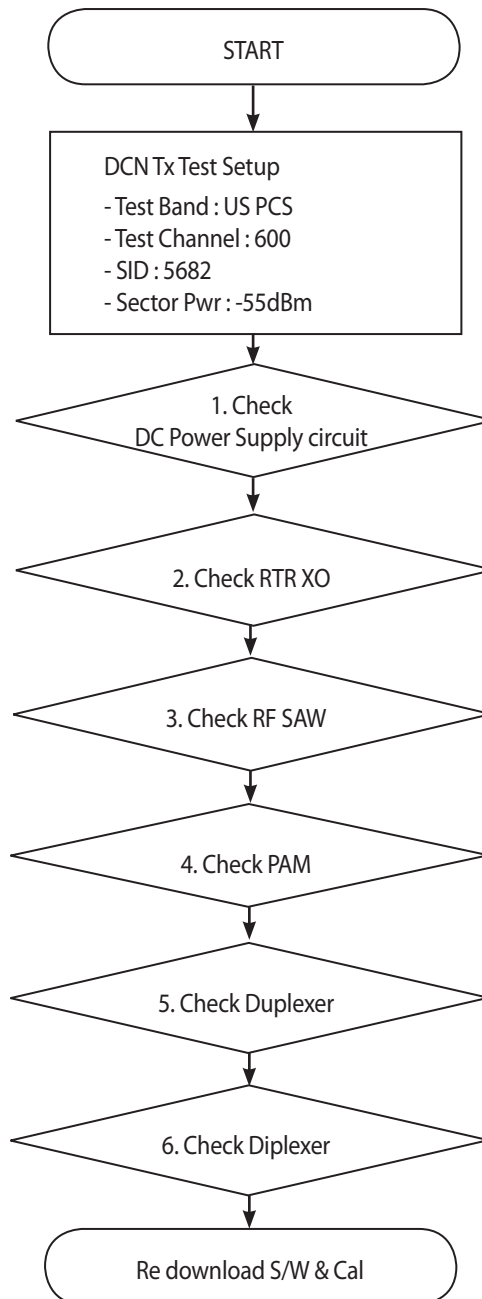


*There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form.

3. TROUBLE SHOOTING


PCS TX RF PATH

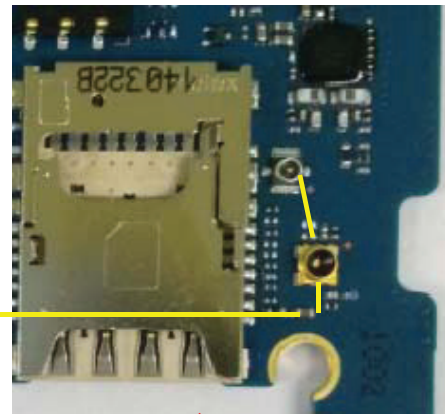
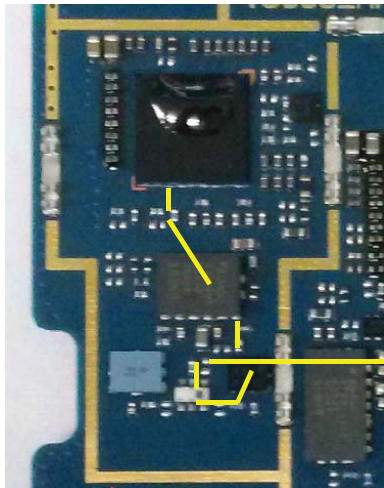


TOP

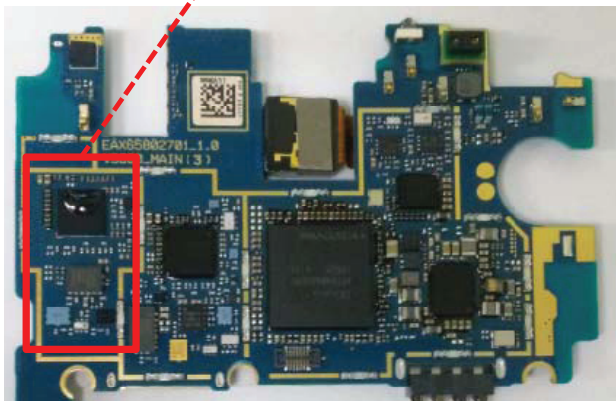


BOT


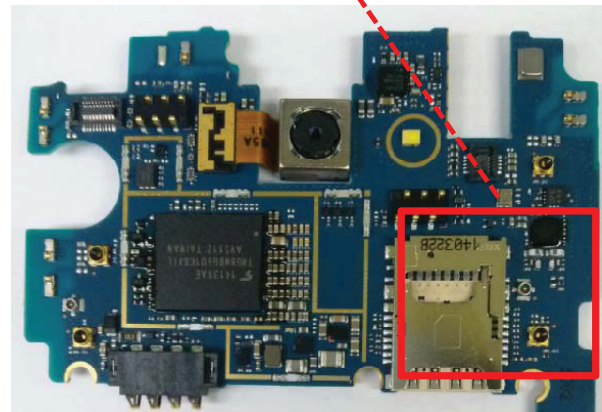


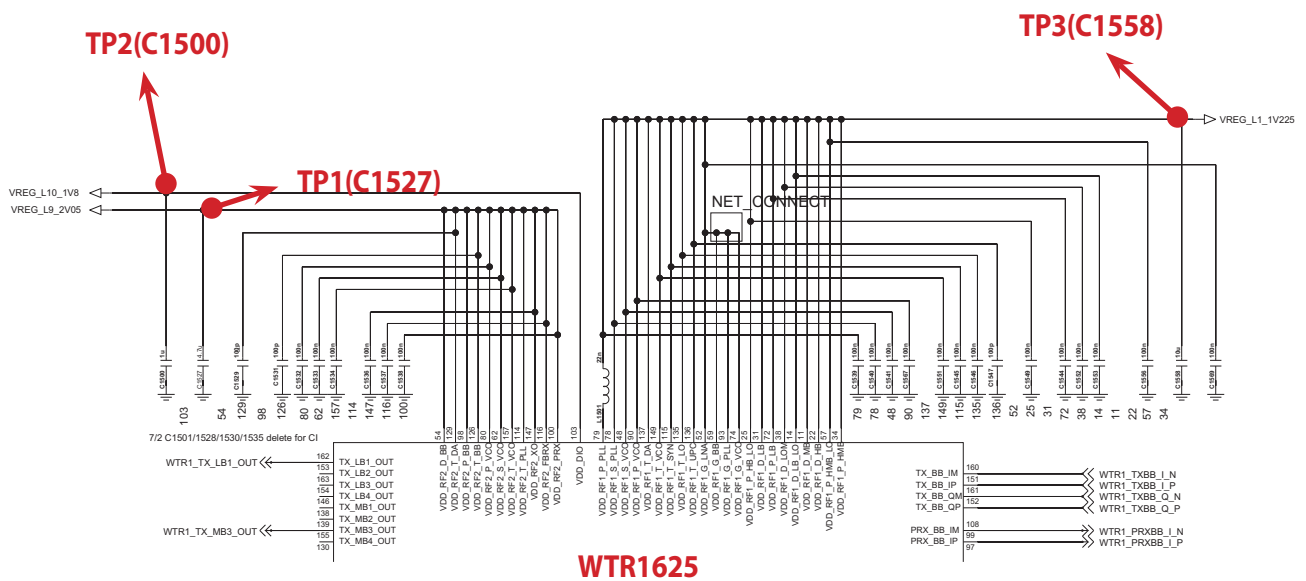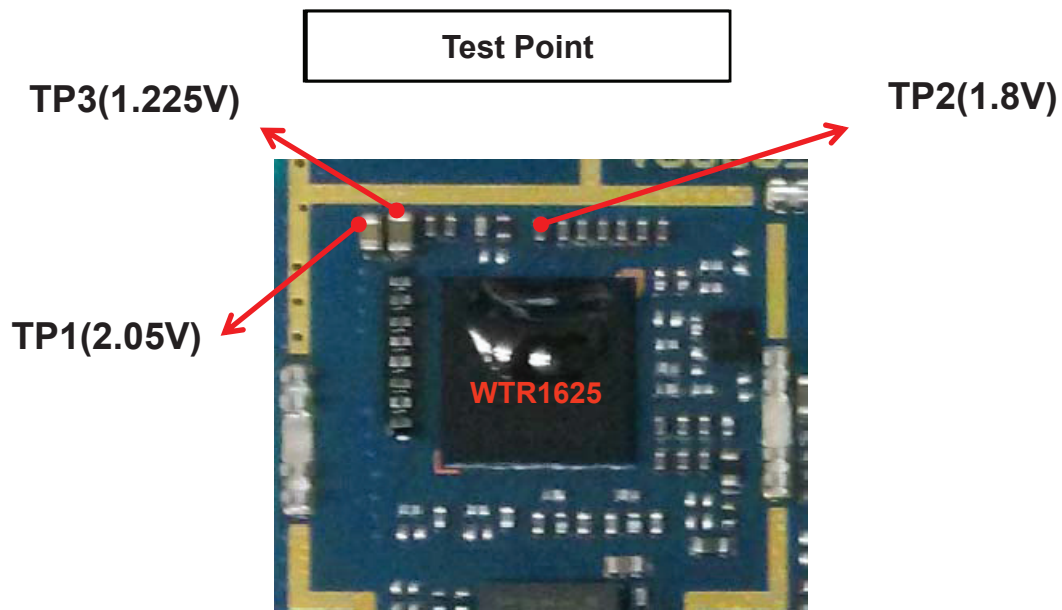


3. TROUBLE SHOOTING

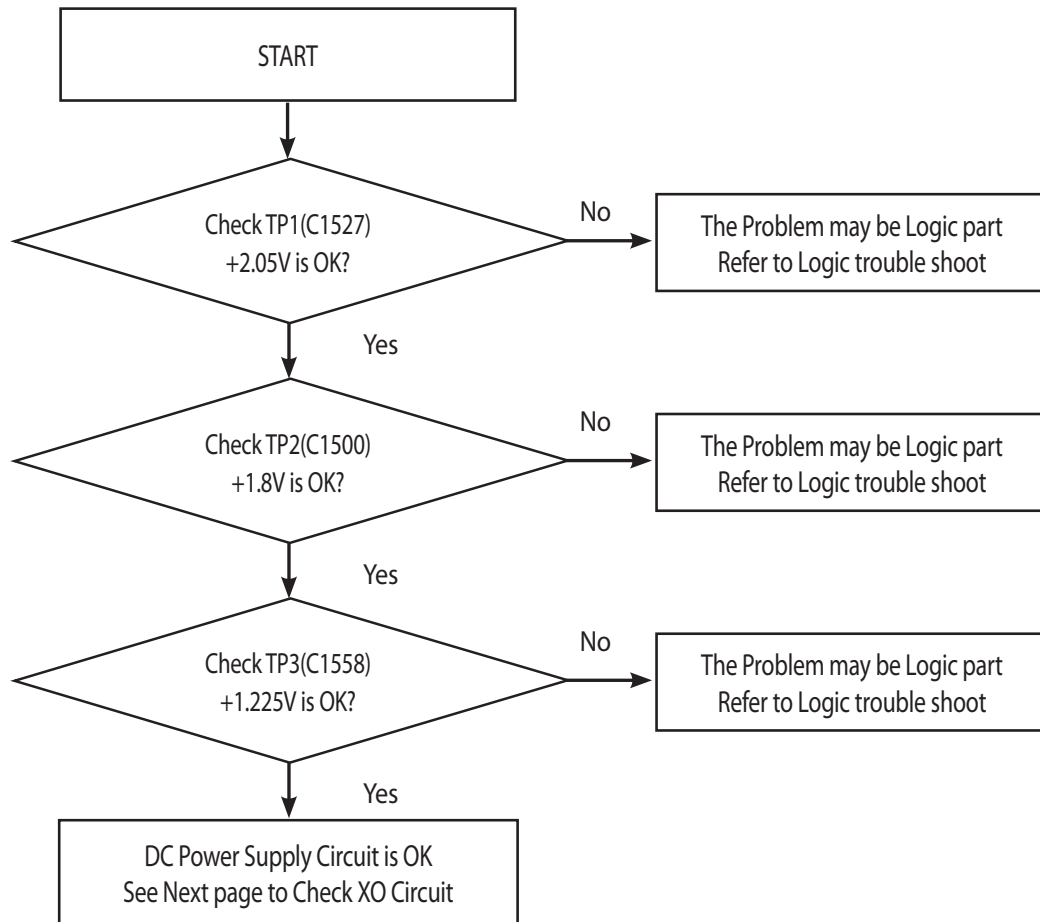

3.2.2.2 Checking WTR XO circuit (WTR1625)

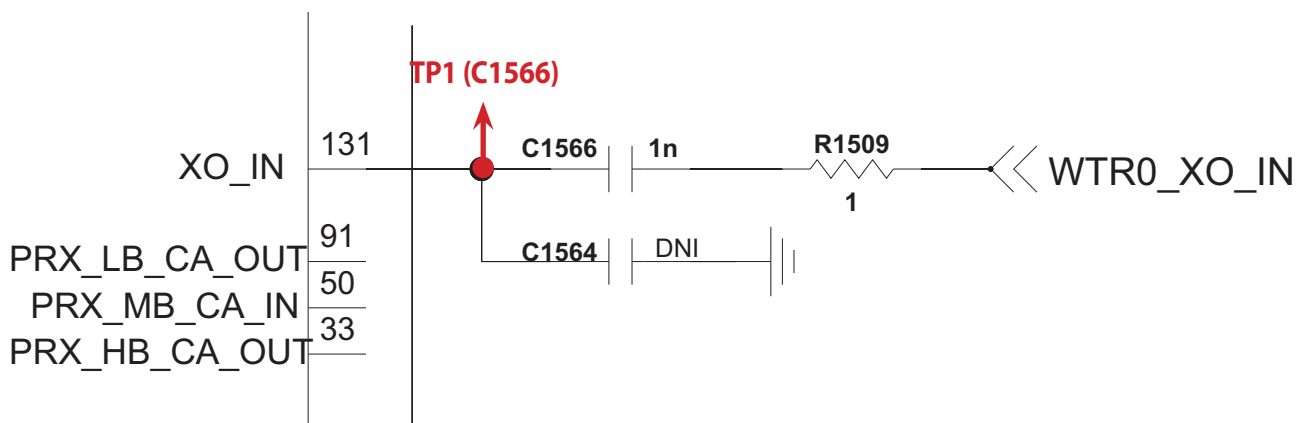
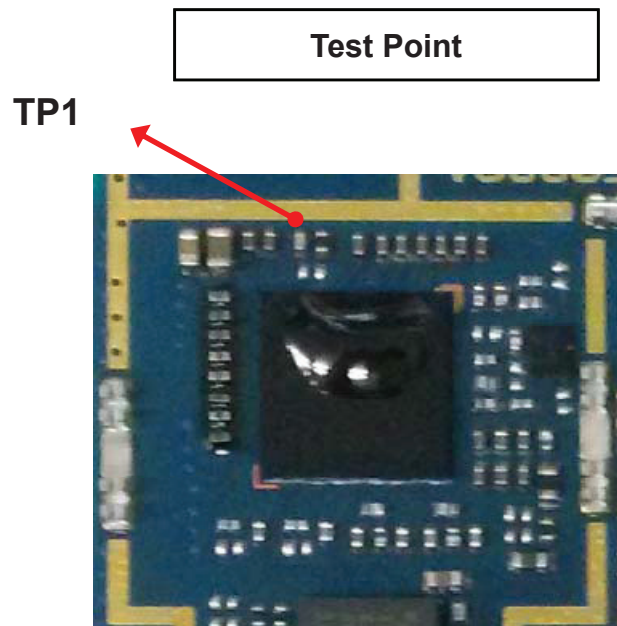


3. TROUBLE SHOOTING

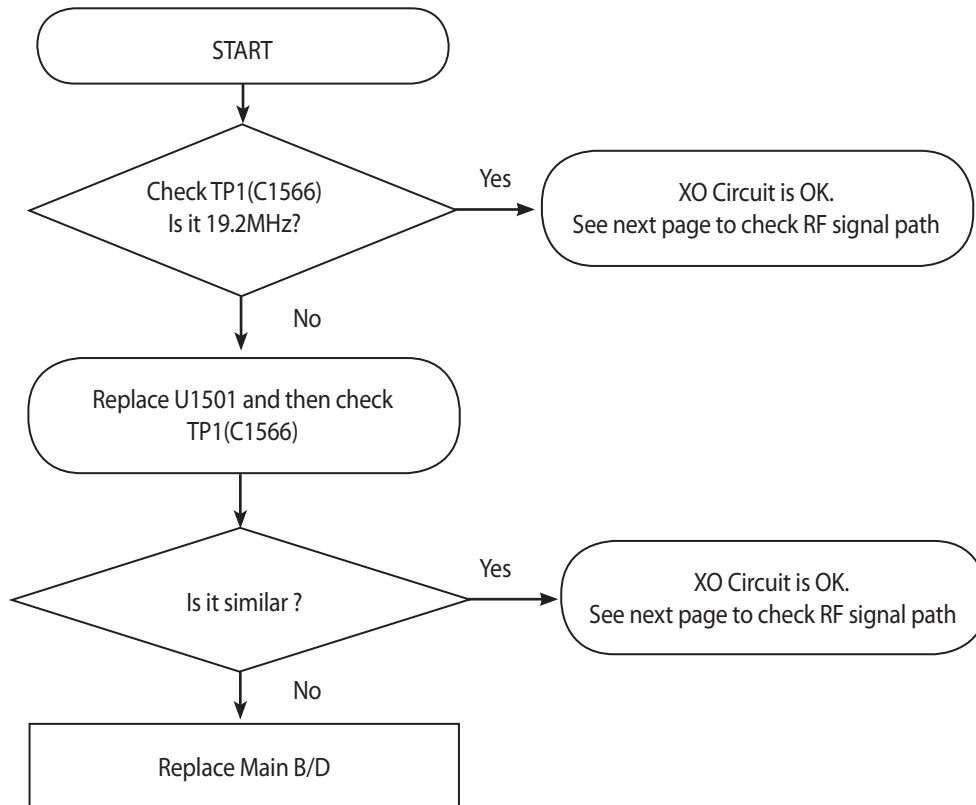

3.2.2.3 Checking PCS TX (Main Tx Path)

Test Point

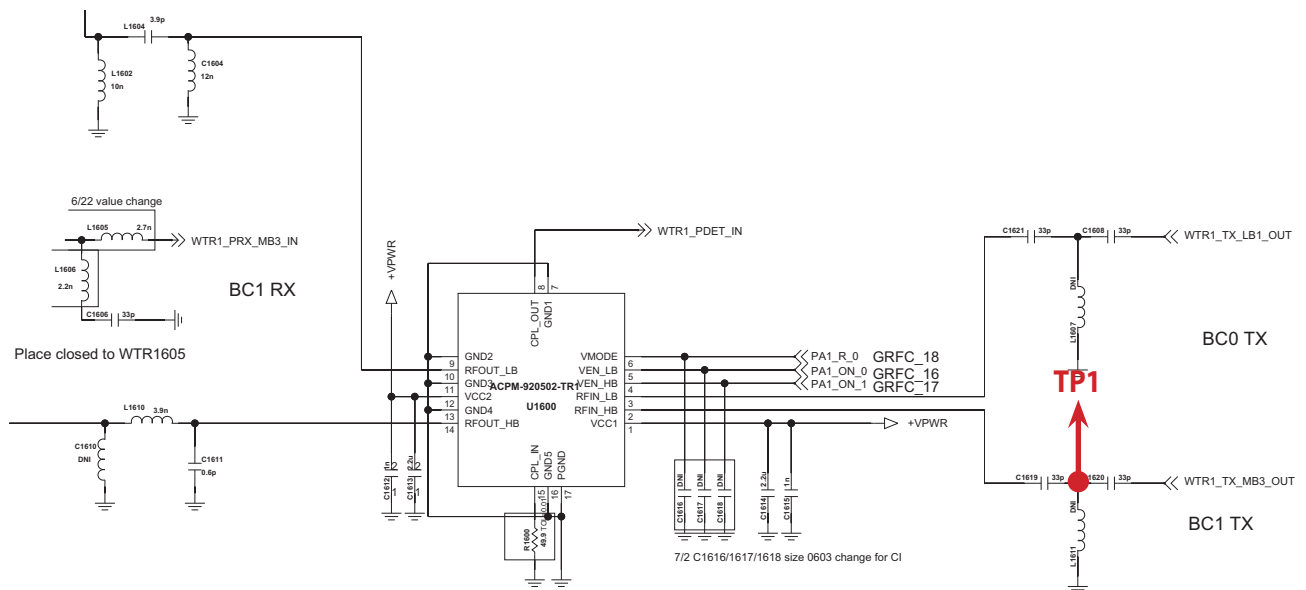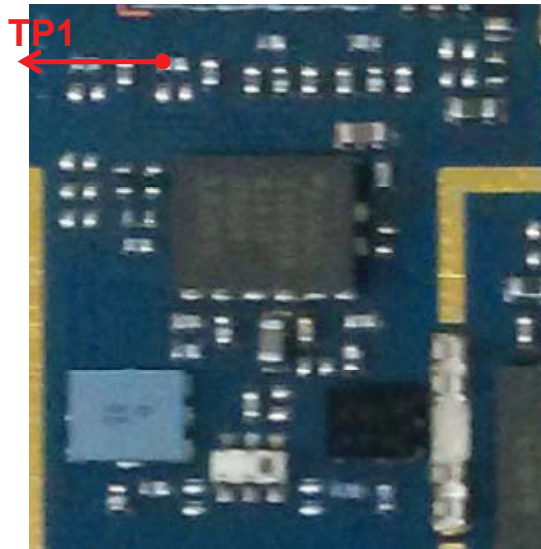

3. TROUBLE SHOOTING





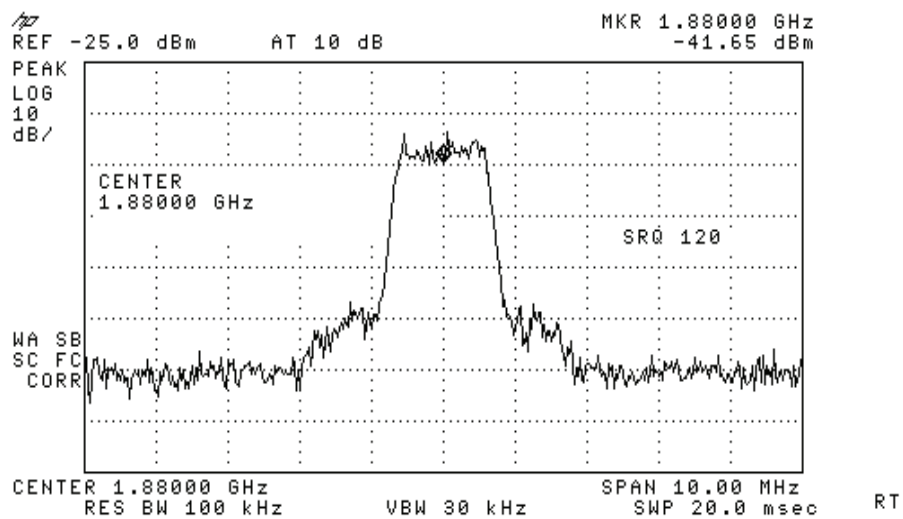


Figure 3.2.2.3 (a)



Test Point

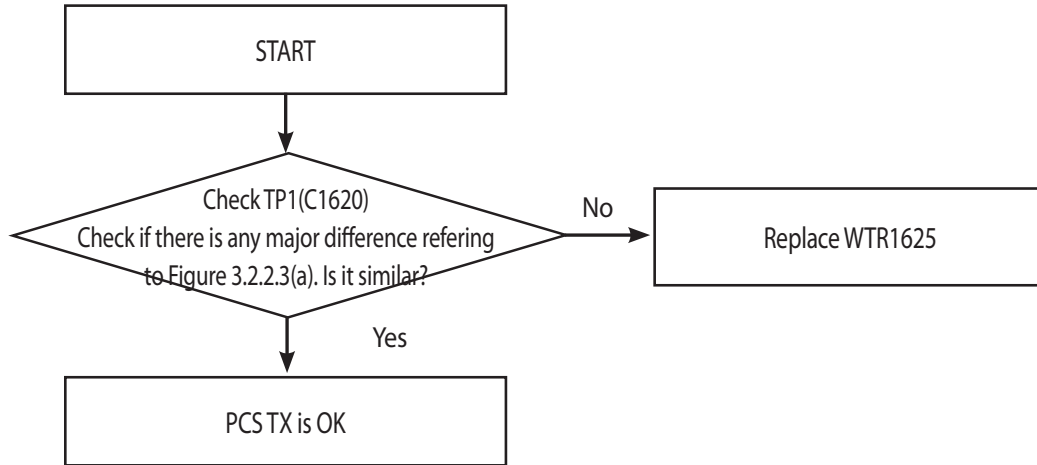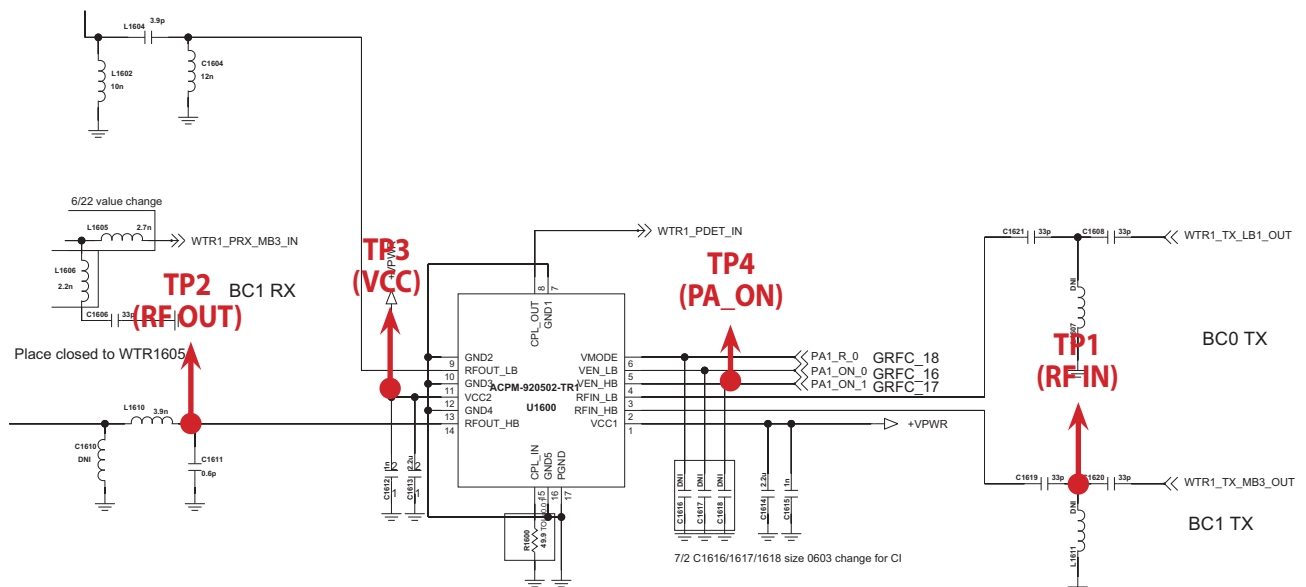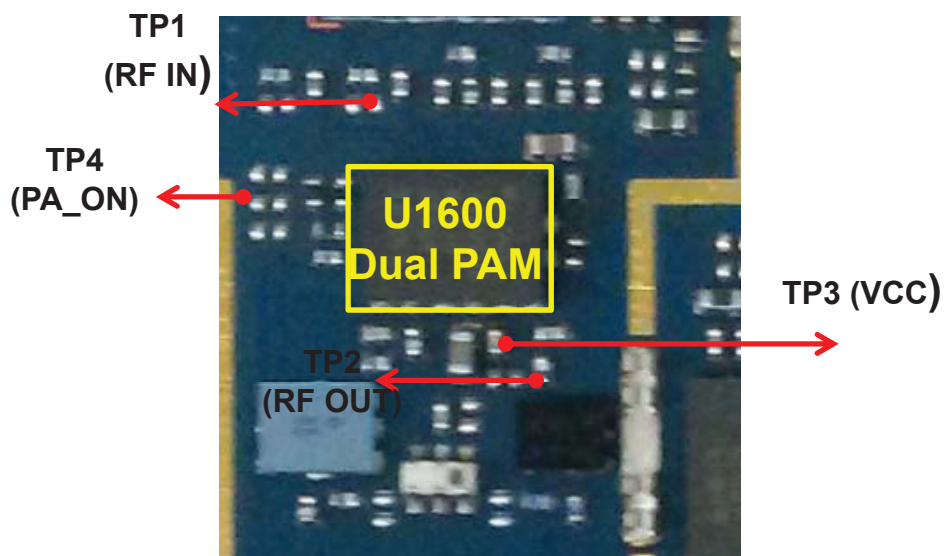


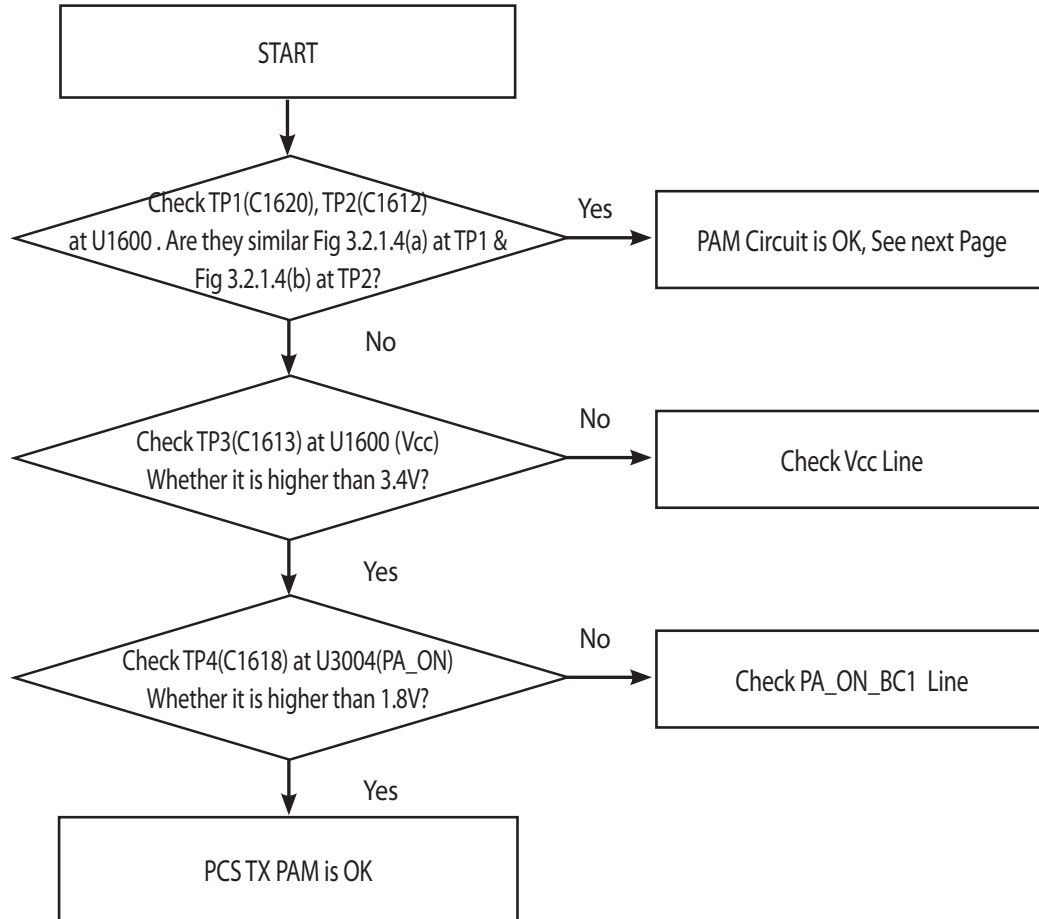

3.2.2.5 Checking RF signal path (Duplexer, Diplexer)

Test Point

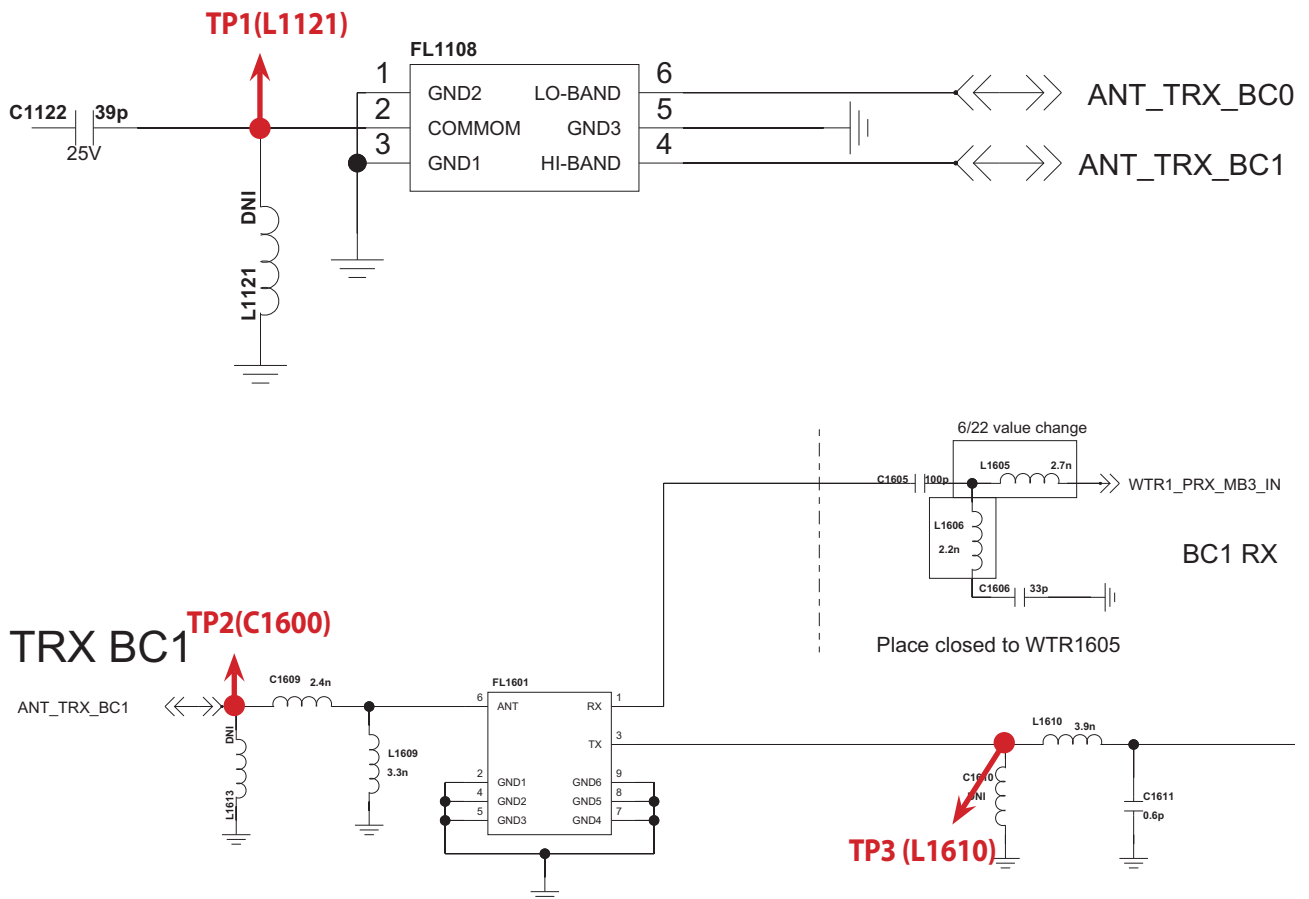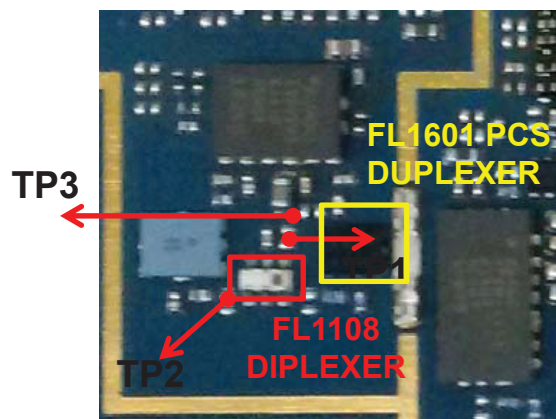

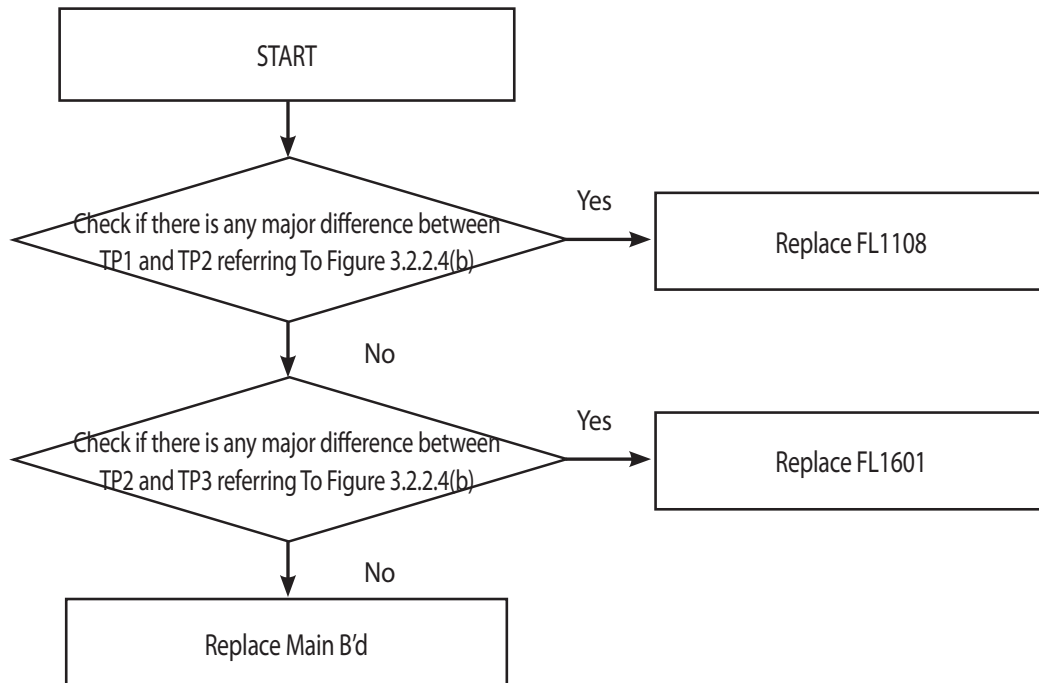

3. TROUBLE SHOOTING

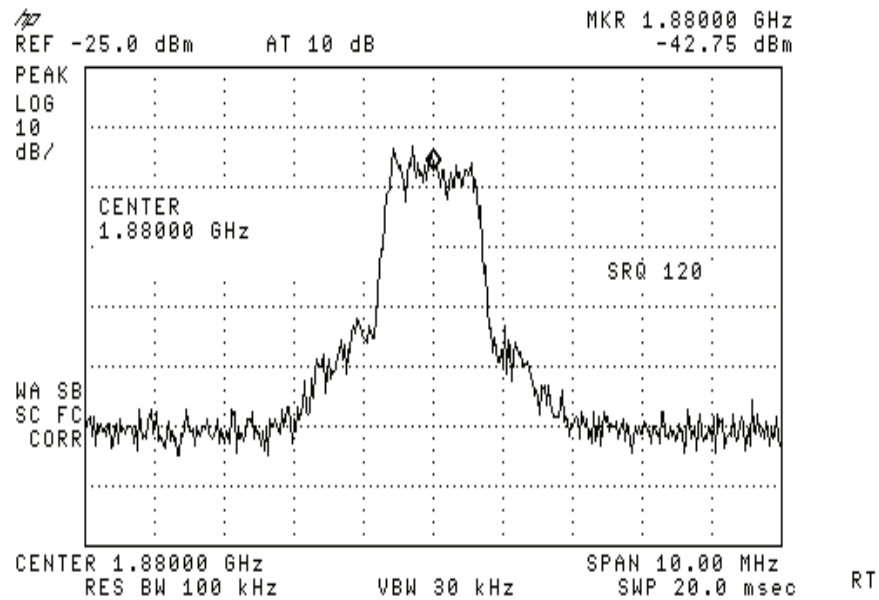


Figure 3.2.2.4(a)


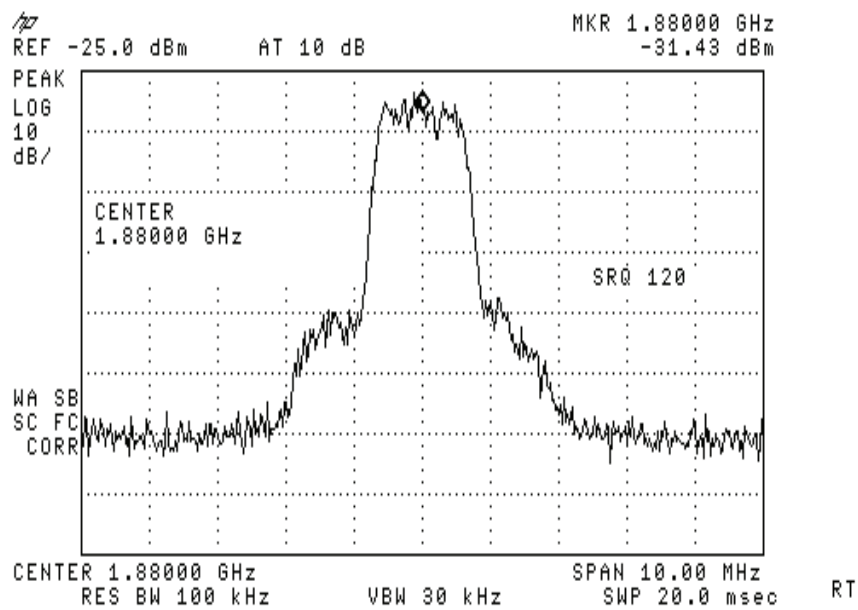


Figure 3.2.2.4(b)

3.3 BT/Wifi Part

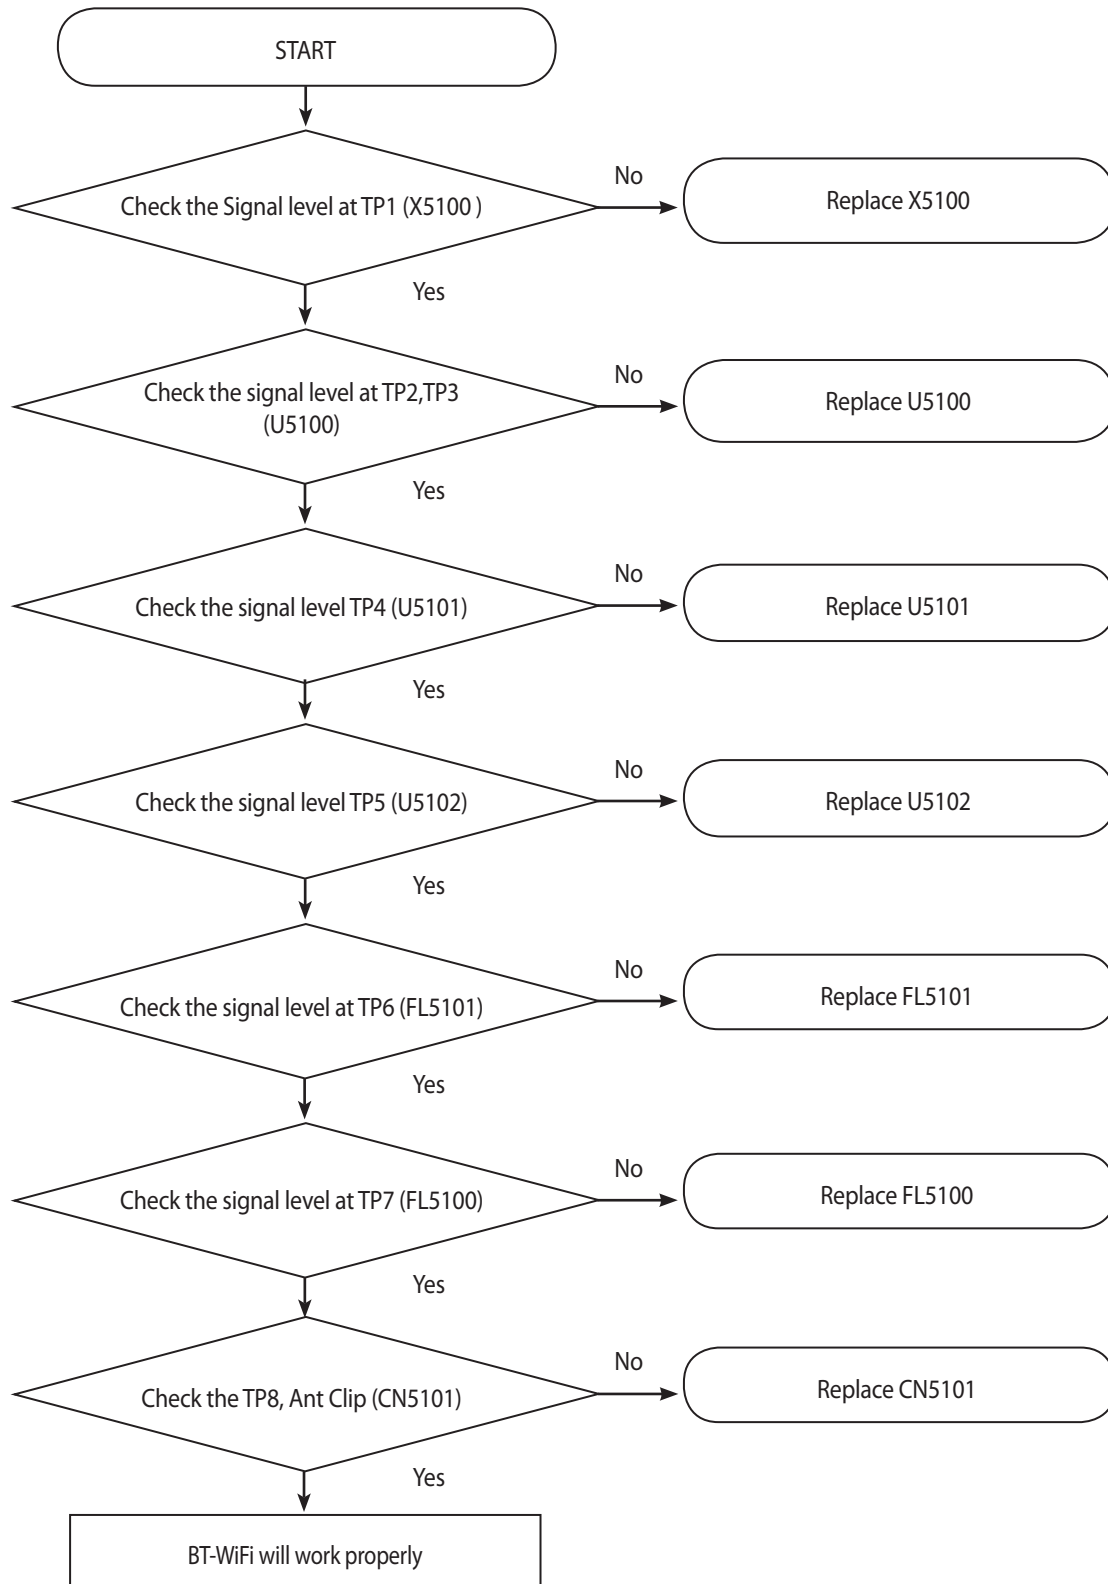



BT&WIFI control signals are generate by WCN3660(U5100)

3. TROUBLE SHOOTING


BT/WiFi RF Path & Test Point


Top

Bottom

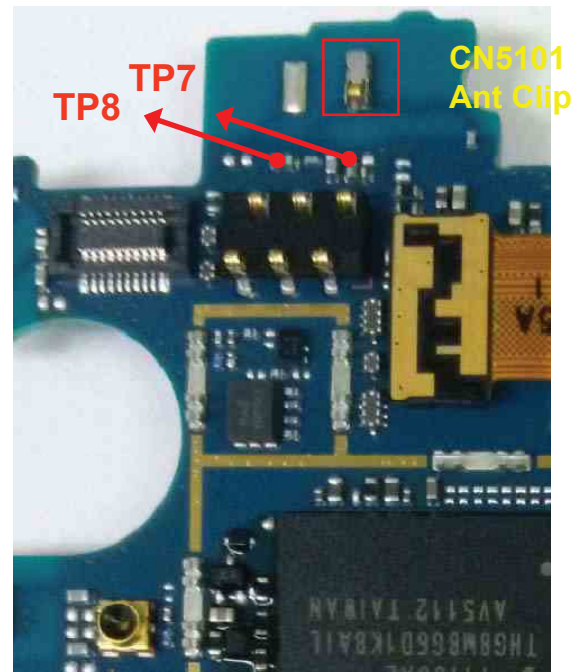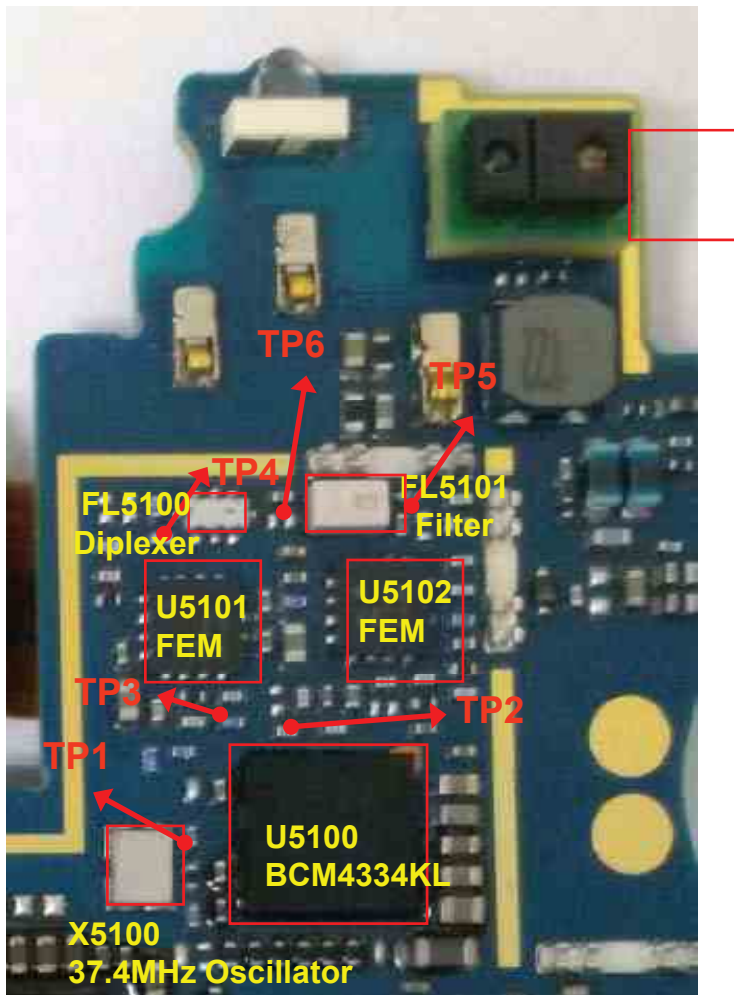


3. TROUBLE SHOOTING

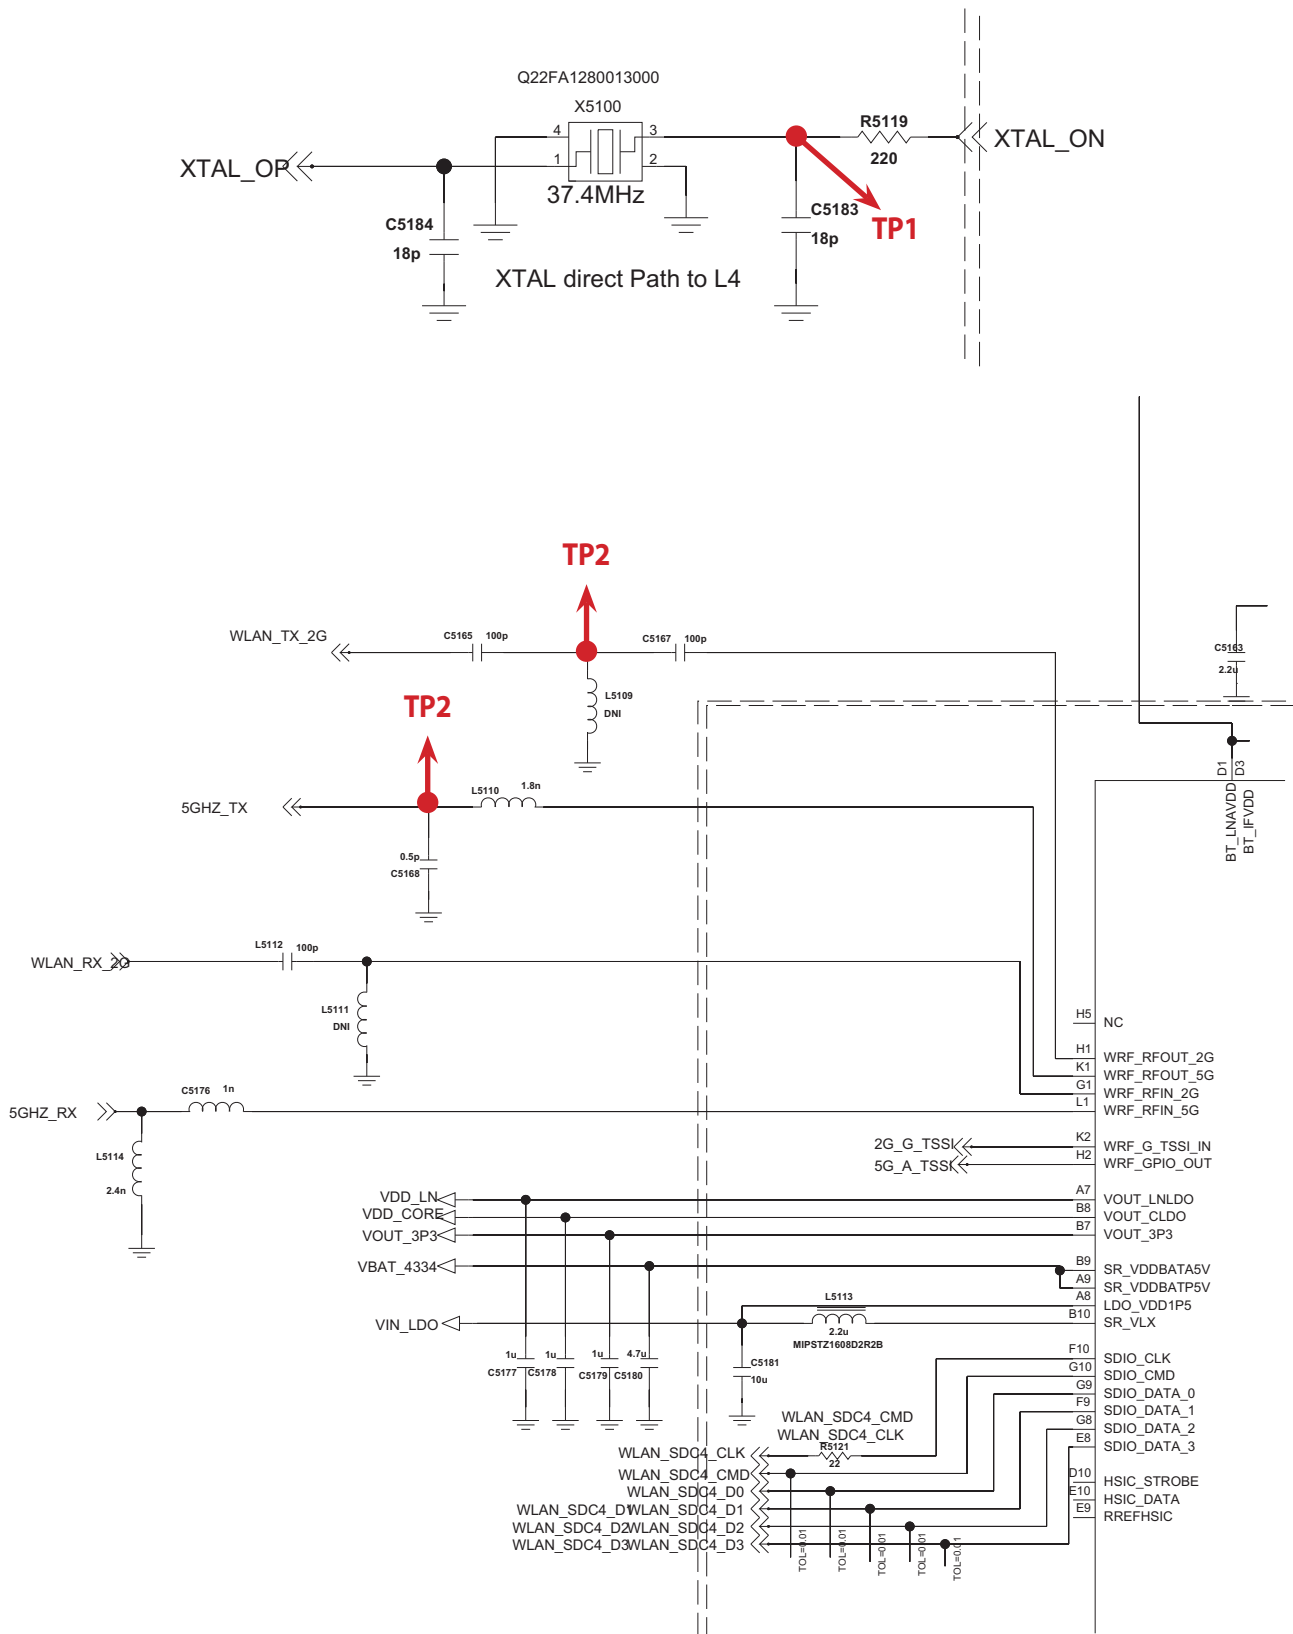




3.4 GPS Part

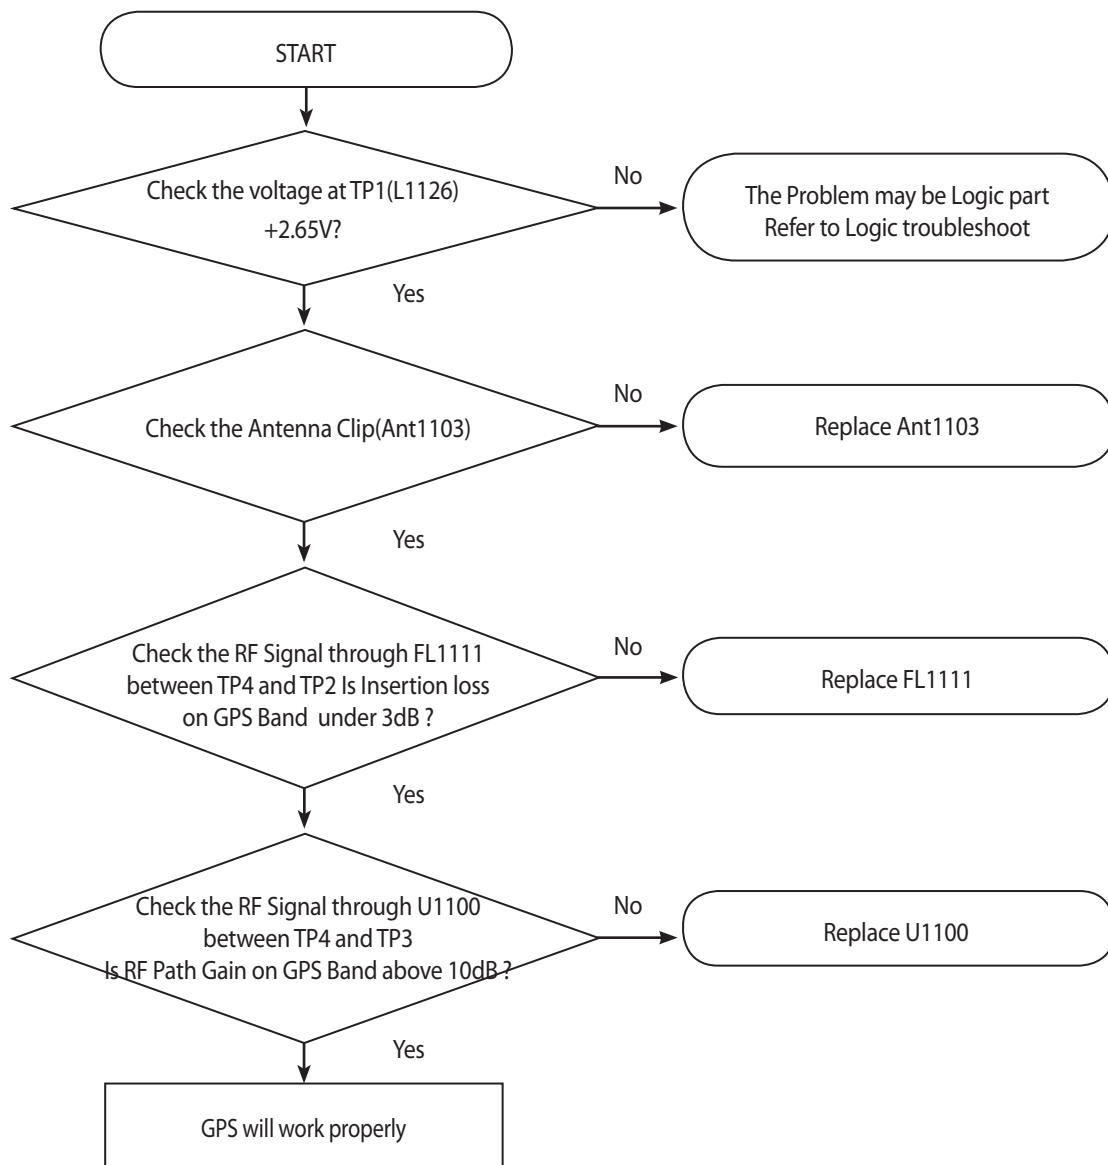


3. TROUBLE SHOOTING


GPS RF Path & Test Point (Top)

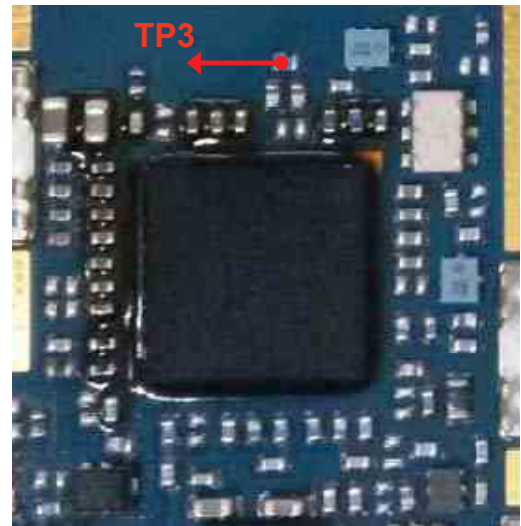

GPS RF Path & Test Point (Bottom)

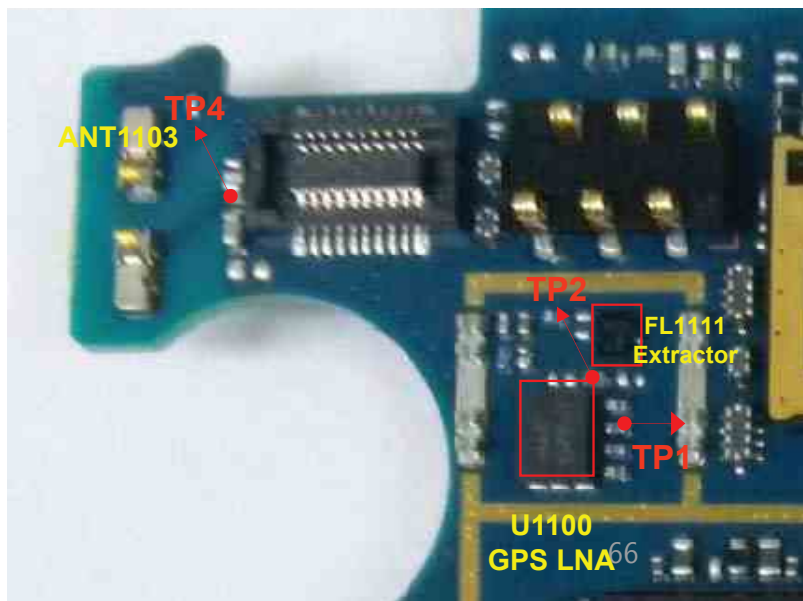


ANT3 (GNSS)

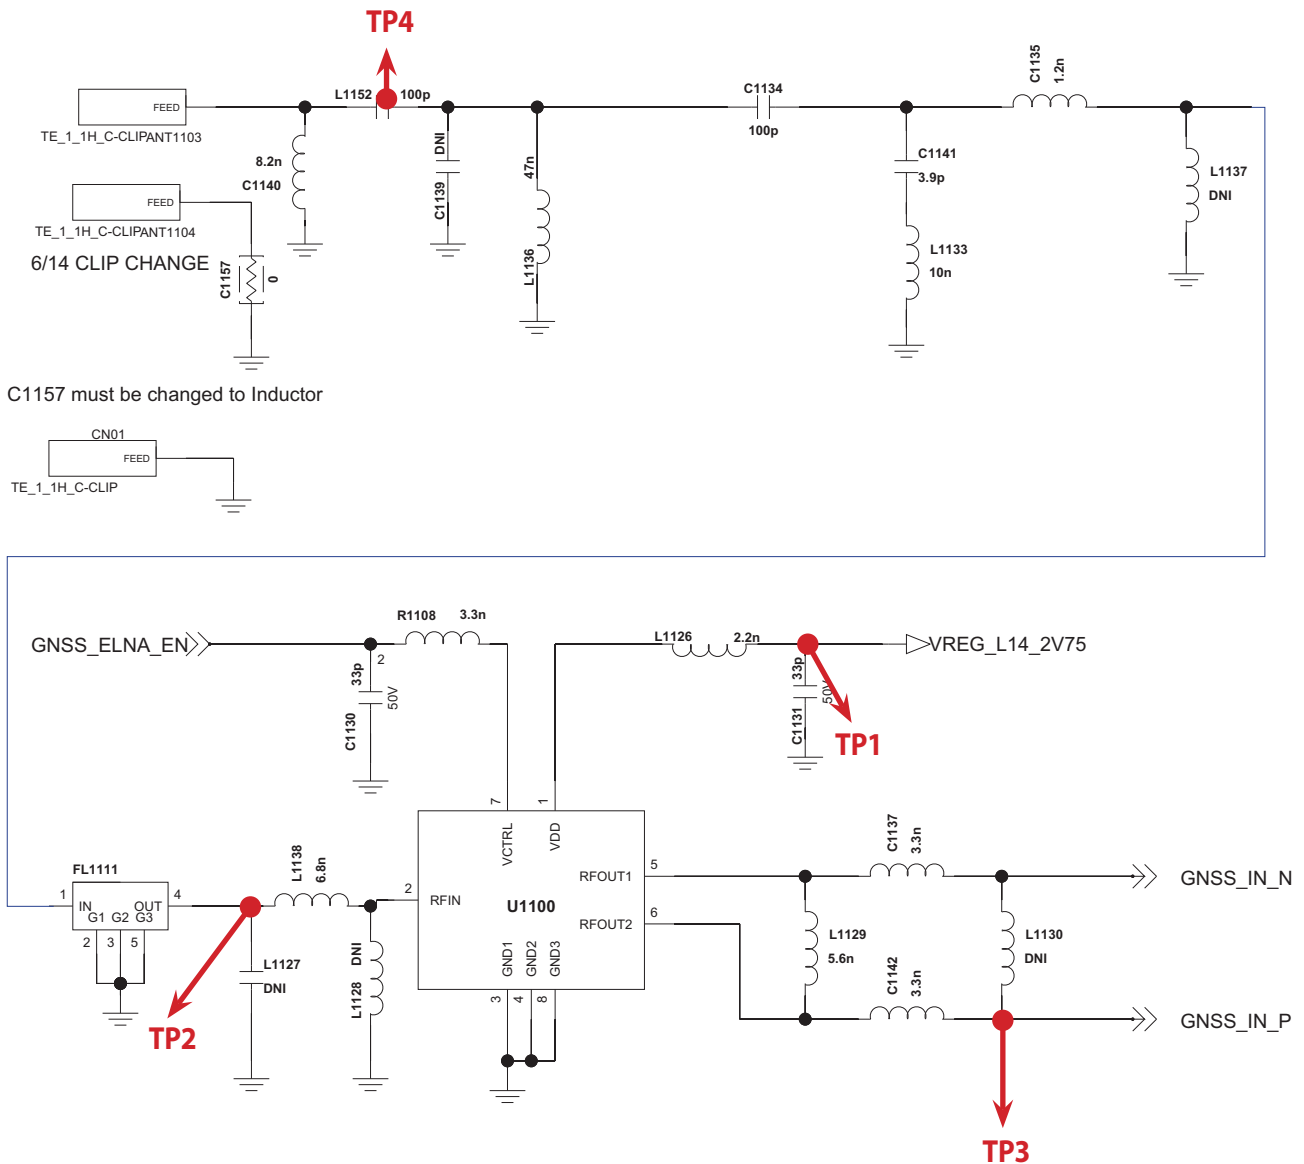

3.5 LTE RF(Power supply, XO) Part

3.5.1 LTE Band13 RF

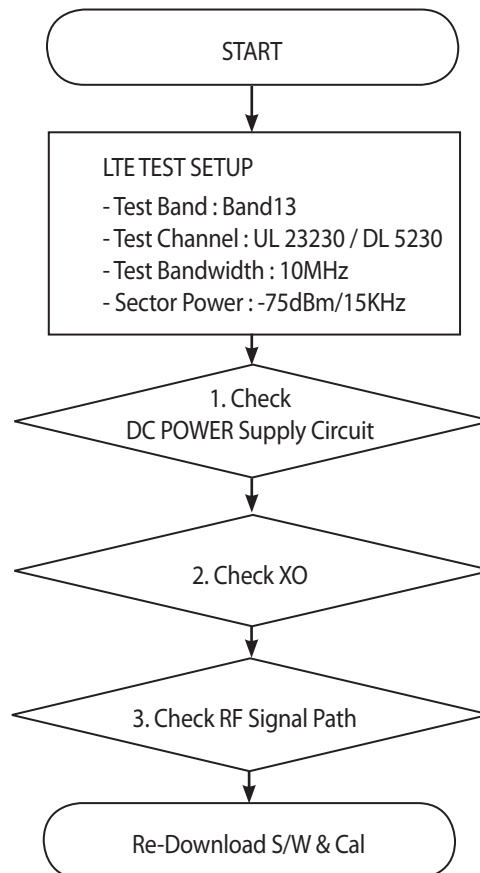


*There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form




3. TROUBLE SHOOTING

LTE B13 path

Top Side

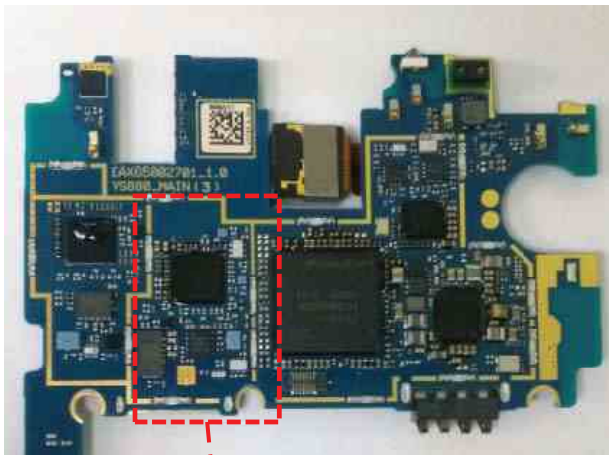


Bottom Side

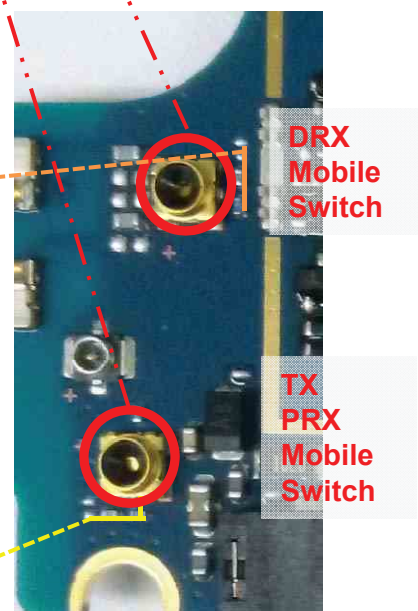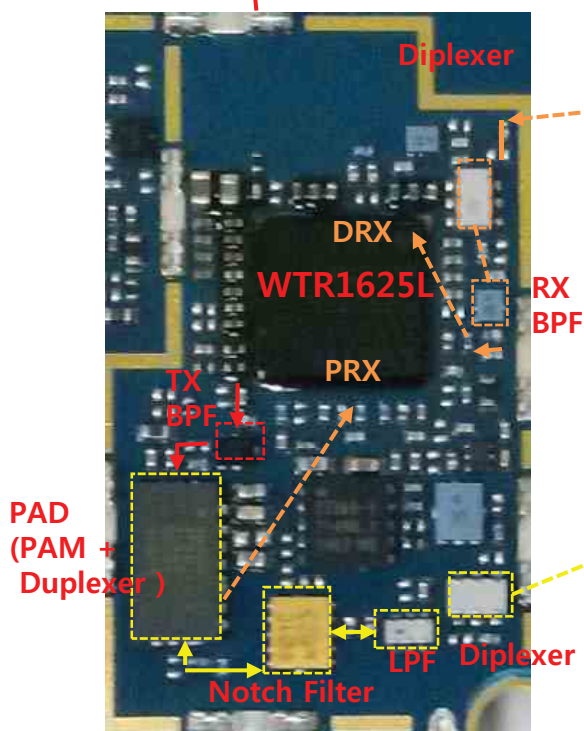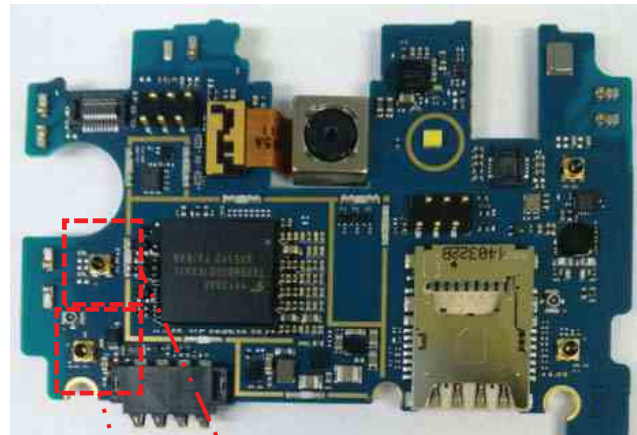

- TX
- RX (PRx/DRx)
- T/RX

3.5.2 LTE Band4 RF

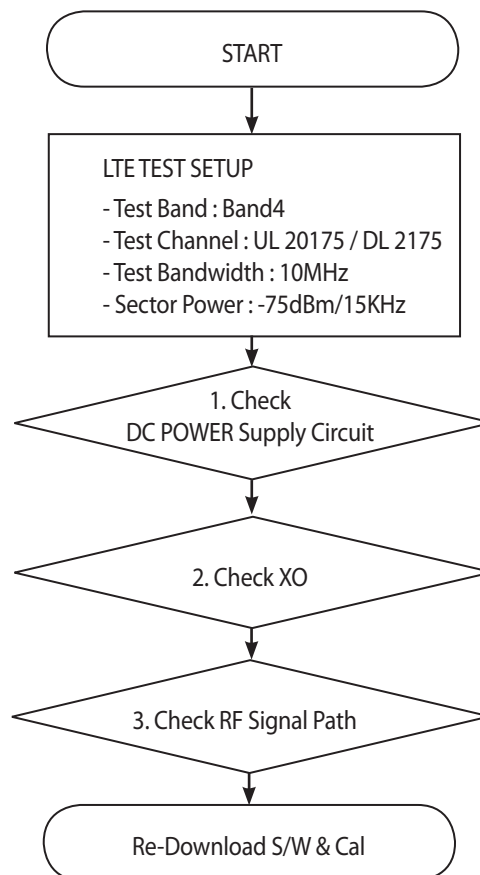


*There are no Test Points on the IQ Data Line. So It is impossible to check the IQ Data Wave form




3. TROUBLE SHOOTING

LTE B4 path

Top Side

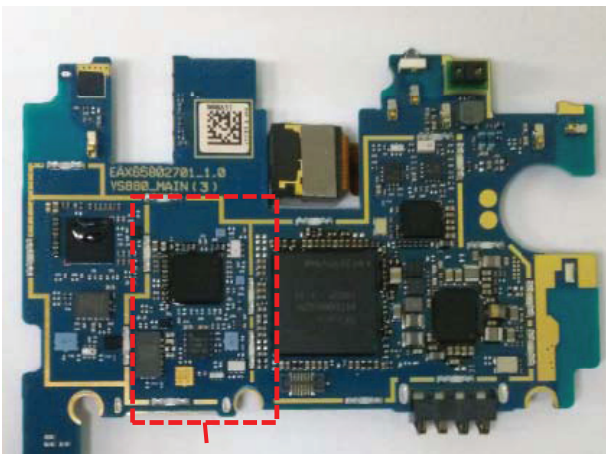


Bottom Side

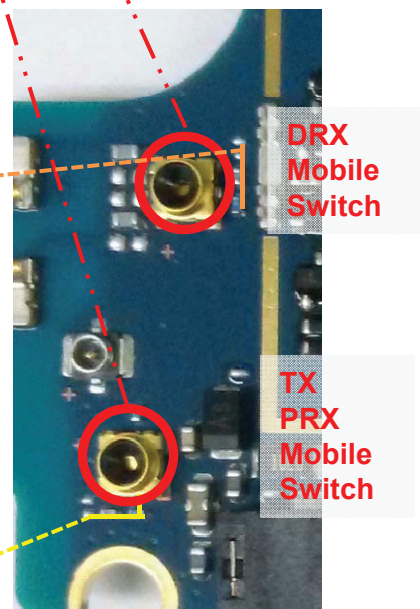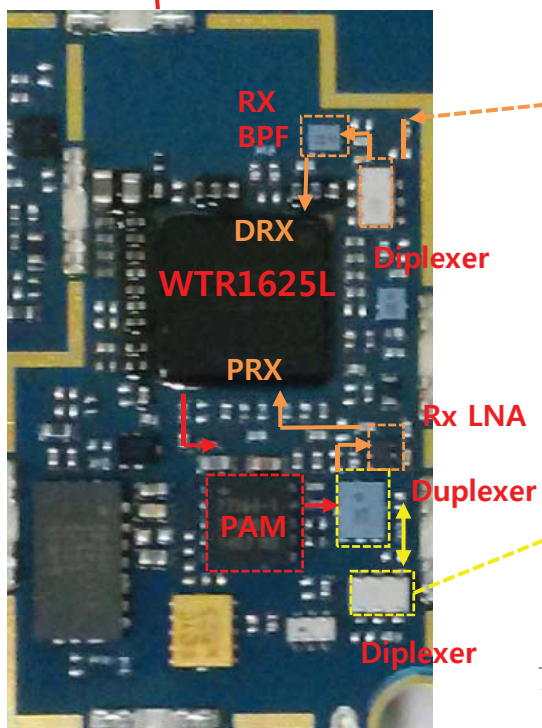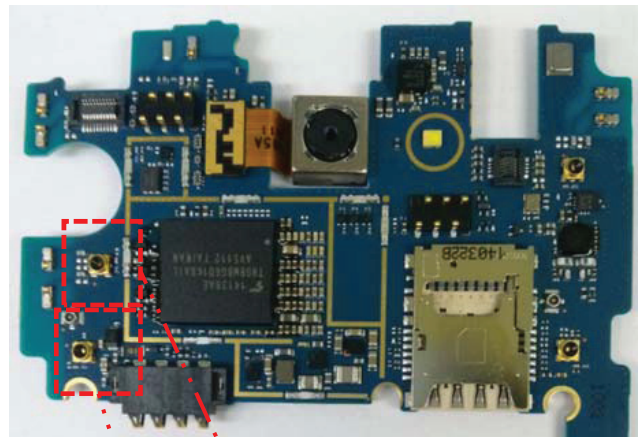

- TX
- RX (PR_x/DR_x)
- T/RX

71

3.5.3 Checking DC Power supply circuit (WTR1625L)

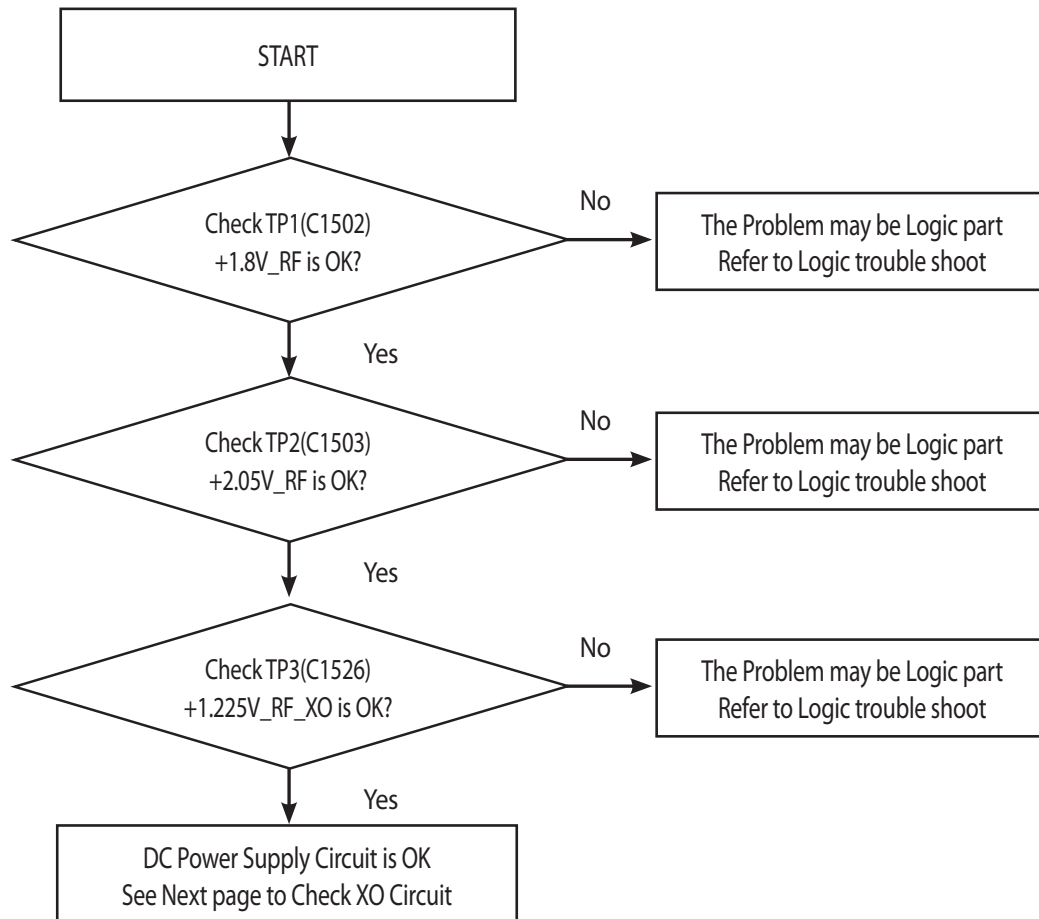


3. TROUBLE SHOOTING

Test Point


TP3
TP1
TP2




TOP Side

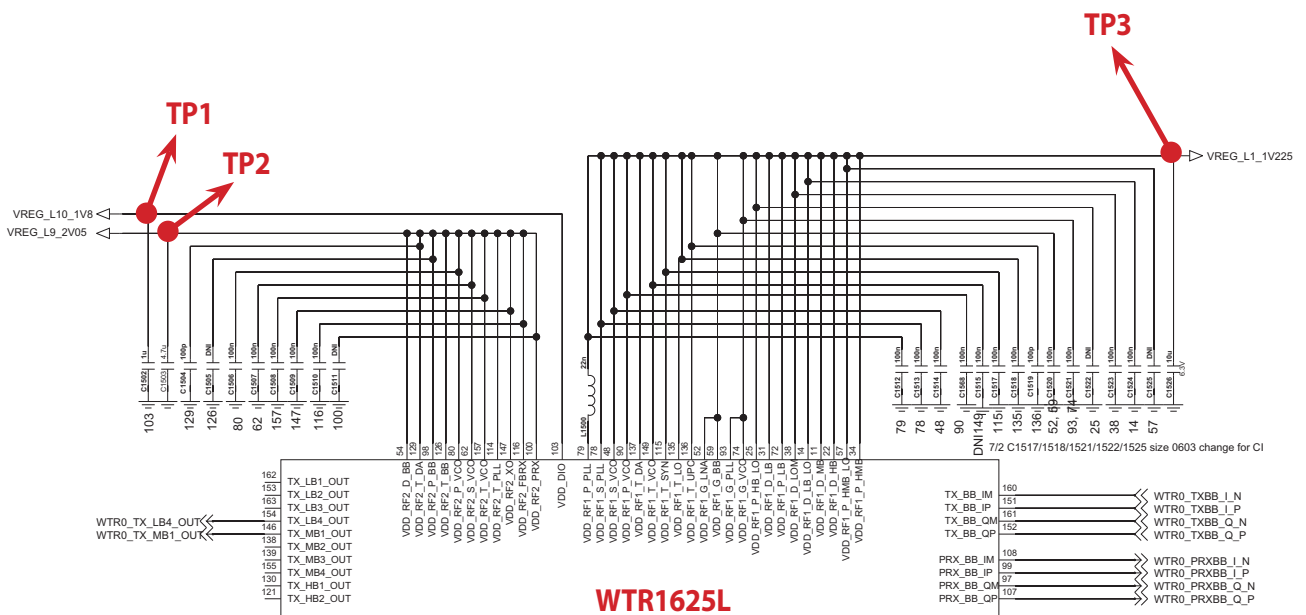


3.5.4 Checking WTR XO circuit (WTR1625L)

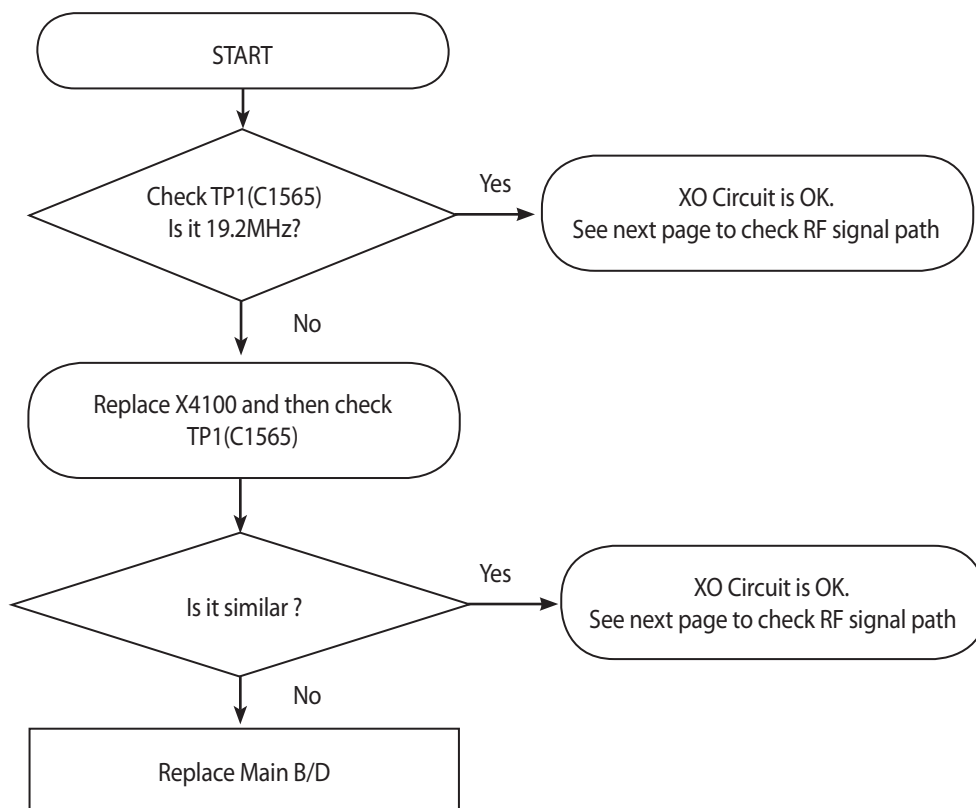

Test Point

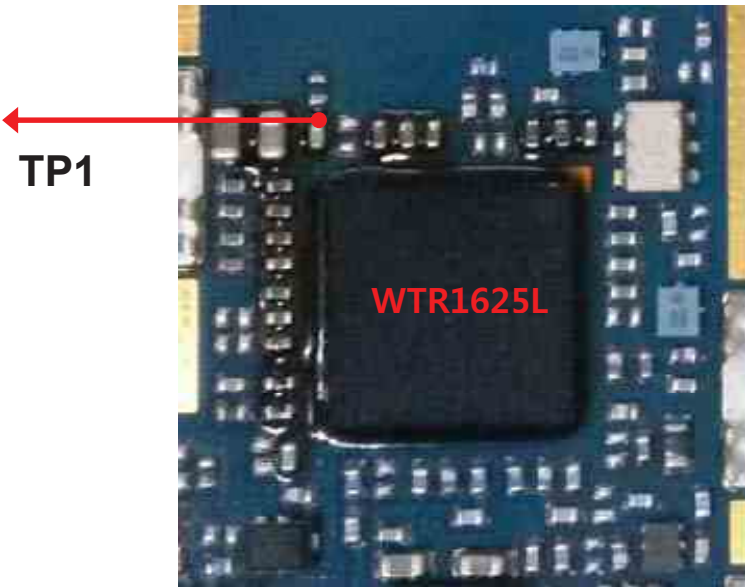


TOP Side

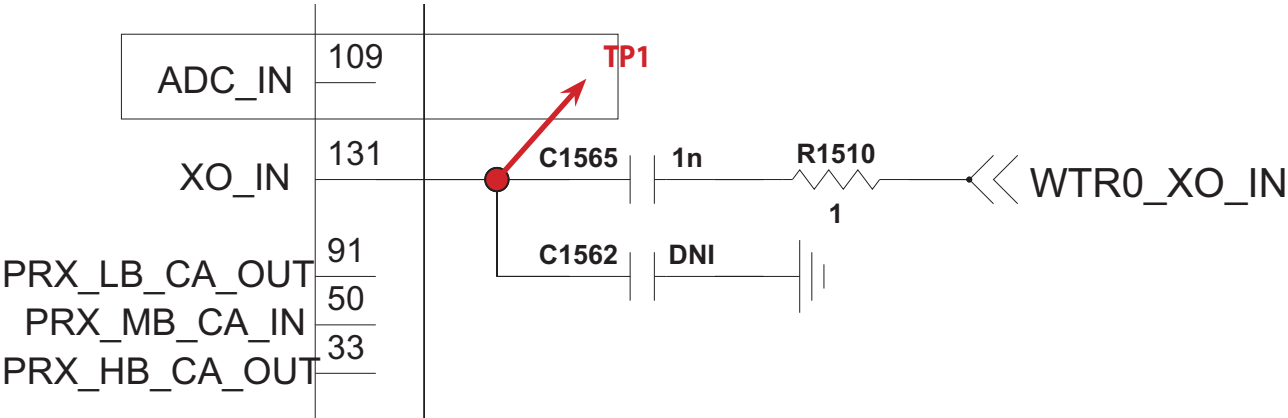

3.6 LTE RF RX Part



3.6.1 LTE Band13 Rx

3.6.1.1 LTE Band13 Rx - PRX


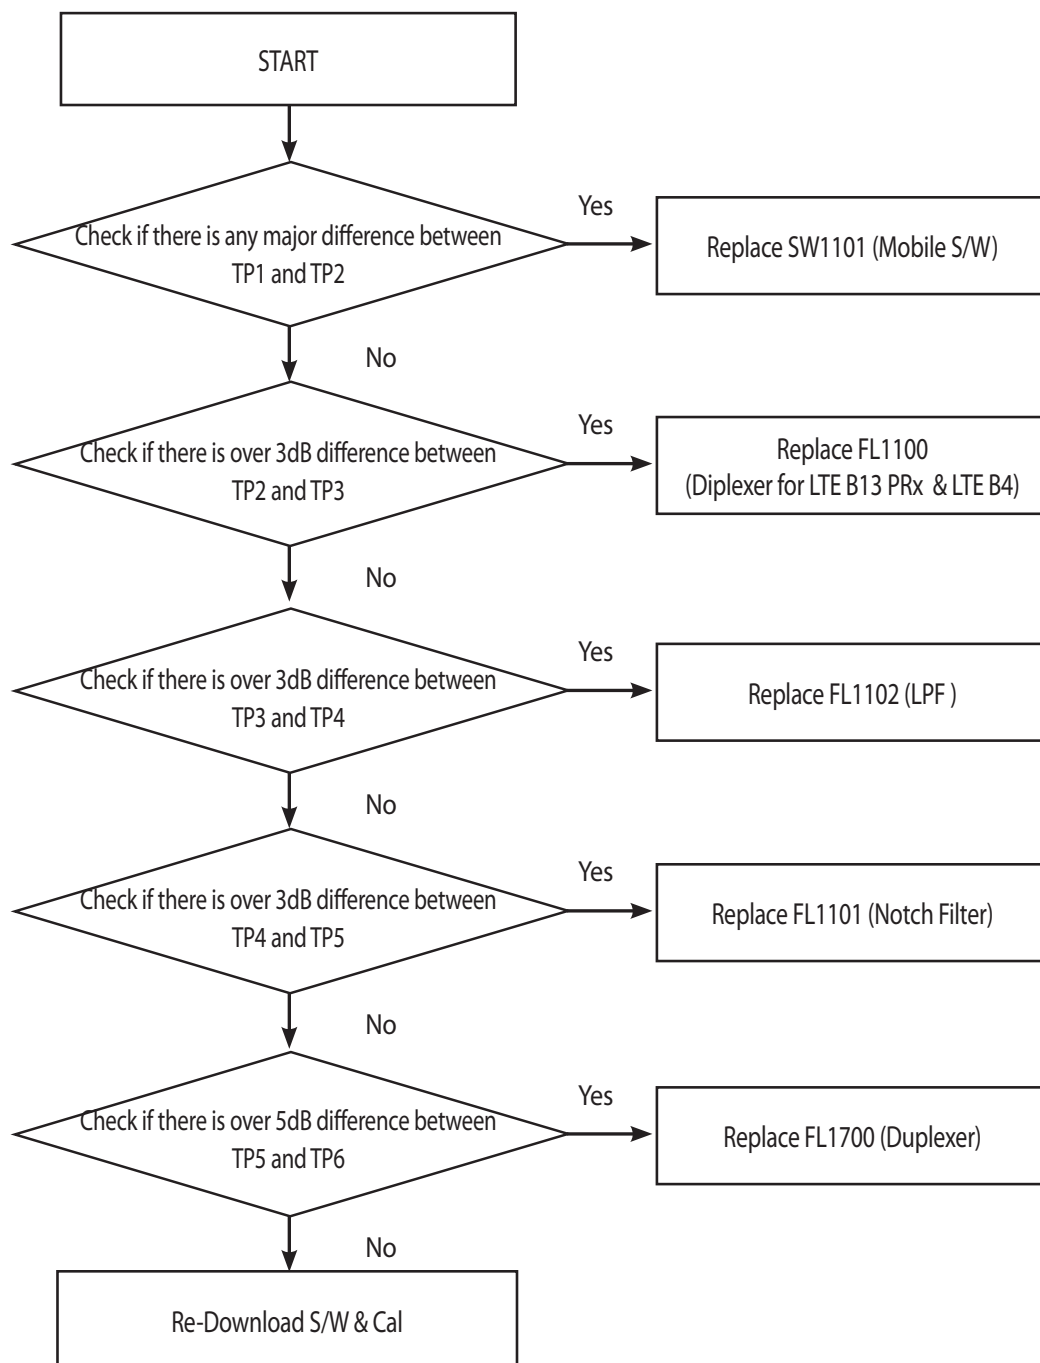


3. TROUBLE SHOOTING


Test Point

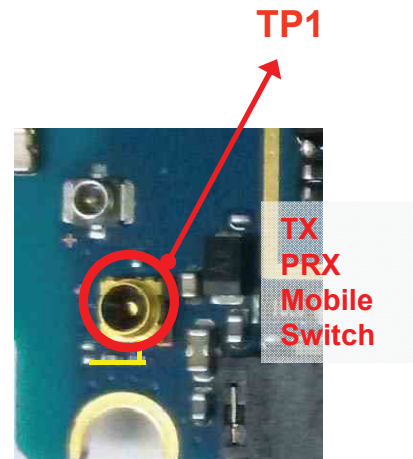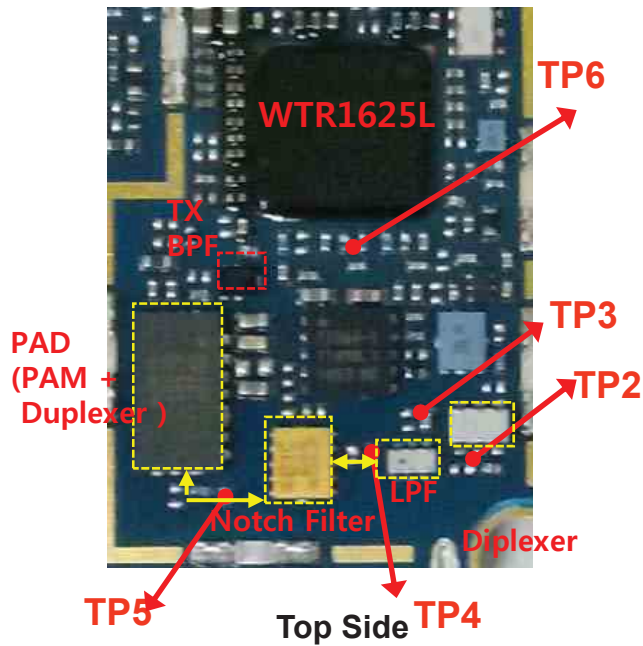

Bottom Side

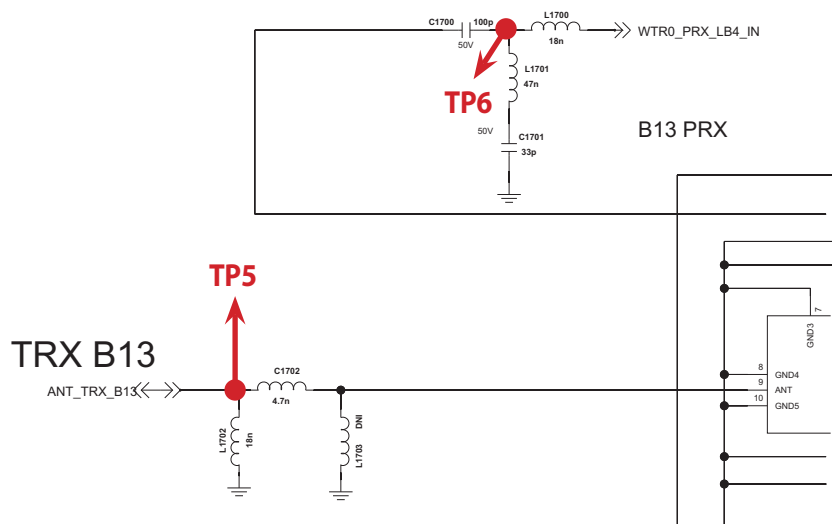
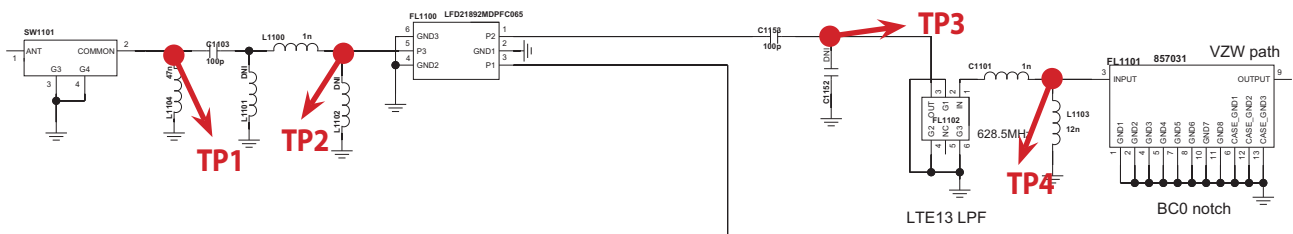


3.6.1.2 LTE Band13 Rx - DRX

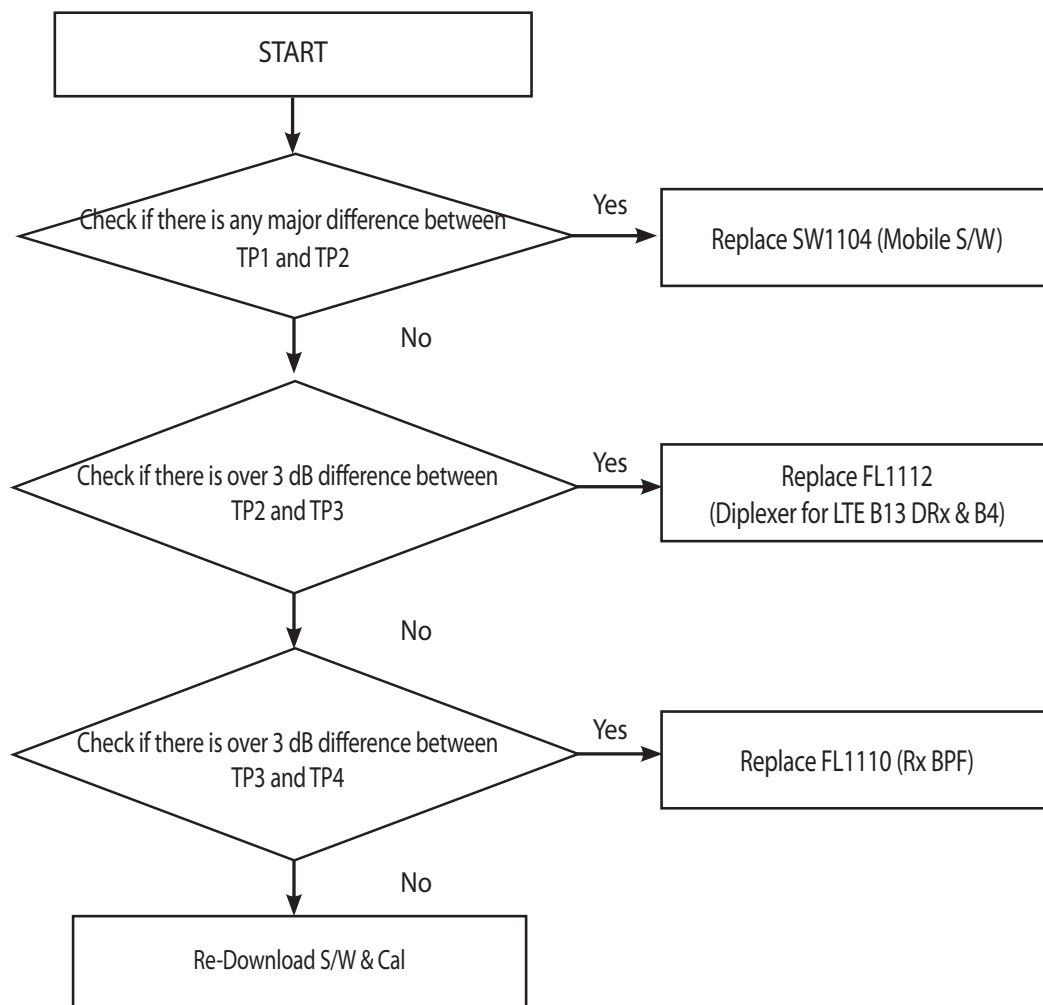


3. TROUBLE SHOOTING

Test Point

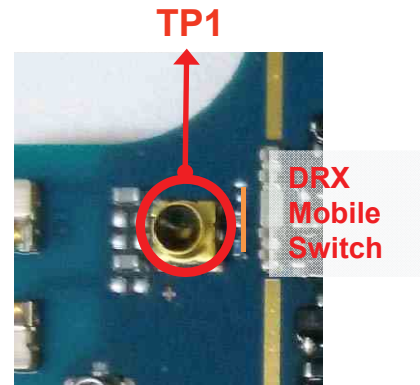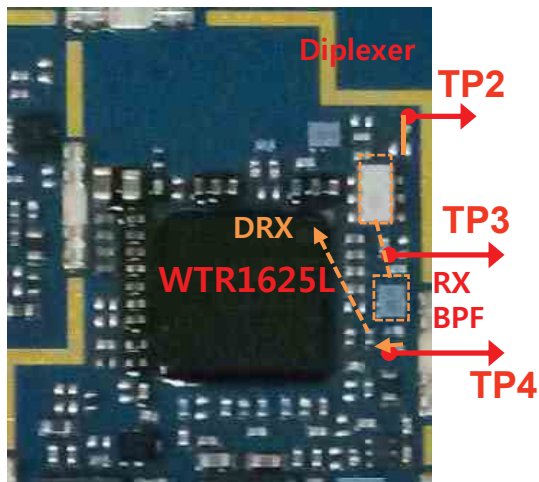


Top Side

Bottom Side

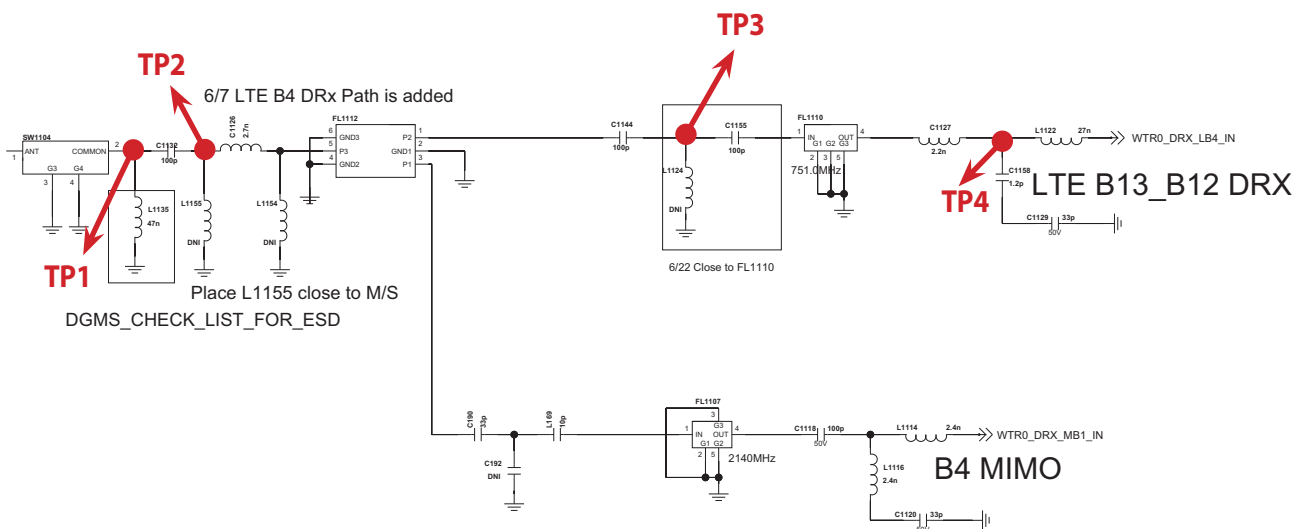


3.6.2 LTE Band4 Rx

3.6.2.1 LTE Band4 Rx - PRX

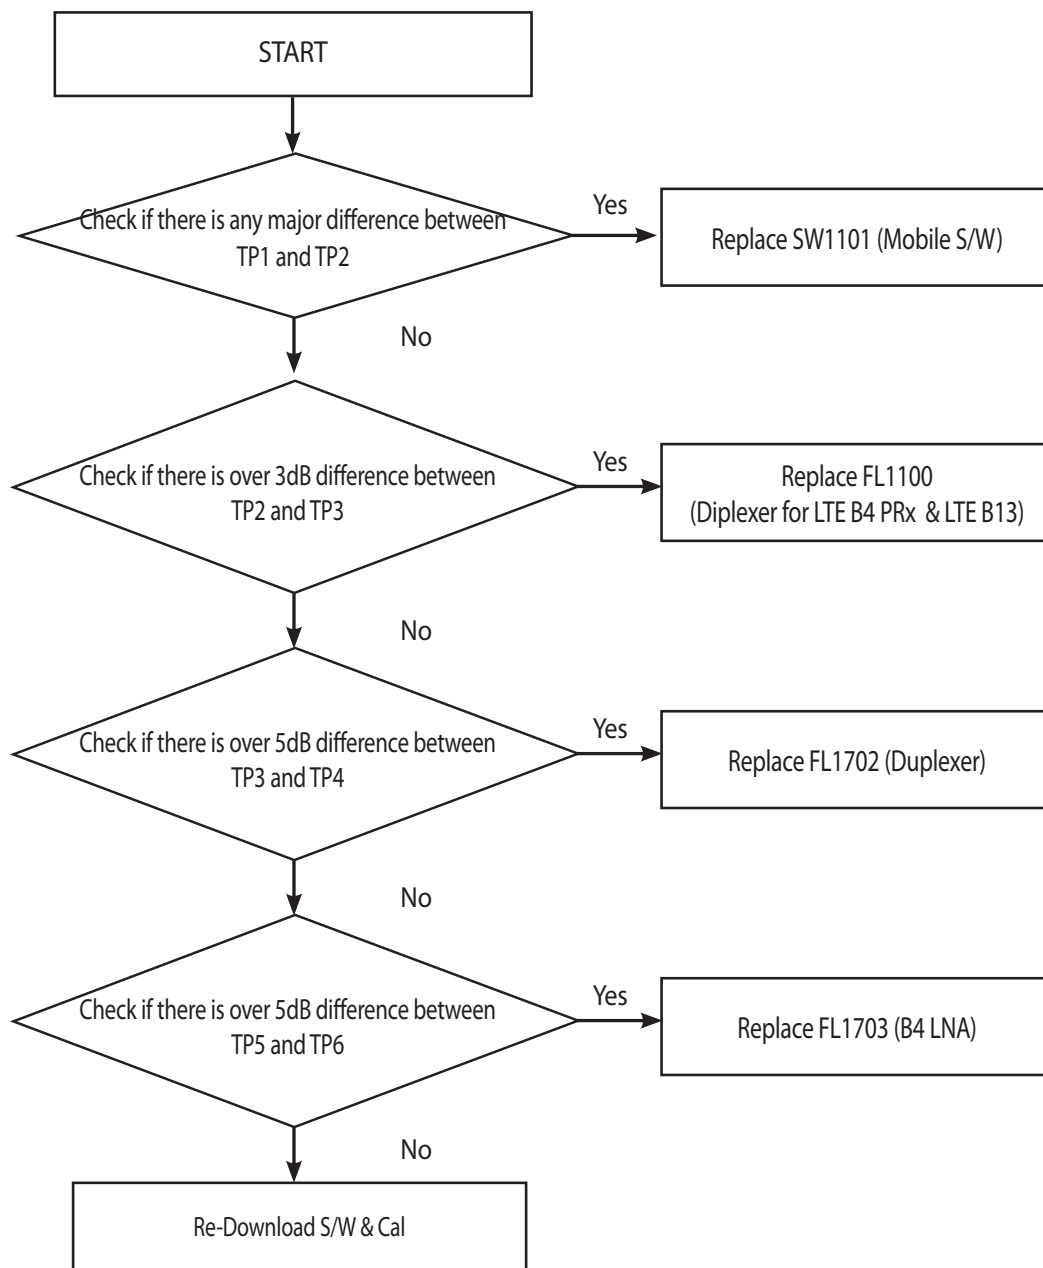


3. TROUBLE SHOOTING


Test Point

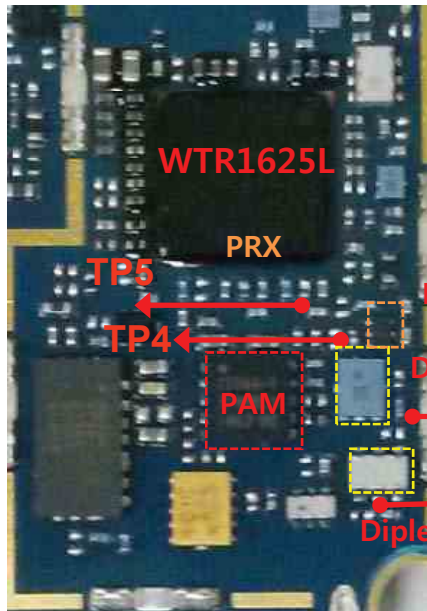


Top Side

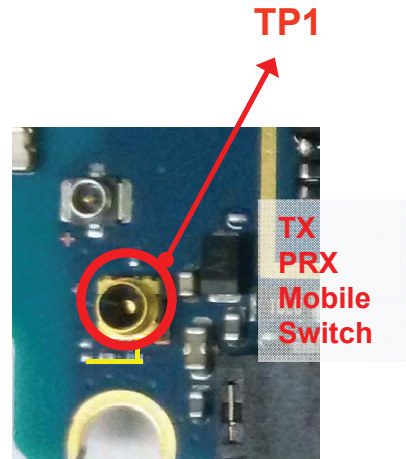


Bottom Side

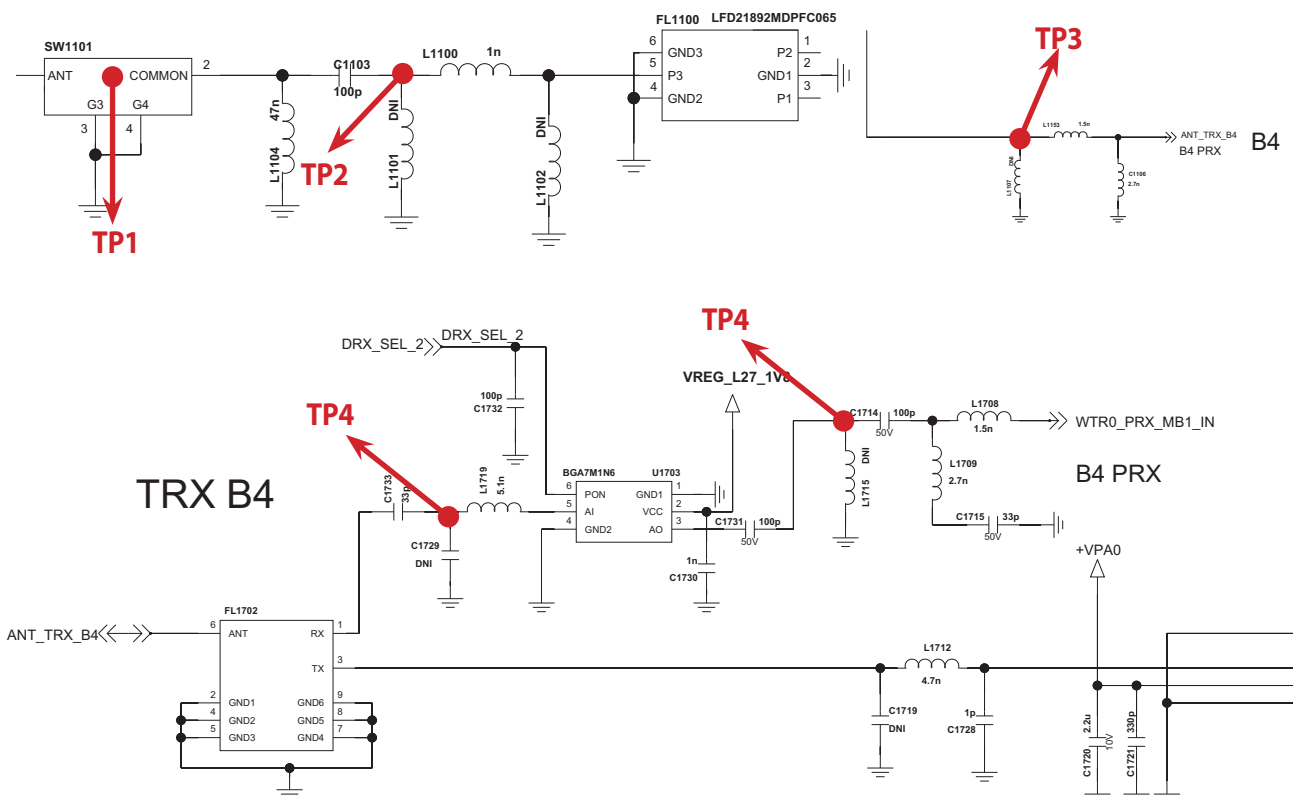

3.6.2.2 LTE Band4 Rx - DRX

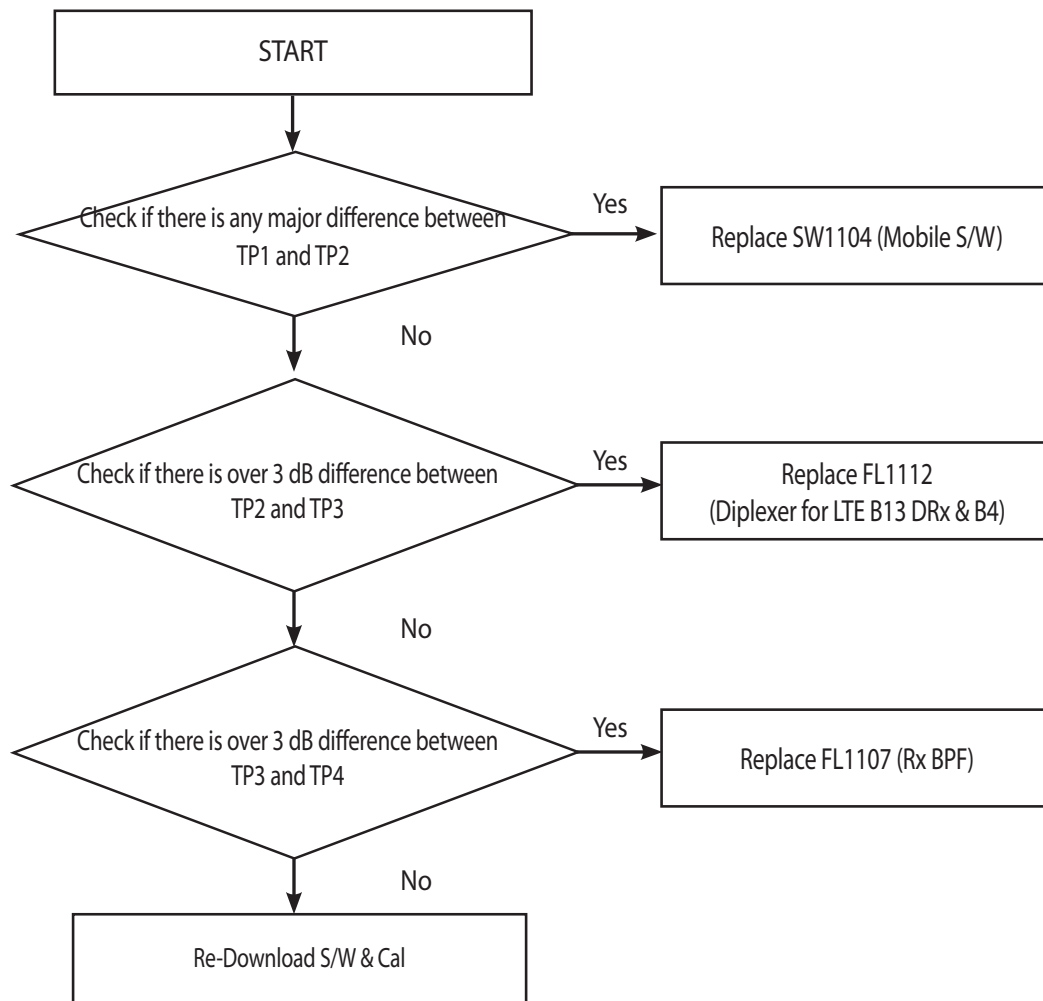


Test Point

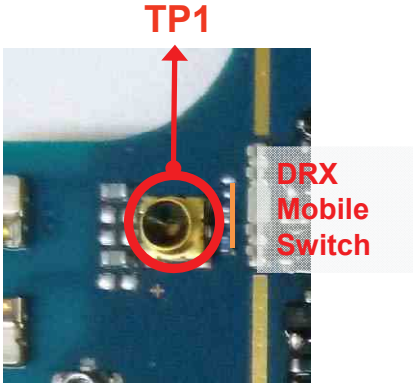


Bottom Side


Top Side

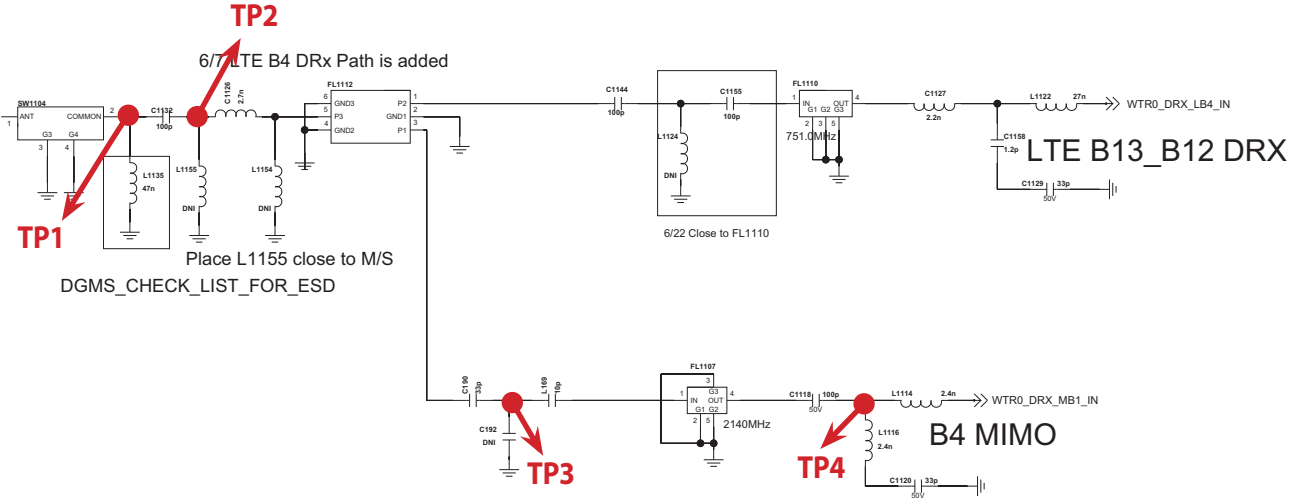


3.7 LTE RF TX Part


3.7.1 LTE Band13 Tx

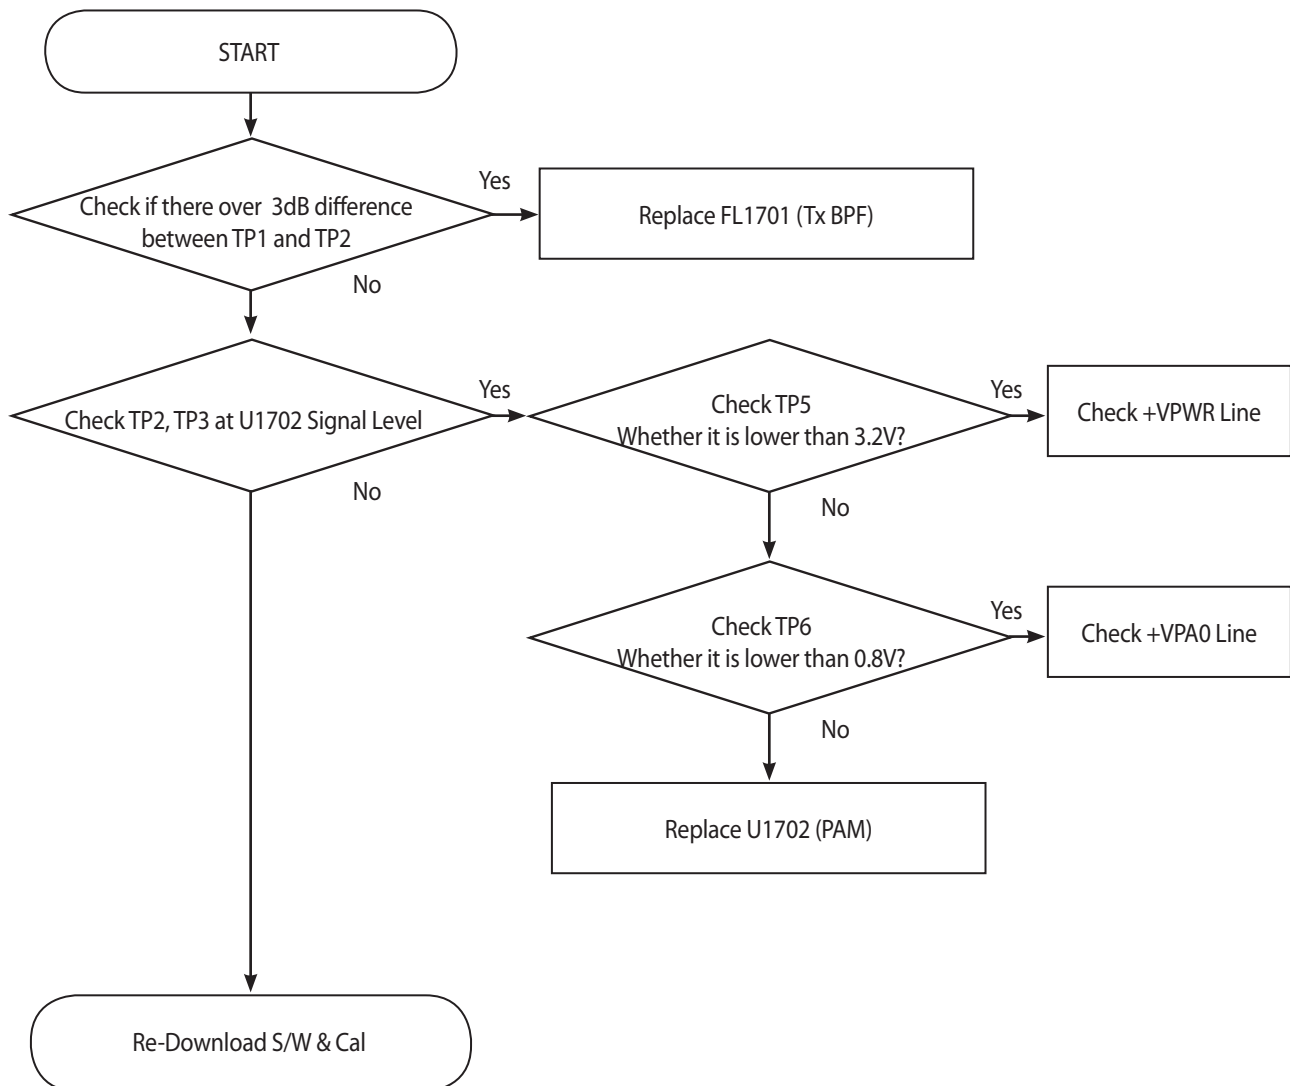

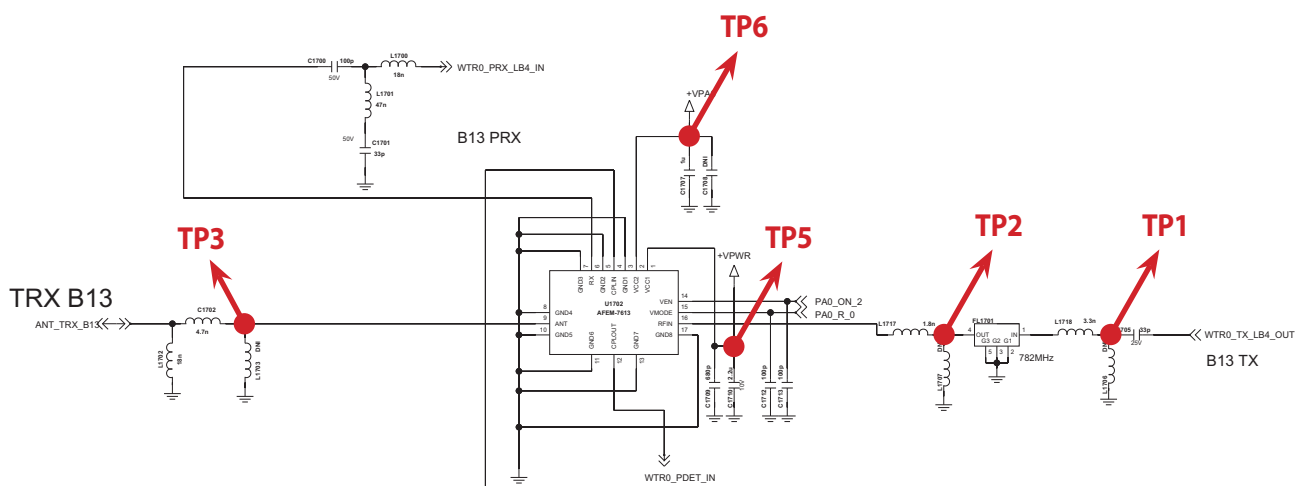

3.7.2 LTE Band4 Tx

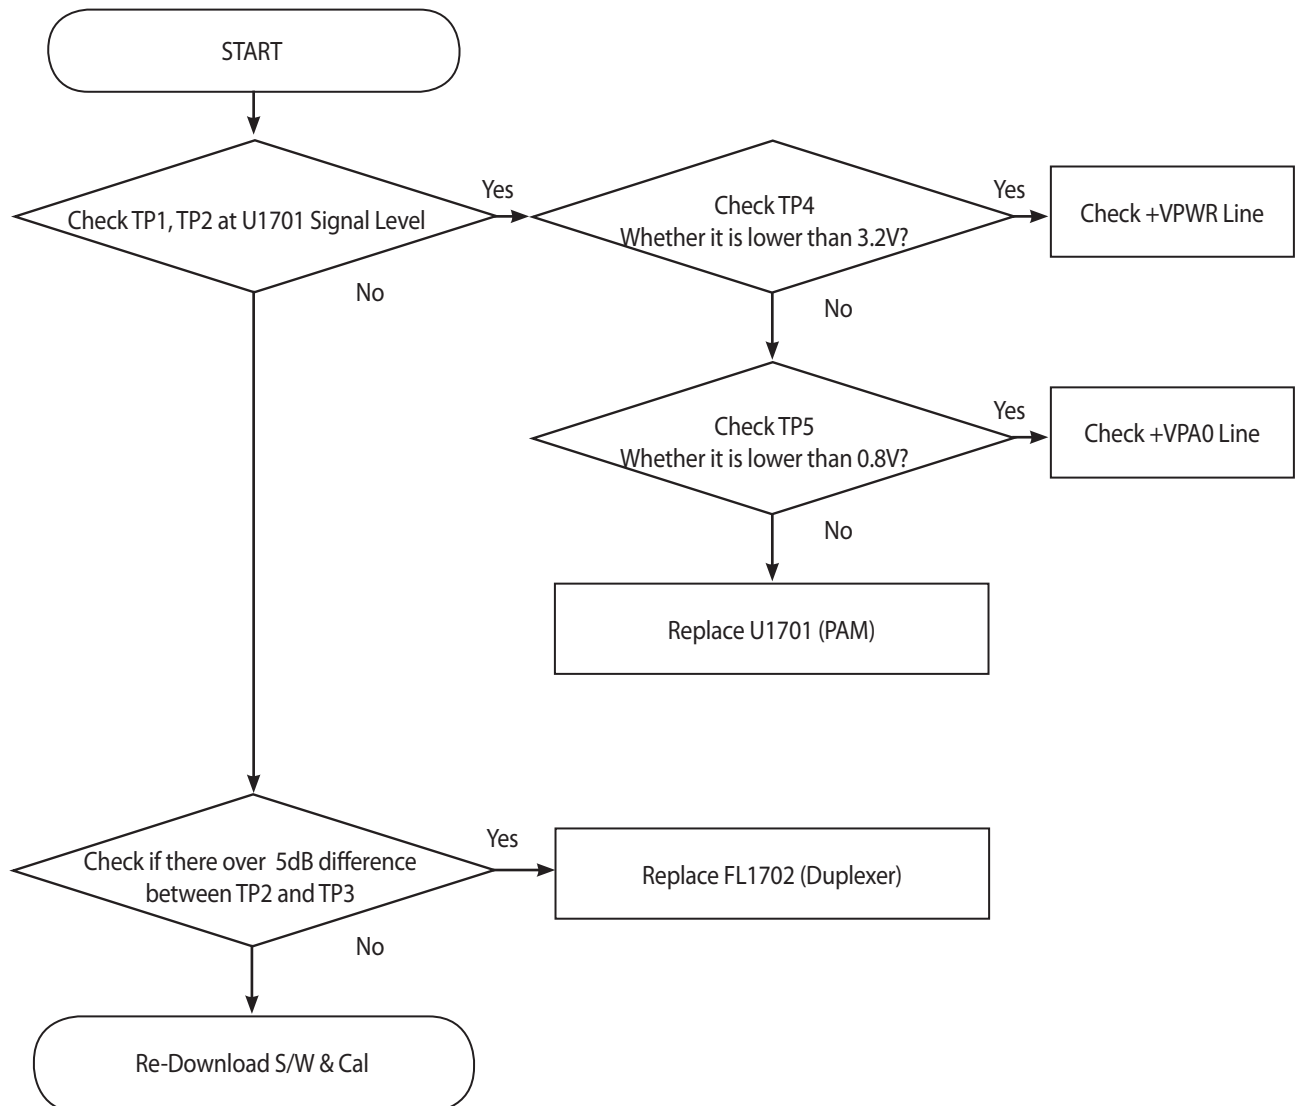




3.8 Power


The main power source of LGVS880 is provided by 1 chip which is PM8926. Since MSM8926 only powers up normally when MSM8926 is properly powered therefore, PM8926 is the actual one to take look at.


Power on sequence of LGVS880 is,

PWR key press -> BAT_FET_N goes low -> GPIO 8 High -> VREG_S3 High -> VREG_L6 High -> VREG_L12 high -> BB_CLK -> PON_RESET_N goes high -> PS_HOLD High.

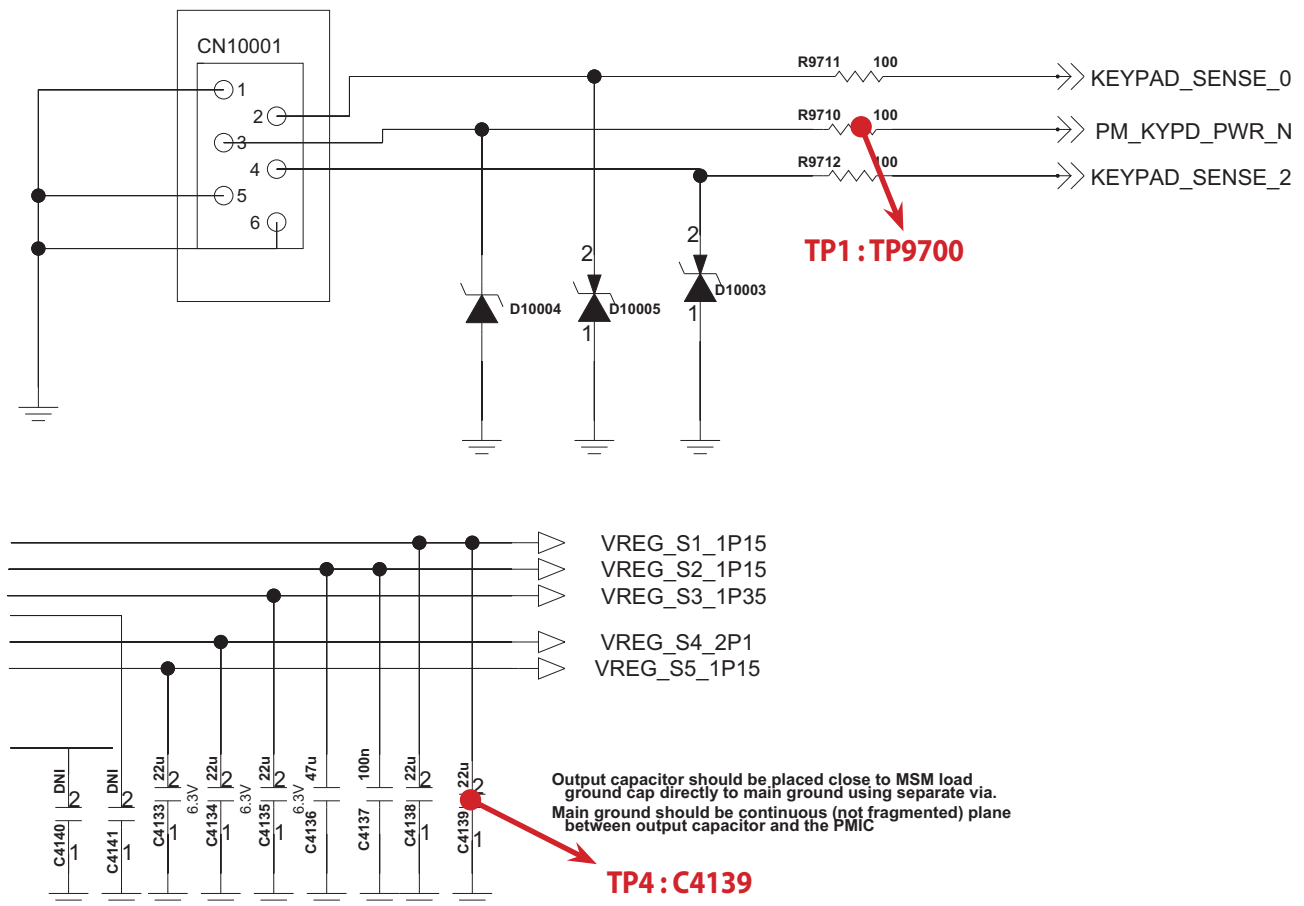


3. TROUBLE SHOOTING

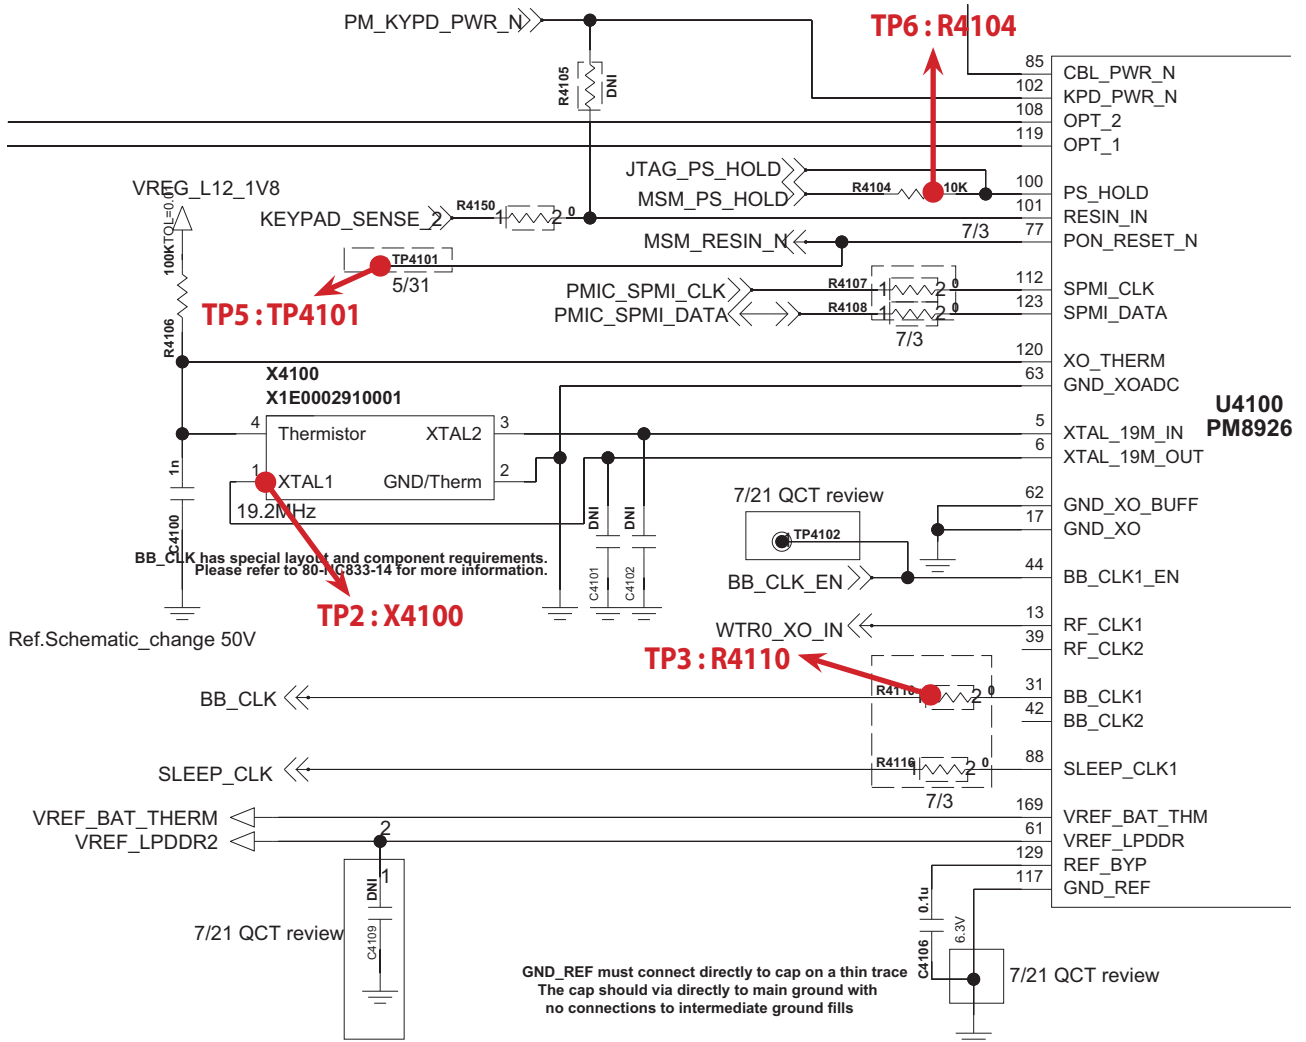


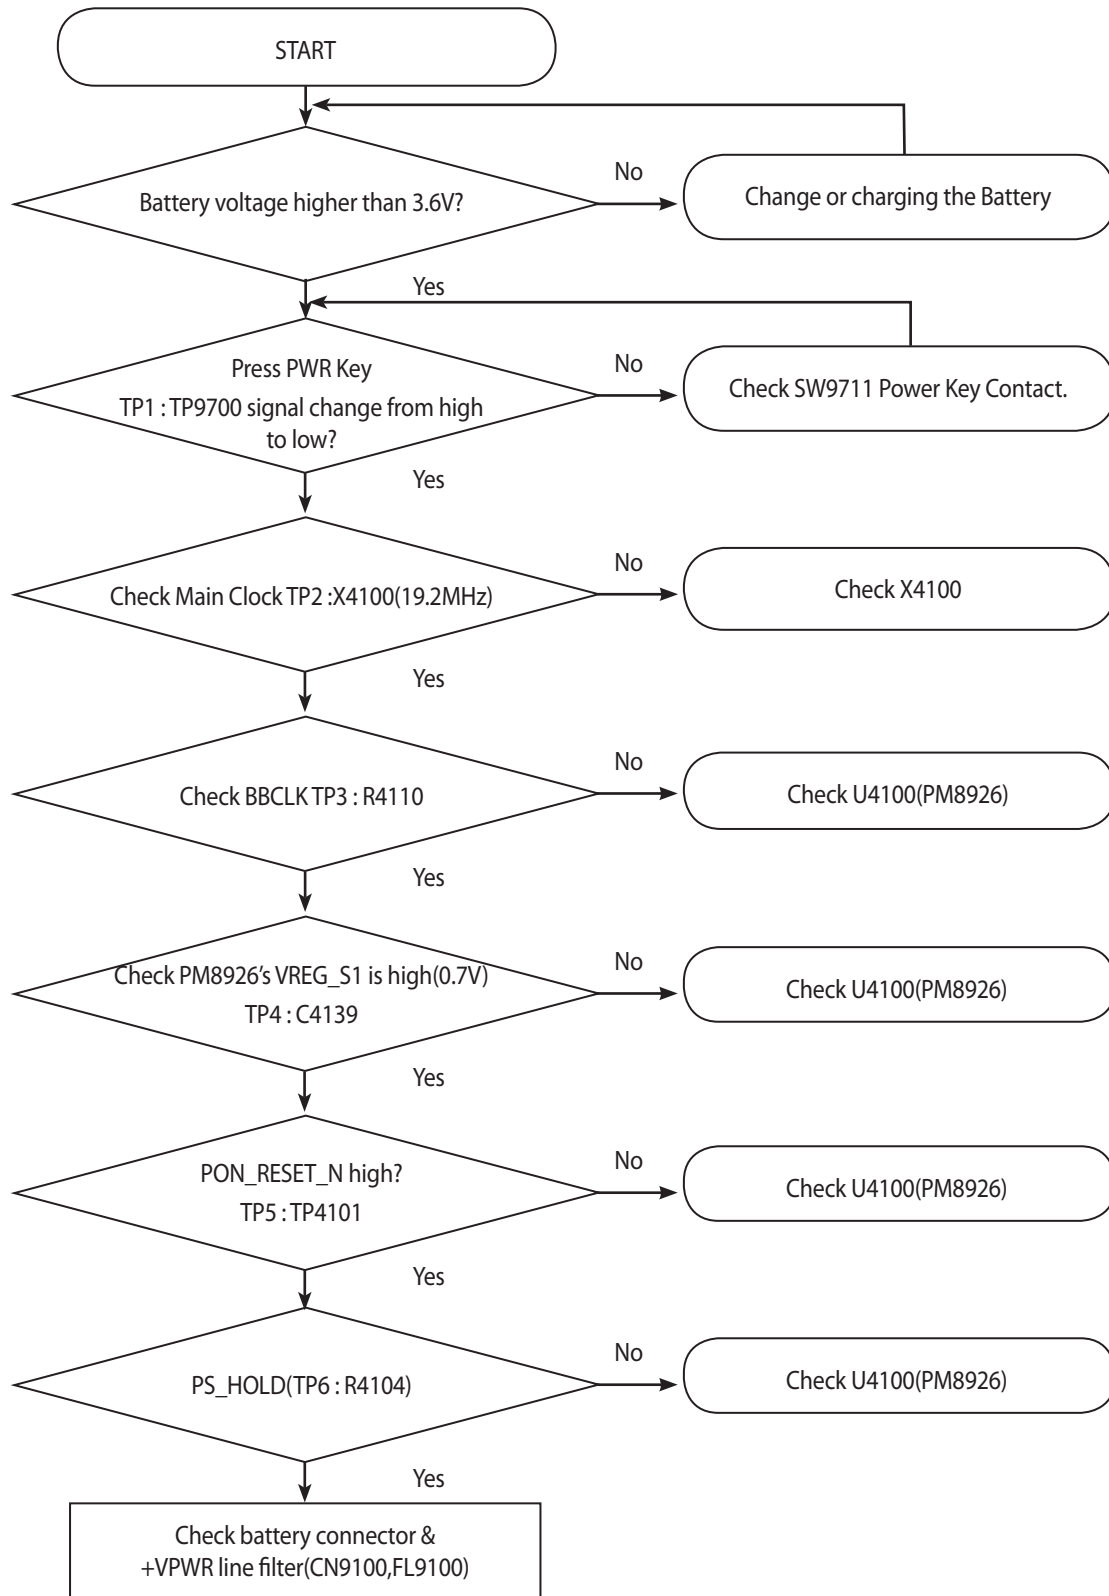

3. TROUBLE SHOOTING

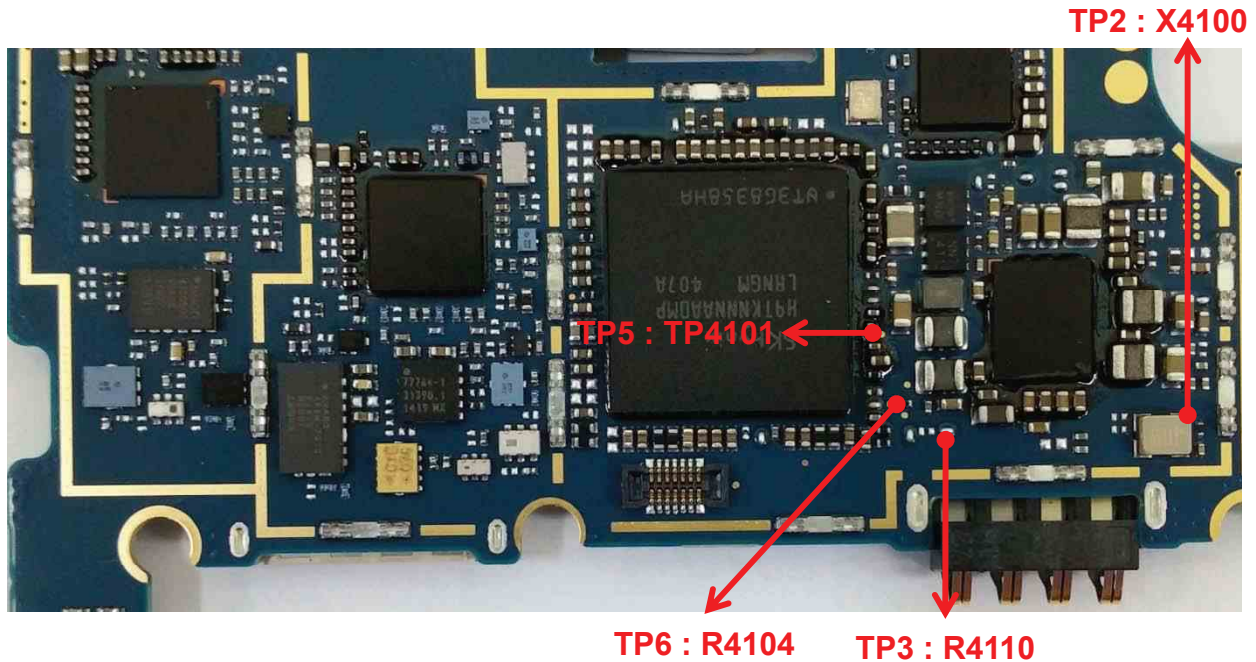

< main top >

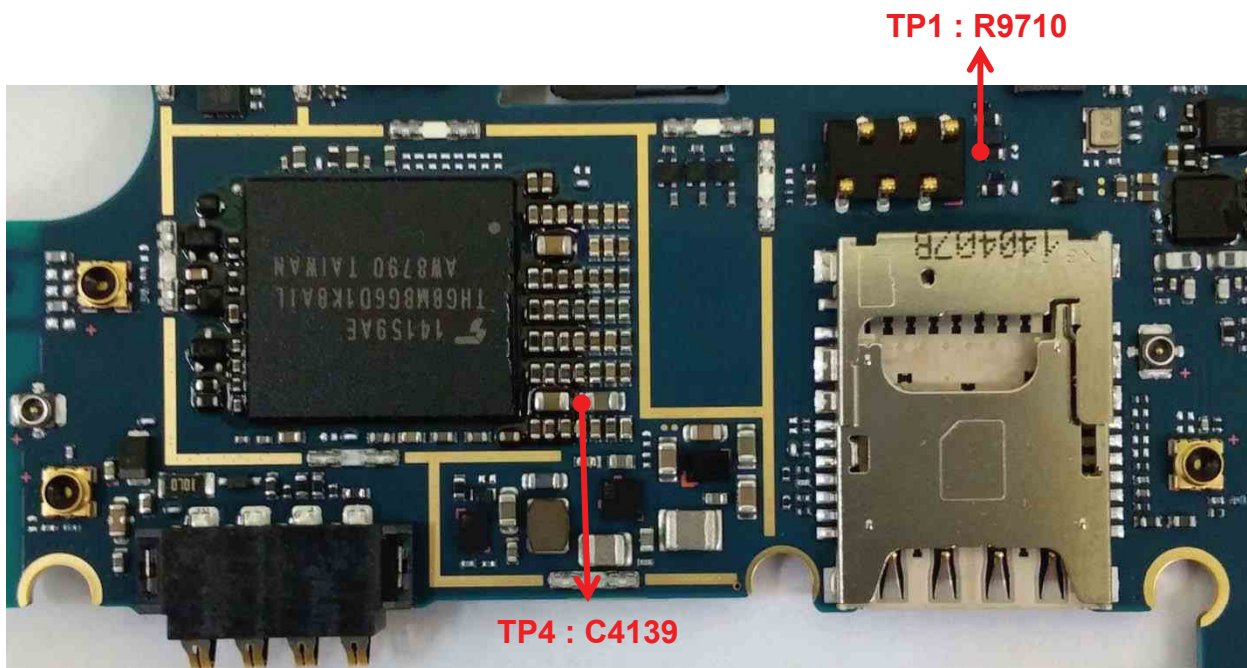


< main bot >


3.9 Audio Part

3.9.1 Speaker

Speaker control signals are generated by MSM8926(U2100) and Power is supplied by WCD9302(U6100).


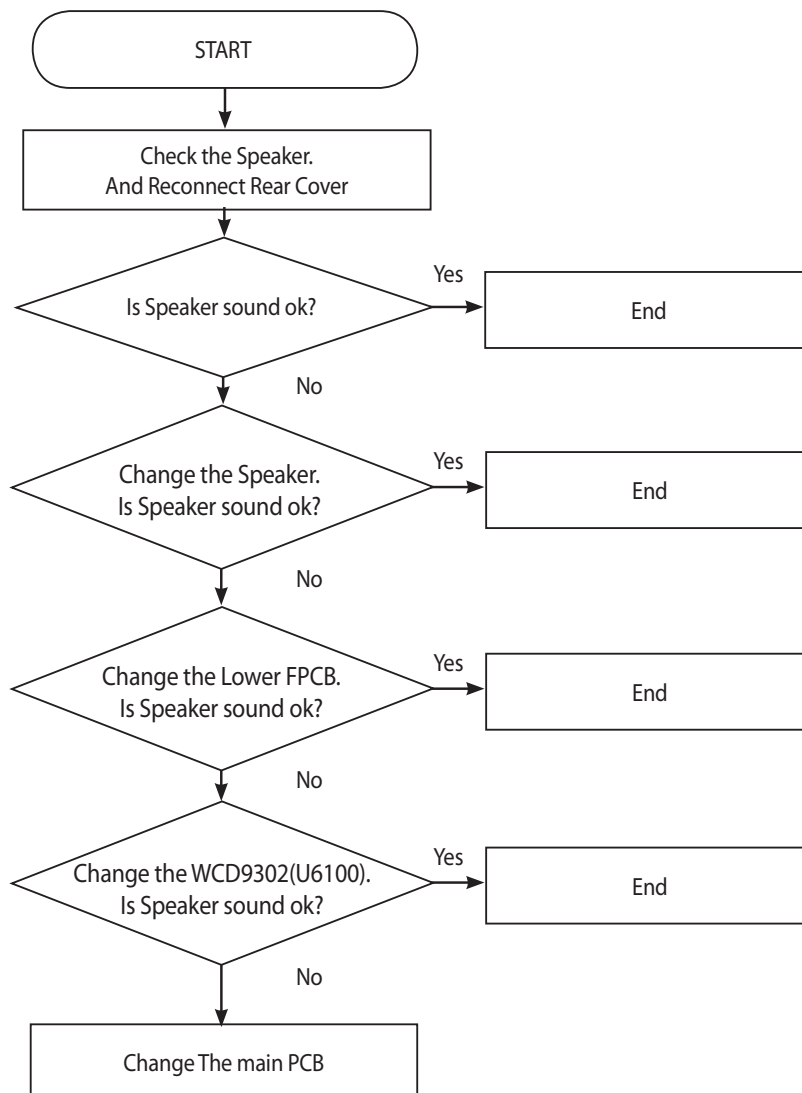


3. TROUBLE SHOOTING

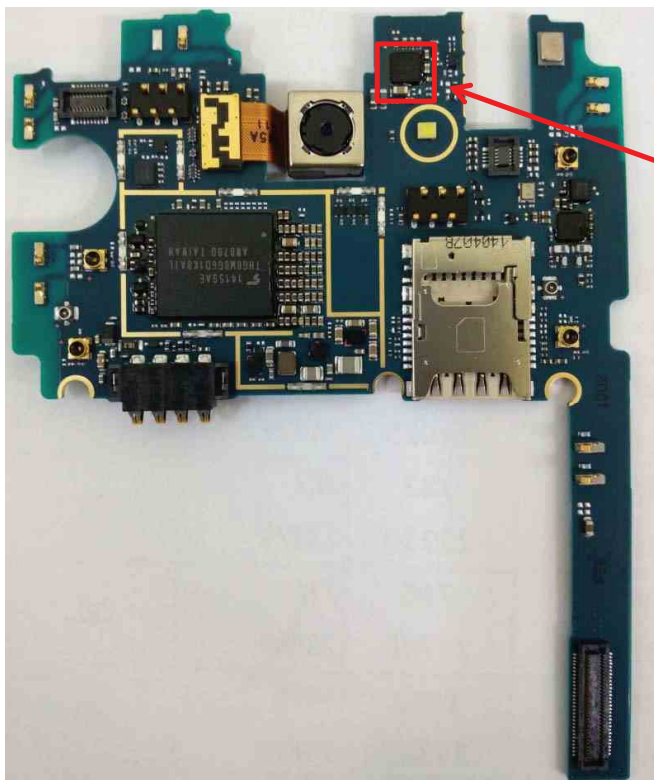



3.9.2 Receiver

Receiver control signals are generated by MSM8926(U2100) and Power is supplied by WCD9302(U6100).

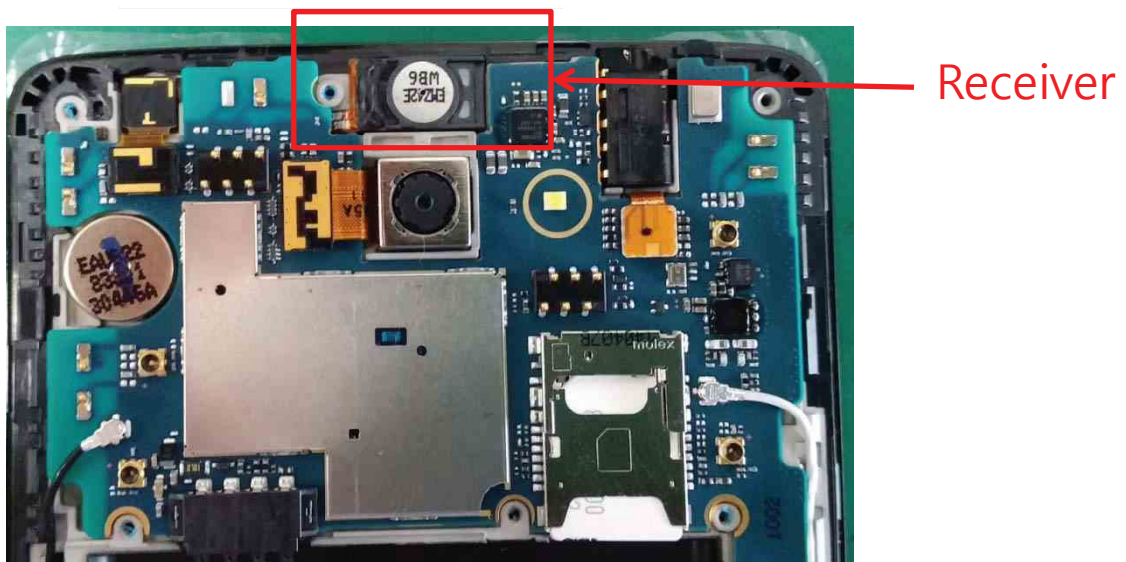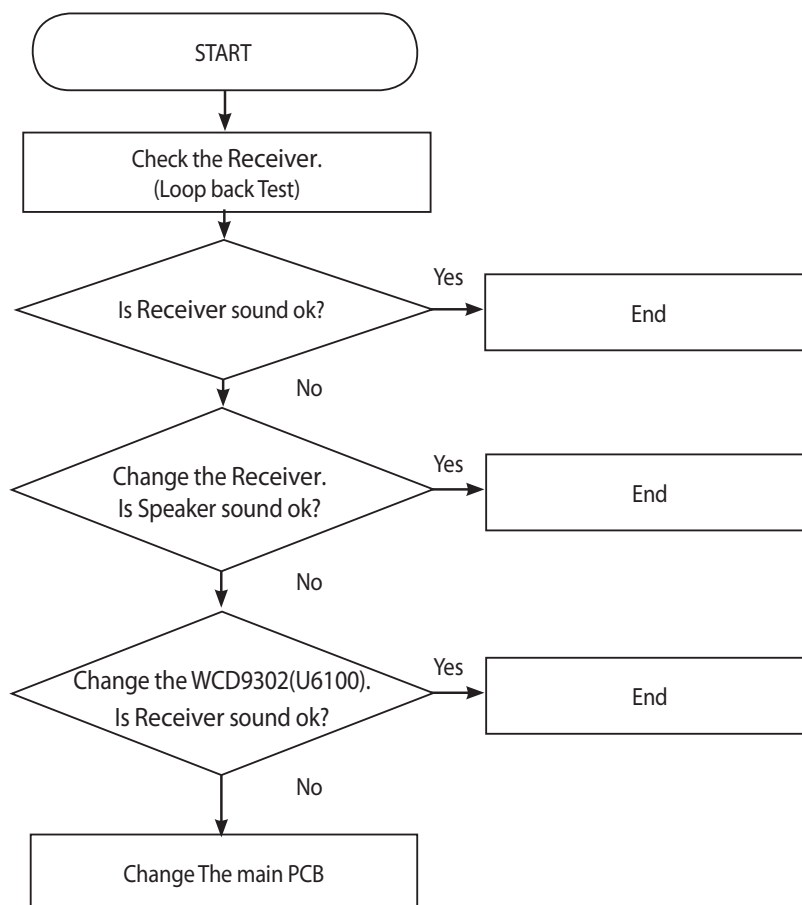



3.9.3 Main MIC

Main MIC signal is generate by MEMS MIC on Lower FPCB.

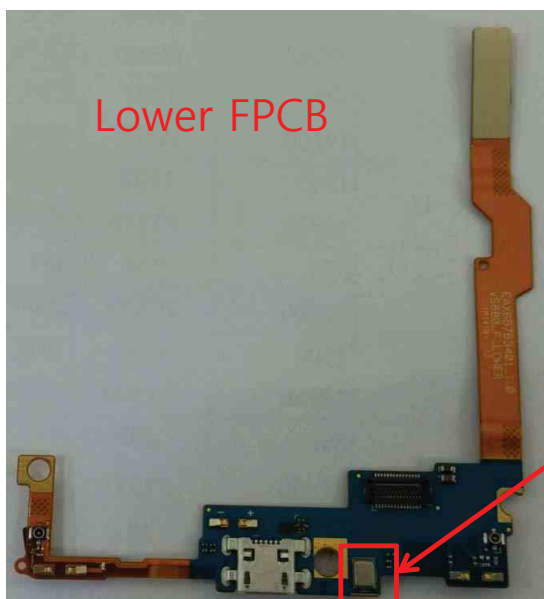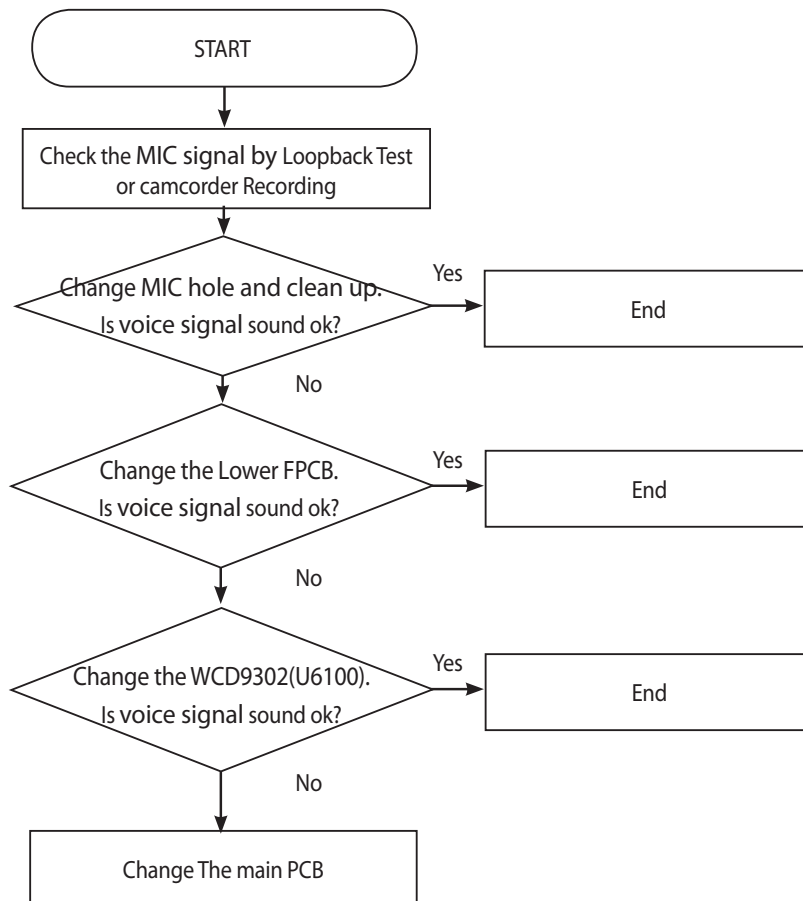



3.9.4 Sub MIC

Sub MIC signal is generate by MEMS MIC on Main PCB

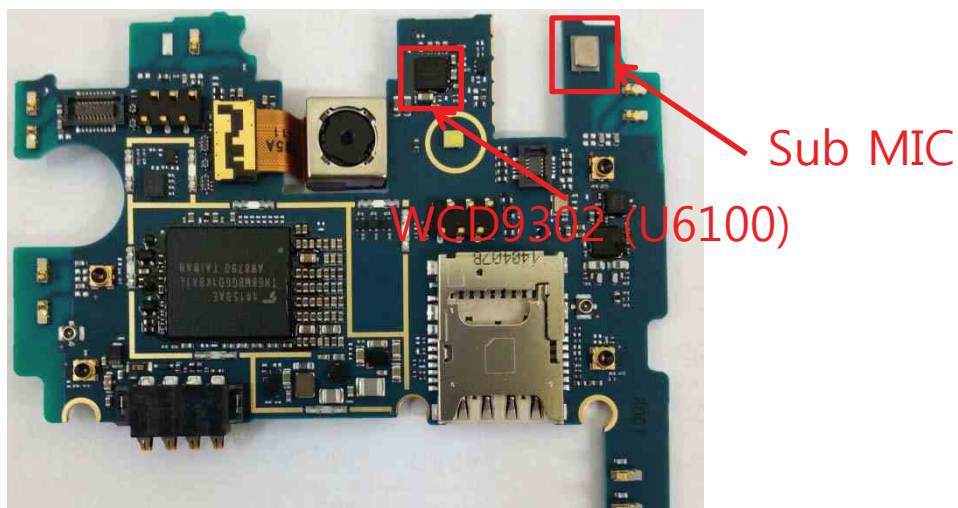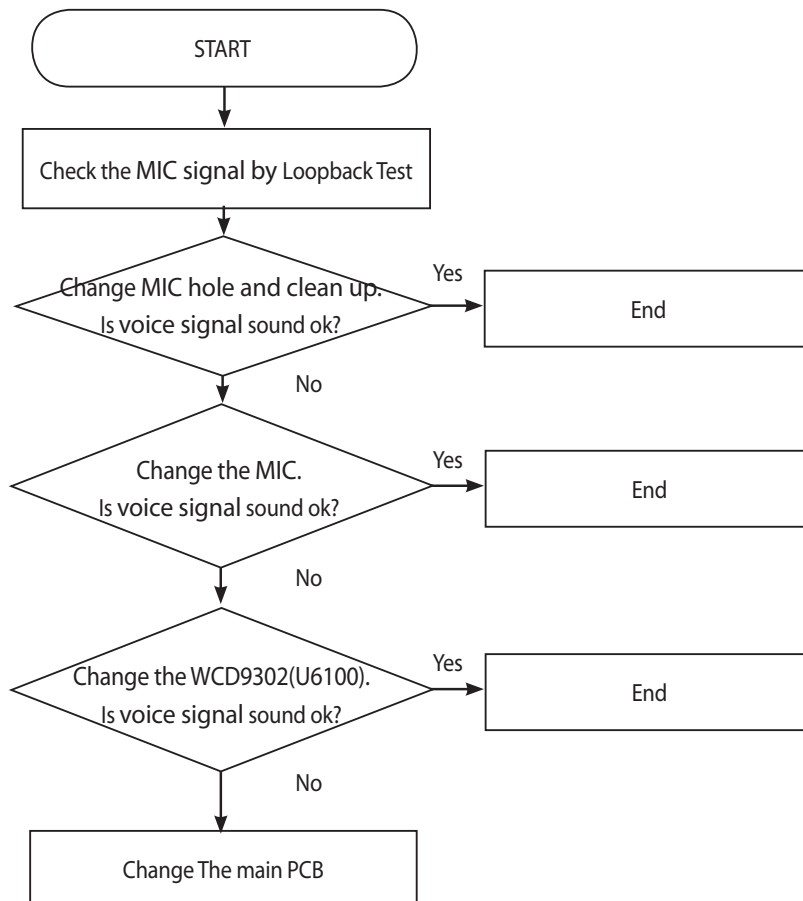


3.9.5 Ear-MIC

Ear MIC control signal is generate by WCD9302(U6100).

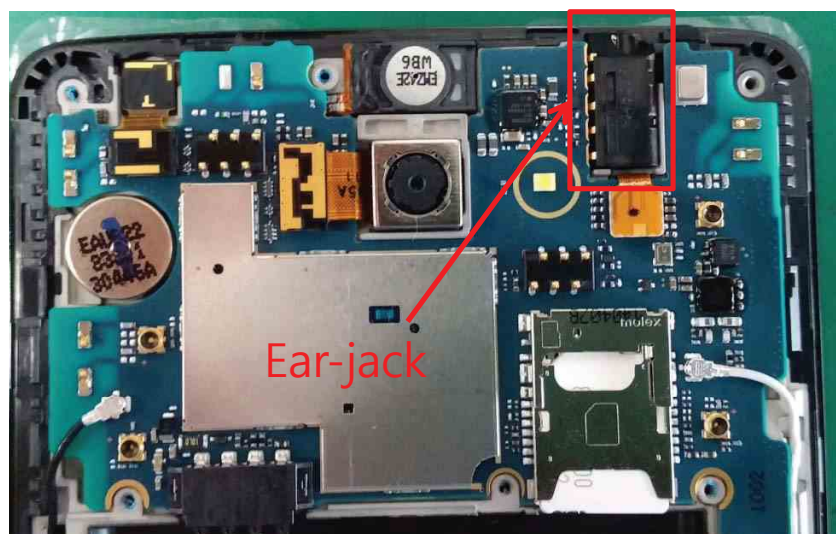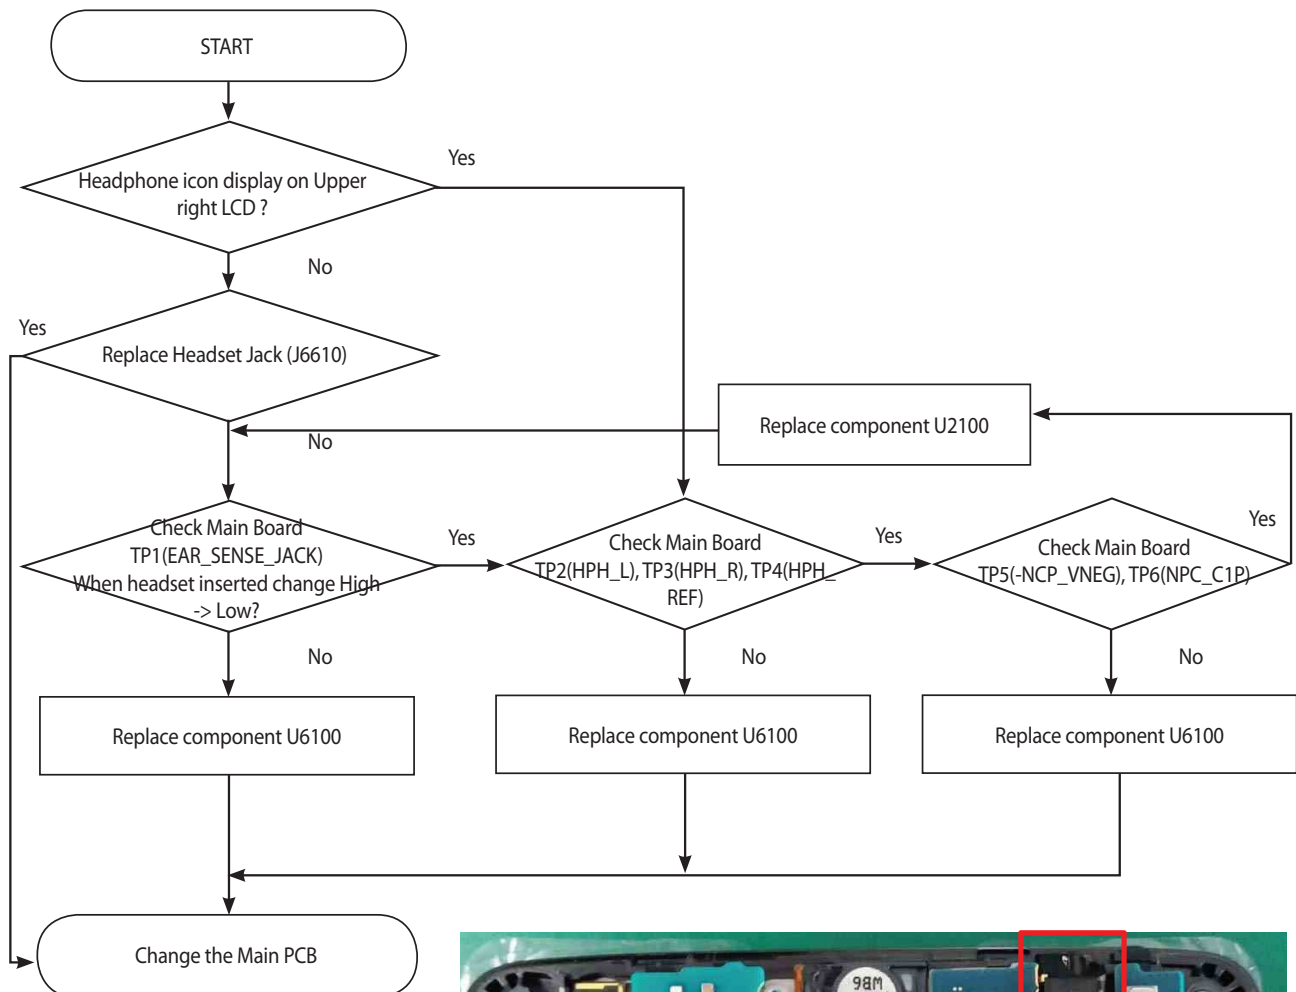




3. TROUBLE SHOOTING

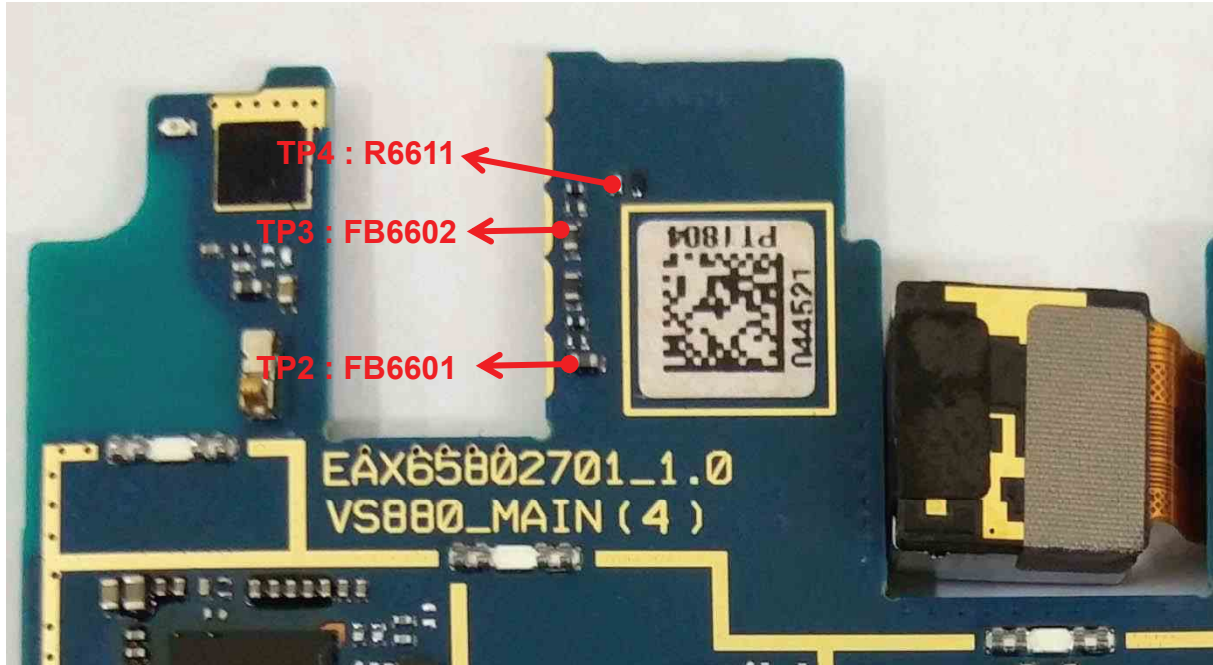

< main top >

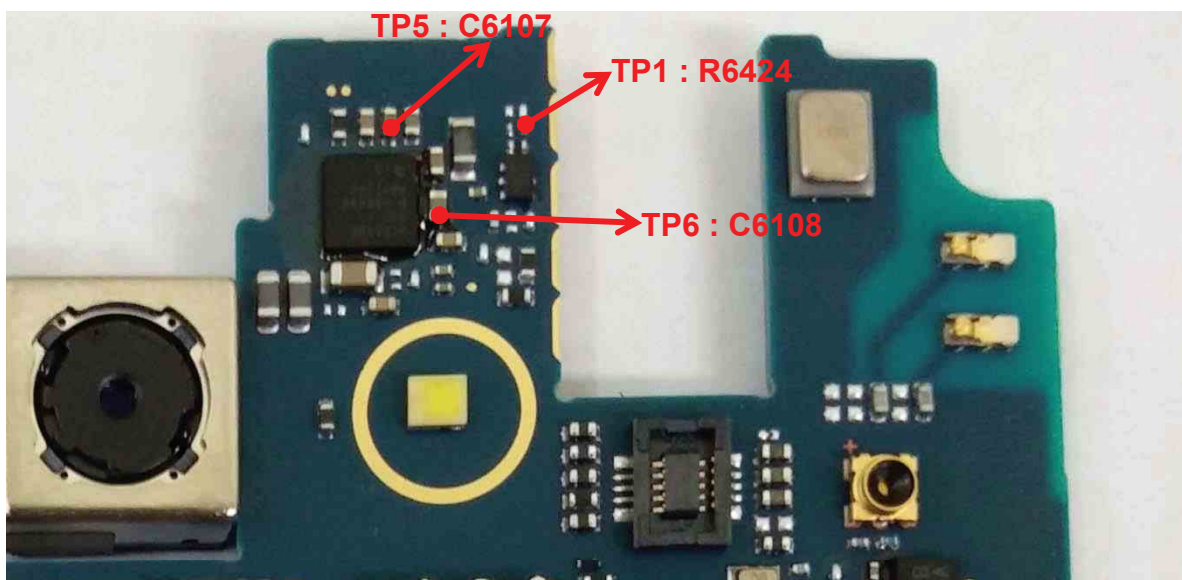


< main bot >

3.10 USB


The sequence of LGVS880 USB is,

USB connected to LGVS880 -> VBUS_USB_IN_PM(C201) goes to 5V -> USB_D+ go to 3.3V -> USB_DATA is triggered -> USB work


USB Trouble shooting is shown below.

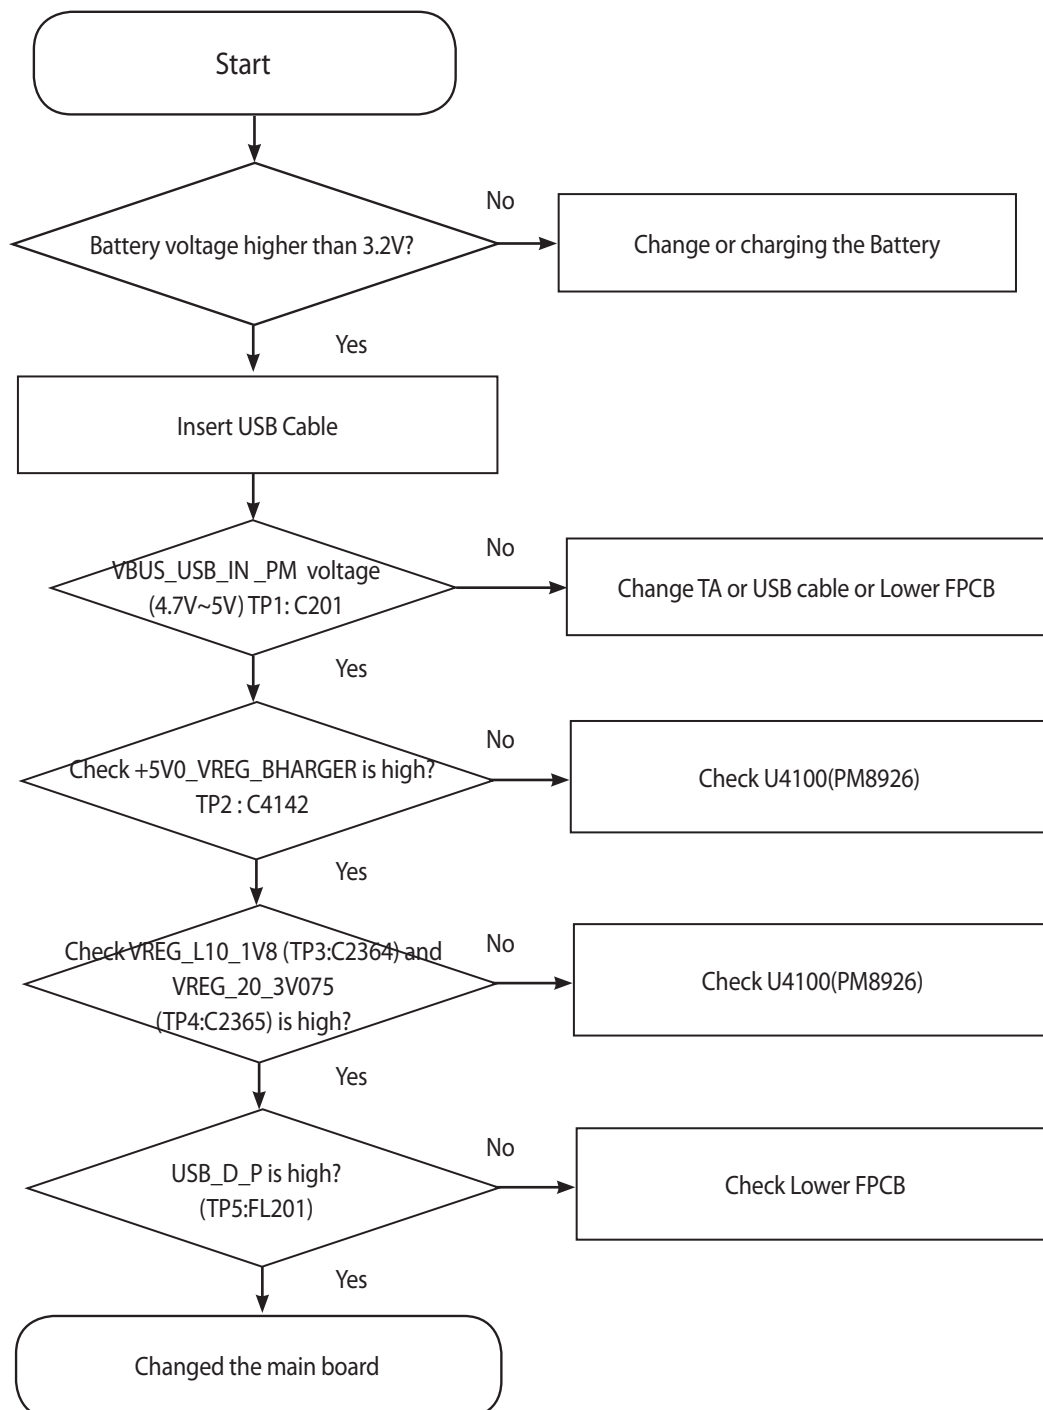


3. TROUBLE SHOOTING

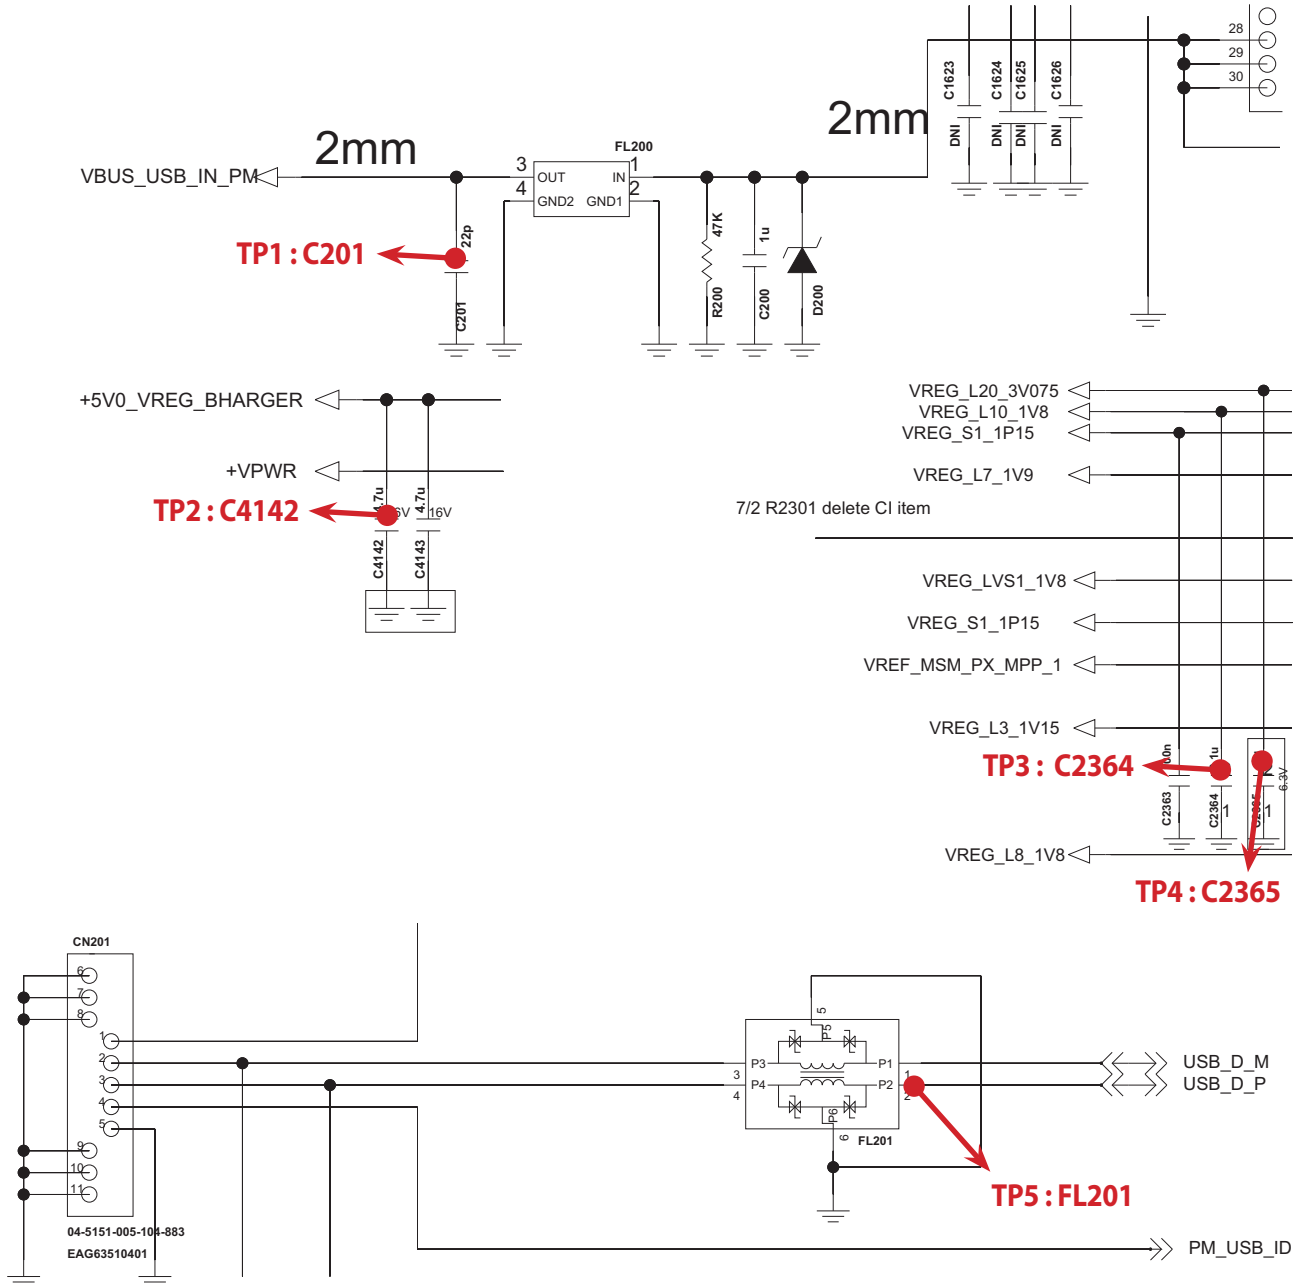

3. TROUBLE SHOOTING

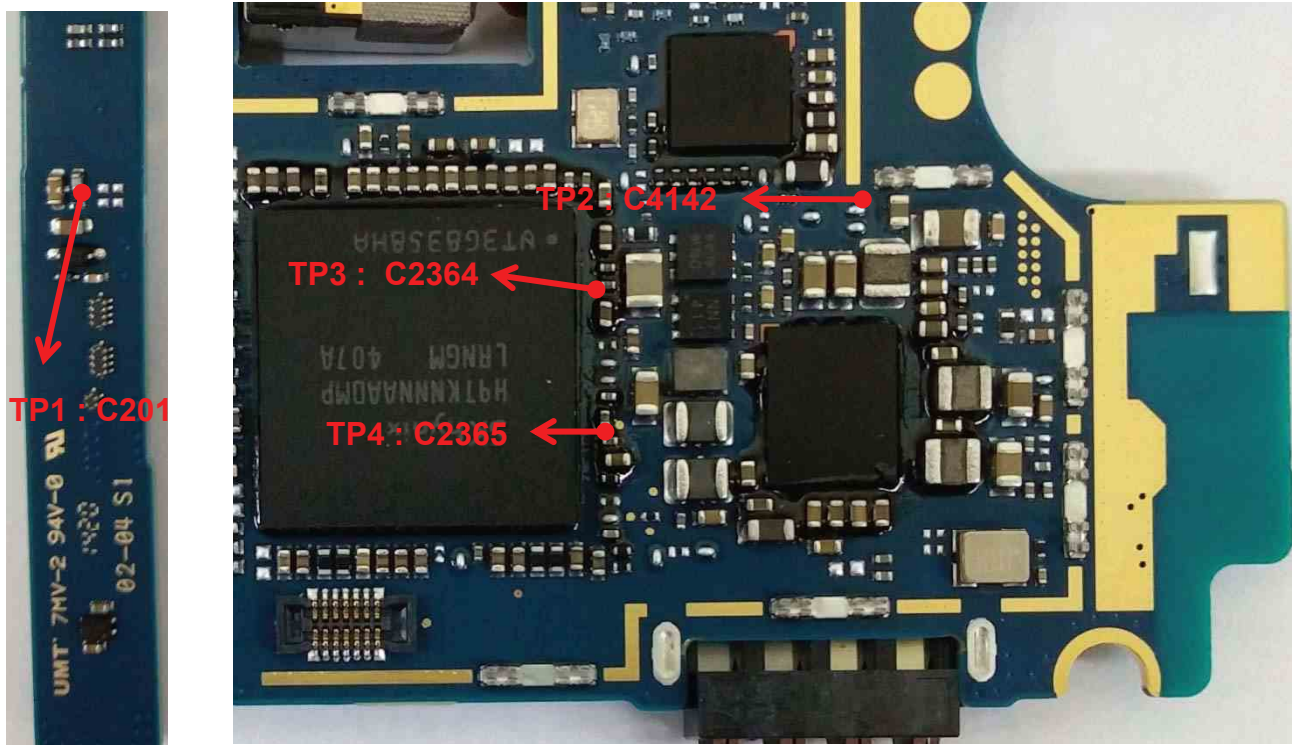

< main top >

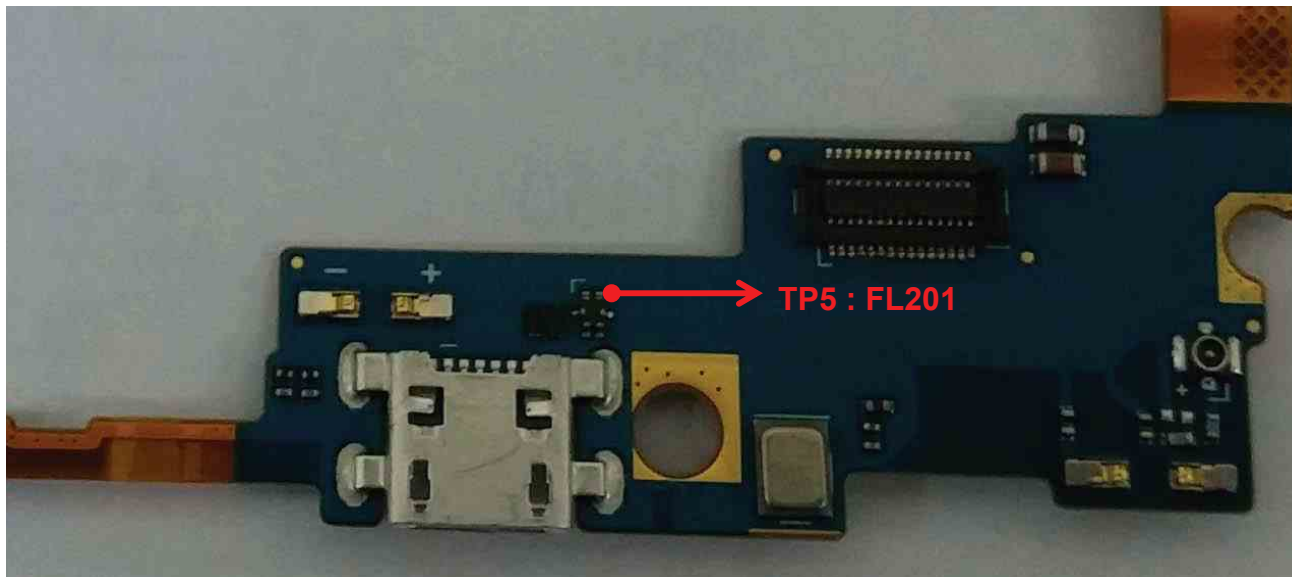


<Lower FPCB bot >


3.11 Camera


3.11.1 Camera (8M)

8M camera control signals are generated by MSM8926

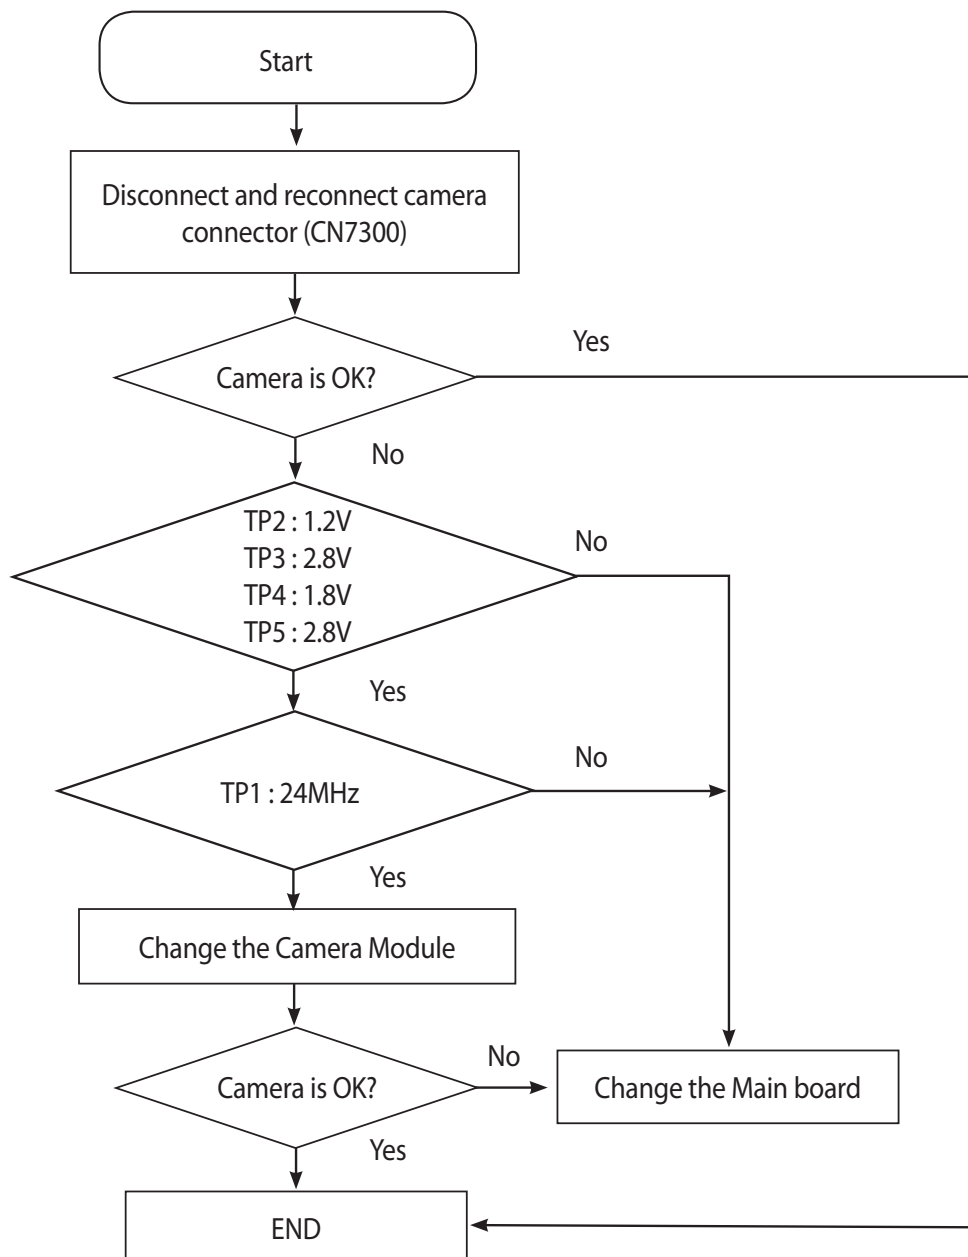

3. TROUBLE SHOOTING

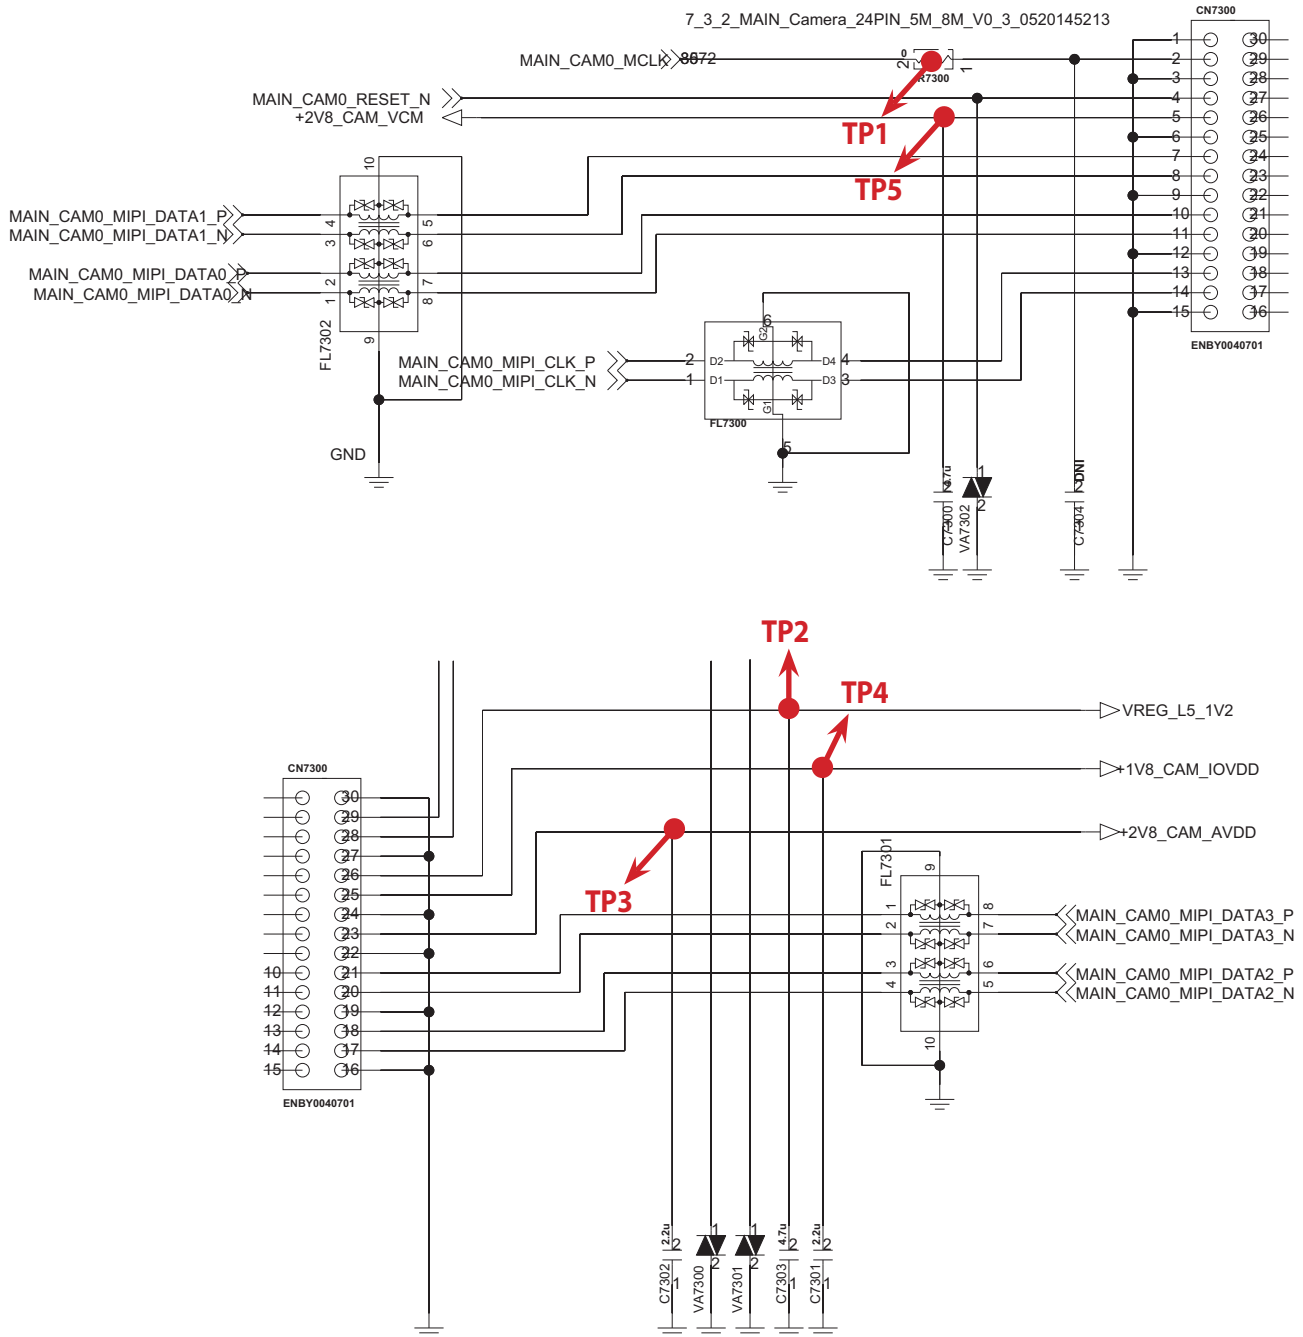


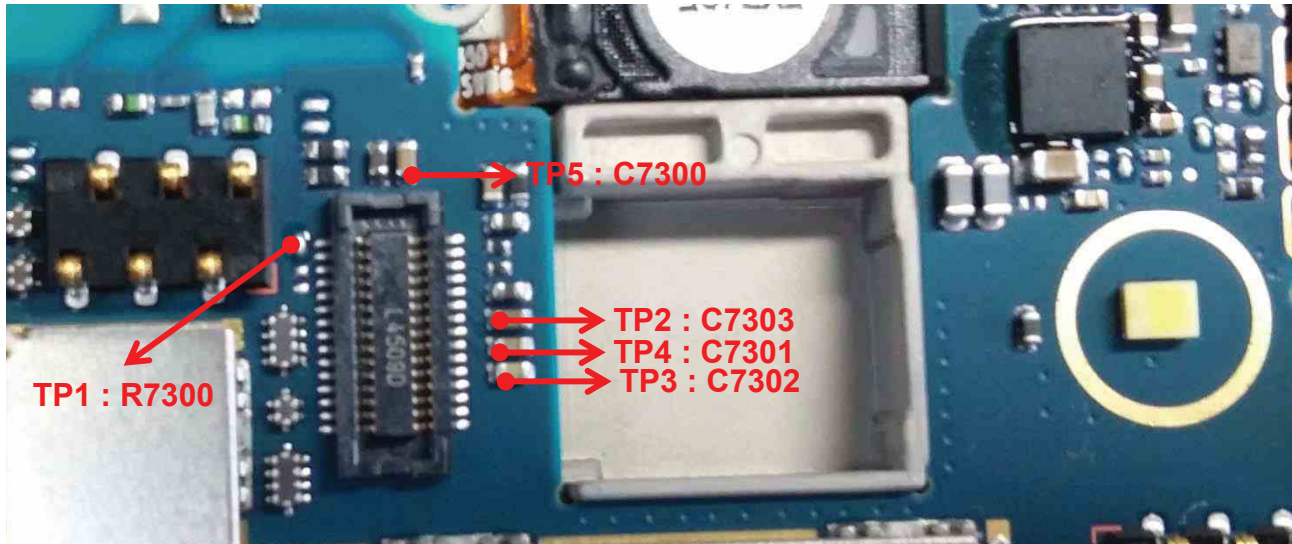


< main bot >

3.11.2 Camera (VGA Front Camera)


VGA Front camera control signals are generated by MSM8960.

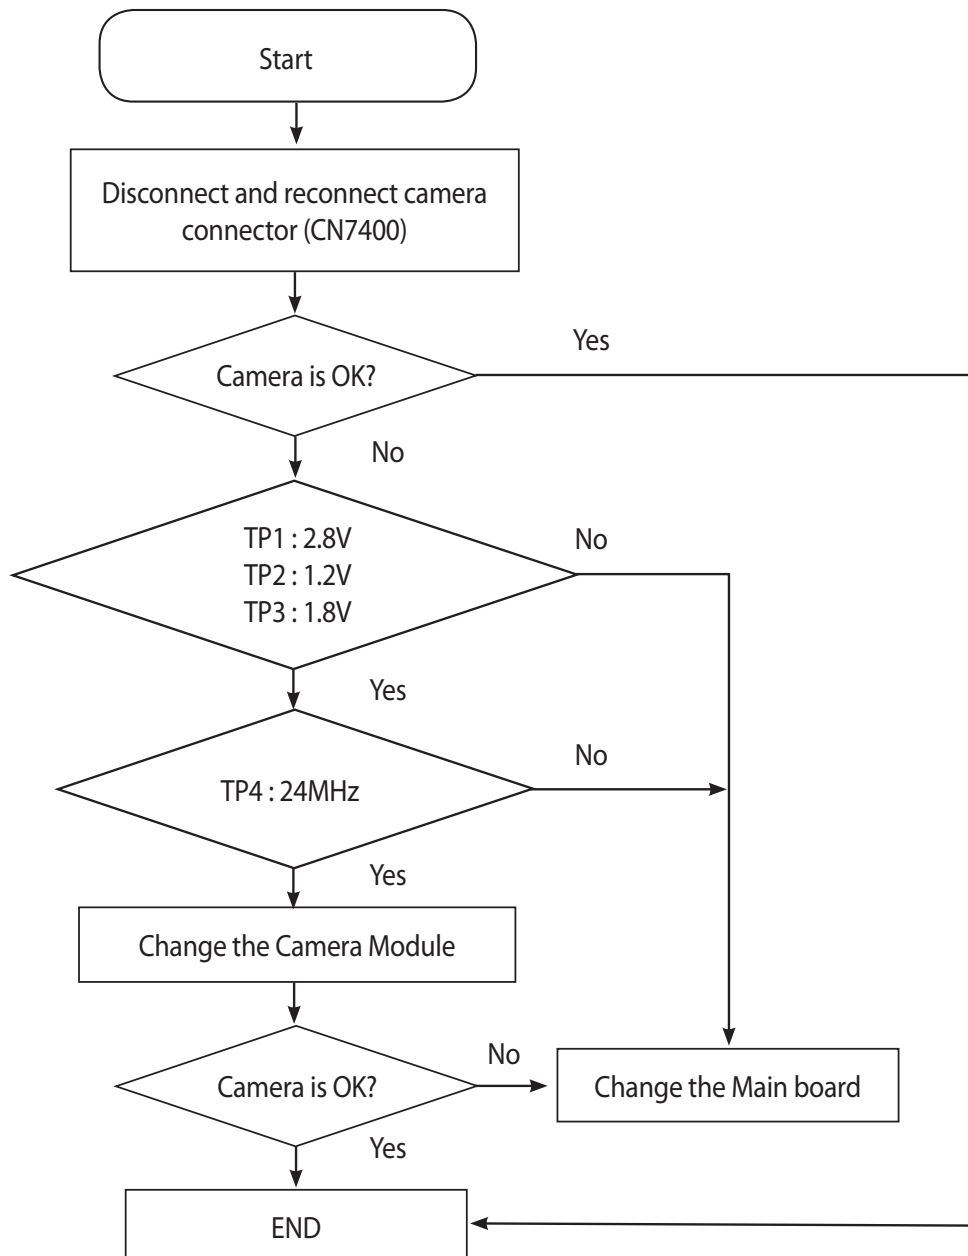

3. TROUBLE SHOOTING

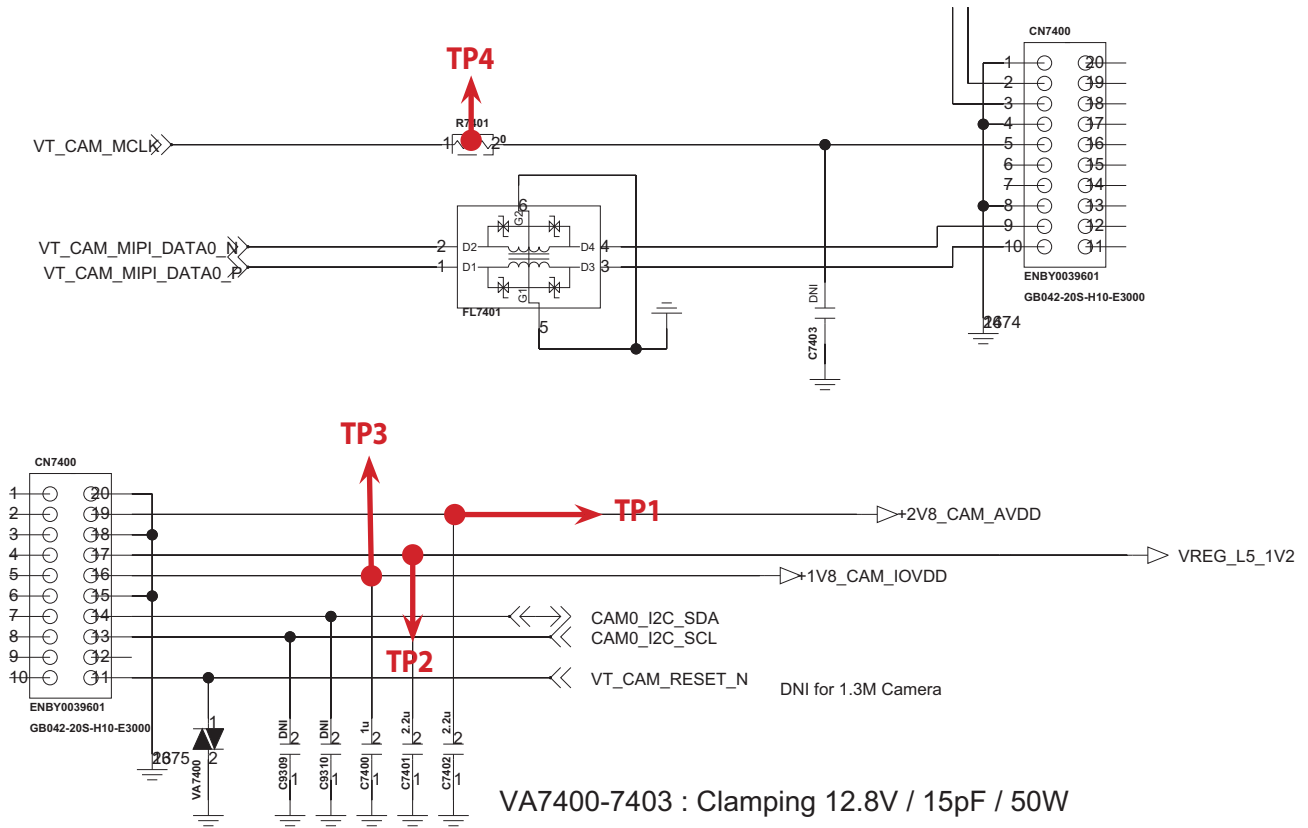


3. TROUBLE SHOOTING

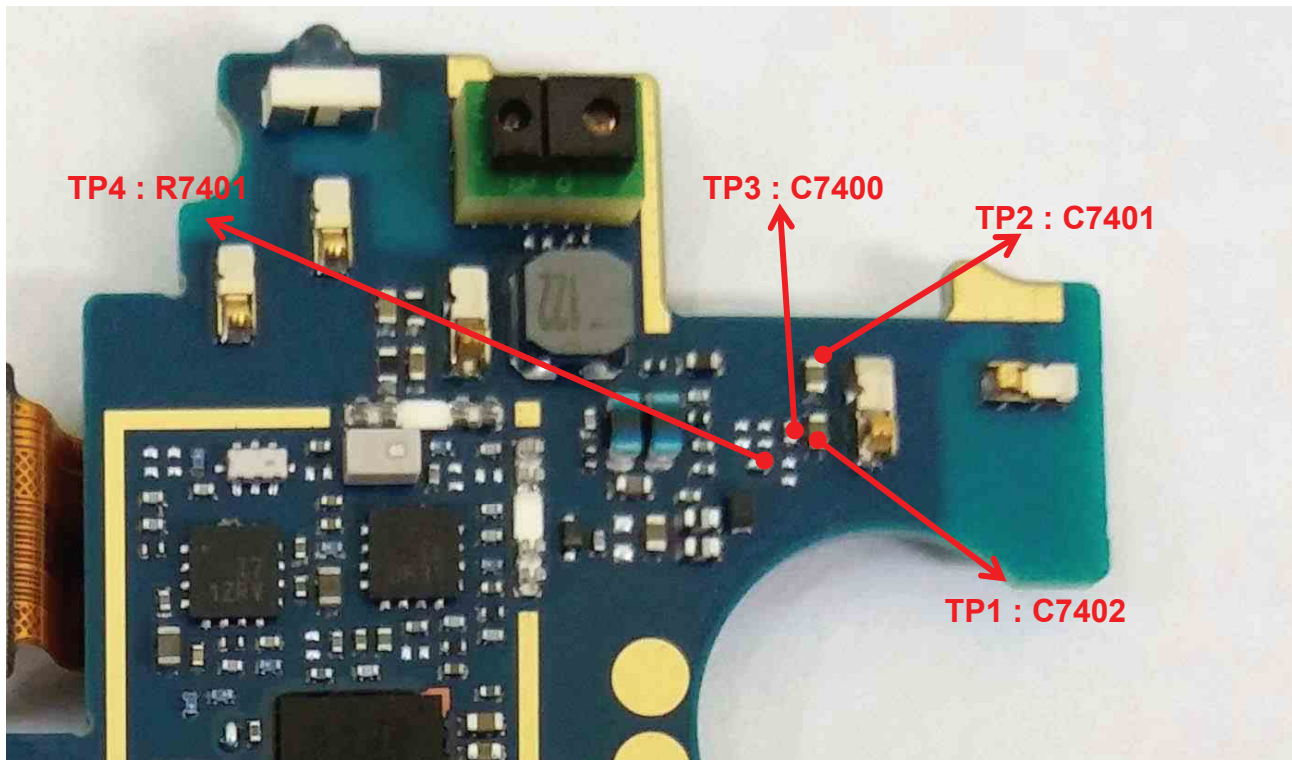


< main top >

3.12 LCD


Main LCD control signals are generated by MSM8926.

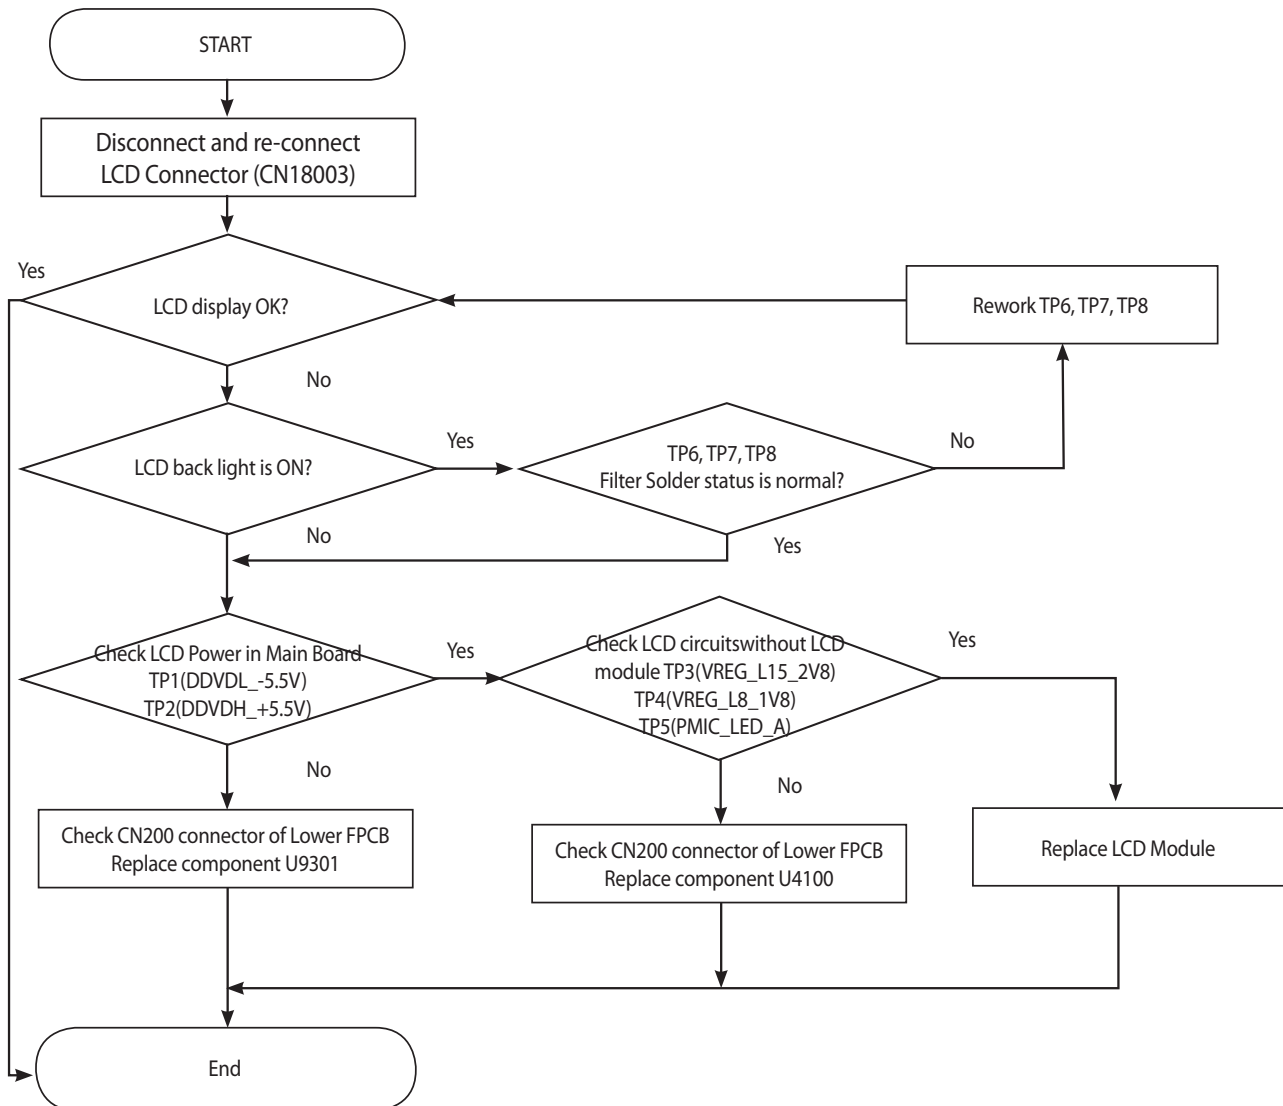


3. TROUBLE SHOOTING

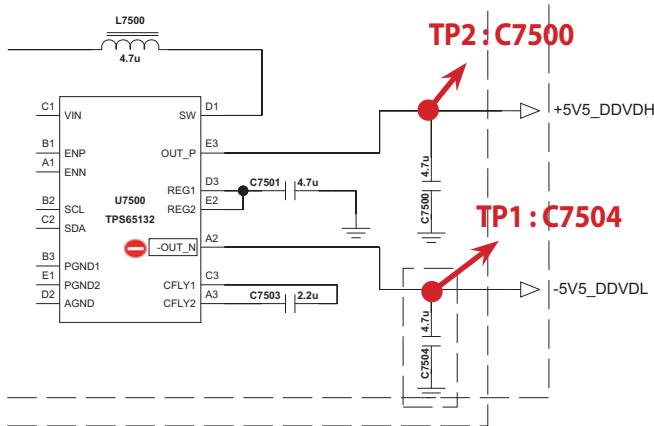



LOWER_FPCB_CON._MAIN

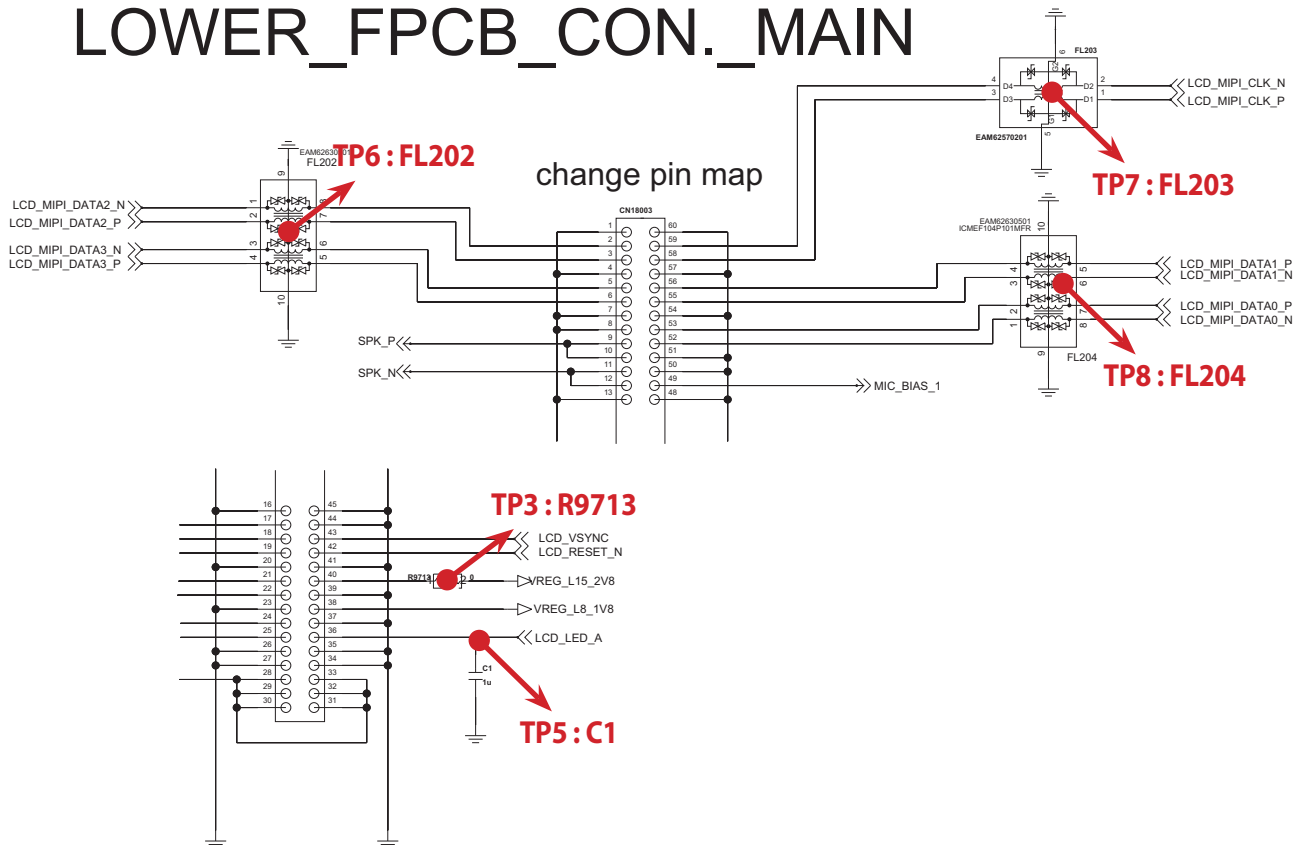

3. TROUBLE SHOOTING

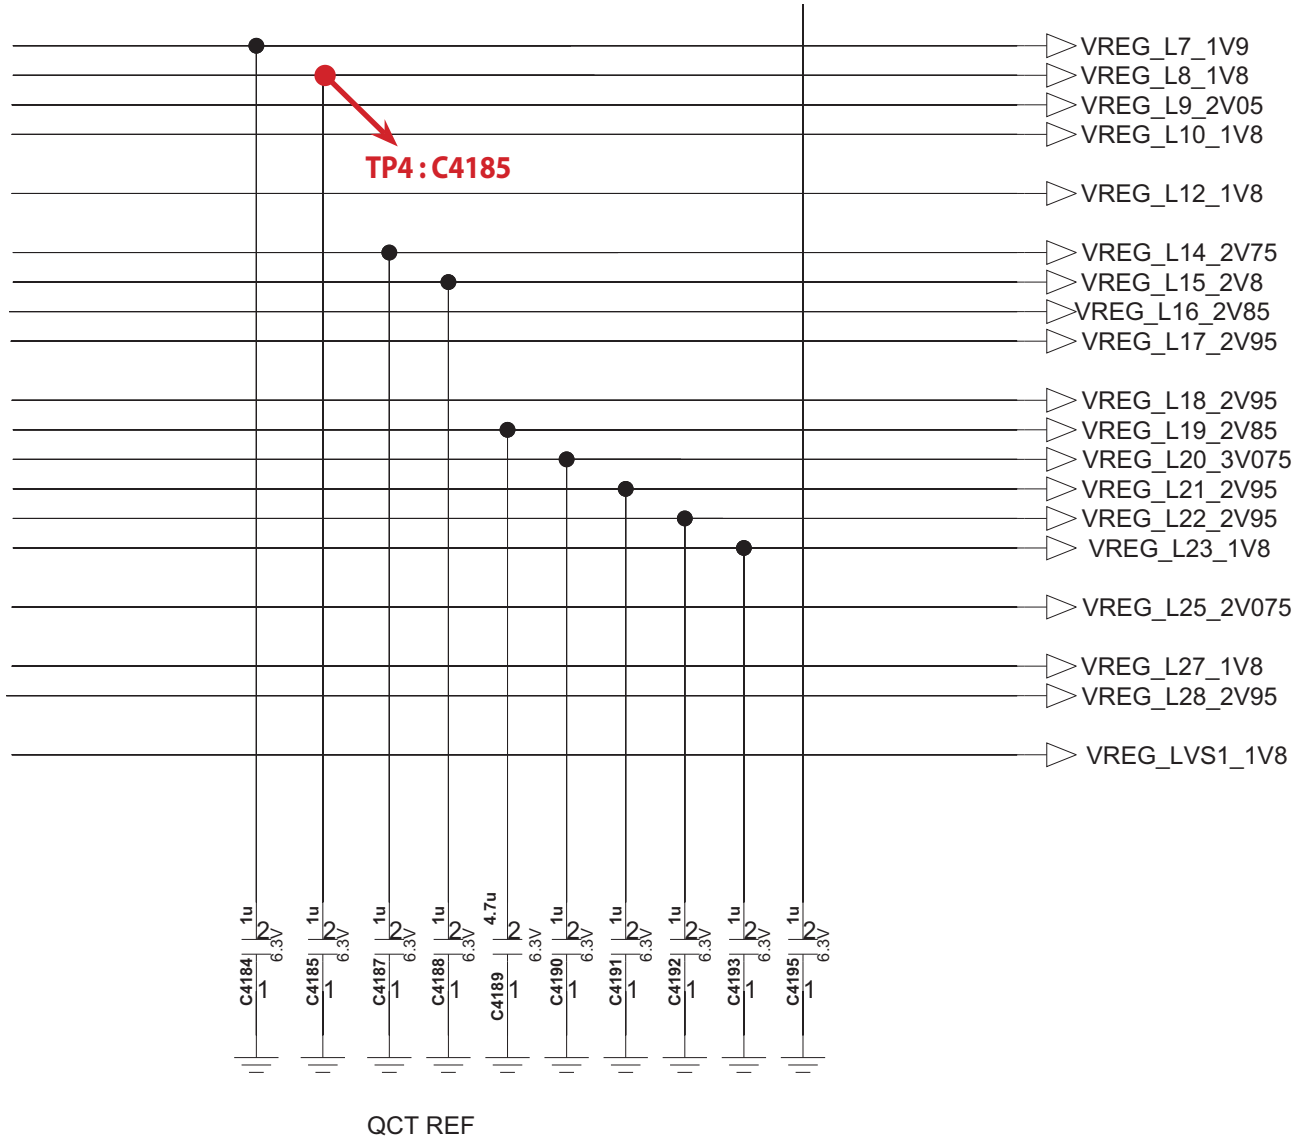

3. TROUBLE SHOOTING

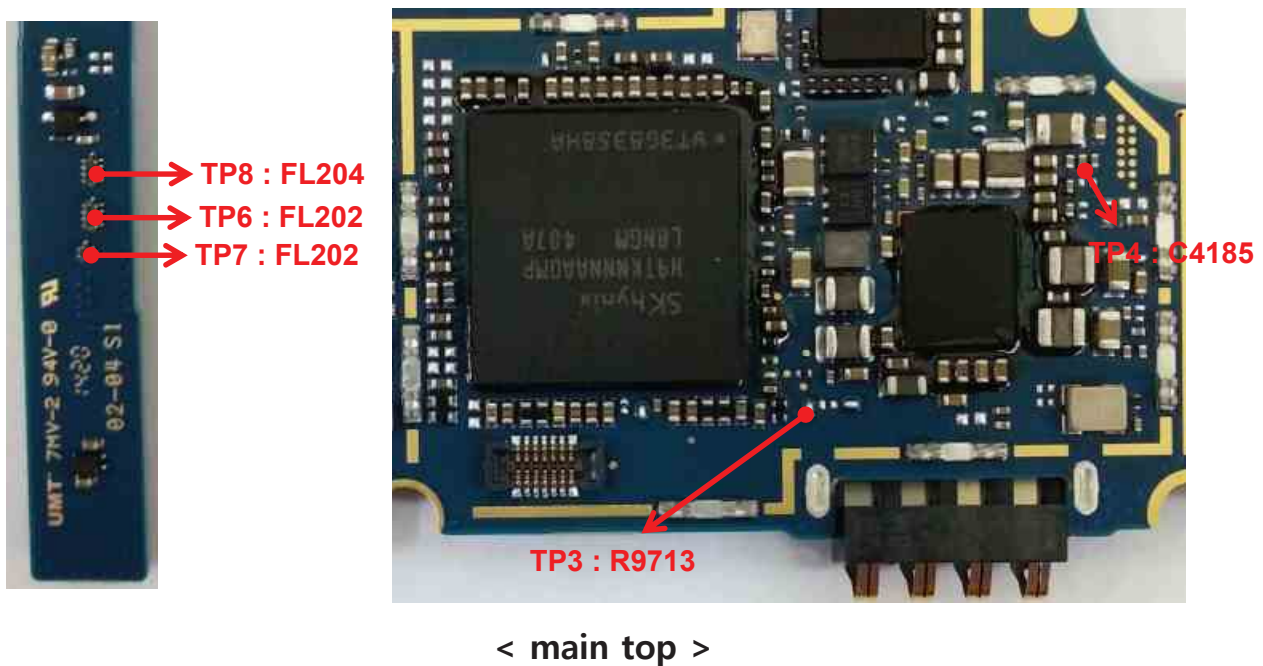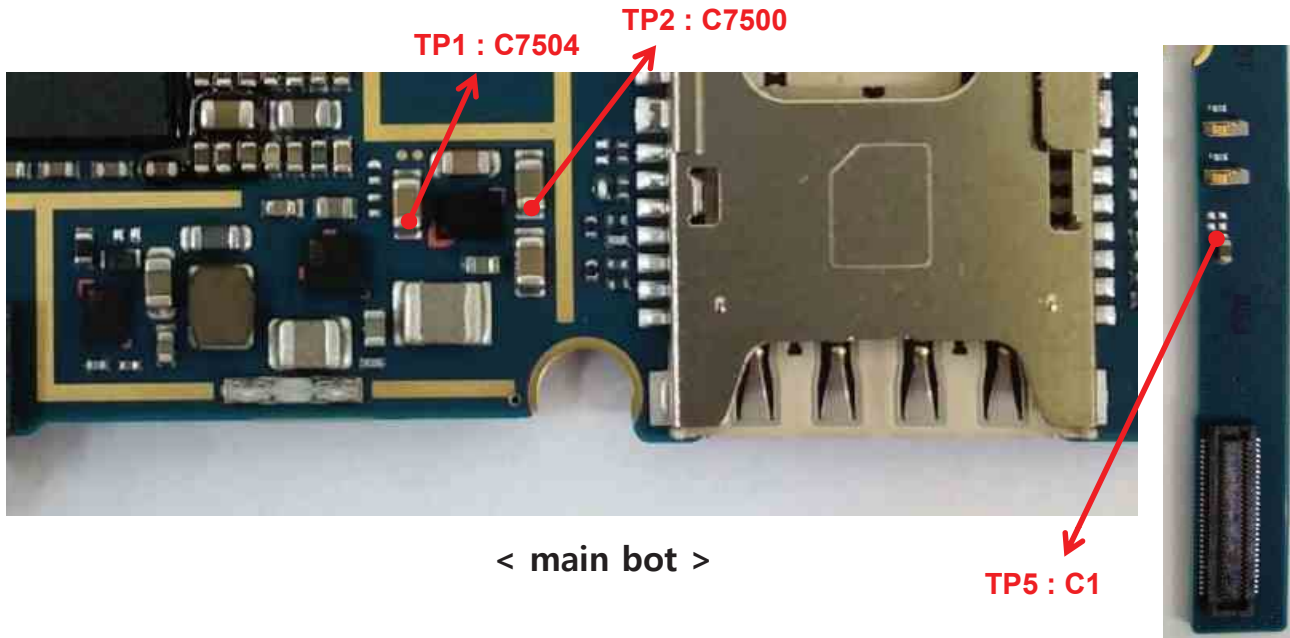


3.13 Touch



Touch screen is a capacitive sensor with an attached flexible PCB.

Touch connector has only sensor line (Touch IC located on Main PCB)

Touch control signals are generated by MSM8926.

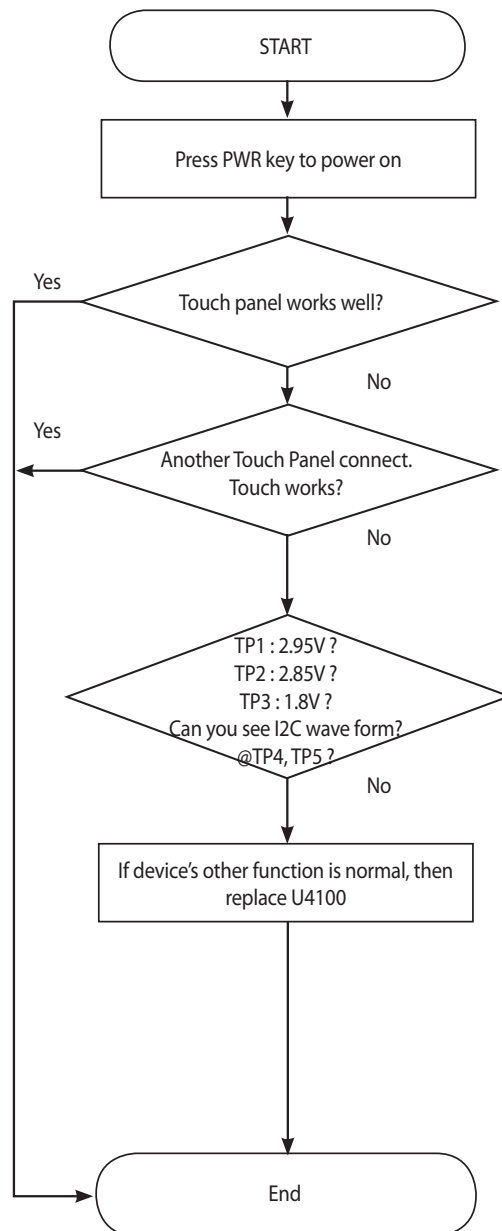


3. TROUBLE SHOOTING

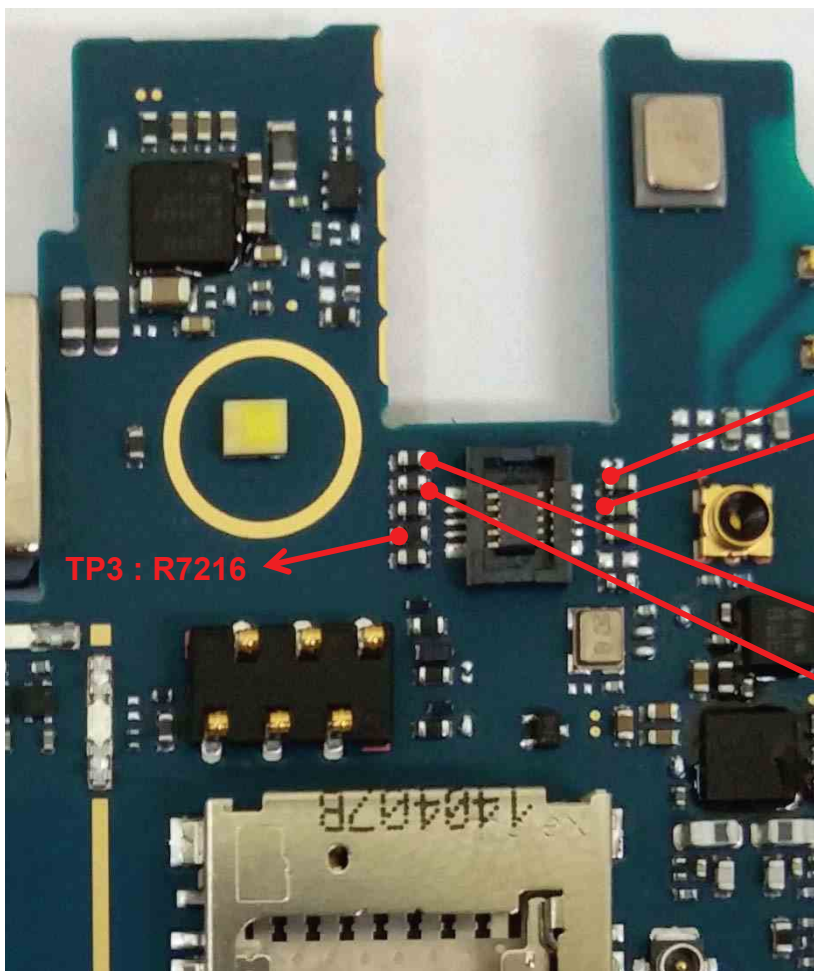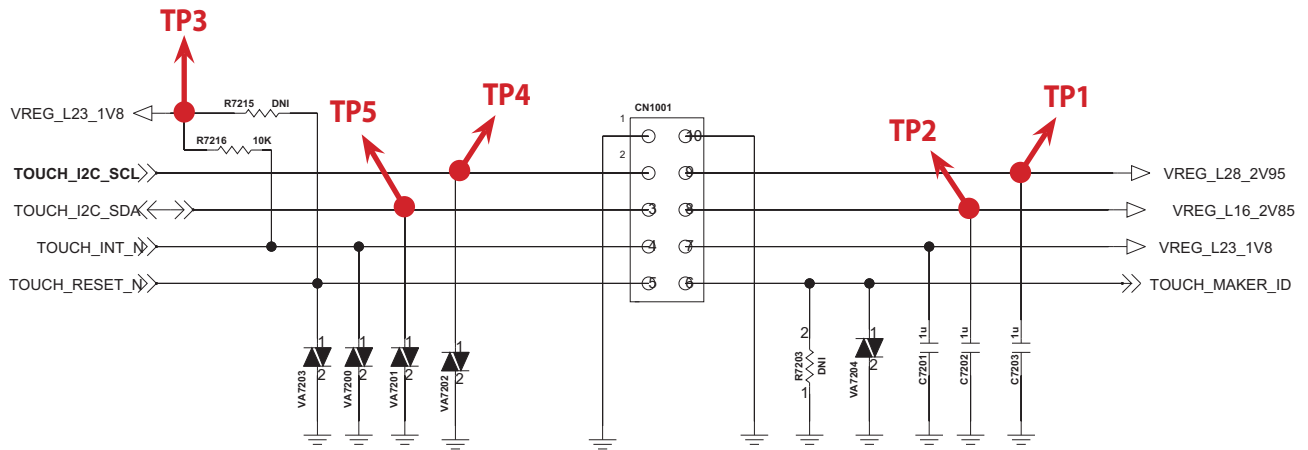


< main bot >

3.14 Sensor


3.14.1 Compass + Accel Sensor

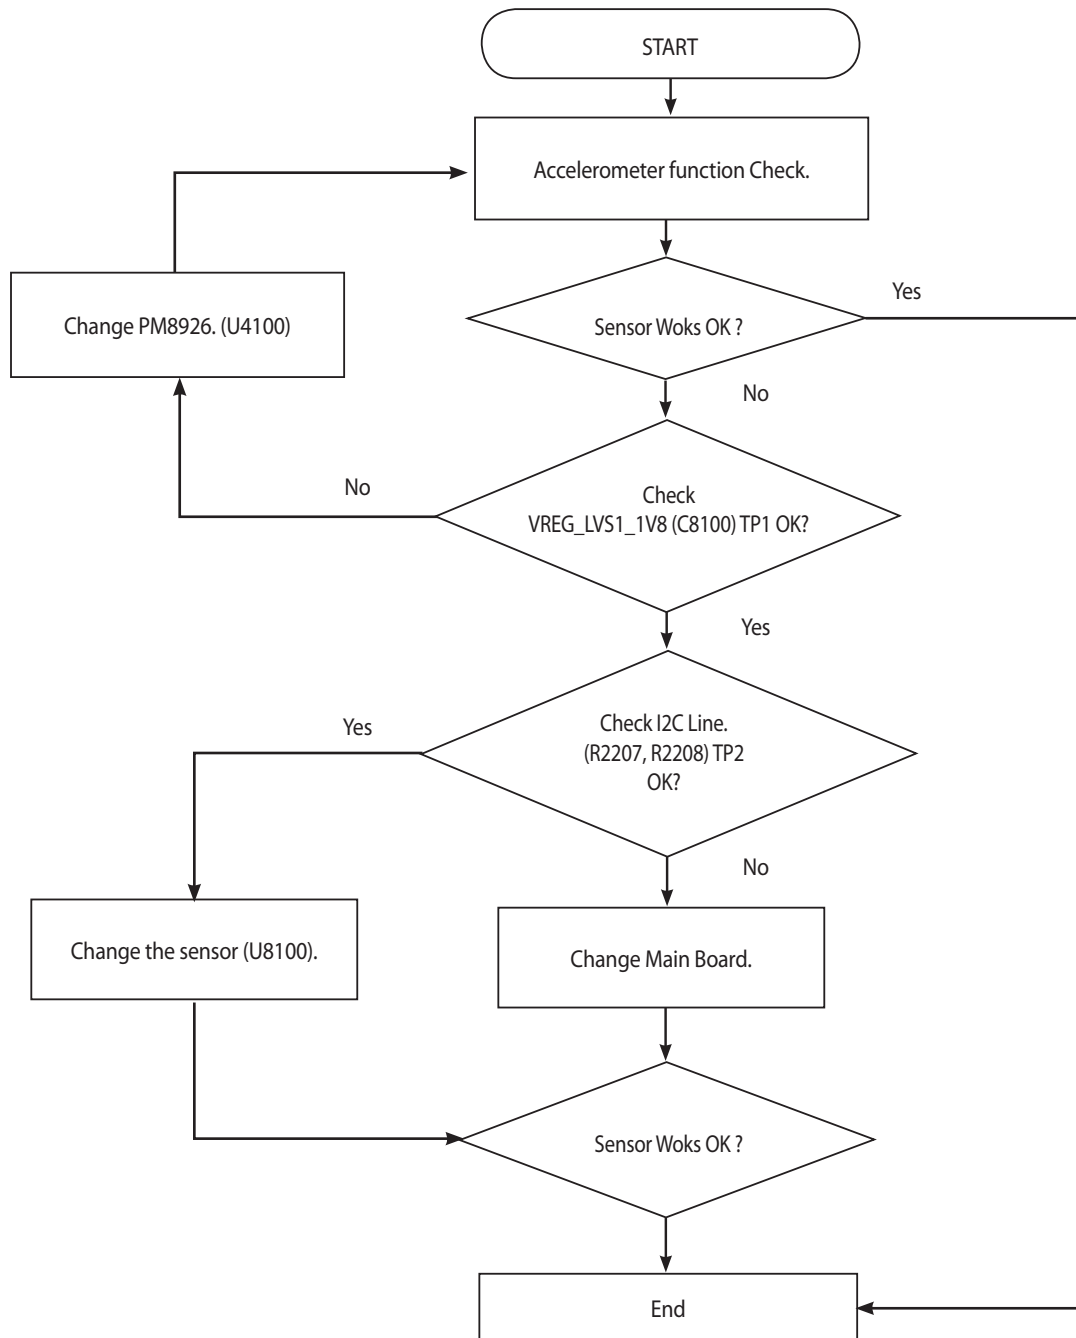

3. TROUBLE SHOOTING

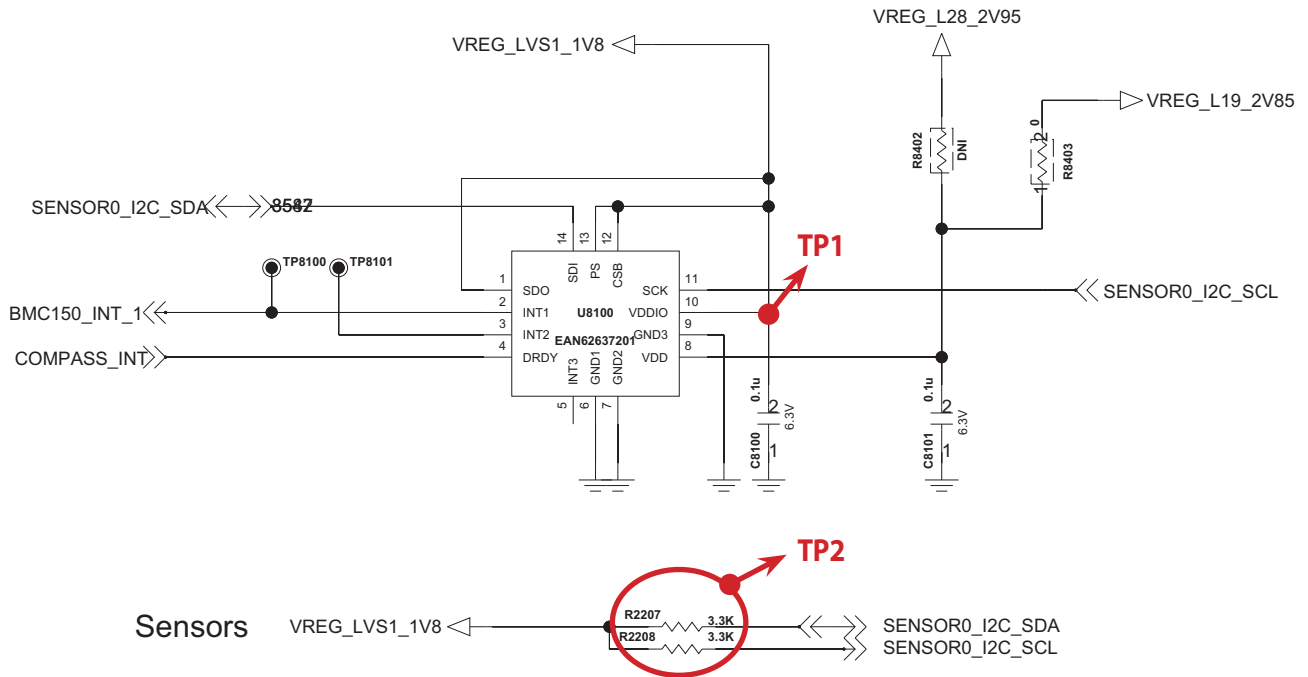

TP1 : C8100

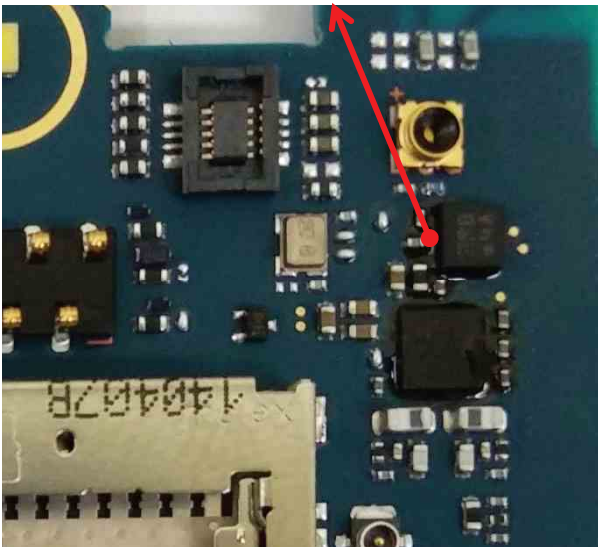

< main bot >



< main top >


TP2 :
R2207,
R2208

3.14.2 Proximity



APDS-9130 is Proximity sensor.

Proximity Sensor is worked as below:

Send Key click -> Phone number click -> Call connected -> Object moved at the sensor -> Control the screen's on/off operation automatically.

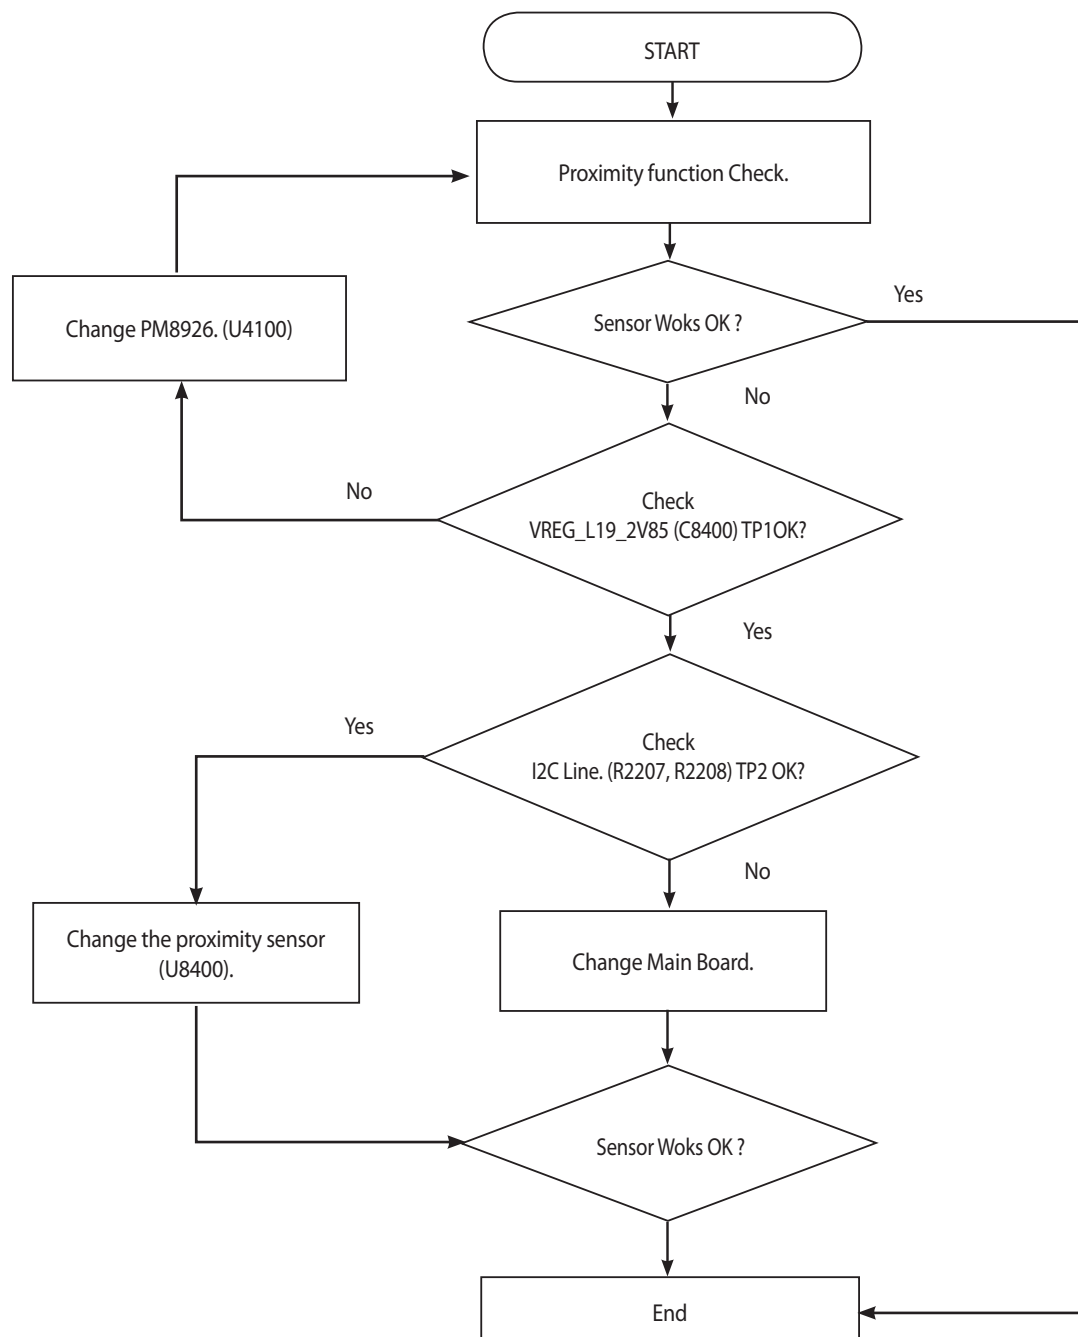

3. TROUBLE SHOOTING

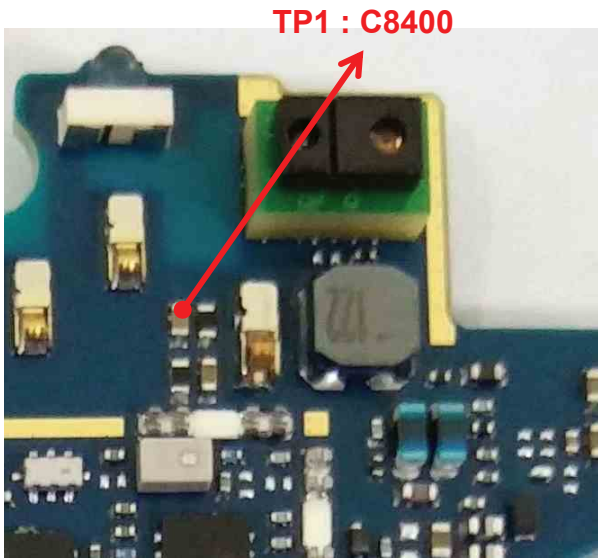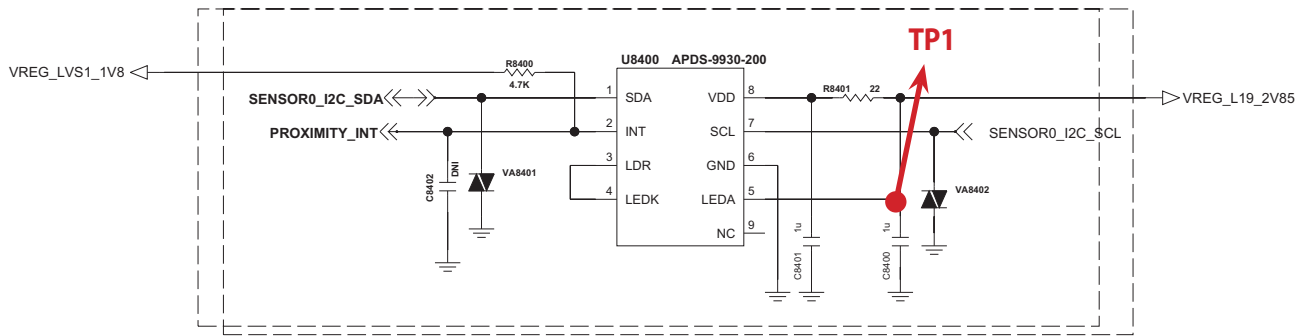


< main top >



< main top >

TP2 :
R2207,
R2208


3.14.3 Vibrator

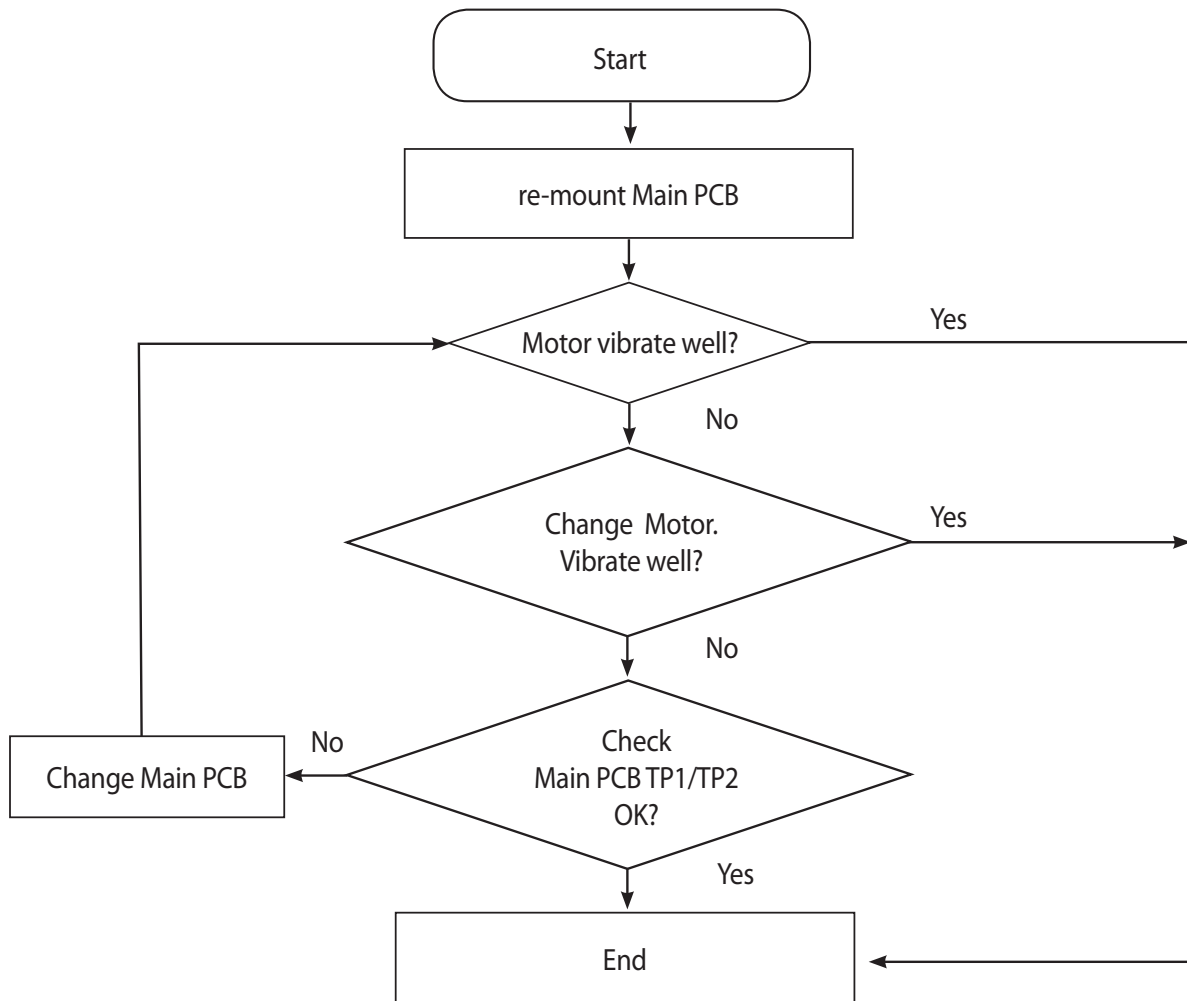




< main top >

3.15 NFC Part

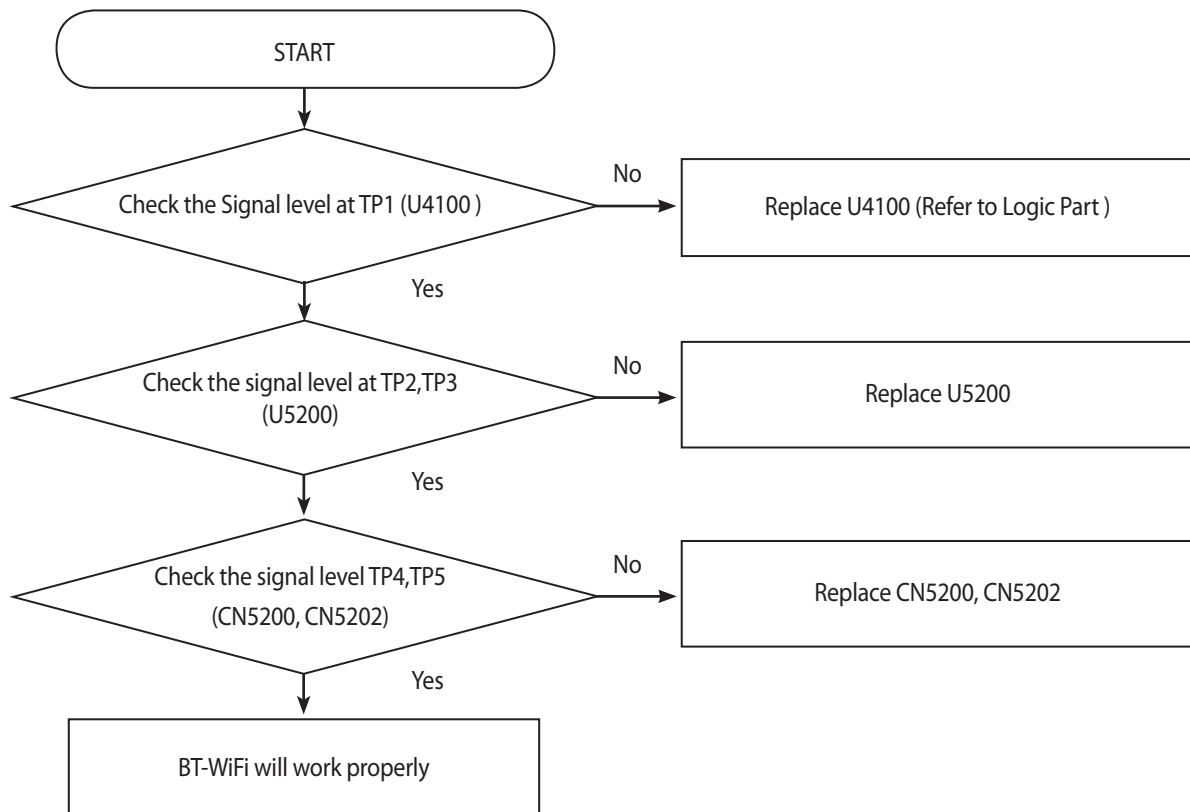



NFC RF Path & Test Point (Bottom)

NFC Chip

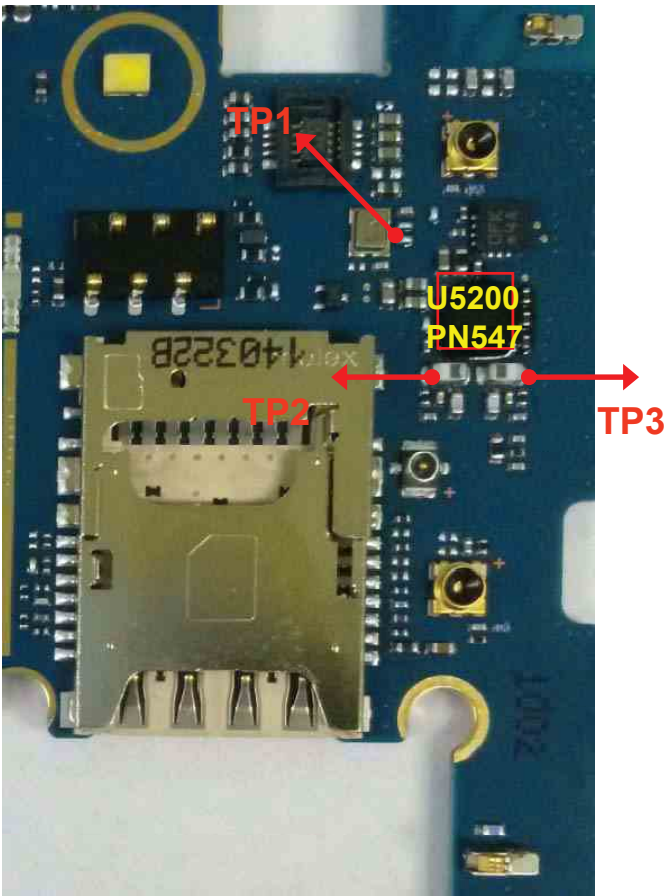

NFC Ant, Clip

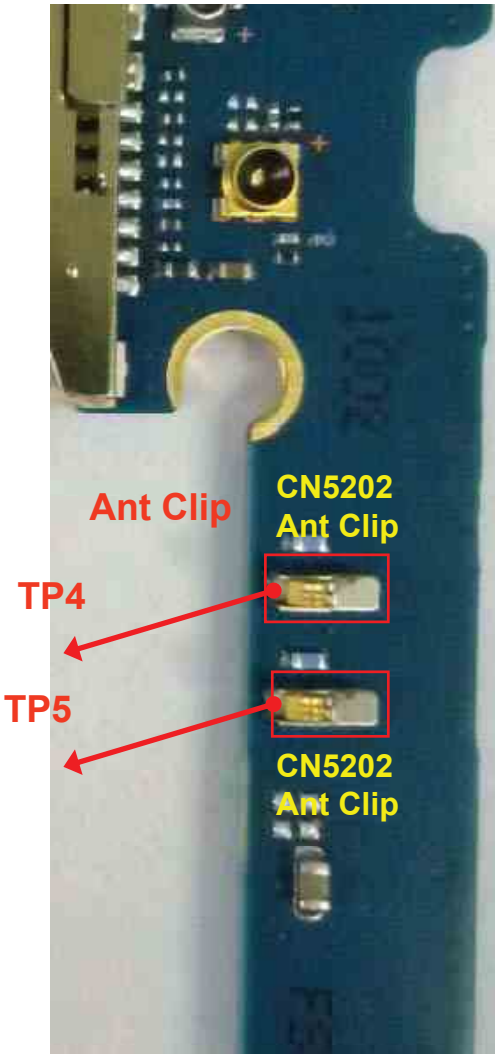


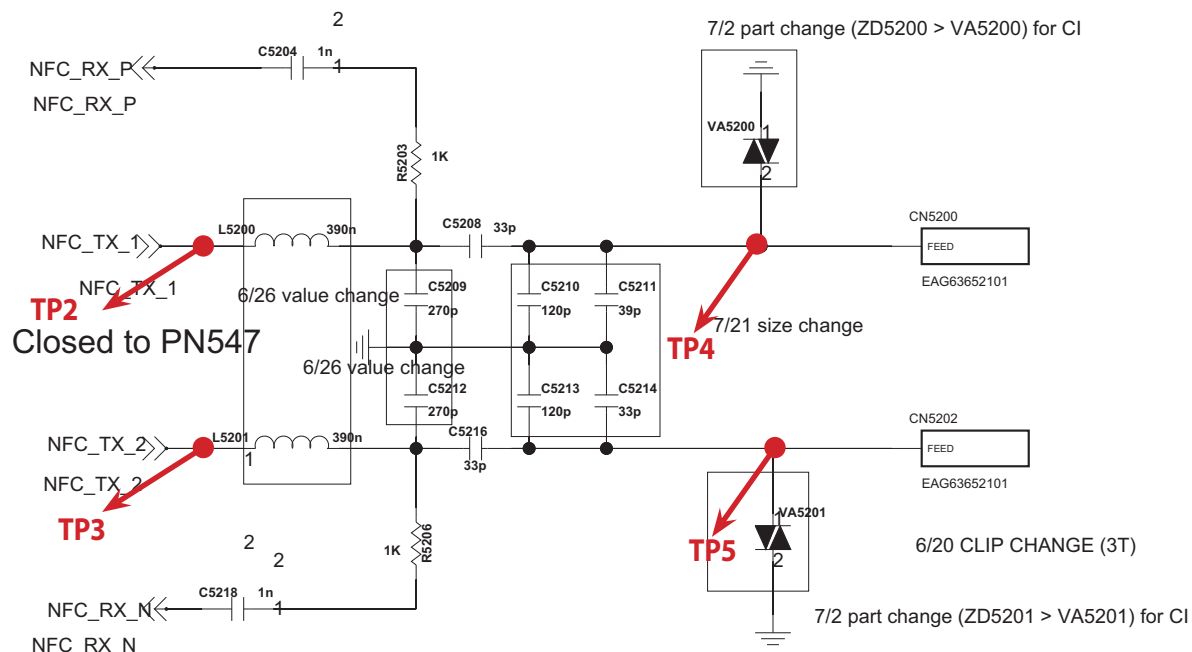



ZD5200-5201 : Clamping 15V / 0.3pF

4. DOWNLOAD



TOOL INFORMATION			
TOOL VERSION	DLL NAME	USB DRIVER	
LGFLASHv160	LGVS880_20140710_LGFLASHv181_ Download	LGUnitedMobileDriver_S4981MAN38AP22_ML_WHQL_ Ver_3.8.1	
Please Check the Version to “B2B”			
H/W			
	Name	Part No.	SW
D/L Cable	Micro 5P (56-open-910K) USB DLC	RAD32167835	TOT

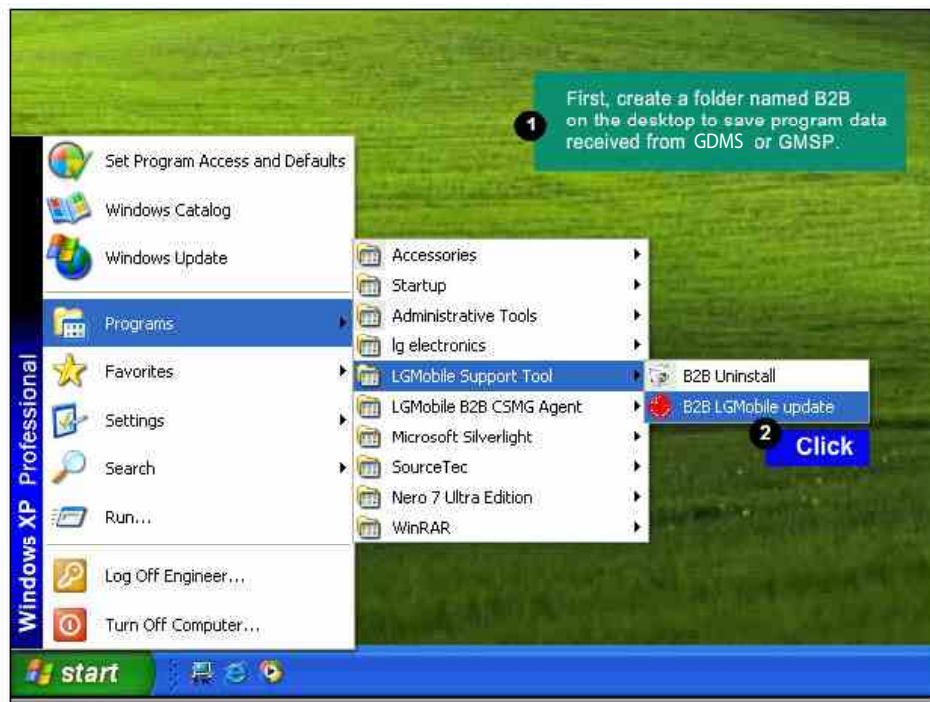



4. DOWNLOAD

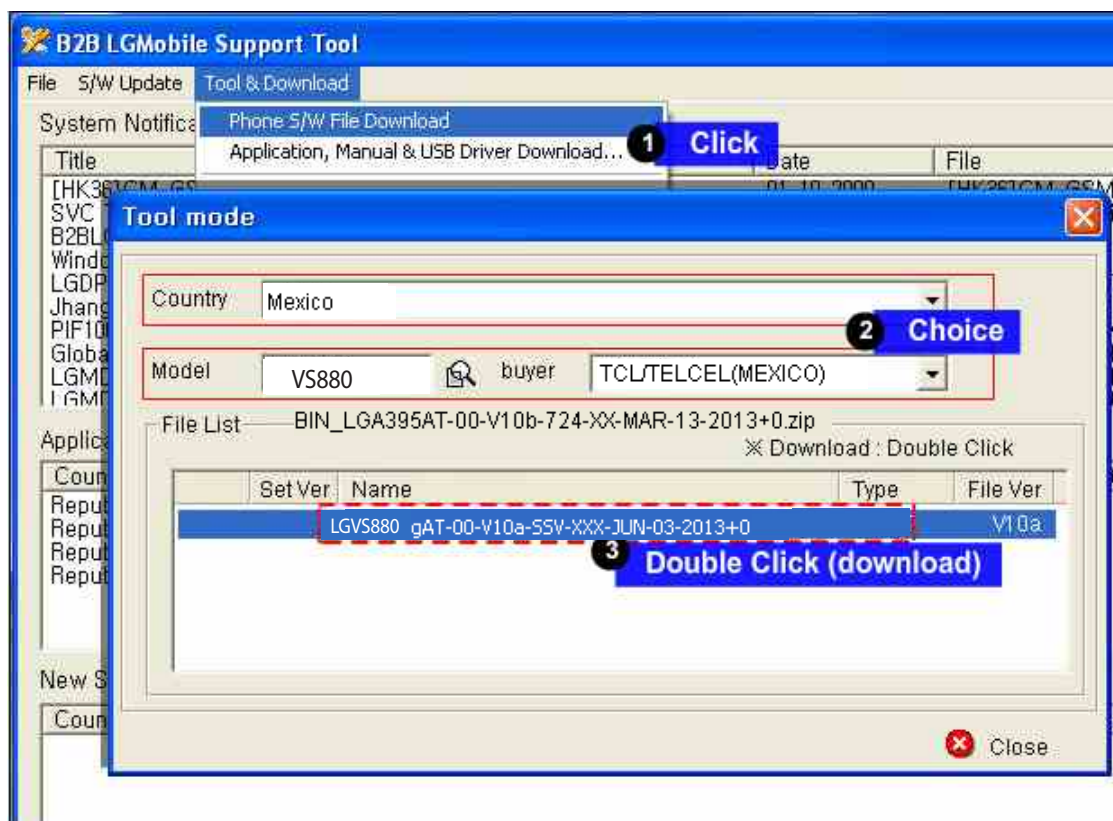
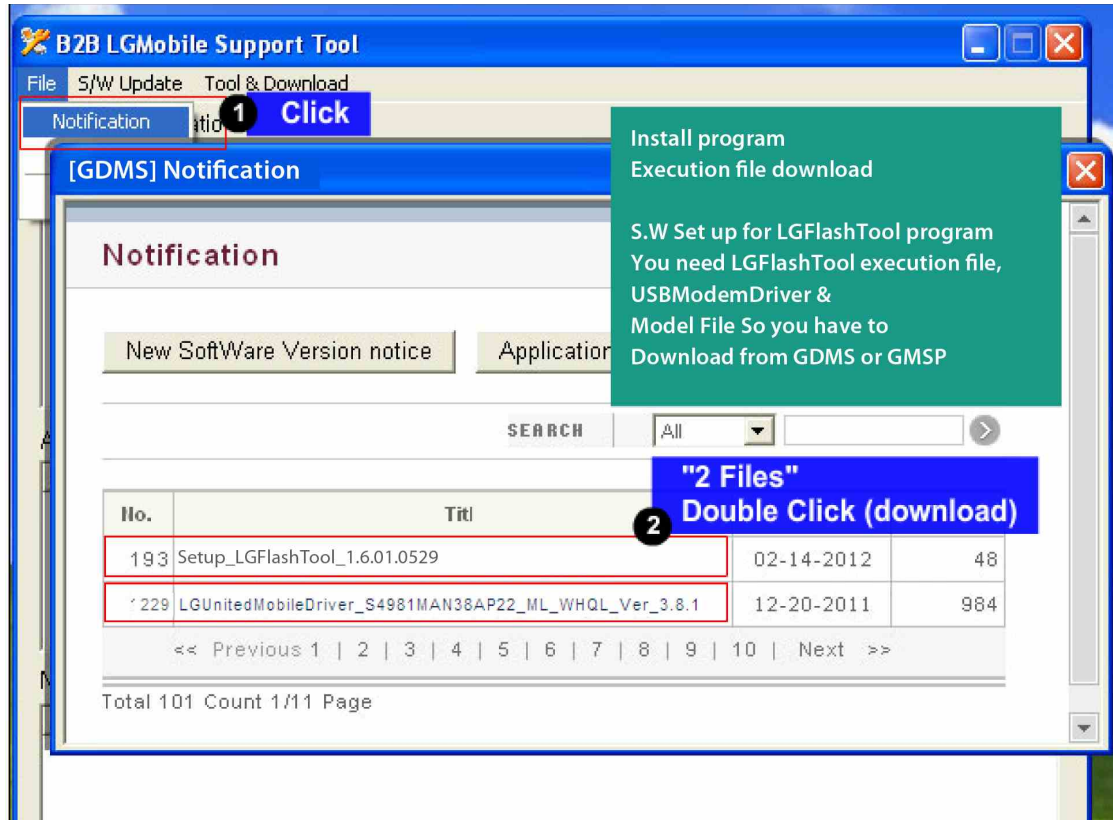



4. DOWNLOAD

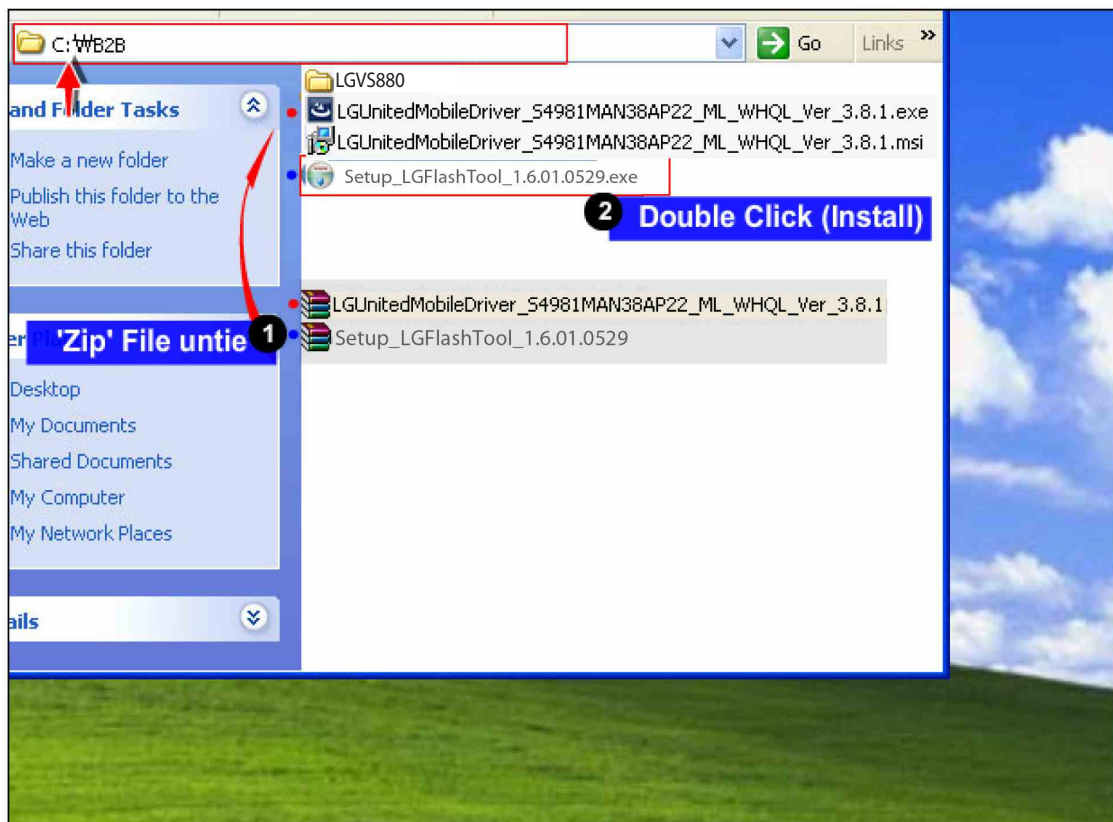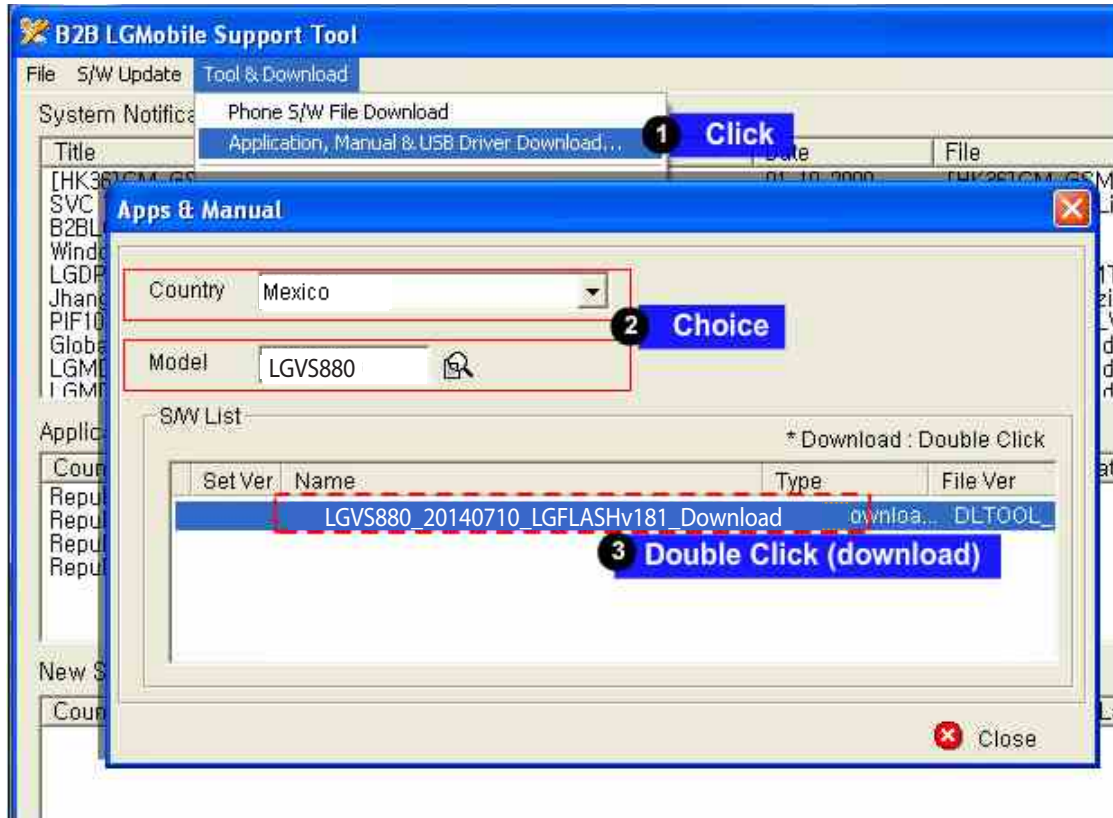


4. DOWNLOAD

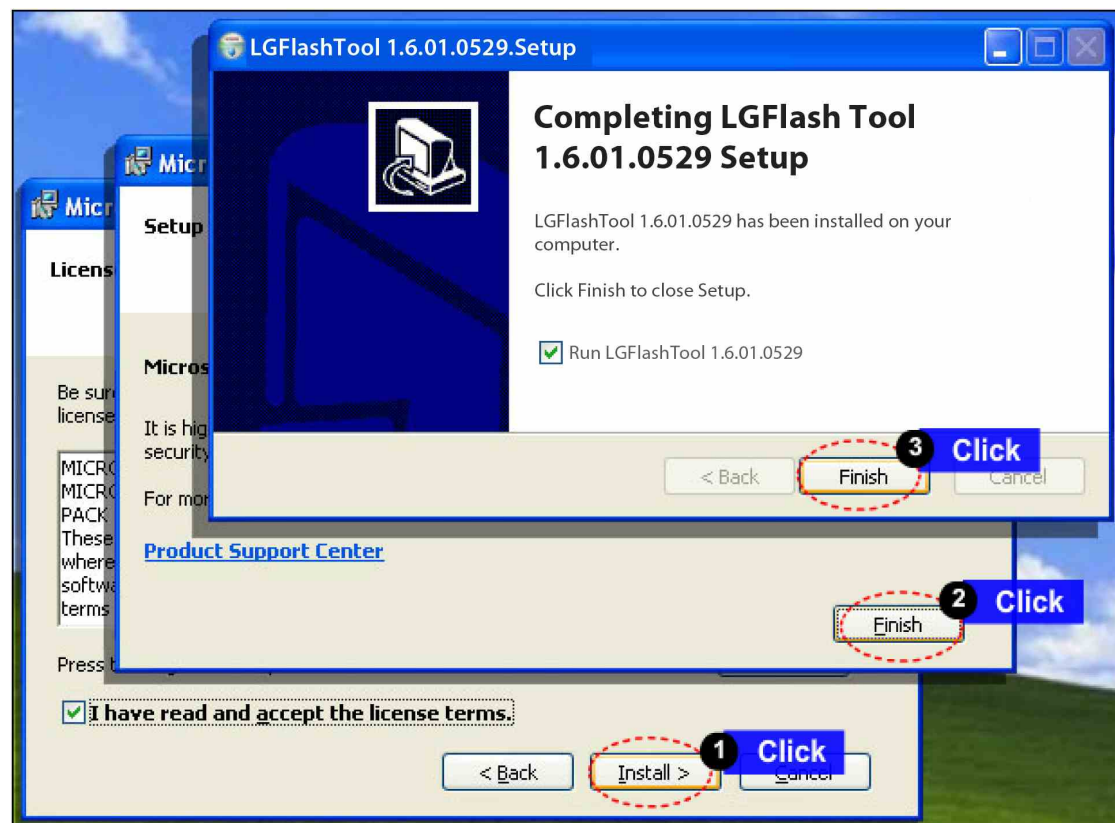
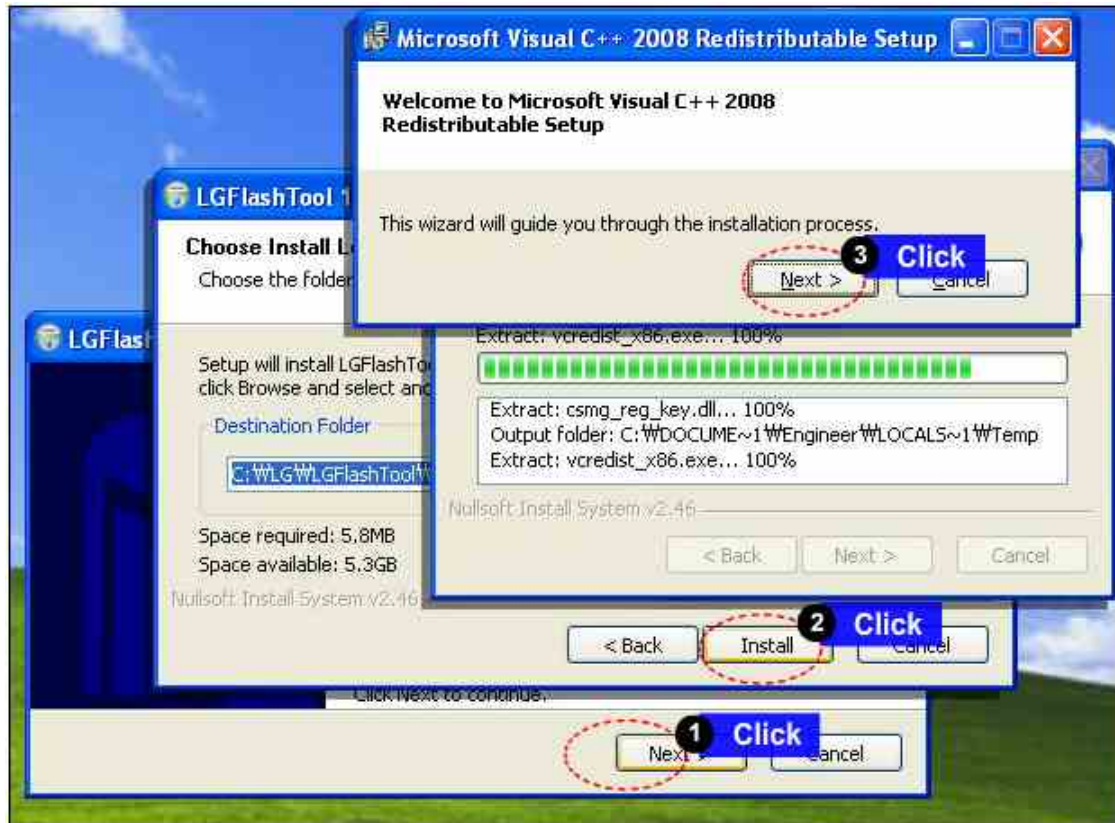


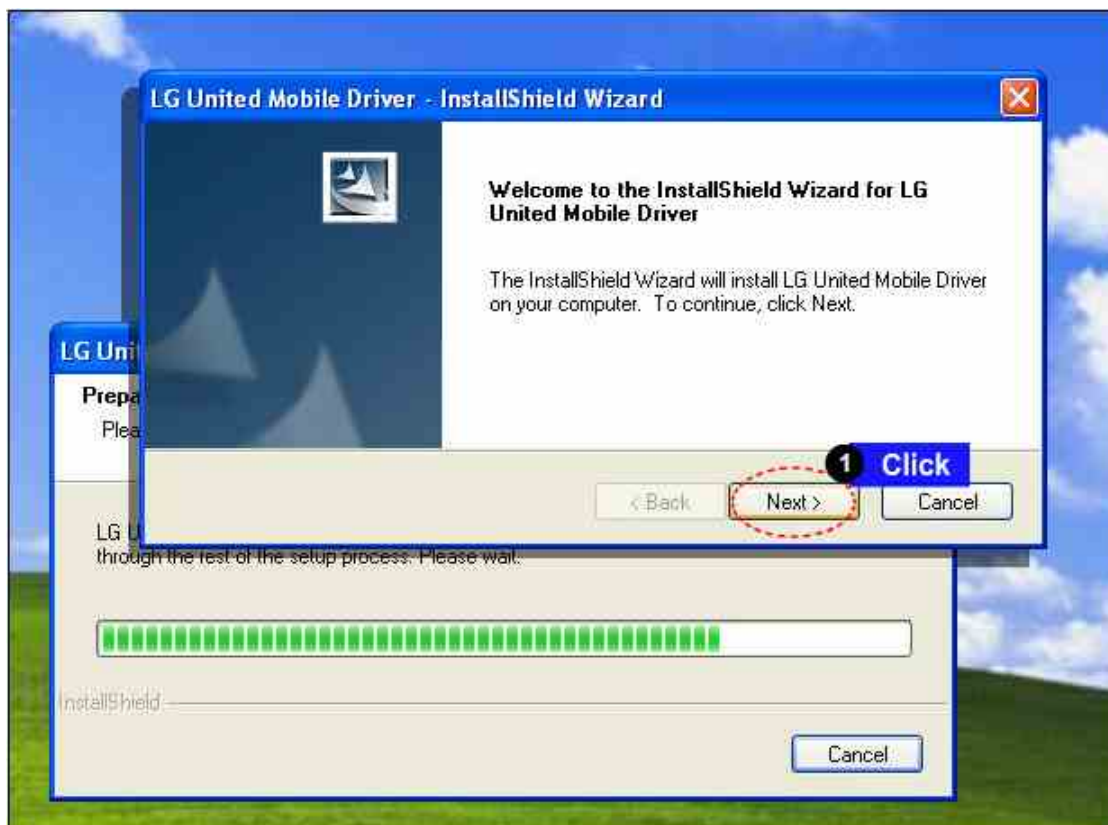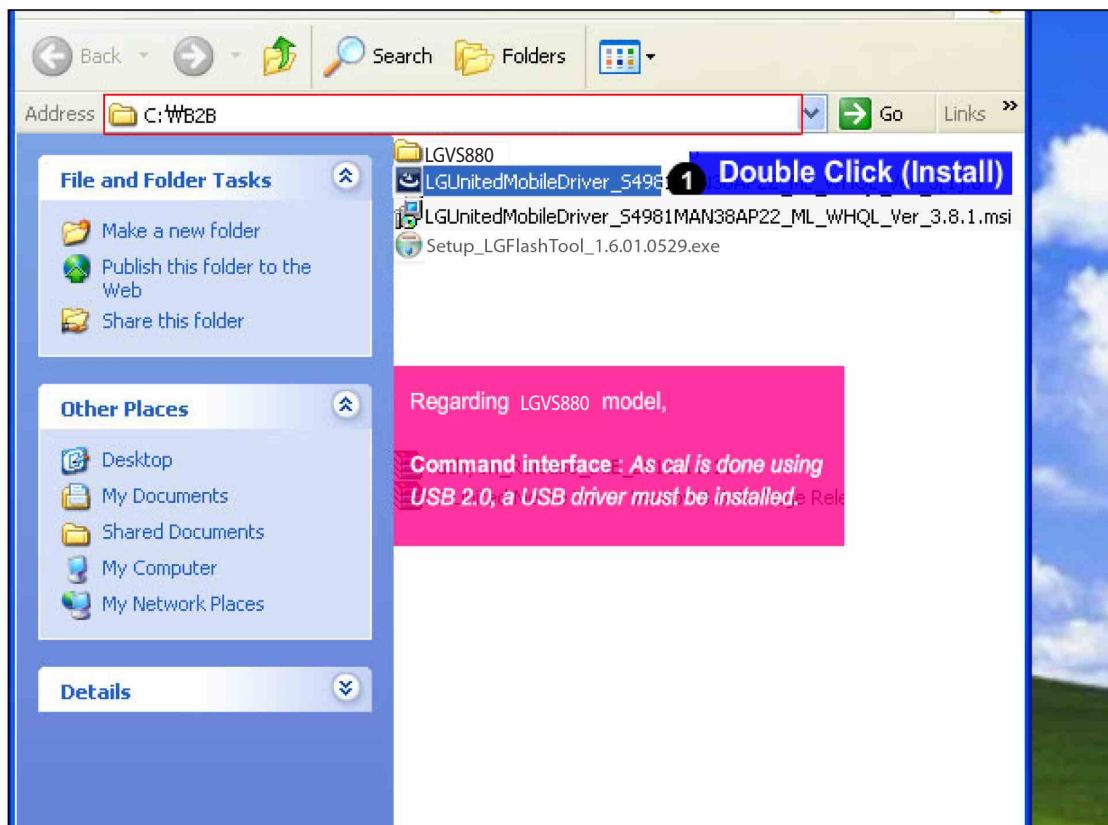


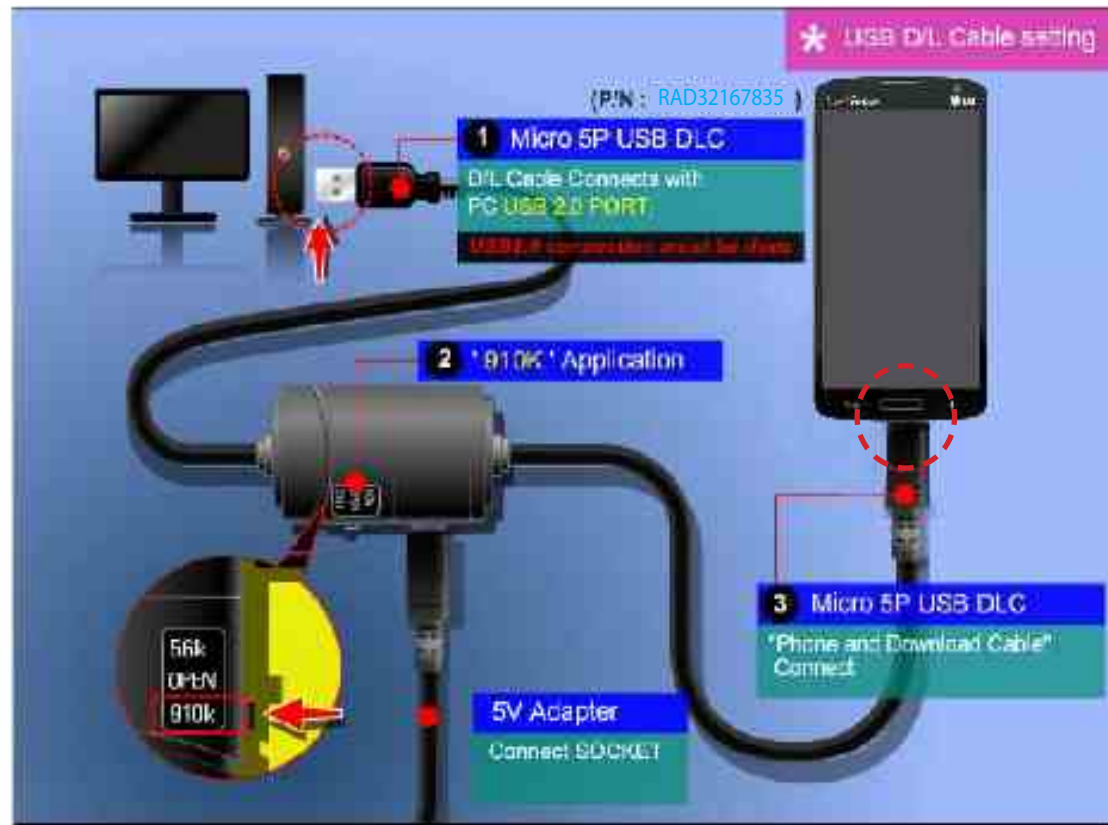


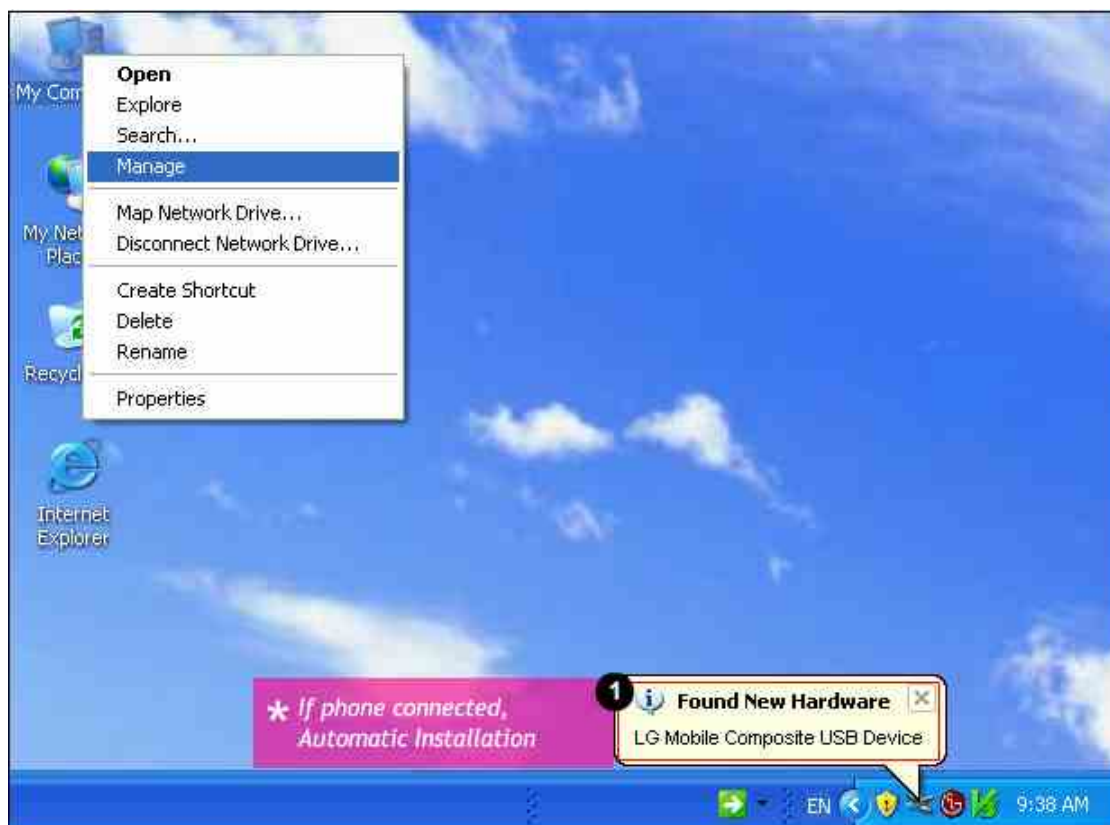



4. DOWNLOAD

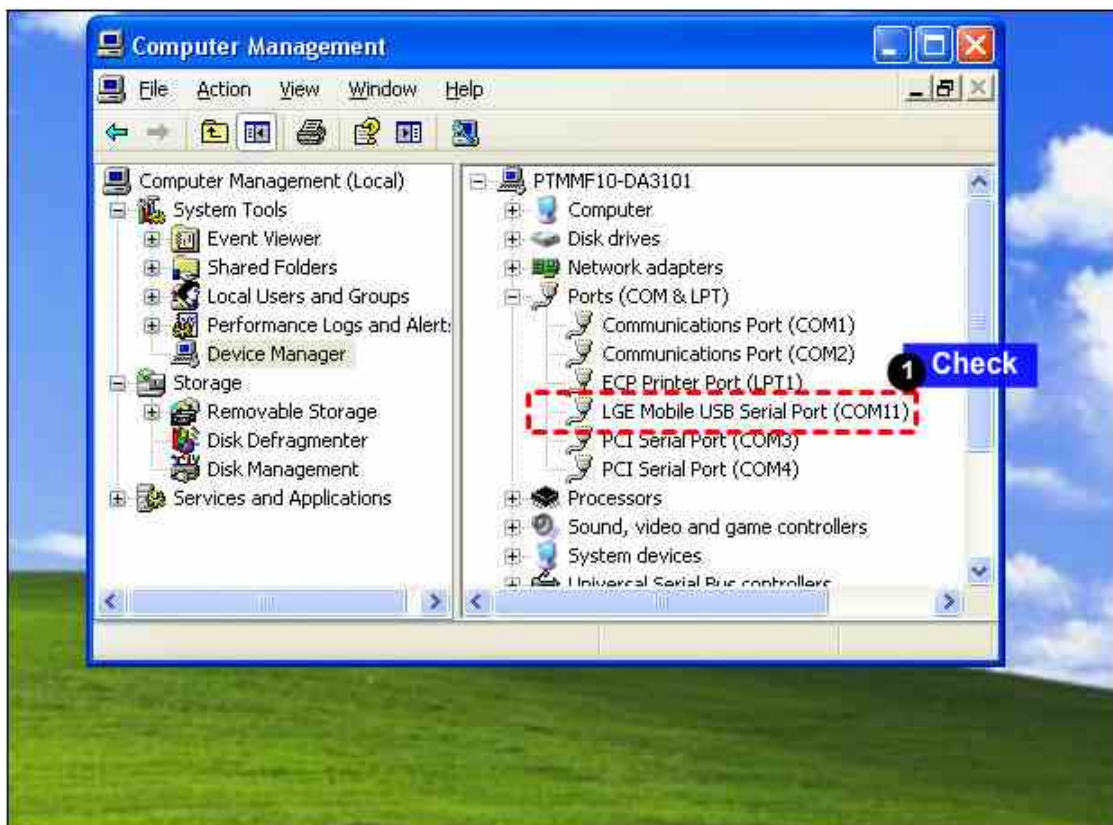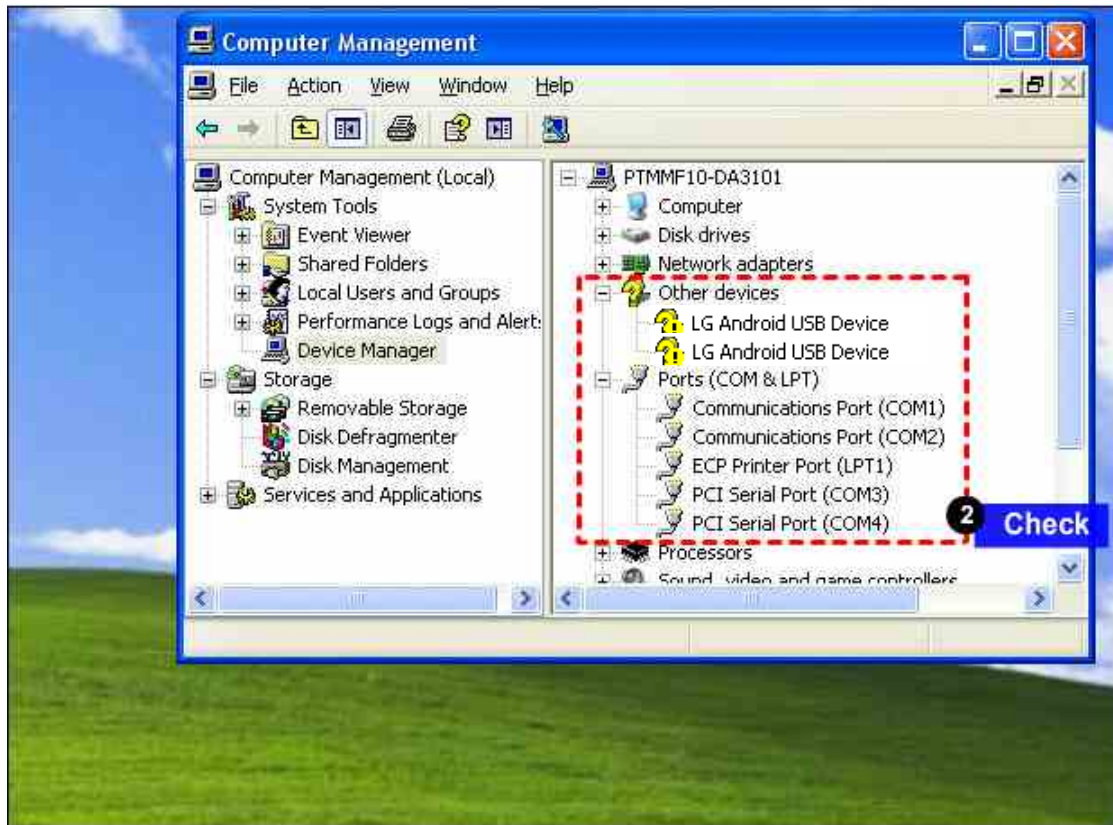



4. DOWNLOAD

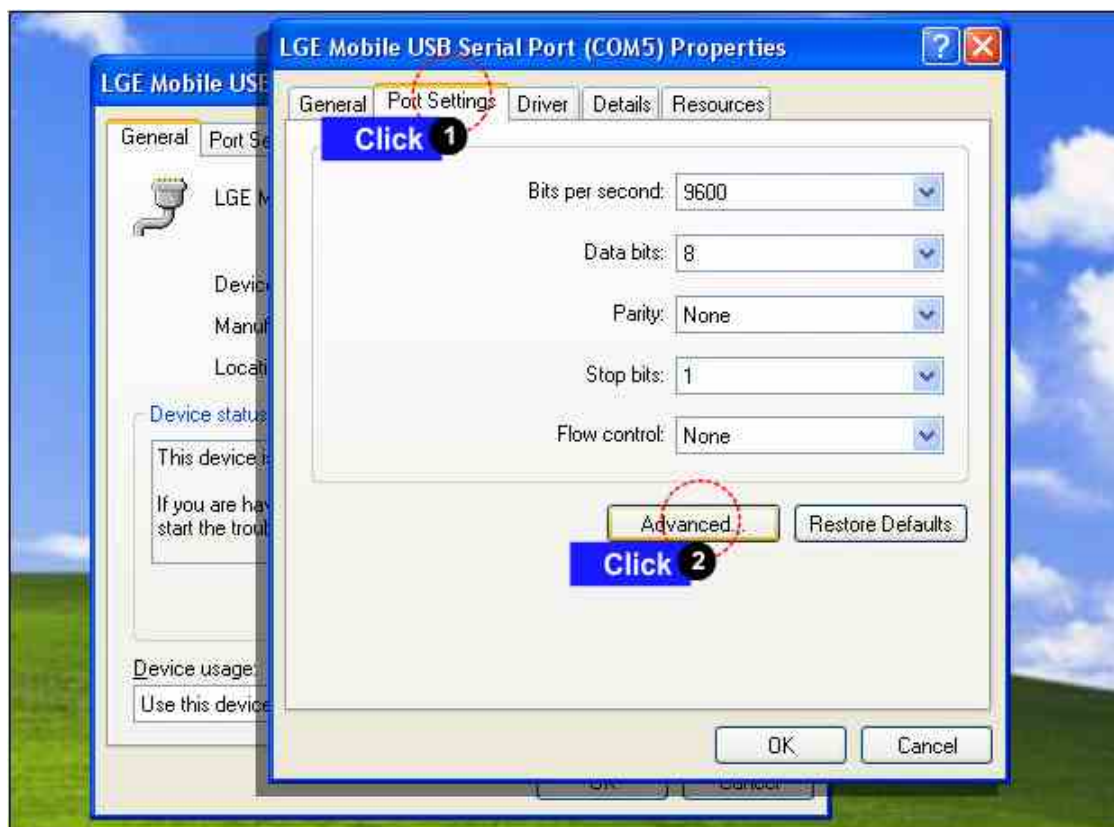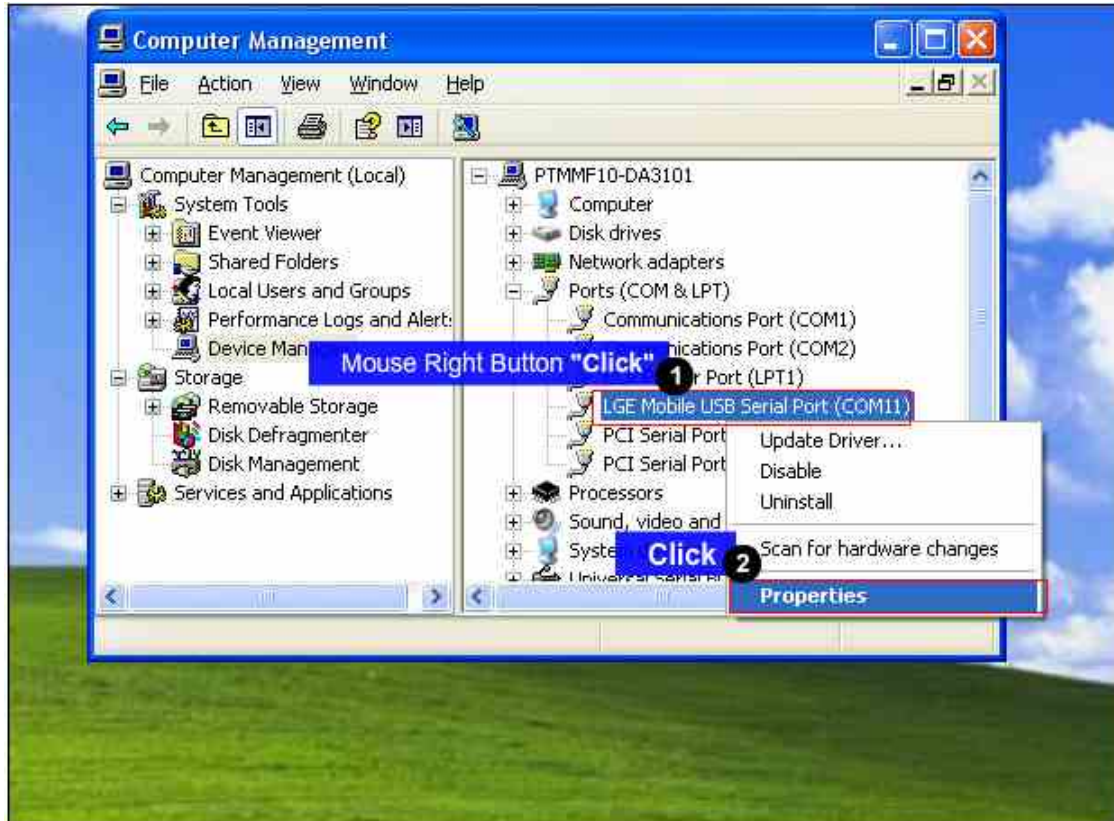



4. DOWNLOAD

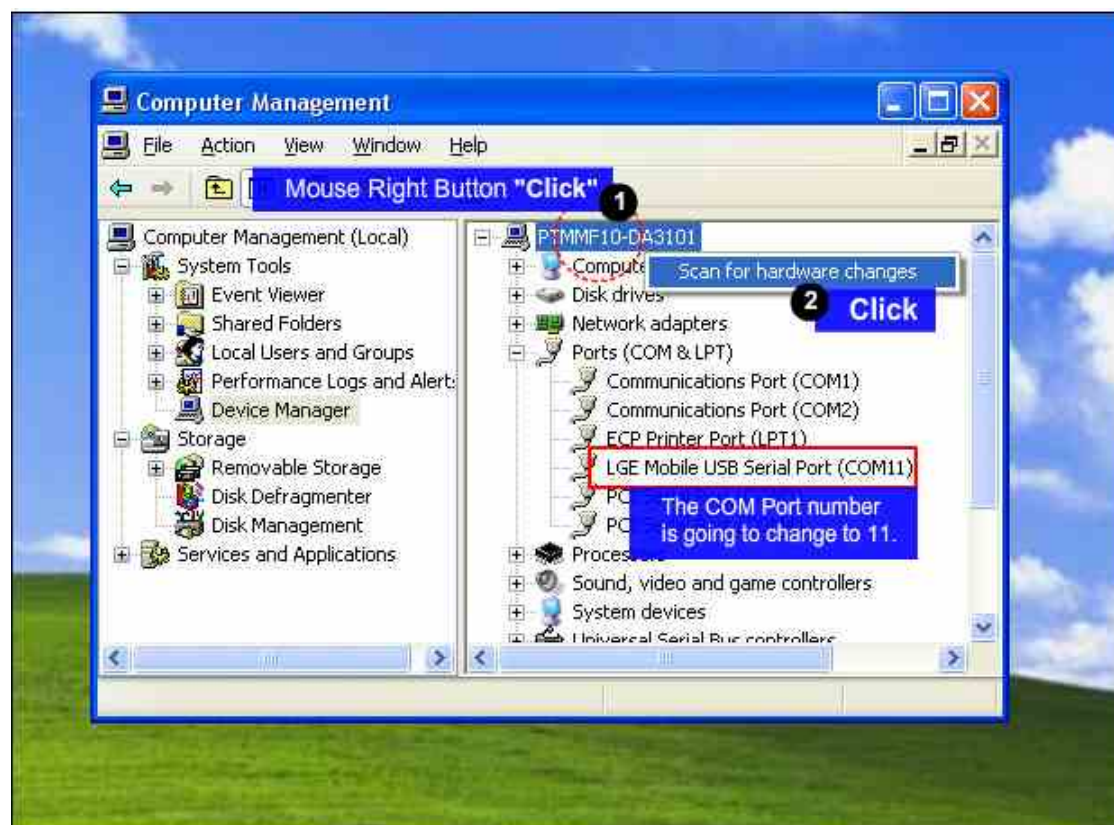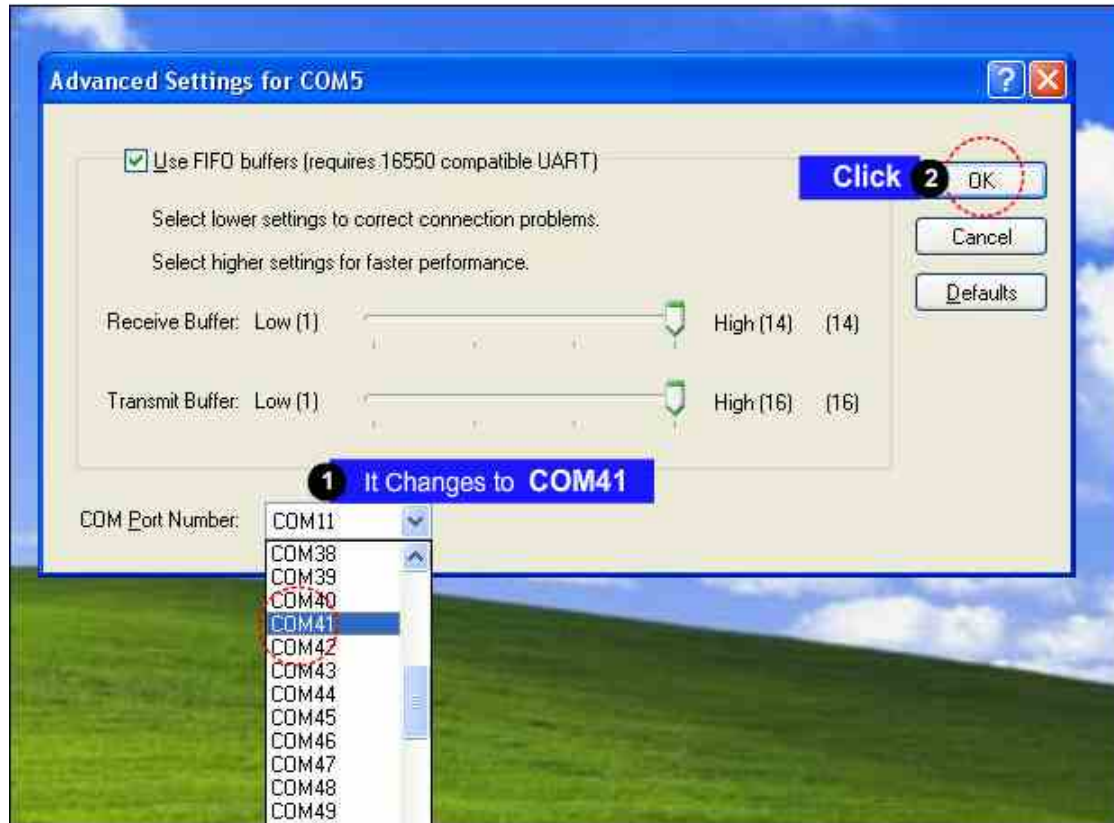



4. DOWNLOAD

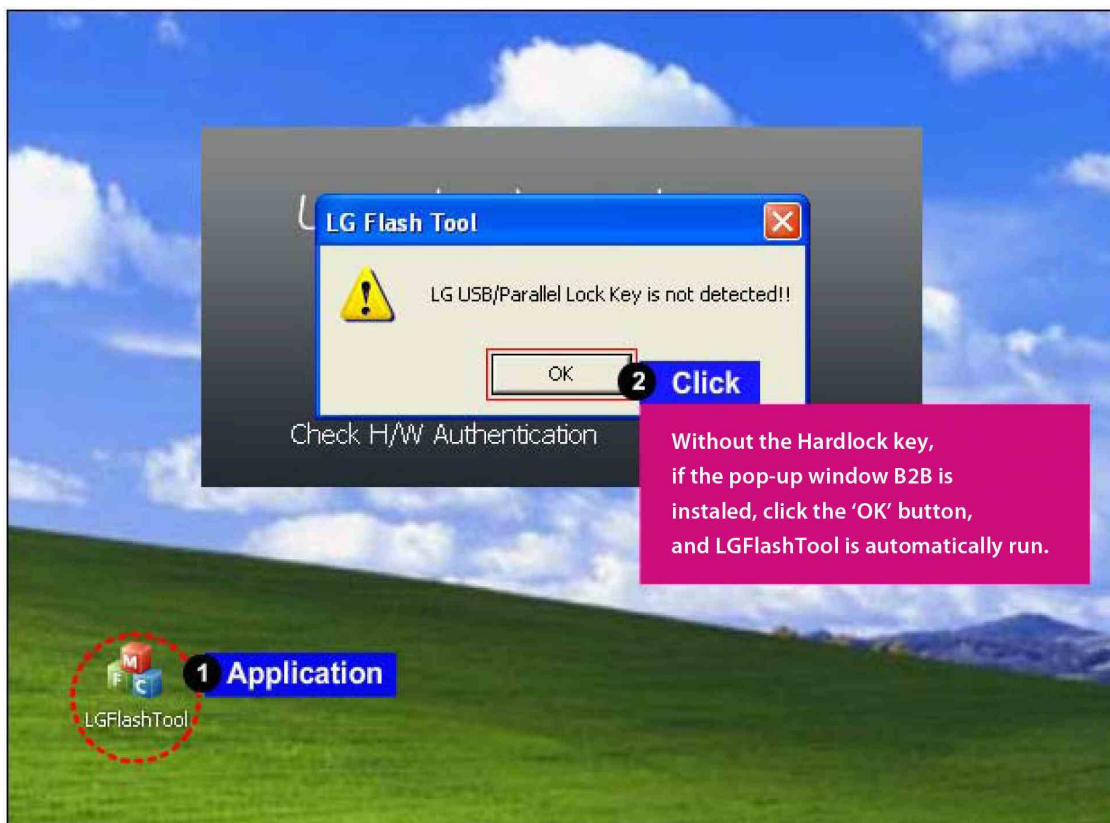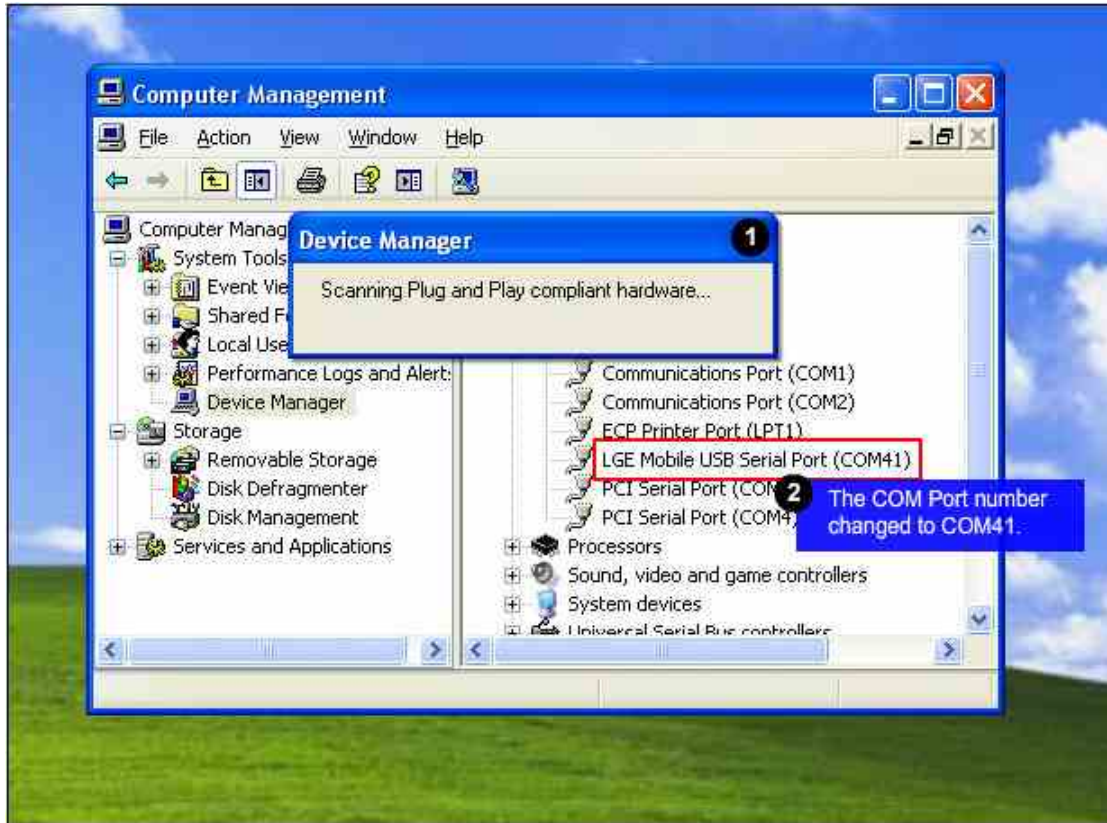



4. DOWNLOAD

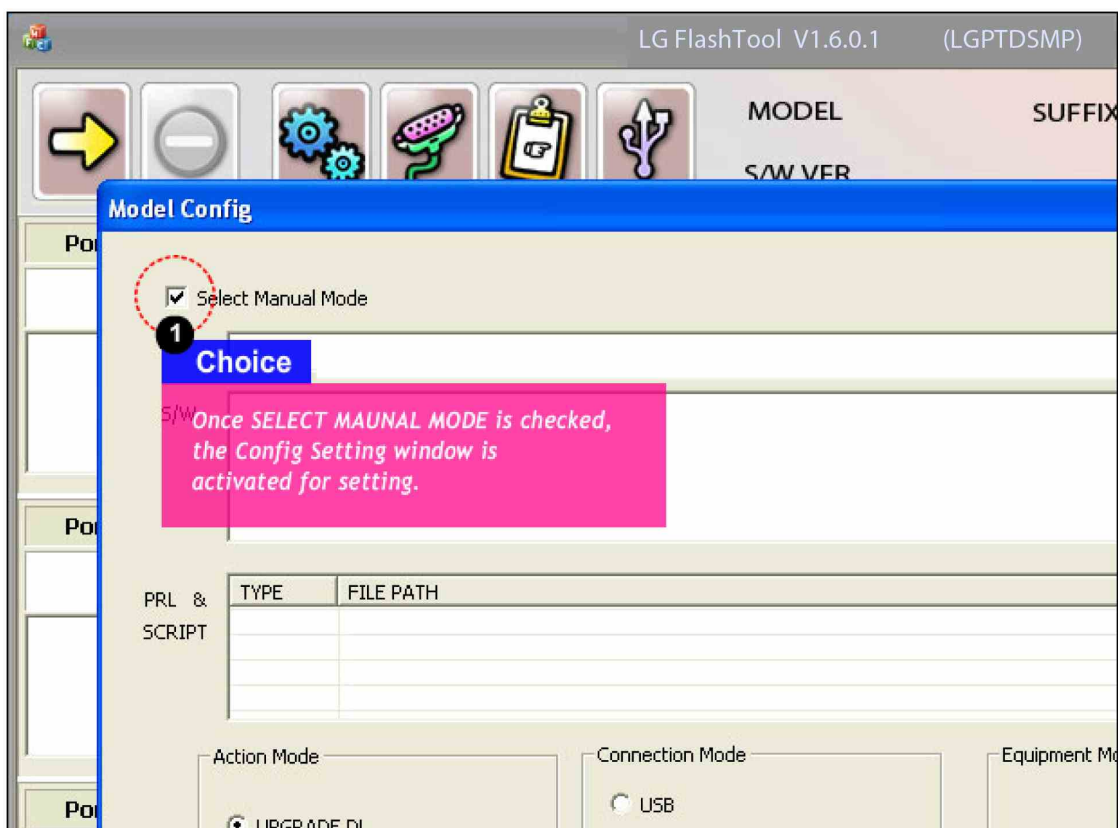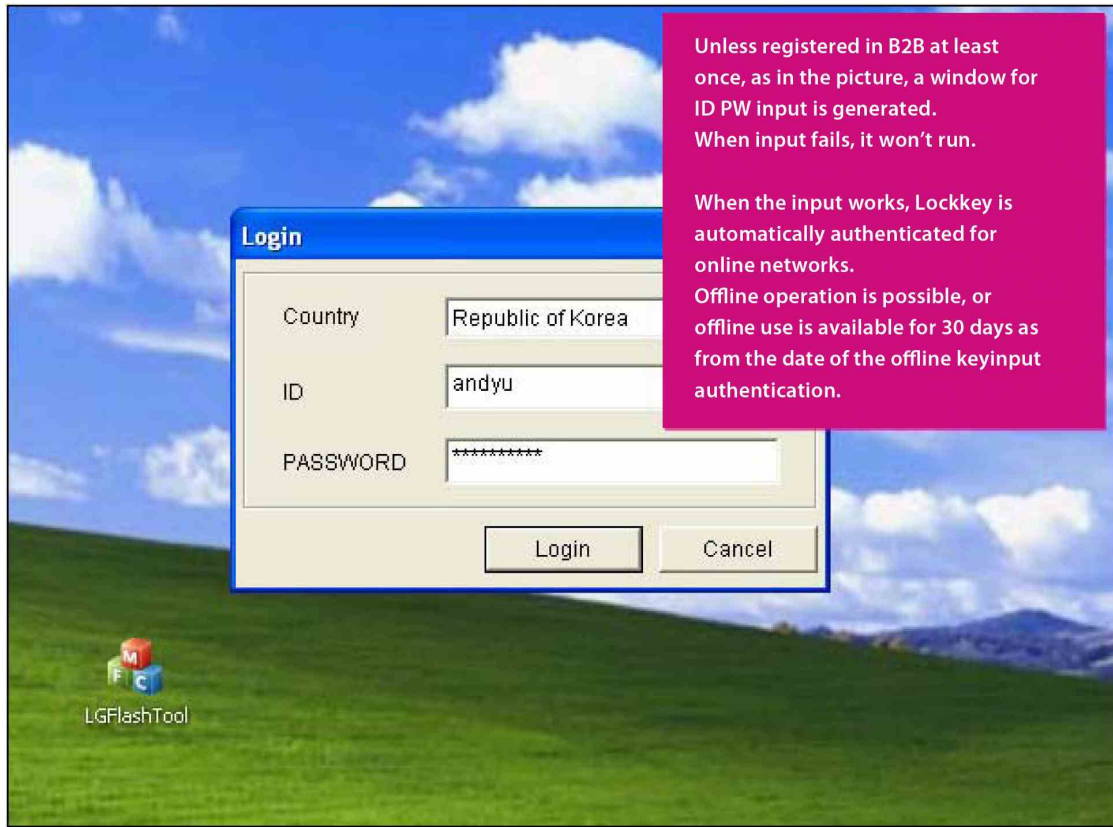


4. DOWNLOAD

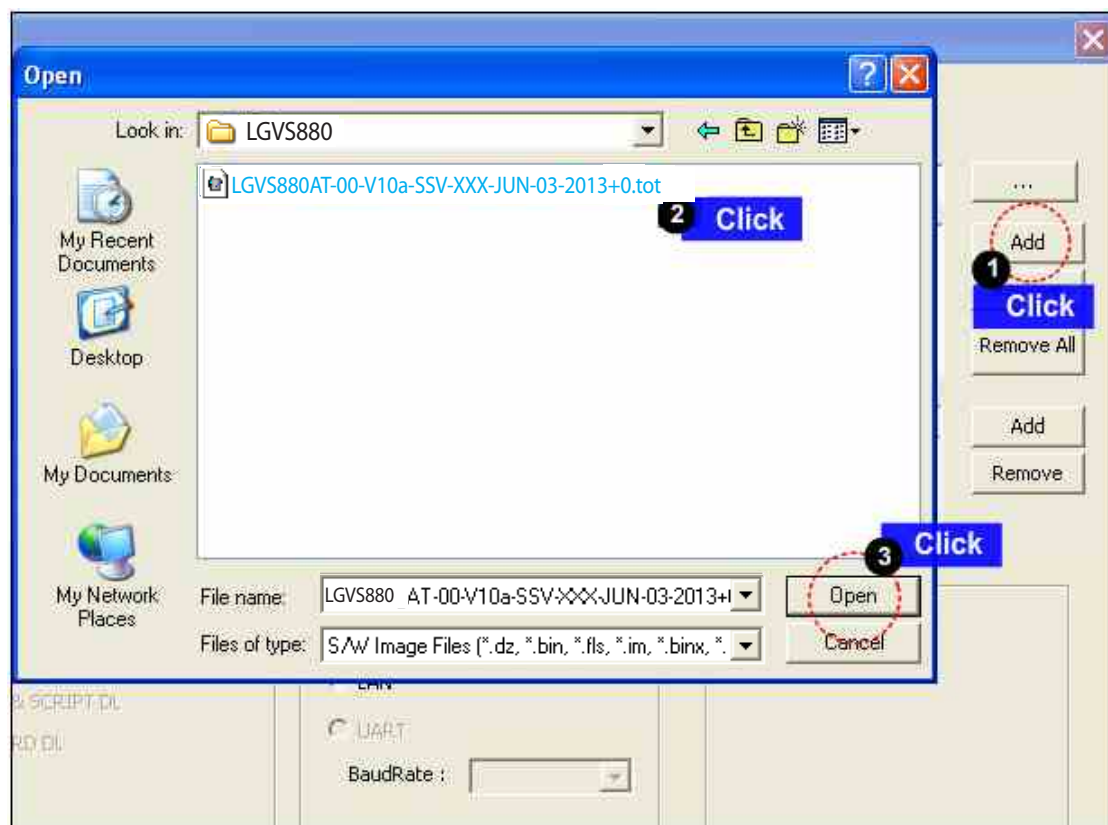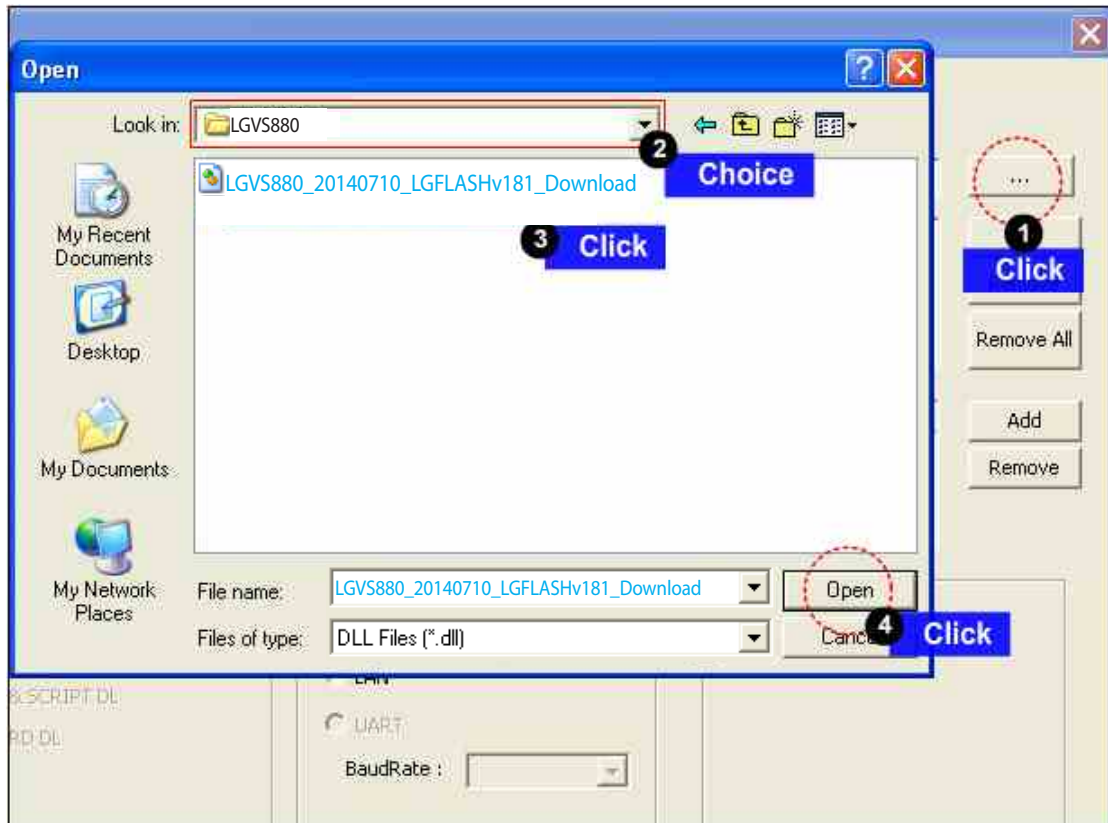



4. DOWNLOAD

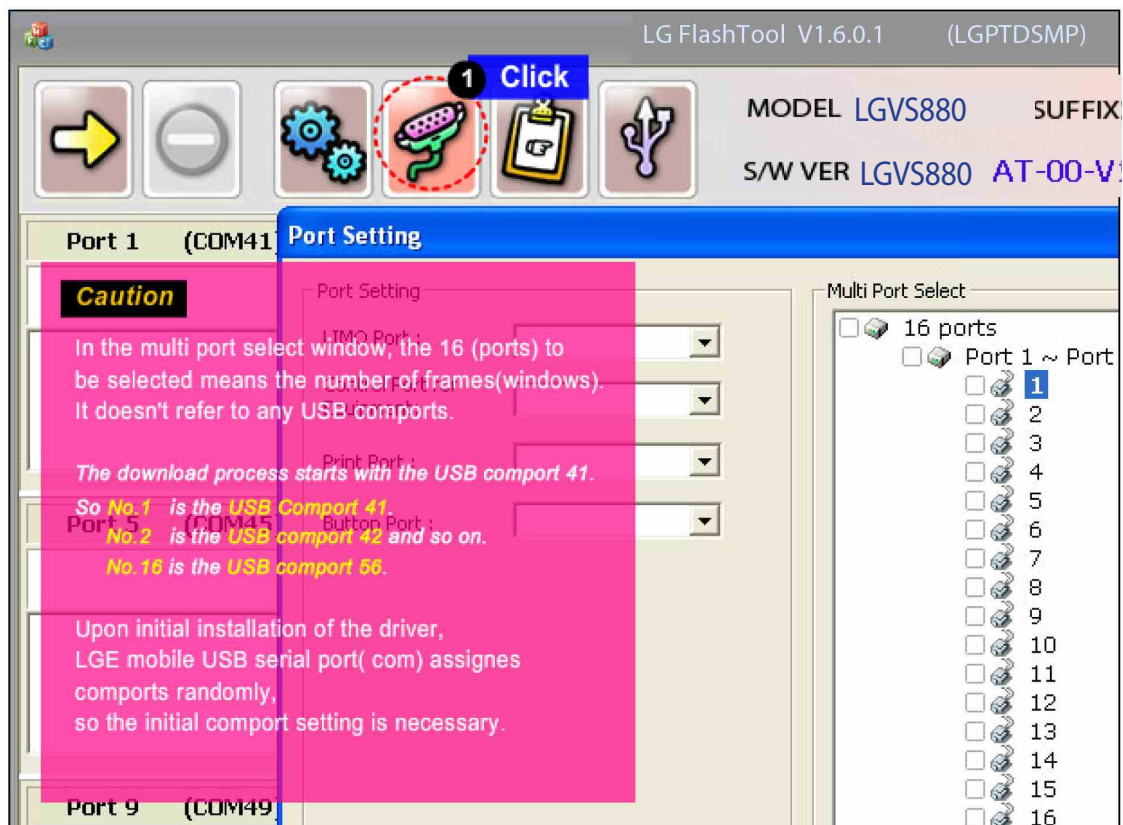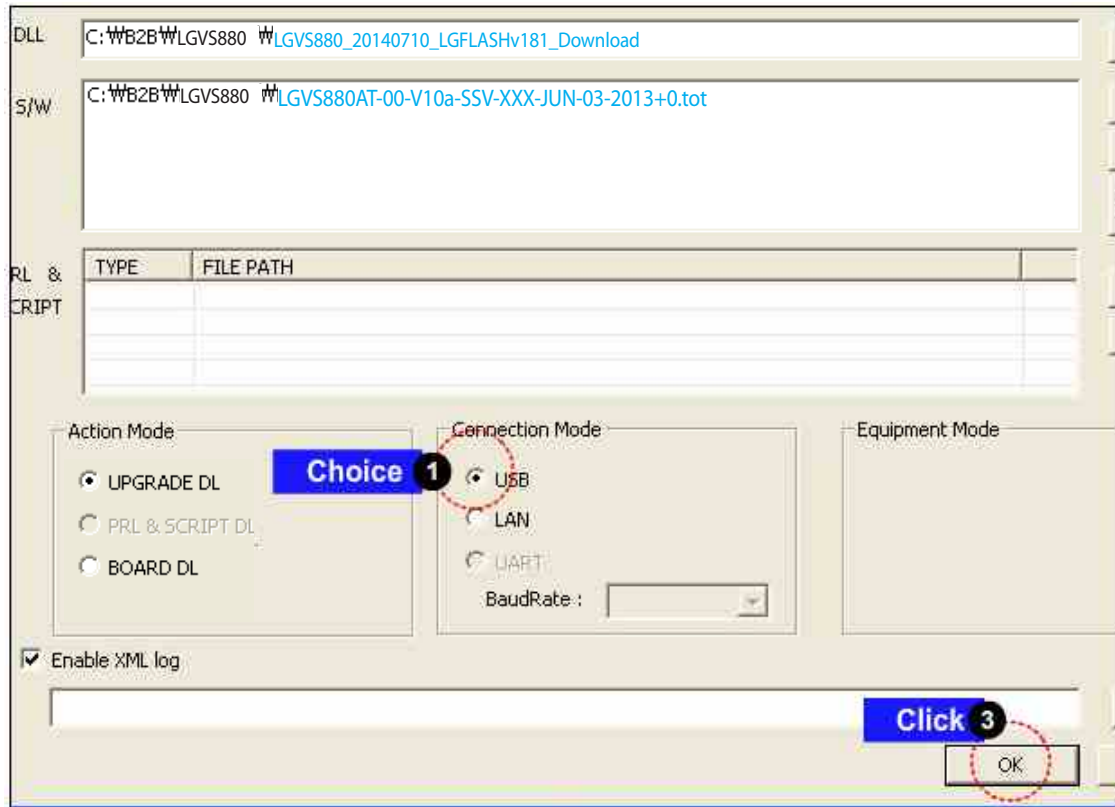


4. DOWNLOAD

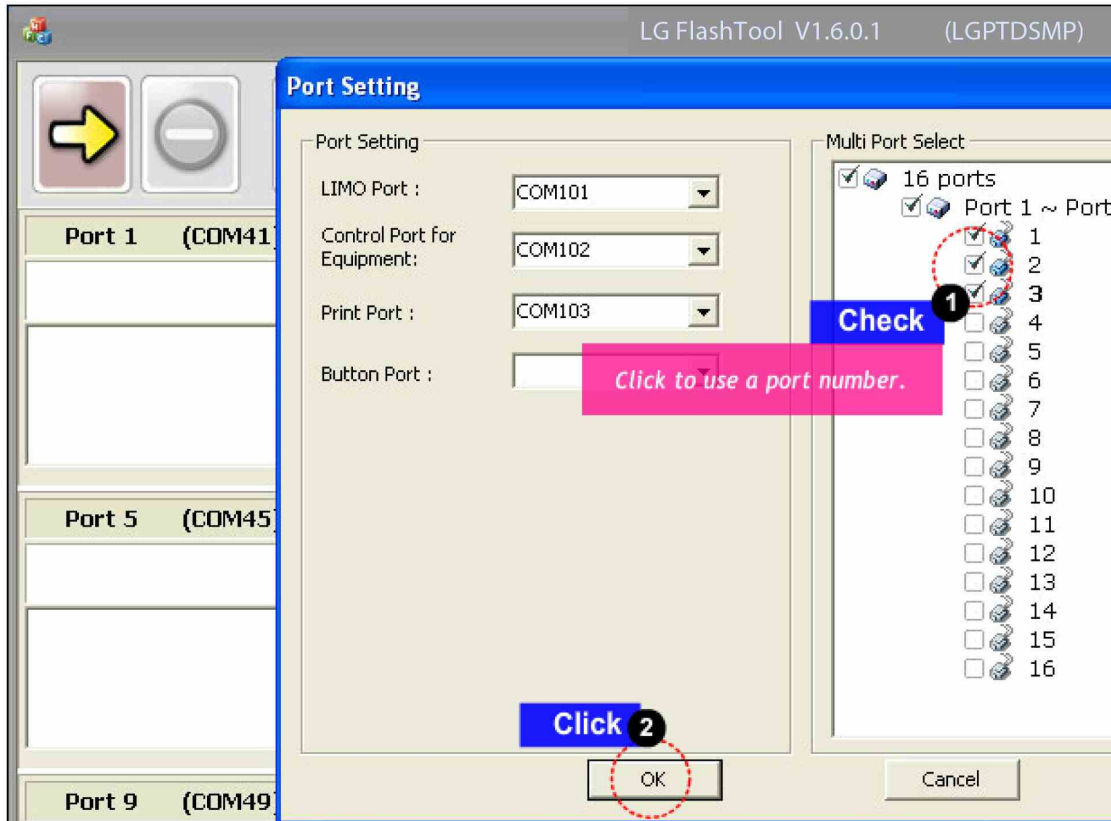

4. DOWNLOAD

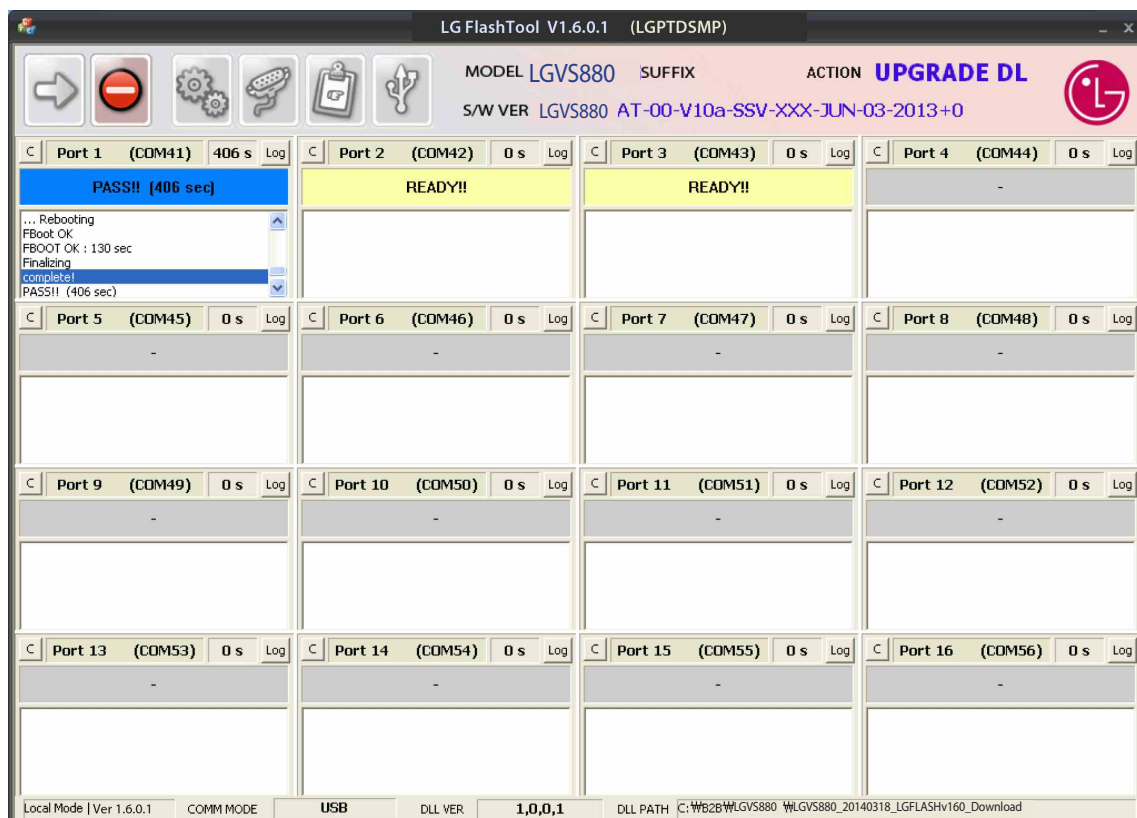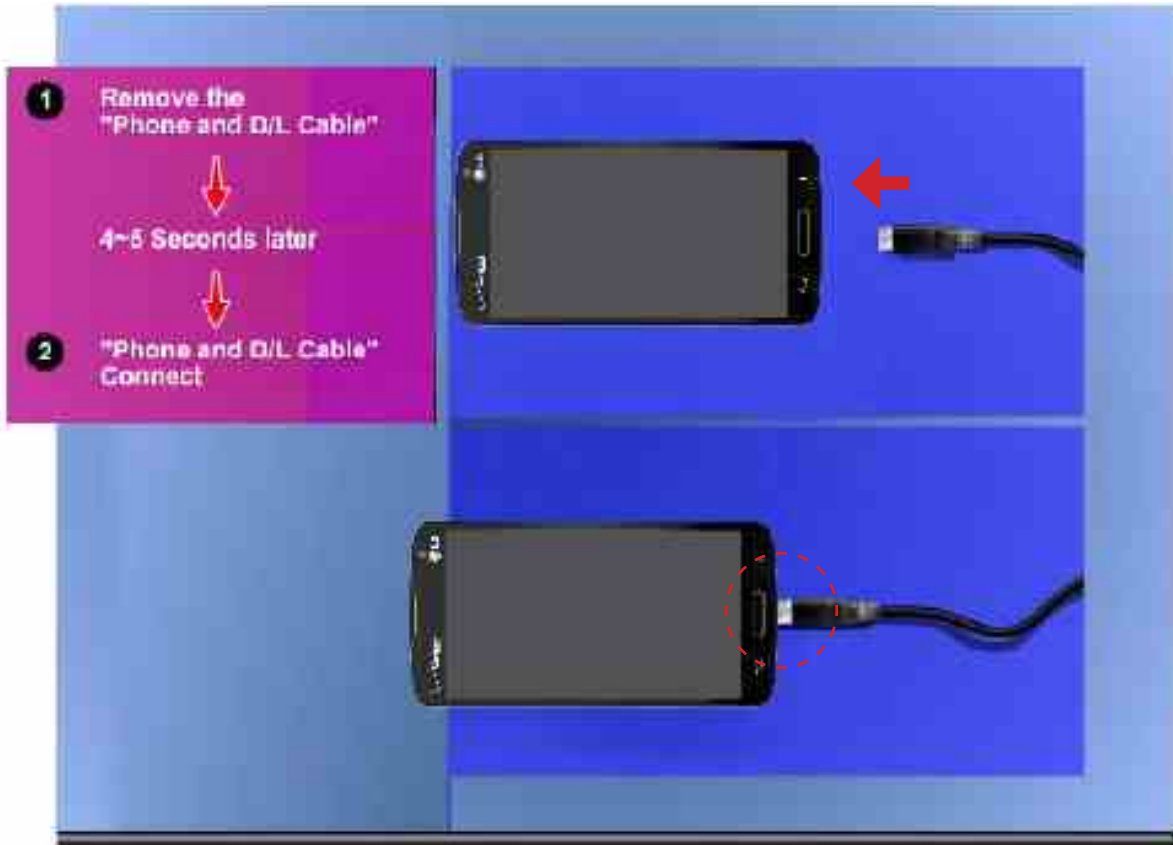


4. DOWNLOAD

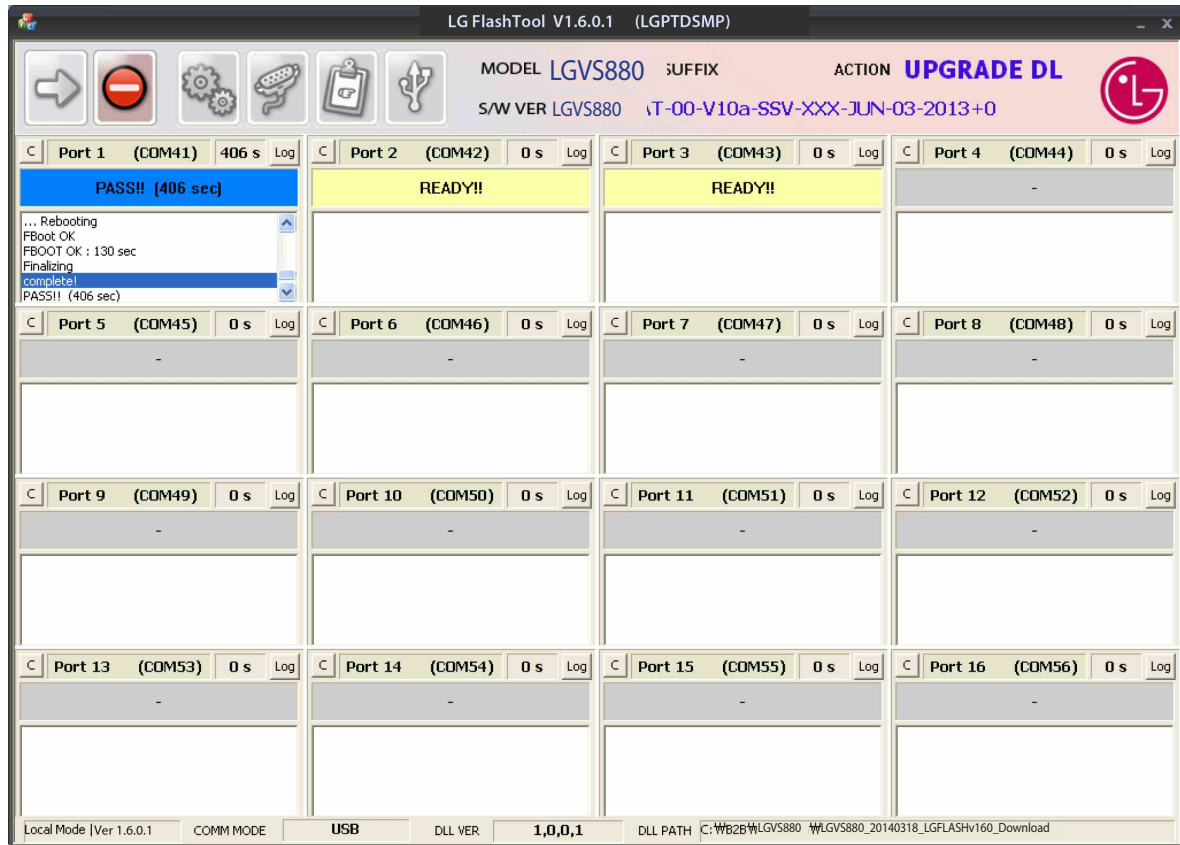


5. BLOCK DIAGRAM

[VS880] MSM8926 Total system

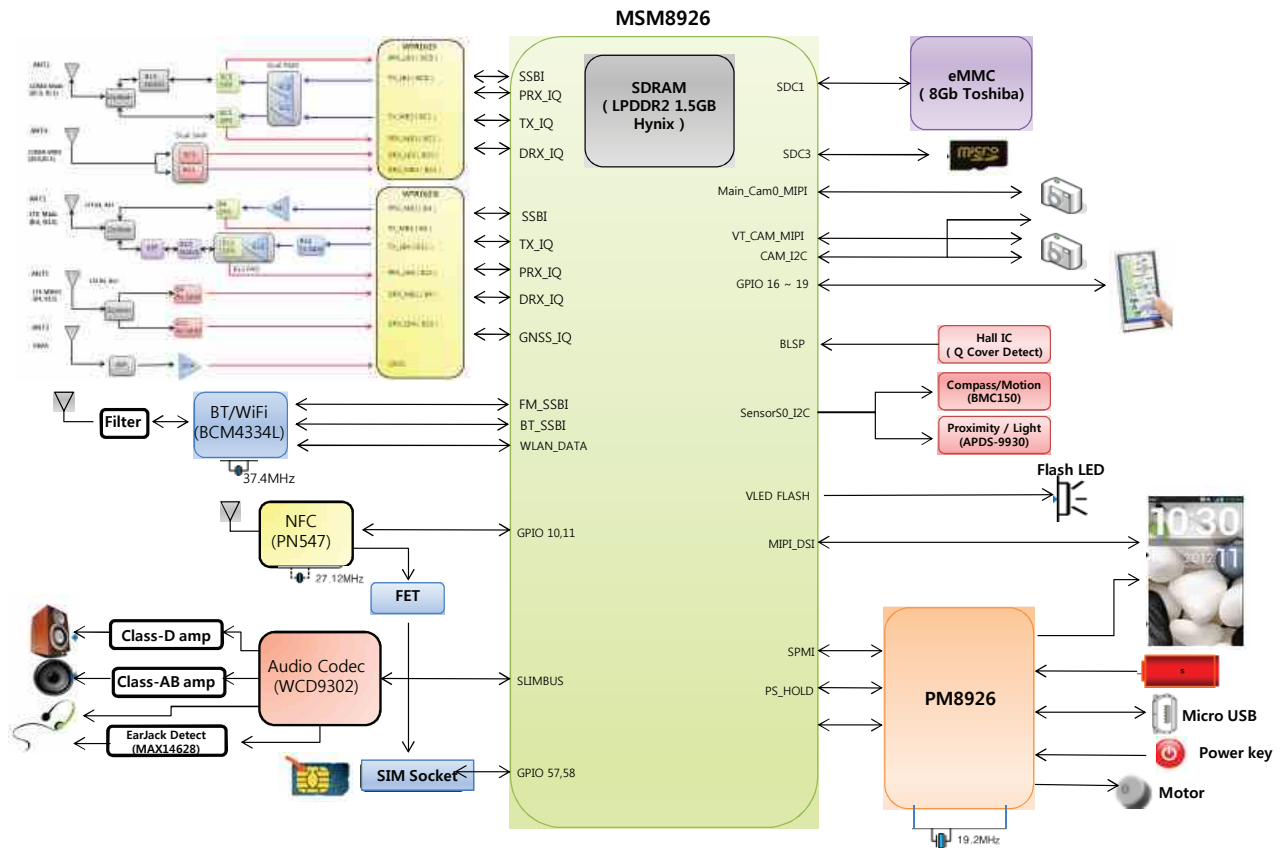


5. BLOCK DIAGRAM

[VS880] MSM8926 RF Main

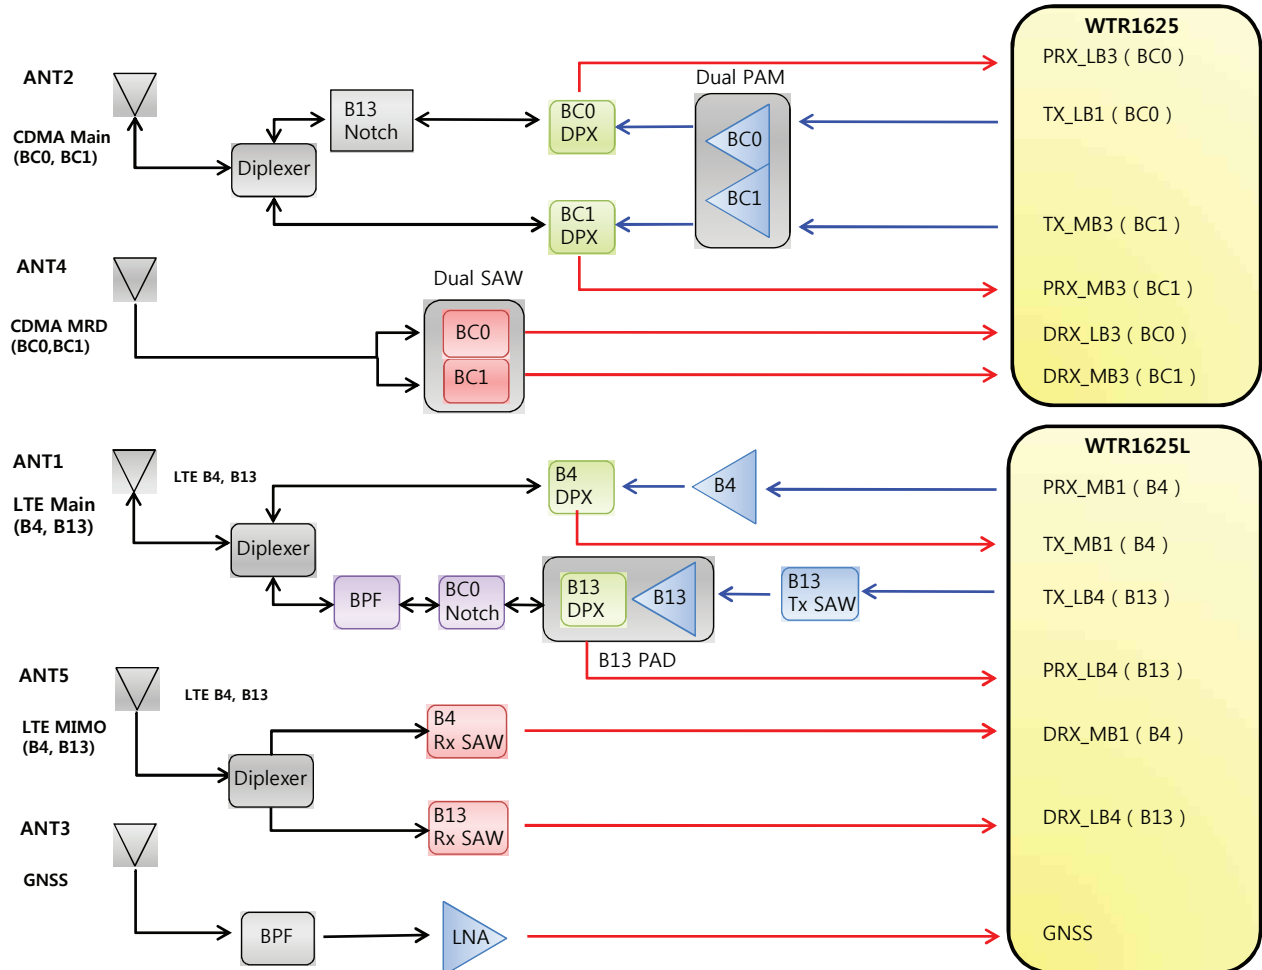


5. BLOCK DIAGRAM

[VS880] MSM8926 BT/WiFi

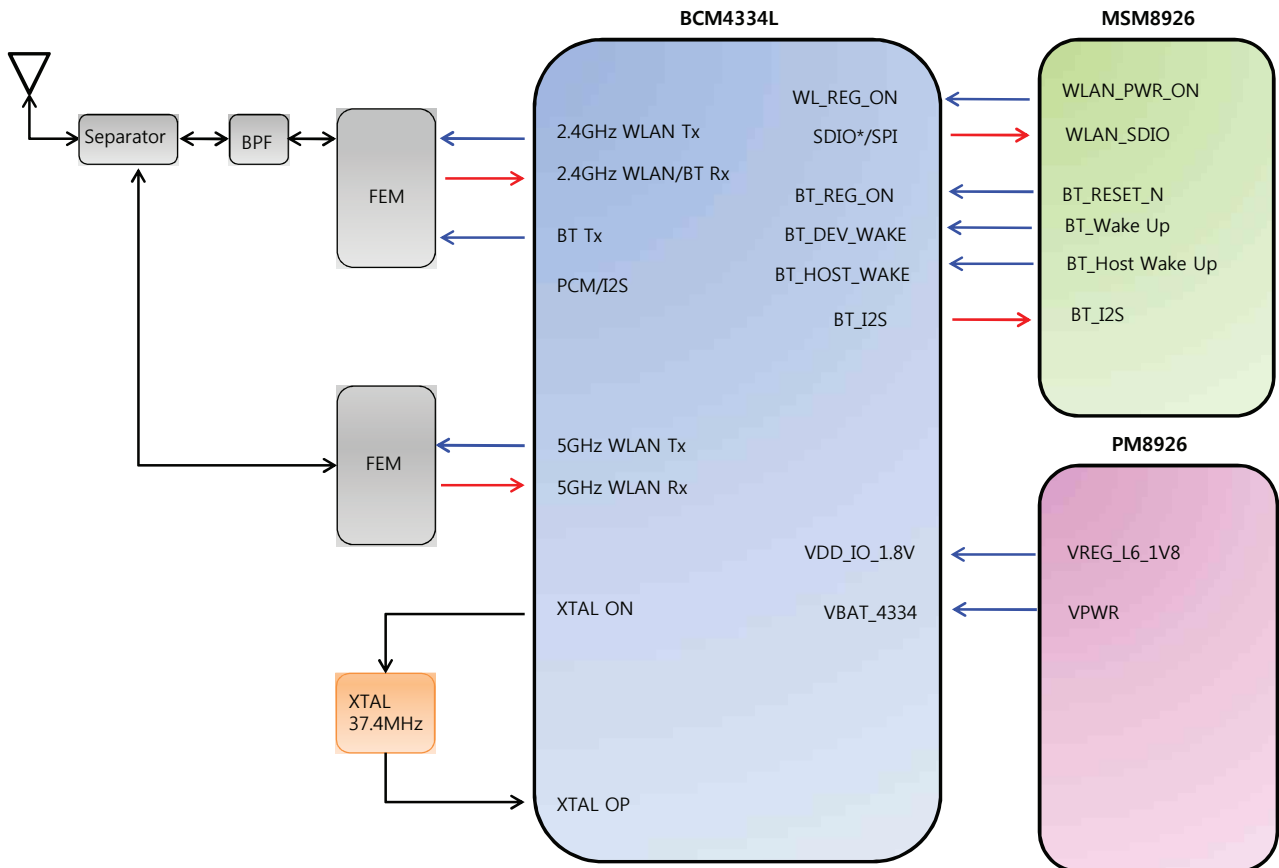


5. BLOCK DIAGRAM

[VS880] MSM8926 NFC

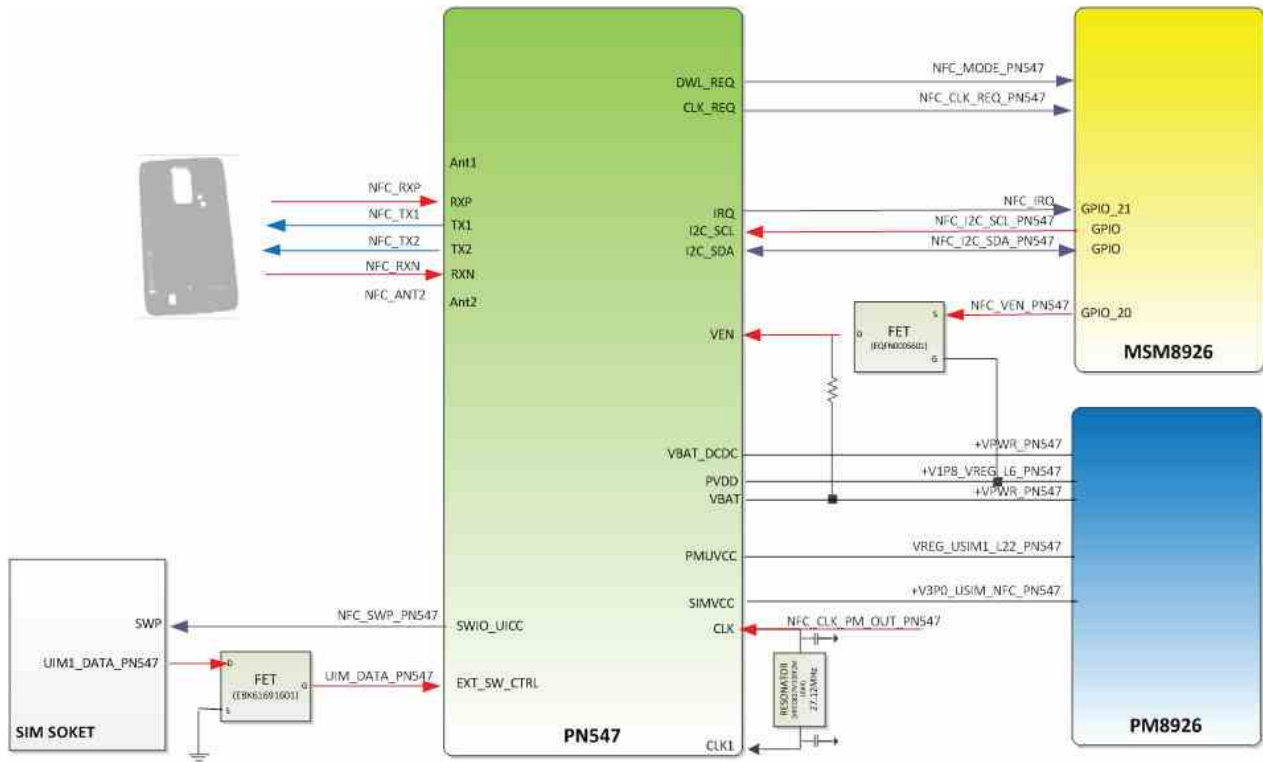


5. BLOCK DIAGRAM

[VS880] MSM8926 Power

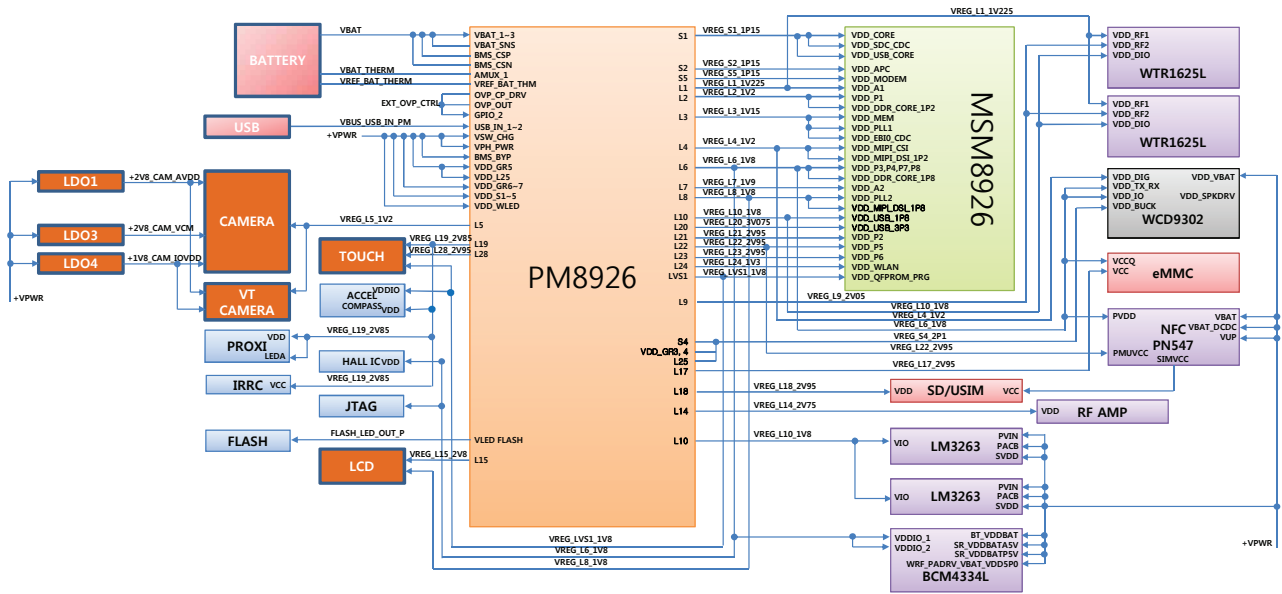


[VS880] MSM8926 Memory

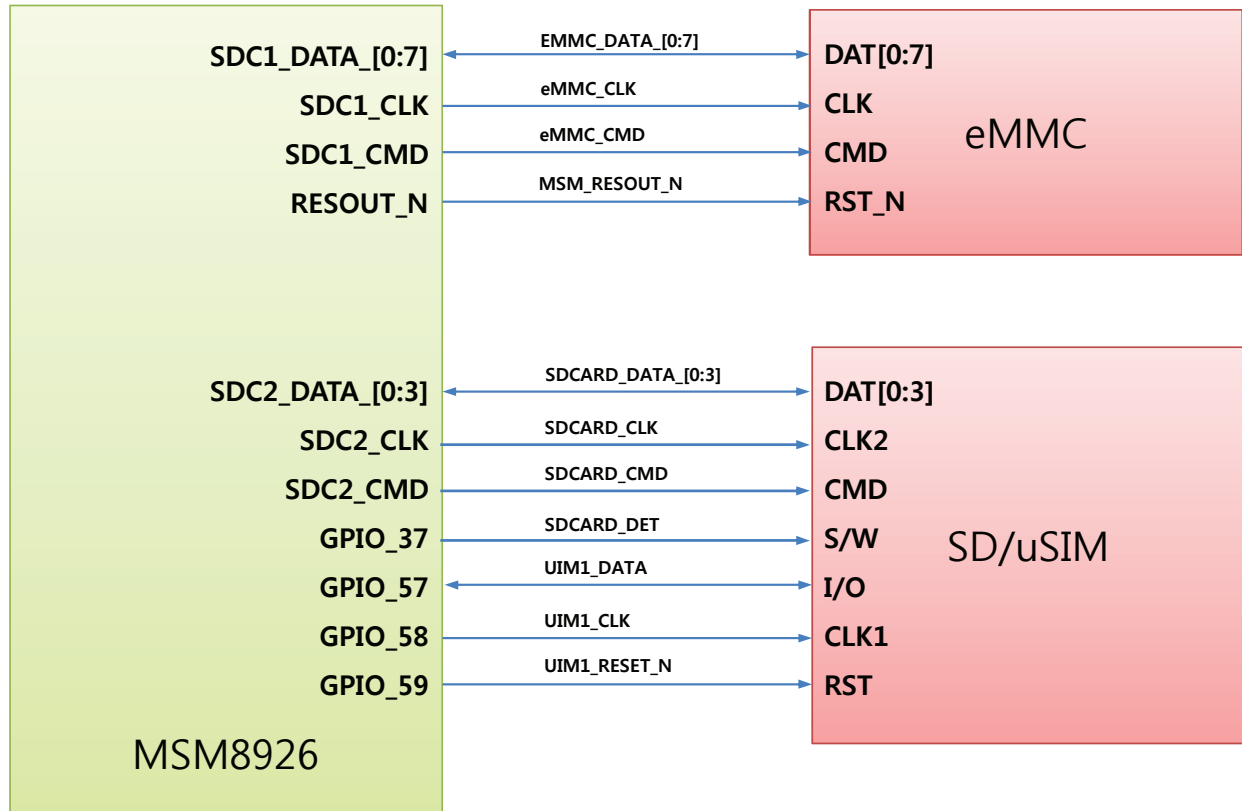


5. BLOCK DIAGRAM

[VS880] MSM8926 Audio

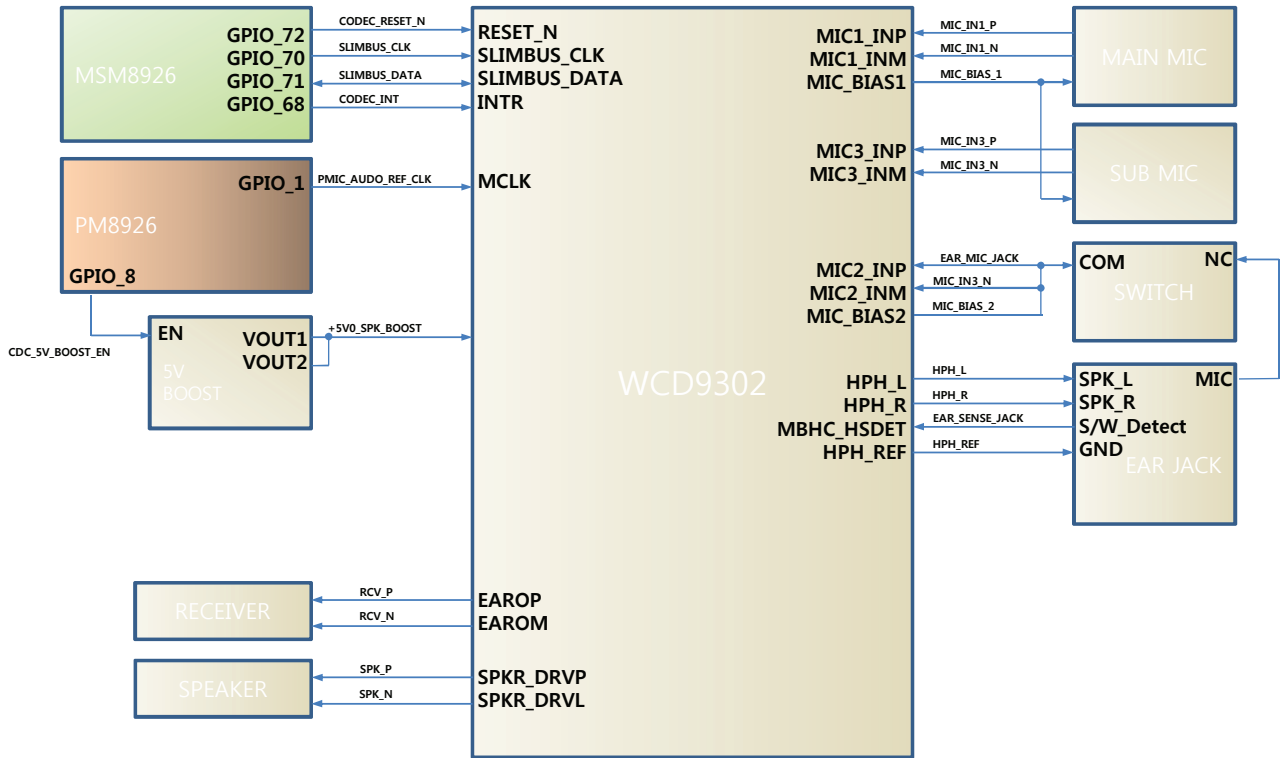


5. BLOCK DIAGRAM

[VS880] MSM8926 LCD/ TOUCH/FLASH

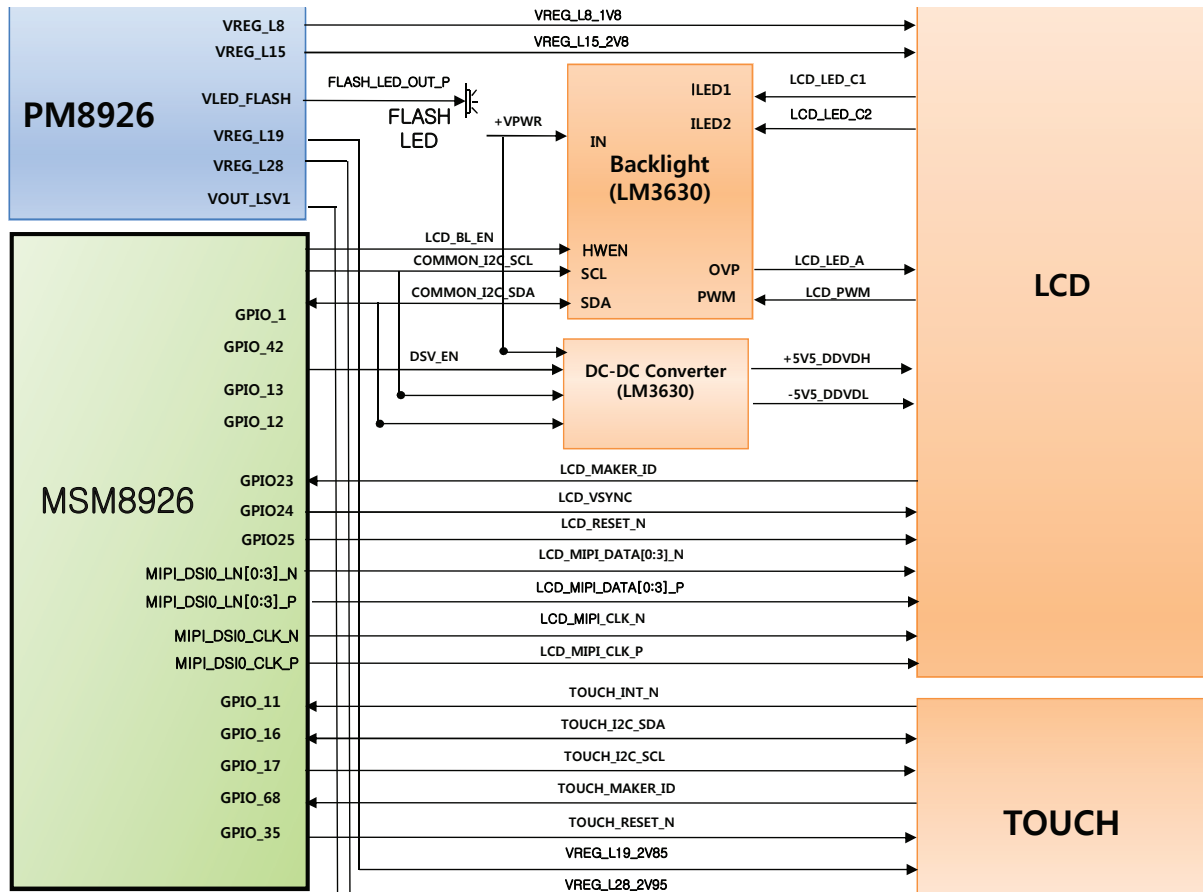


[VS880] MSM8926 CAMERA

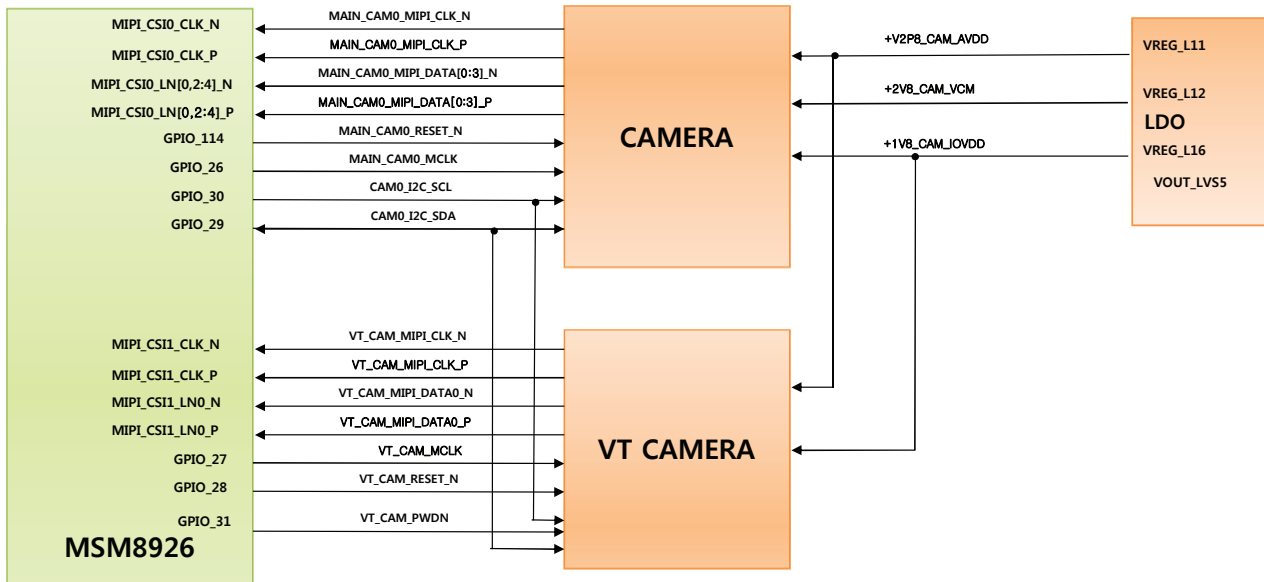


5. BLOCK DIAGRAM

[VS880] MSM8926 Sensor, Hall IC, IRR


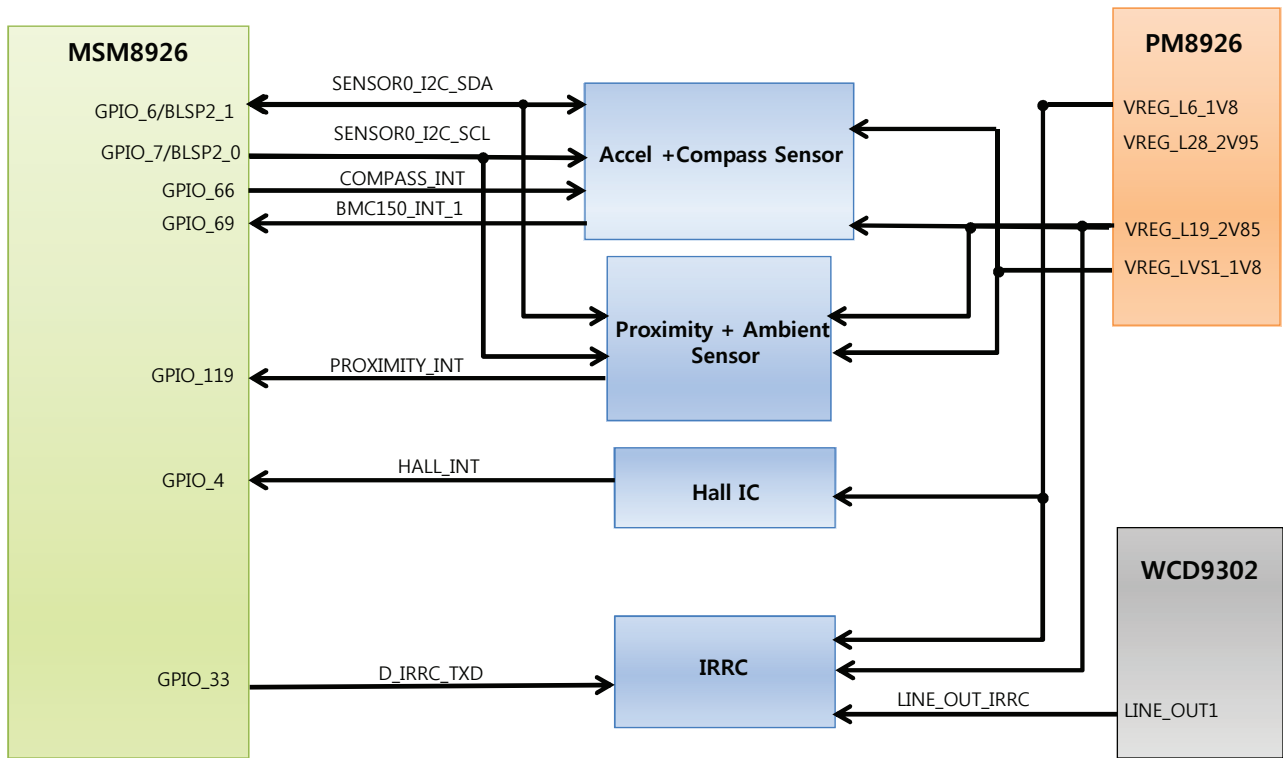


5. BLOCK DIAGRAM

[VS880] MSM8926 uUSB, Motor, Back key

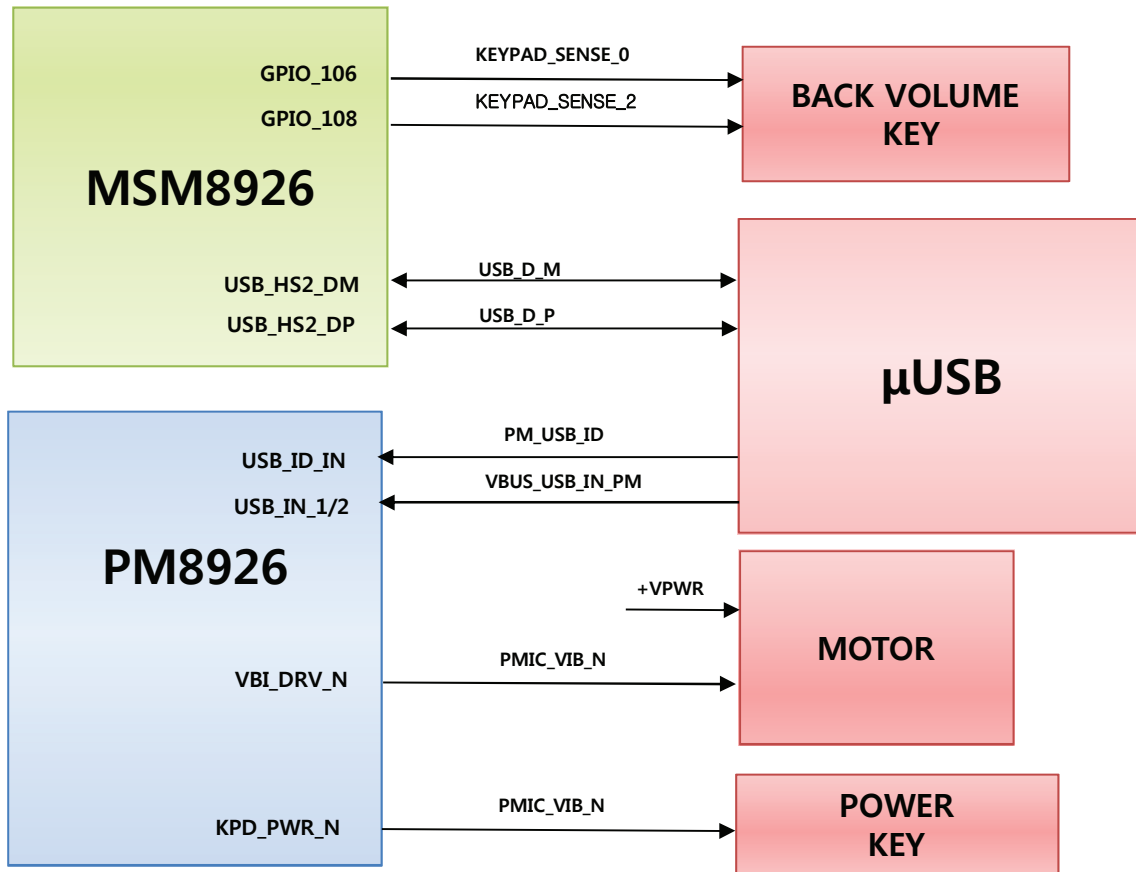


Rev_0.3

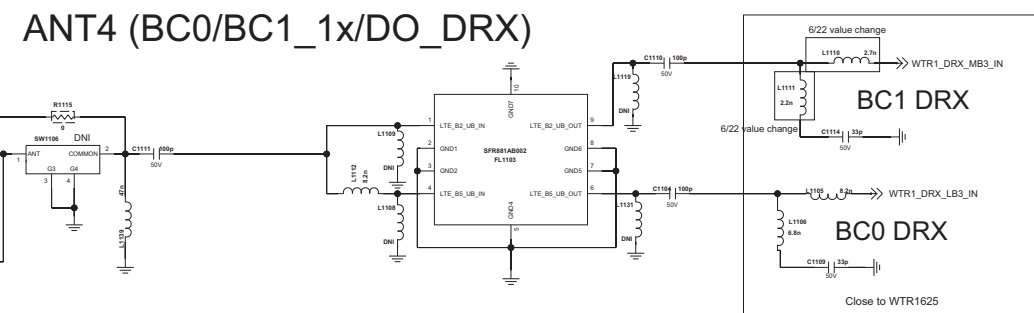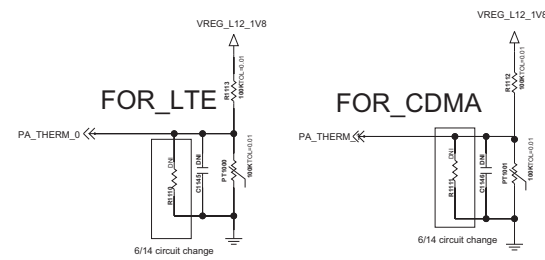[illegible][illegible]

< 1-3-6-3_TRX_B13_B4 >


Rev_0.3

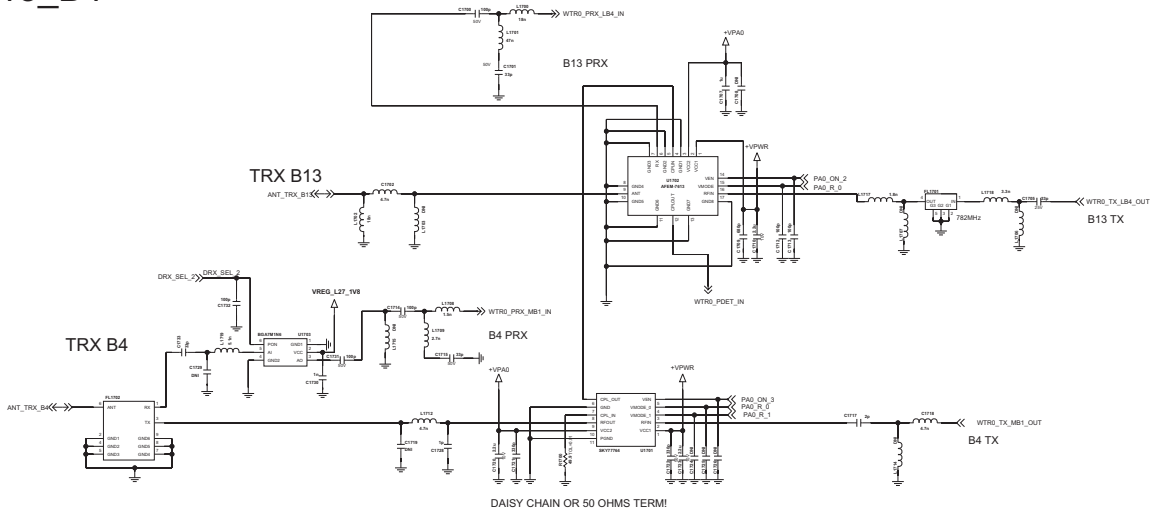

< 1-3-4-2_PT_APT_LM3263 >

Rev_0.3


FOR ONLY SVLTE(IF NOT SVLTE, REMOVE THAT)

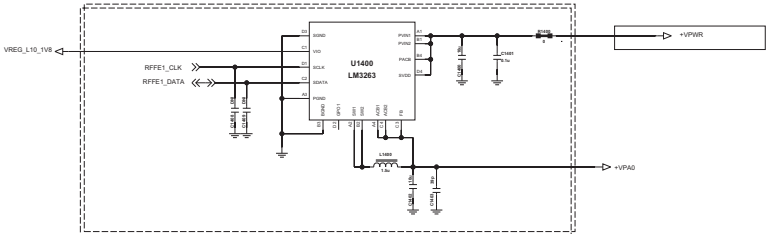


< 1-3-5-2_RFIC_SVLTE_WTR1625 >

Rev_0.3


RF PORT MAP TABLE FOR WTR1625(L)+WFR2600 v01						
WTR1625 RF PORT MAPPING						
RF PORT	KR	DCM, KDDI	ATT, TMUS, SPD	EU, GLOBAL	VZW, USC	
TX LB1_OUT	GSM LB		B5/26, BC0/10	B5/8, BC0	B5, B8	BC0
TX LB2_OUT			GSM LB	GSM LB	GSM LB	
TX LB3_OUT	B17			B20		
TX LB4_OUT	B5, B8	B6/18/19, BC0	B17		B12/13	
TX MB1_OUT			B11/21	B34/39	B4	
TX MB2_OUT	GSM HB	GSM HB	GSM HB	GSM HB	GSM HB	
TX MB3_OUT	B1, B2	B1, BC6	B1/2/25, BC1	B1/2	B1, B2	BC1
TX MB4_OUT	B3, B4			B3		
TX HB1_OUT	B7	B41	B7	B7		
TX HB2_OUT			B41	B38/40		
PRX LB1_IN	850, B5	B6/18/19, BC0		B29	B3	
PRX LB2_IN	900, B8	900	900	900, B8	B8, G900	
PRX LB3_IN		850, B5/26, BC0/10	850, B5, BC0		B5, G850	BC0
PRX LB4_IN	B17		B17		B12/13	
PRX MB1_IN	B2	B11/21	B2/25, BC1	B2	B4	
PRX MB2_IN	GSM HB	GSM HB	GSM HB	GSM HB	G1800	
PRX MB3_IN			B3	B3	B2, G1900	BC1
PRX HB1_IN		B41	B41	B38/40		
PRX HB2_IN				B34/39		
PRX HB3_IN	B7		B7	B7		
PRX HMB4_IN		B1, BC6	B1/4	B1		
DRX LB1_IN	B8		B29	B20		
DRX LB2_IN	B5	B18/19, BC0		B8		
DRX LB3_IN			B5/26		B5	BC0
DRX LB4_IN	B17		B17		B12/13	
DRX MB1_IN		B11/21	B2/25, BC1		B4	
DRX MB2_IN				B39		
DRX MB3_IN				B3		BC1
DRX HB1_IN			B41	B38	B2	
DRX HB2_IN				B40		
DRX HB3_IN	B7		B7	B7		
DRX HMB4_IN		B1, BC6	B1/4	B1		
WFR1620 RF PORT MAPPING						
RF PORT	KR	DCM, KDDI	ATT, TMUS, SPD	EU, GLOBAL		
PRX MB1_IN			B2/25, BC1			
PRX MB2_IN	B3		B3			
PRX MB3_IN	B1/4		B1/4			
DRX MB1_IN			B2/25, BC1			
DRX MB2_IN	B3		B3			
DRX MB3_IN	B1/4		B1/4			

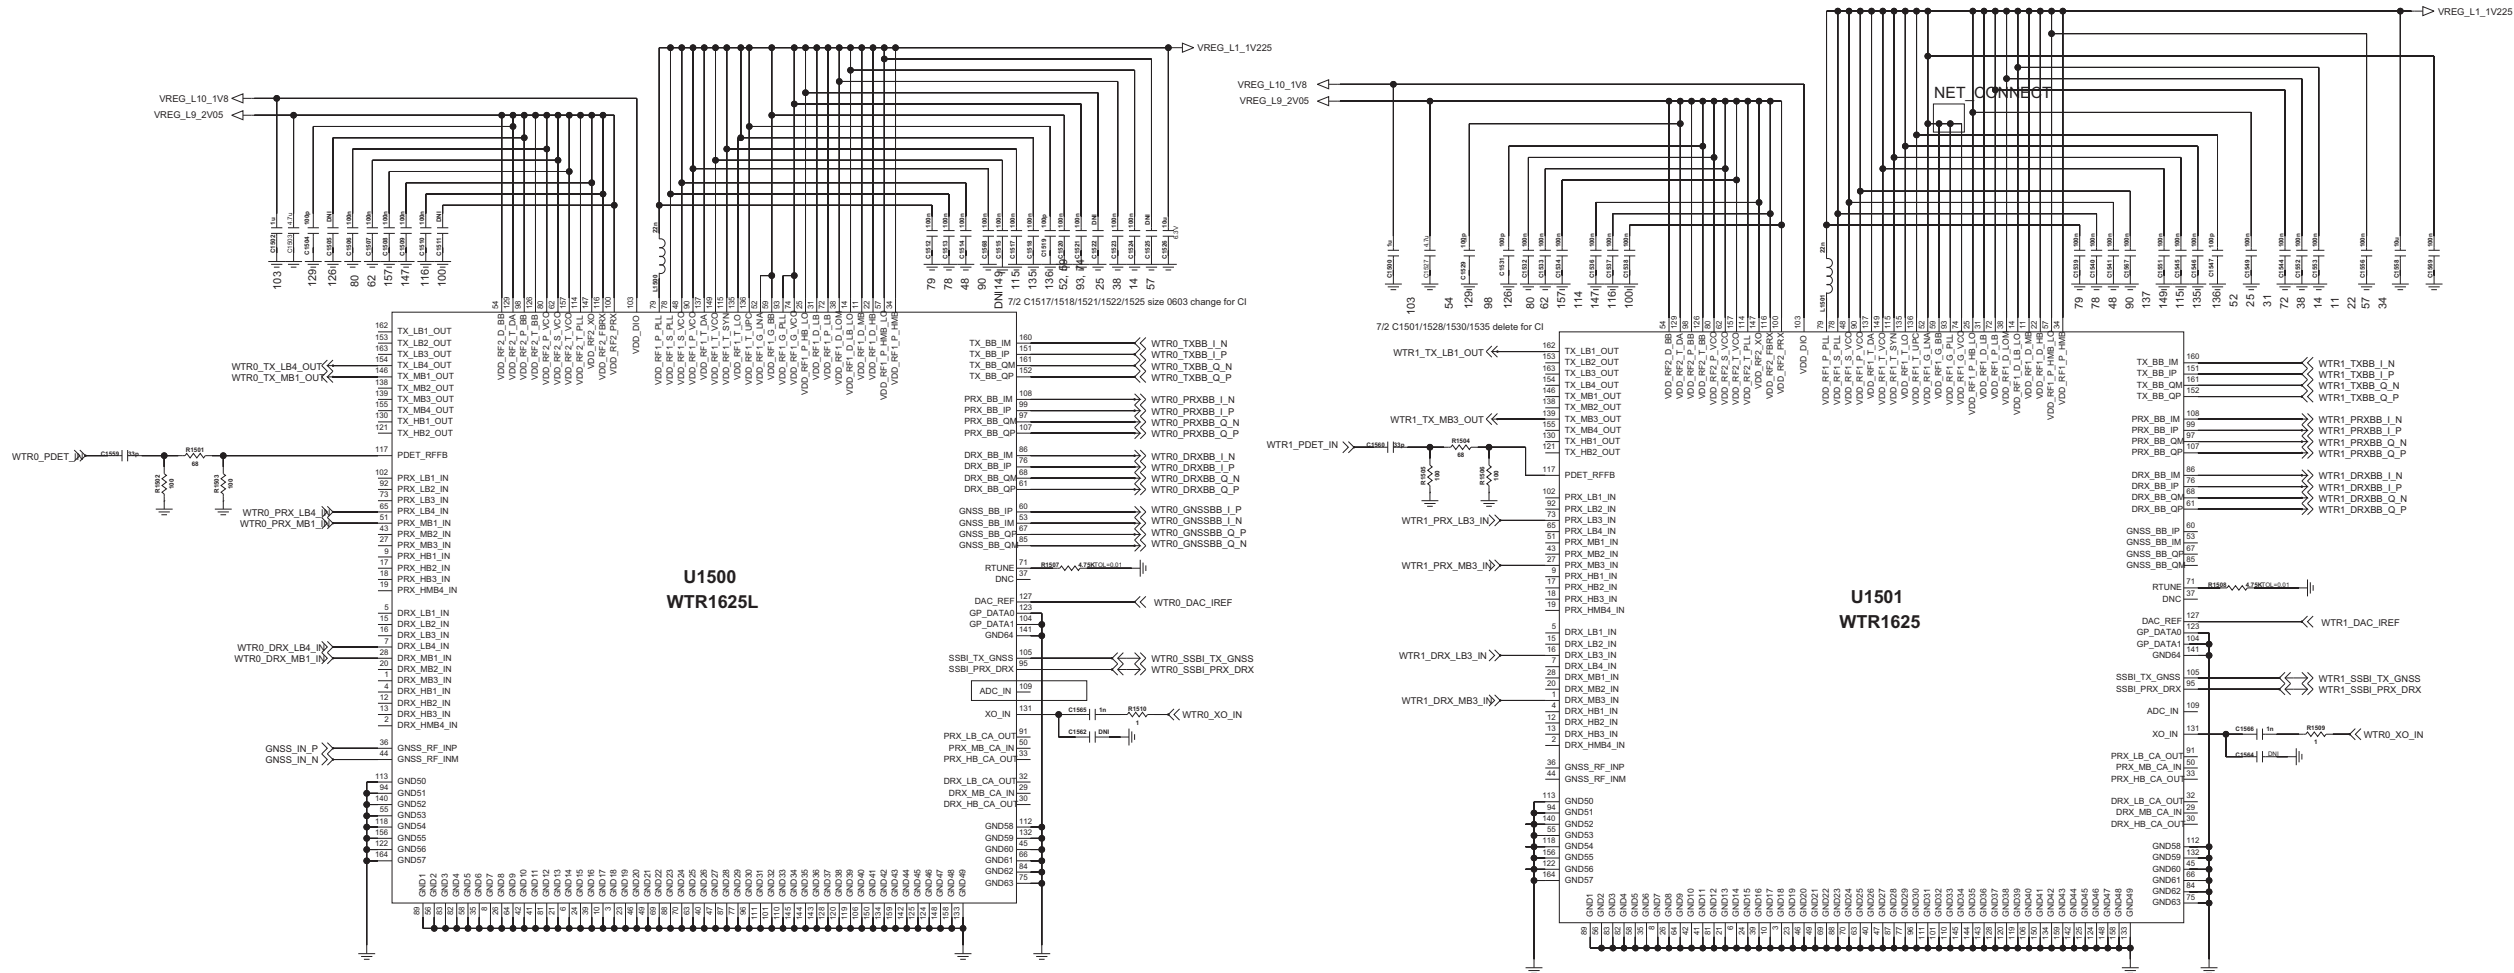

Rev_0.3



Rev_1.0



Rev_1.0




Rev_1.0




Added for Current split on VDD_P3 after traceID assertion

<2-1-3-3-4_MSM8926_GND_NC>

Rev_1.0

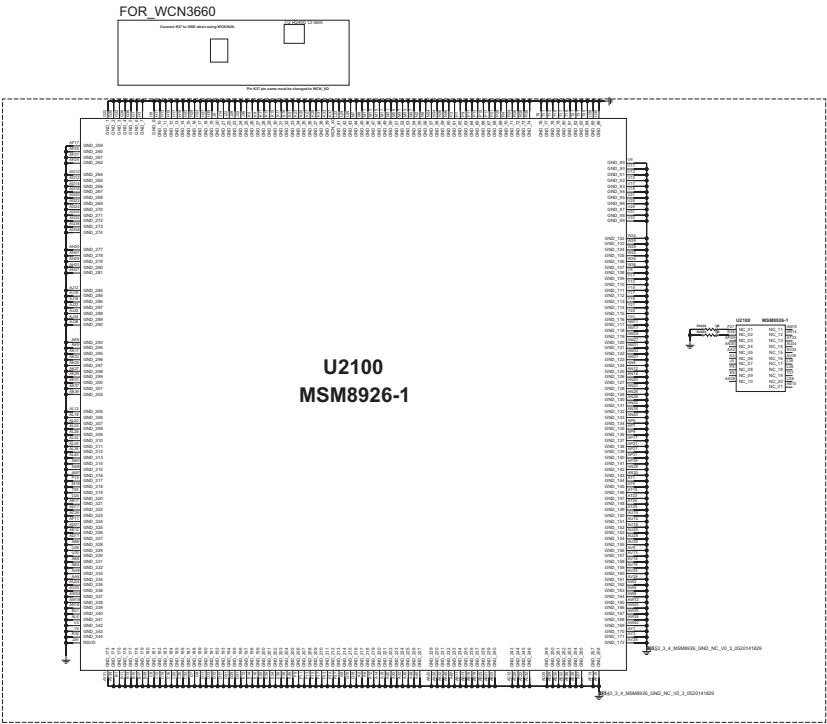


< 3-2-3-1-1_eMMC_5_0_8Gbyte_Toshiba >Rev_0.3

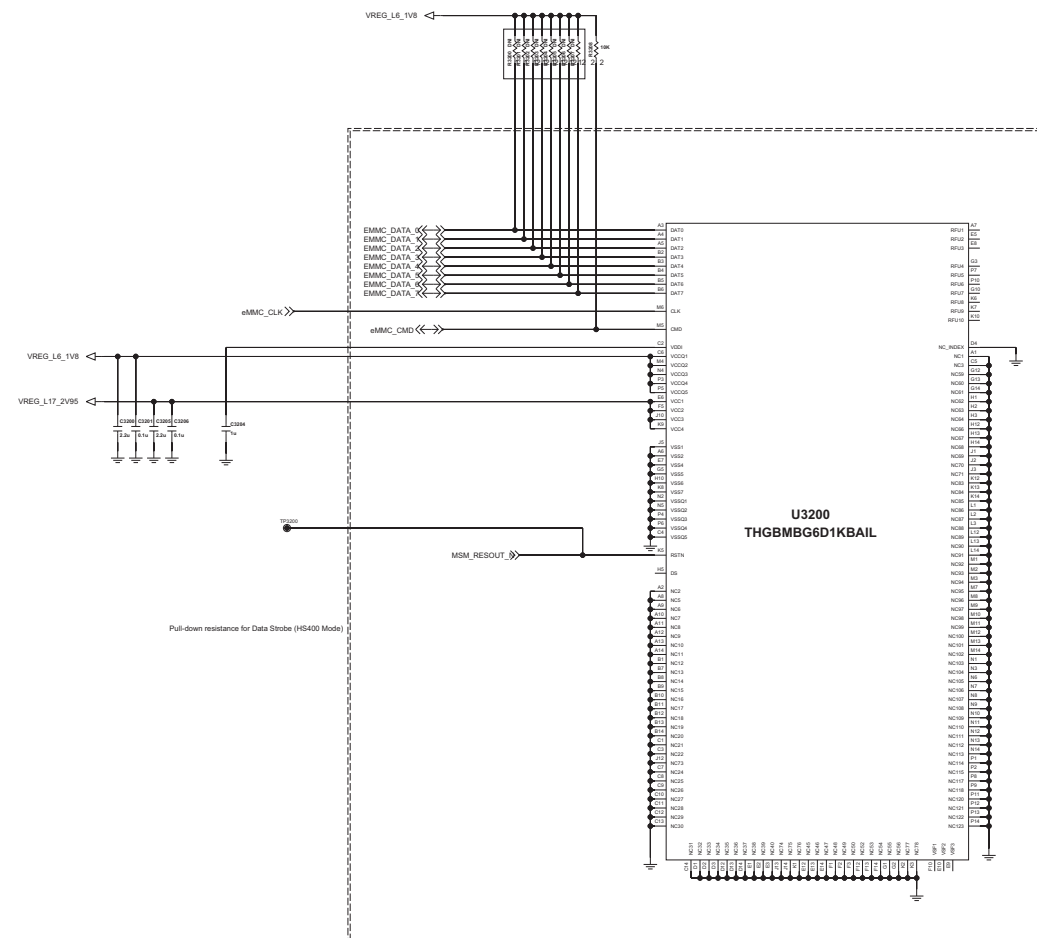

< 4-1-3-1_PMIC_PM8926_DATA >


Rev_0.6

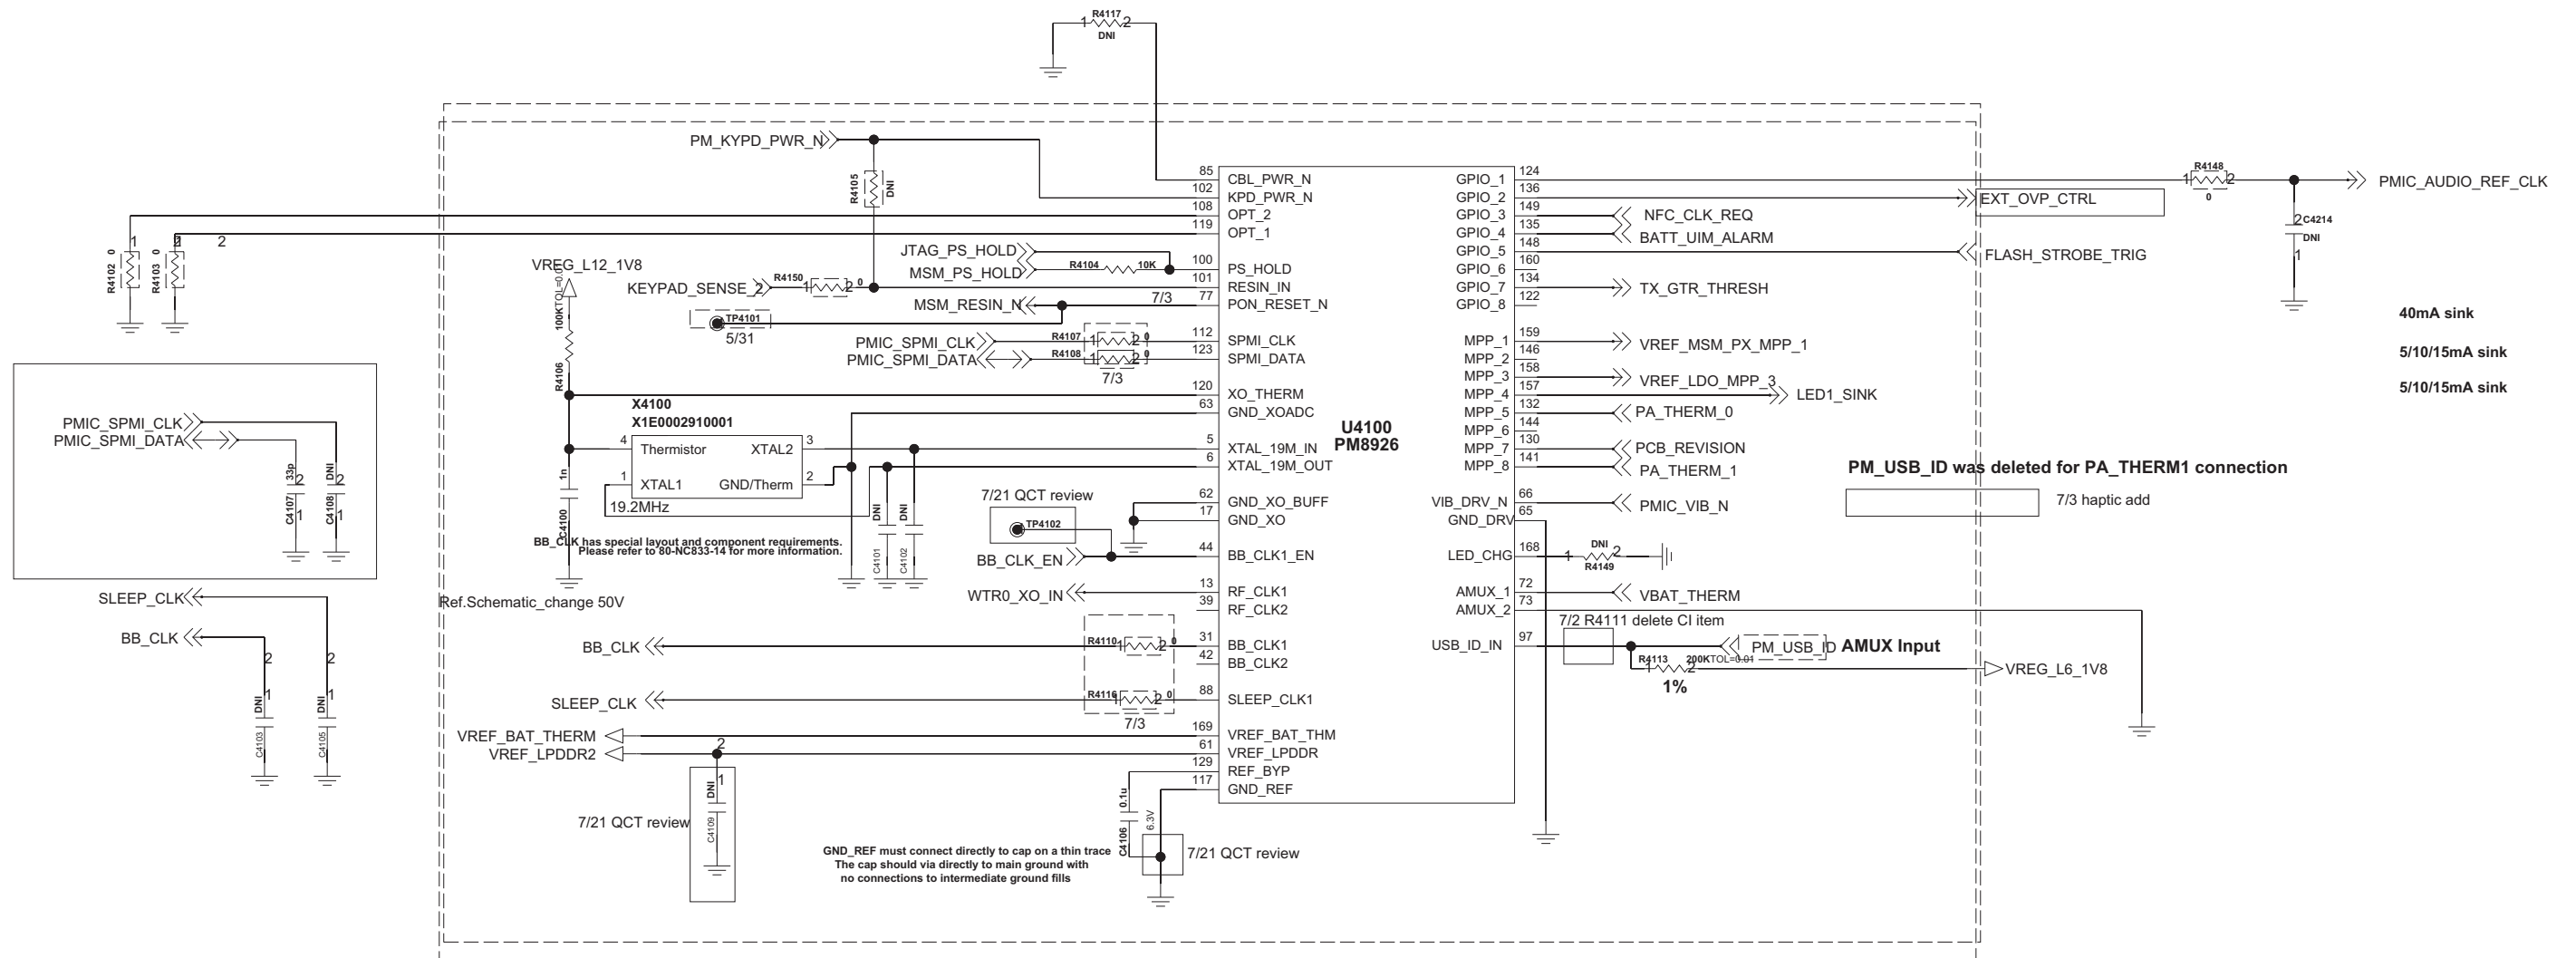

Rev_1.0




<4-4-2_LCD_Backlight_Booster_LM3630>Rev_1.0

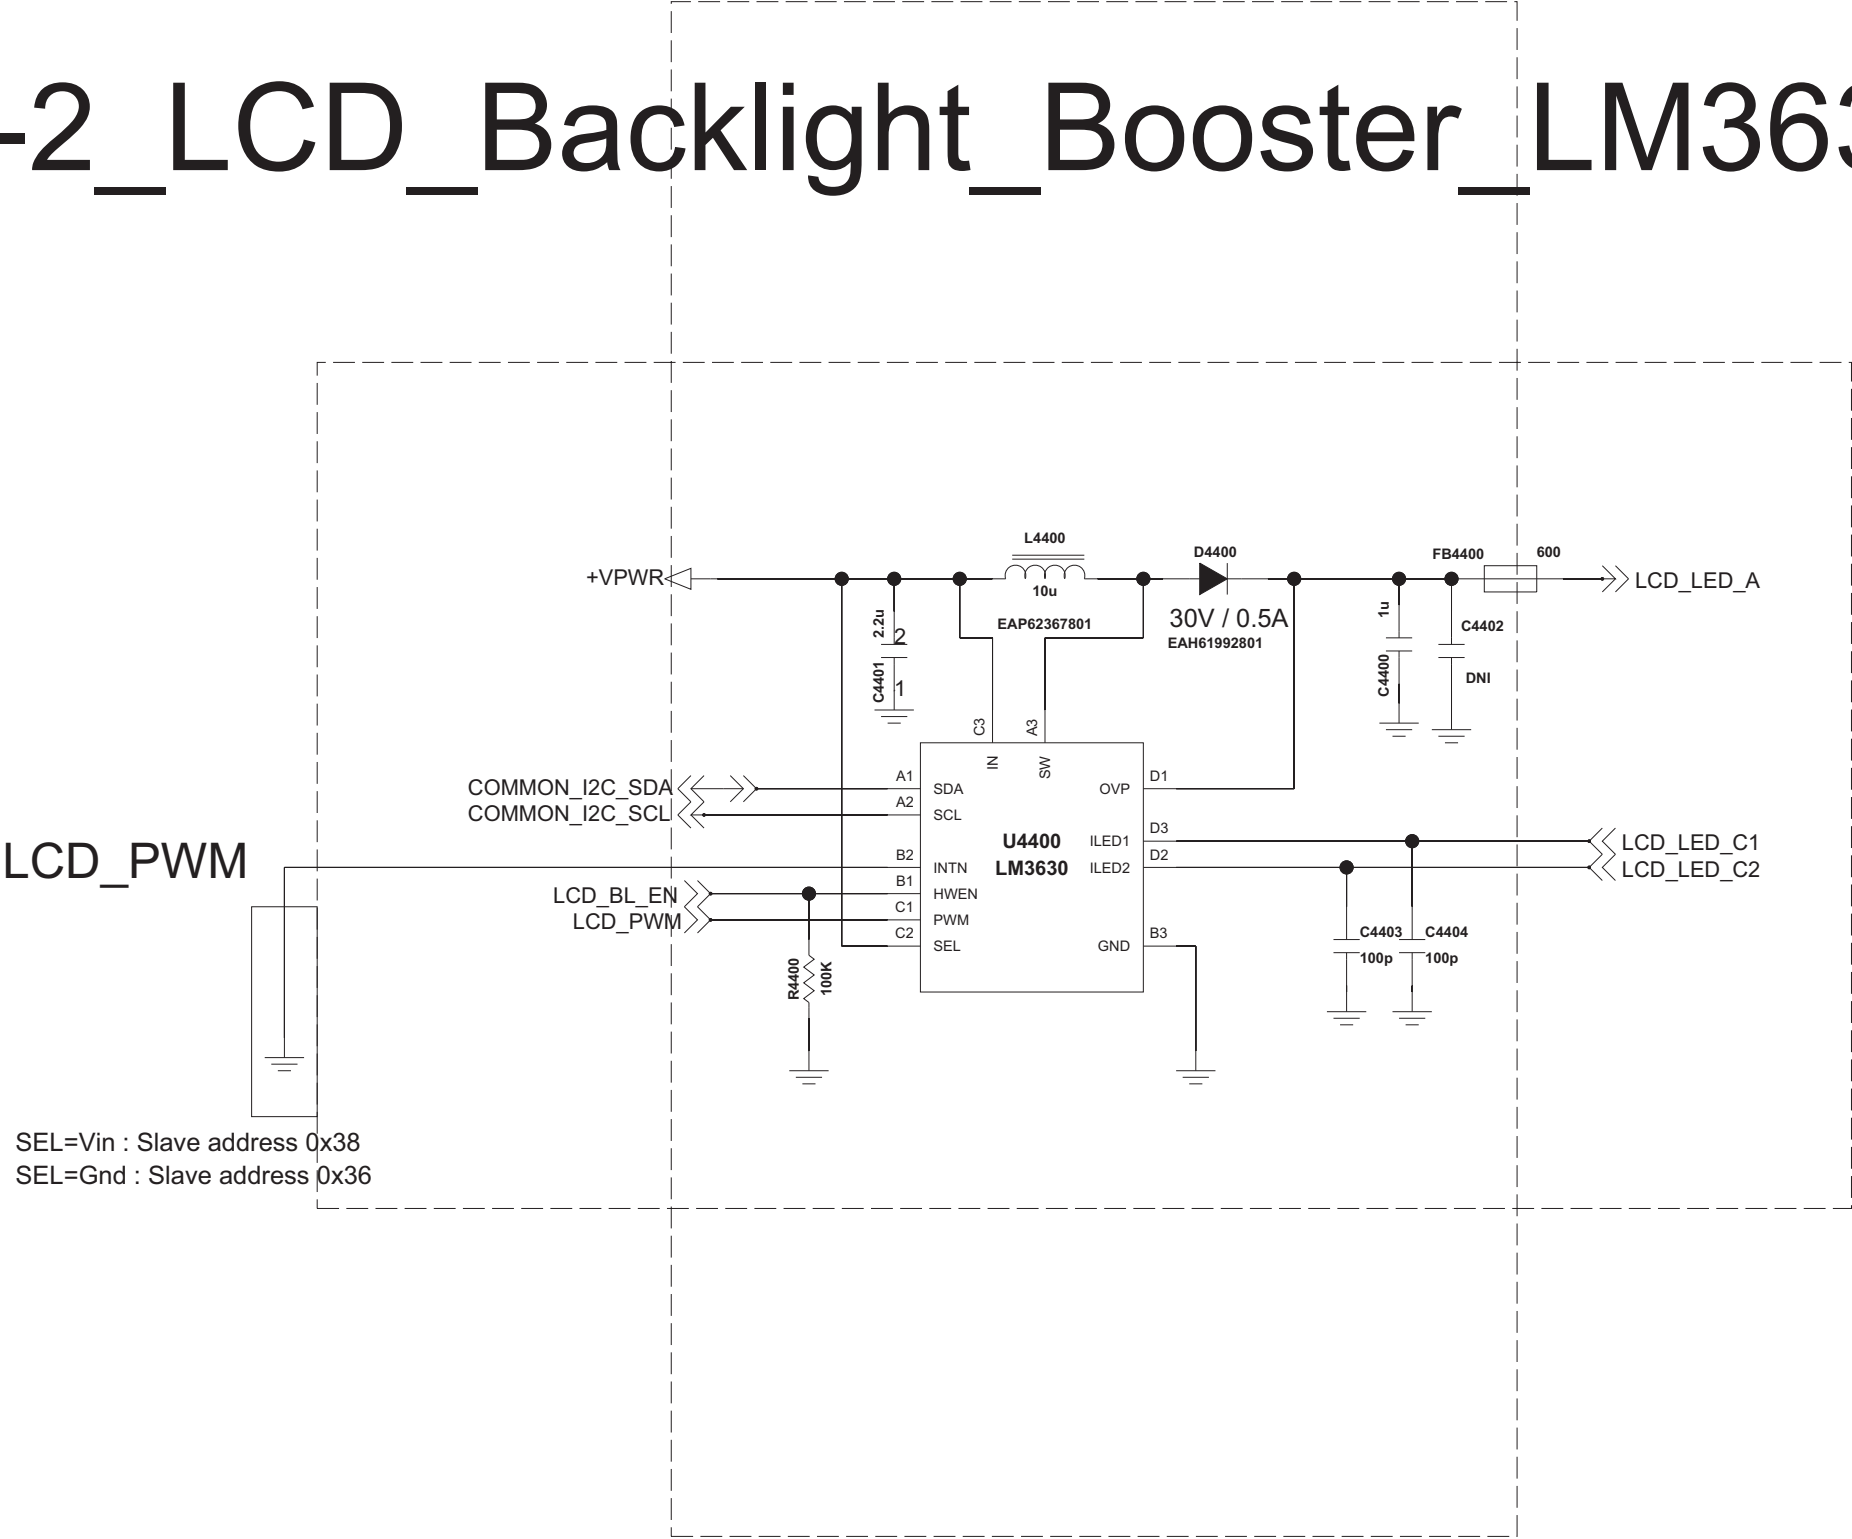


Rev_0.6


BCM4334L

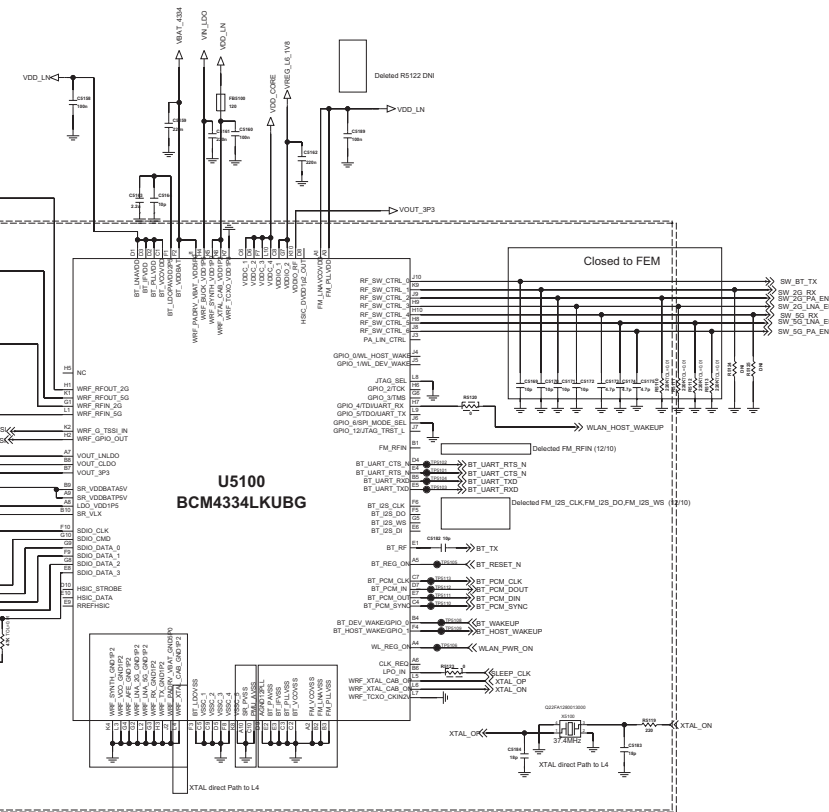

5G FEM(SPDT +5G PA + LNA)

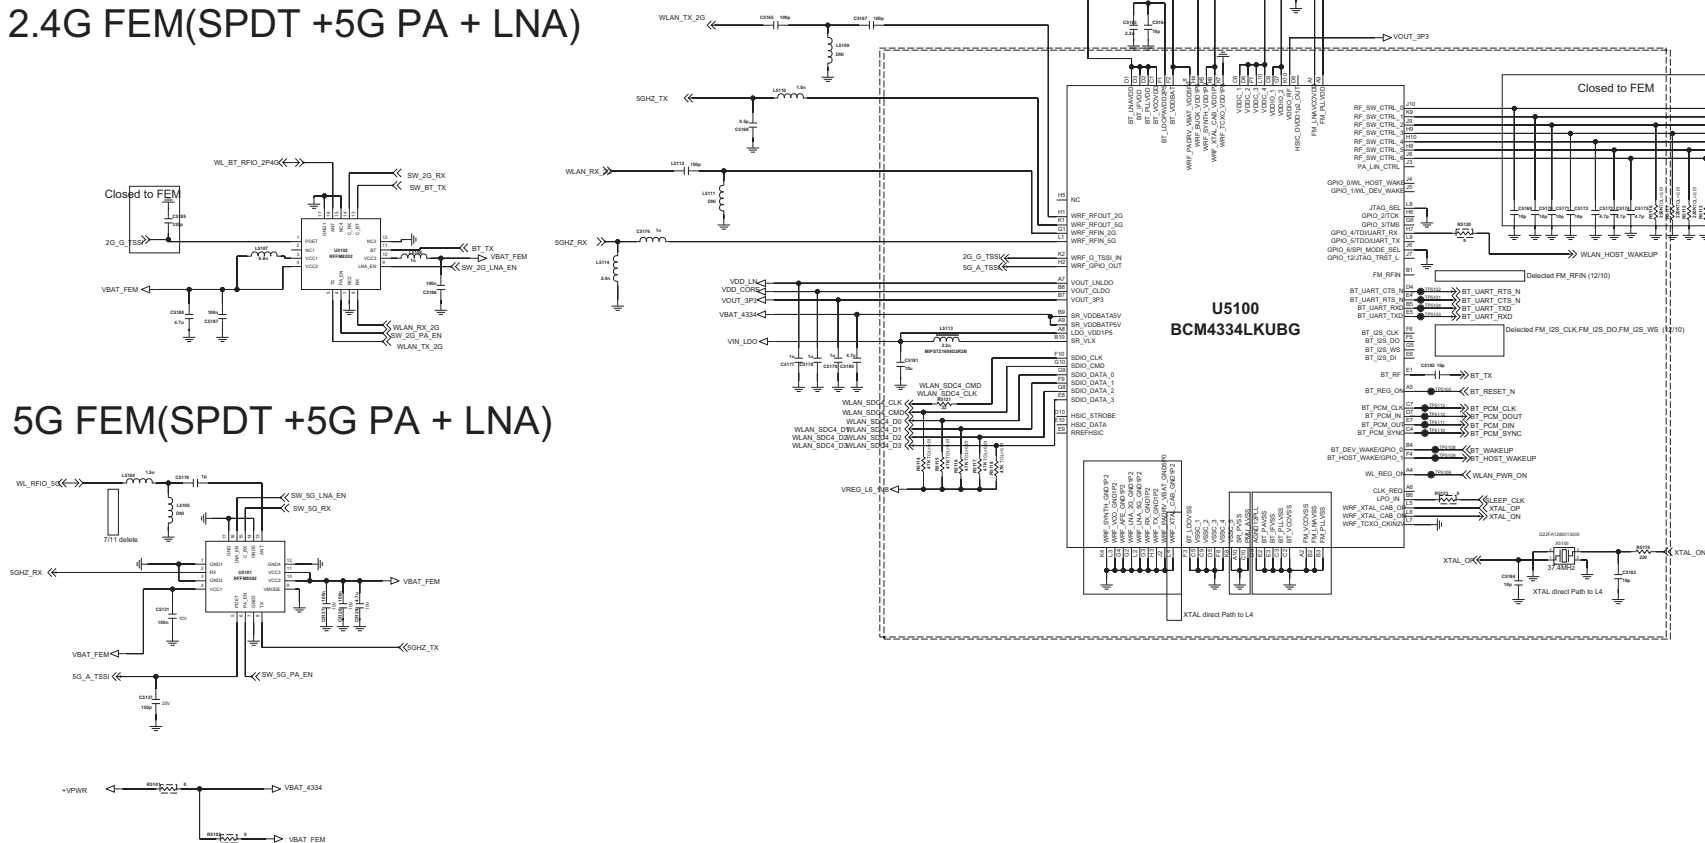


Rev_1.0

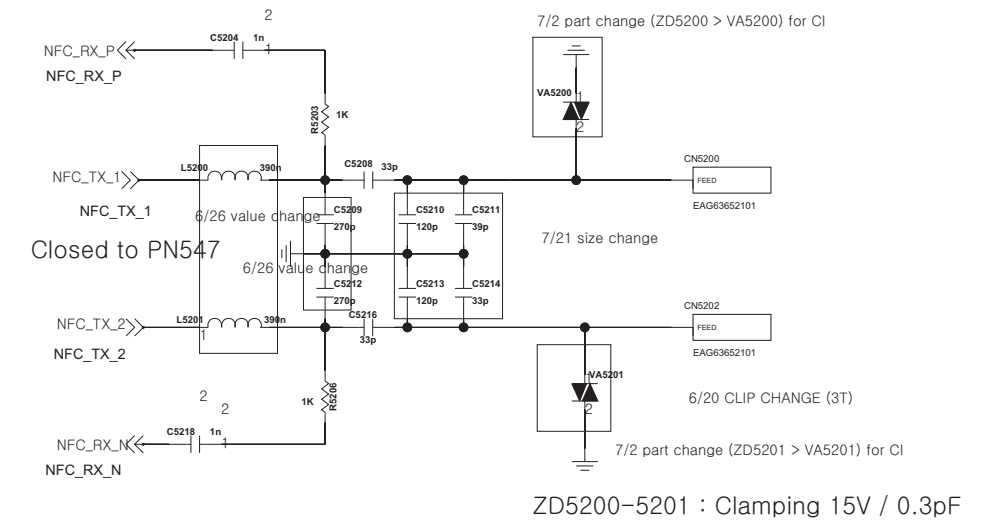


< 6-1-1-1_Codec_WCD9302 >

Rev_1.0

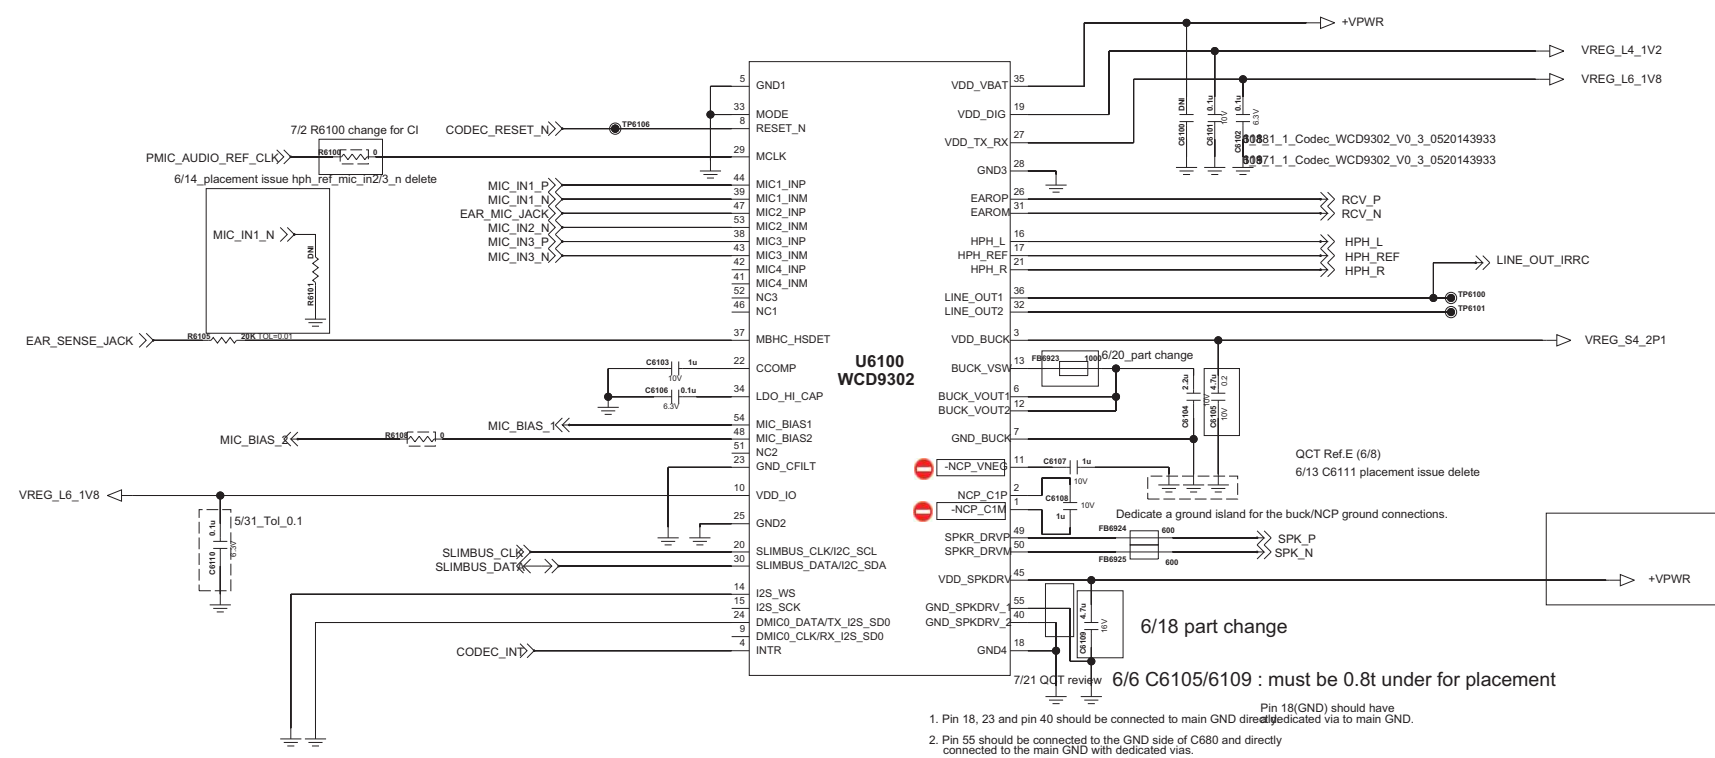


Rev_0.3



Rev_0.3




< 6-9-2_2MIC >

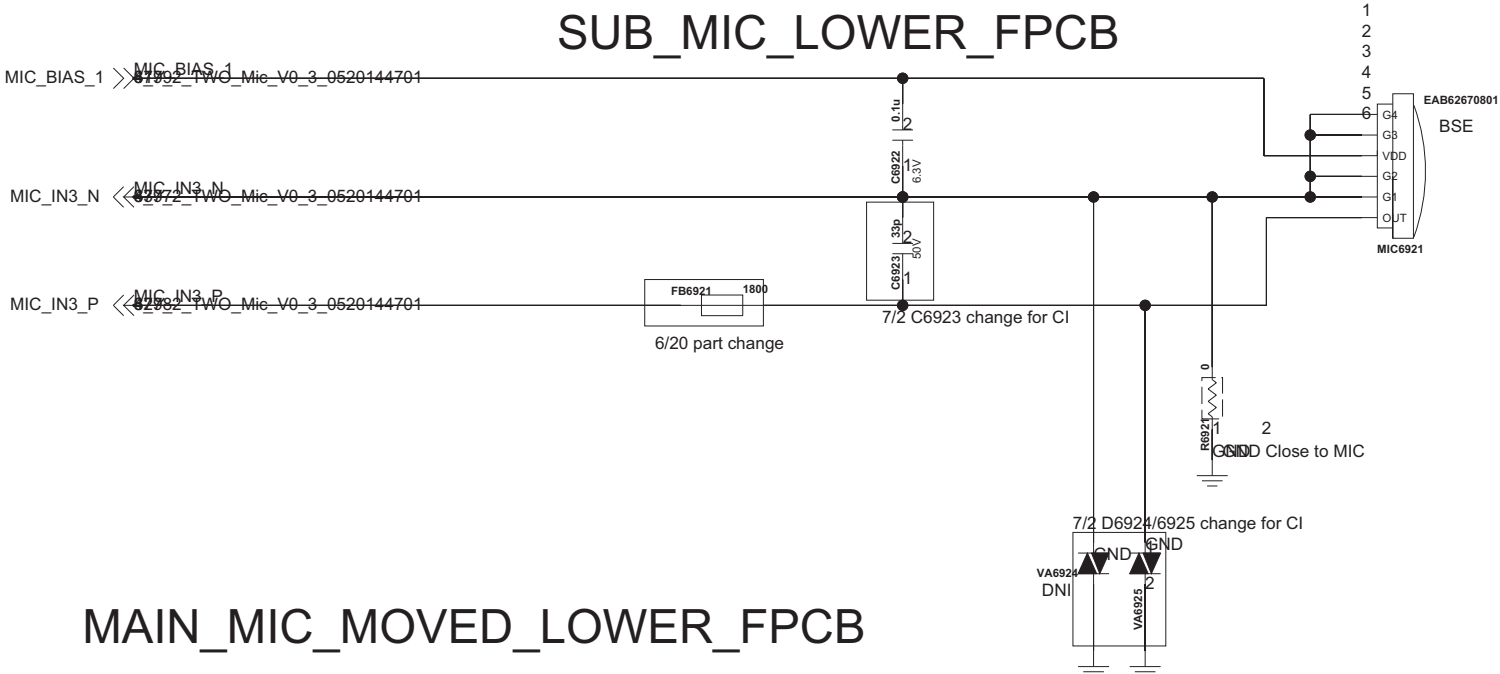


D6924-6925 : Clamplng 12V / 6.5pF

<7-5-1_DSV_TPS65132> Rev_1.0

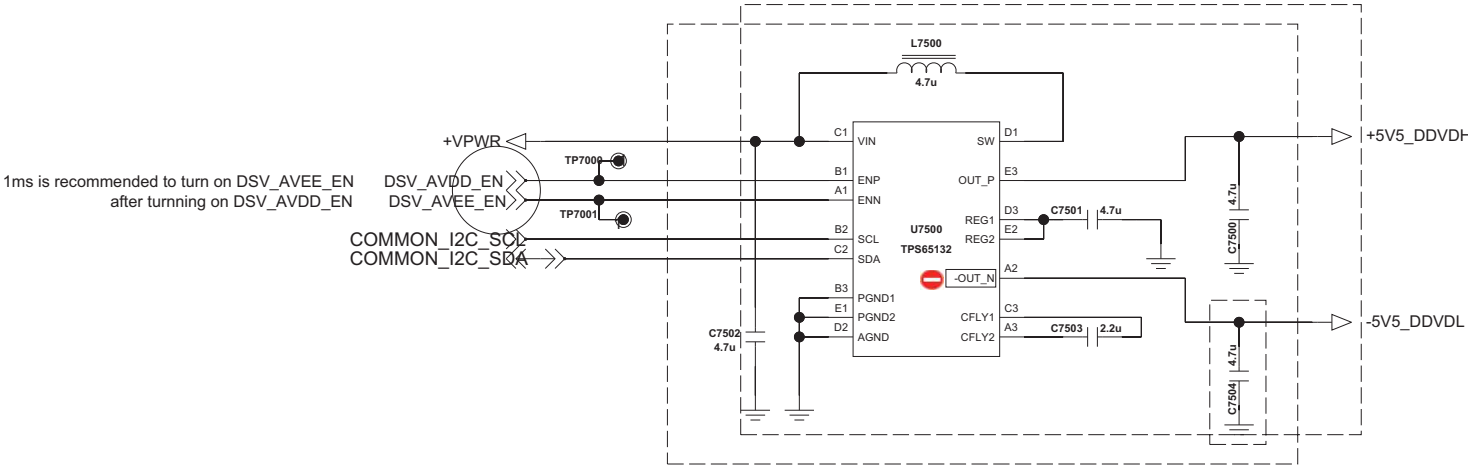


MC-C06162-1 : 1. Don't connect Positive of Tantal, TVS diode to Negative voltage if use
2. We recommend MLCC capacitor in this case


B2 Lite Touch pin map

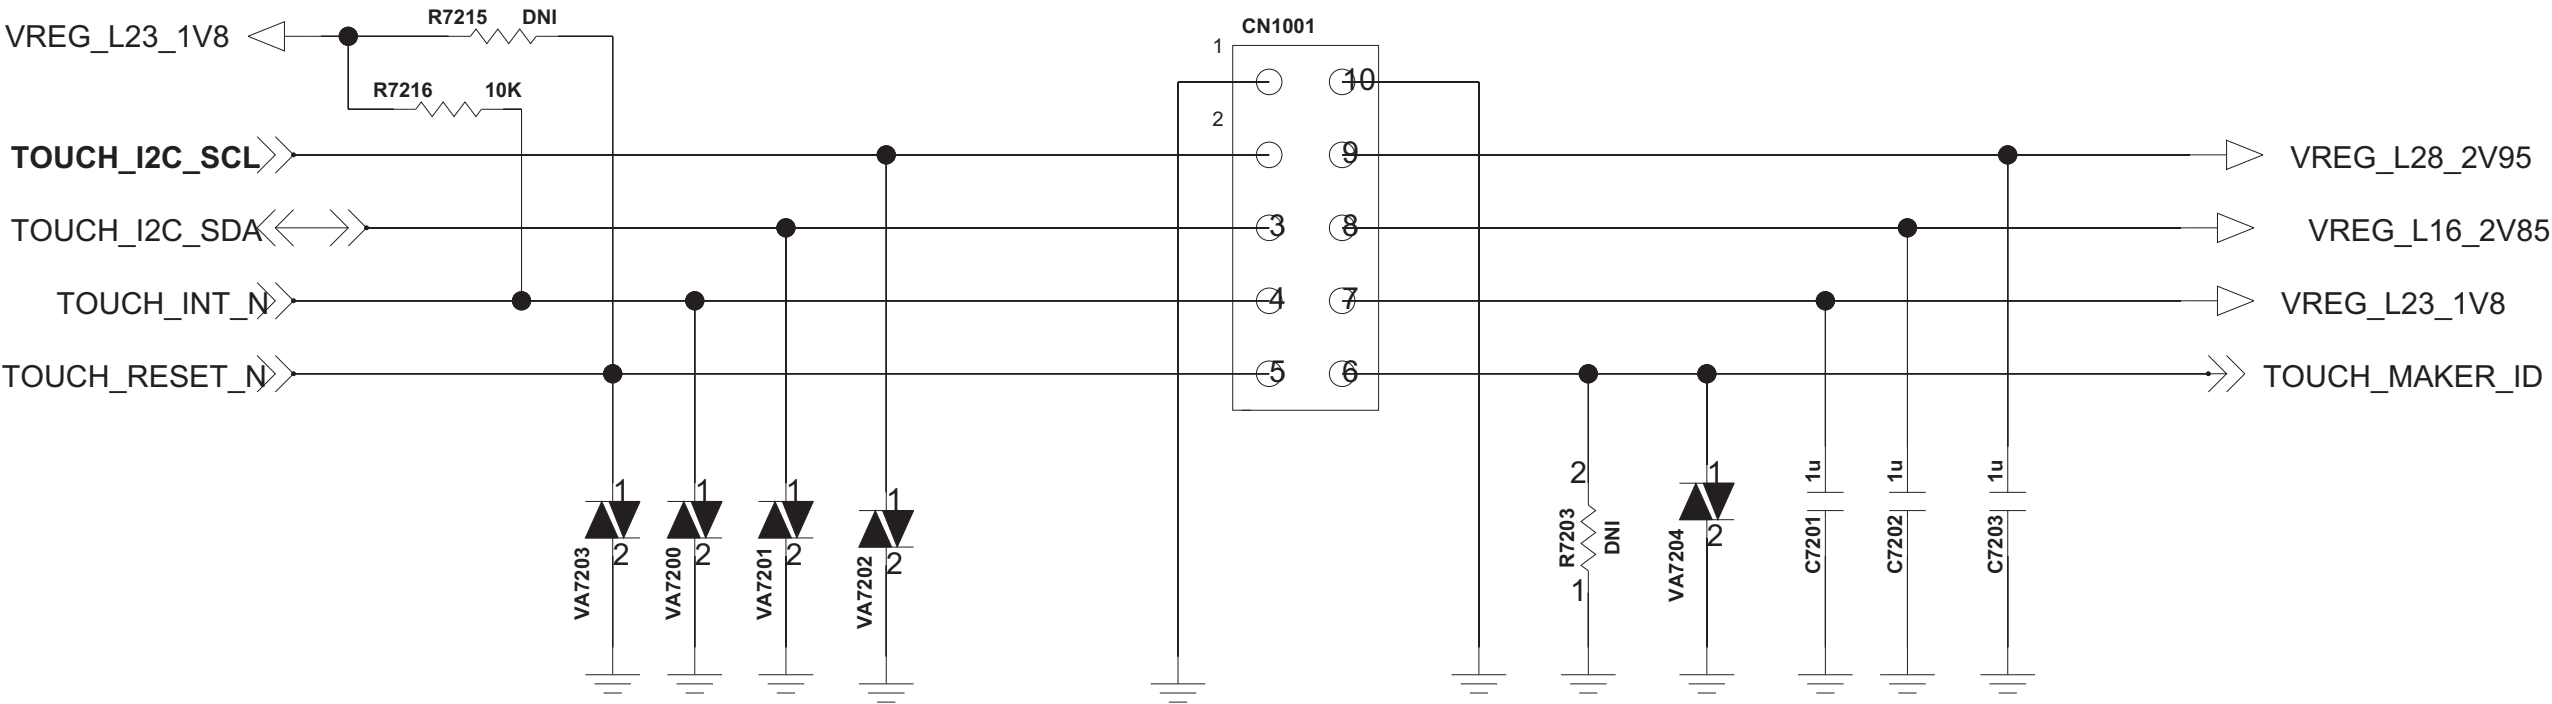


< 7-3-_Main_Camera_30pin_5M_8M >
Check G2 Mini Model!!

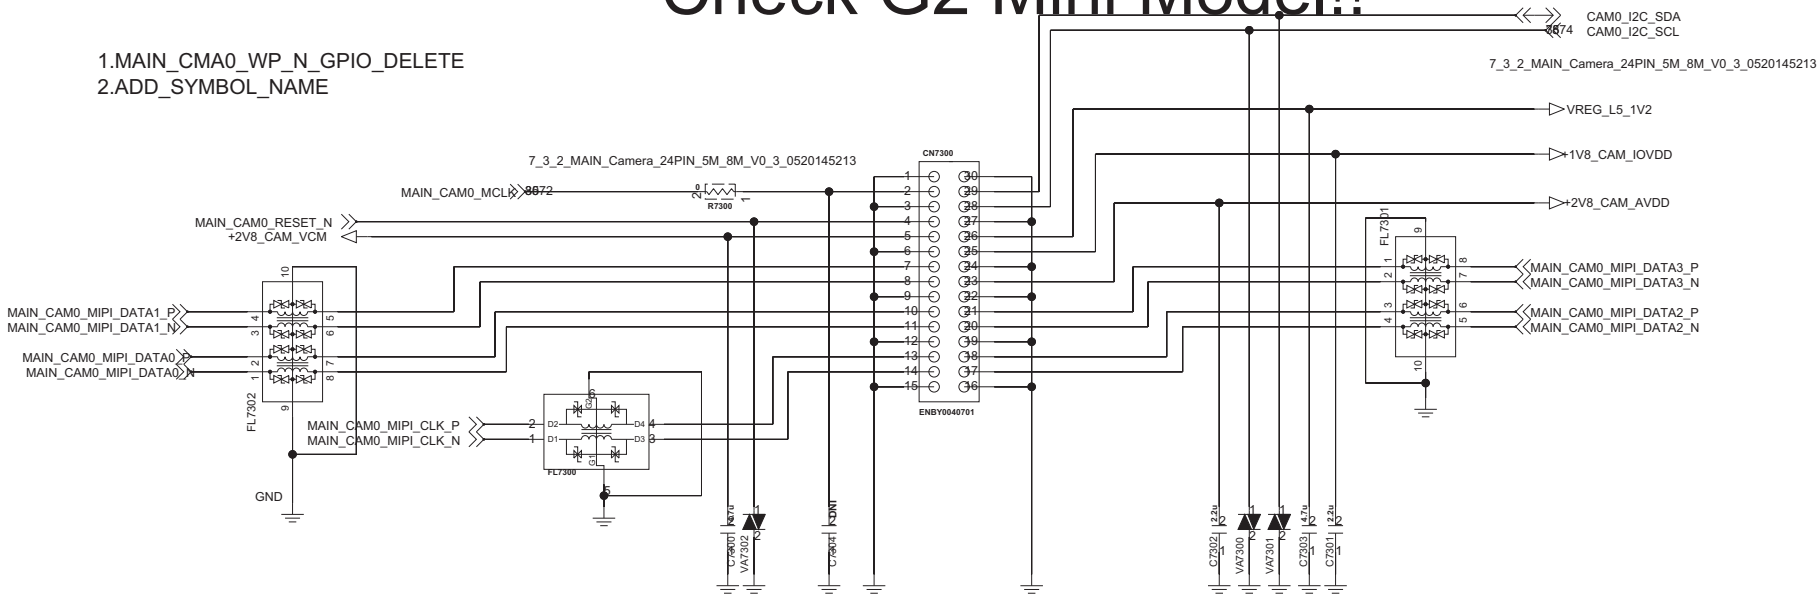


VT_MAIN_CAM_LDO1

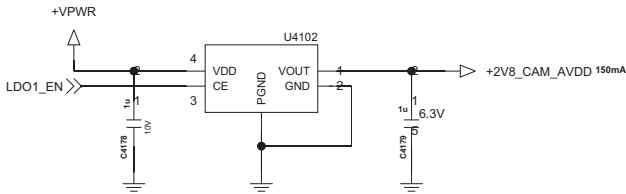


VT_MAIN_CAM_LDO3

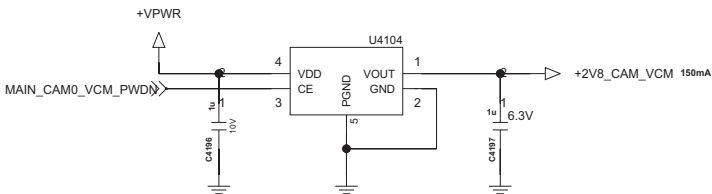


VT_MAIN_CAM_LDO4

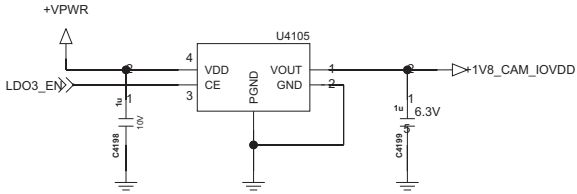

LDAF 6PIN Contact type

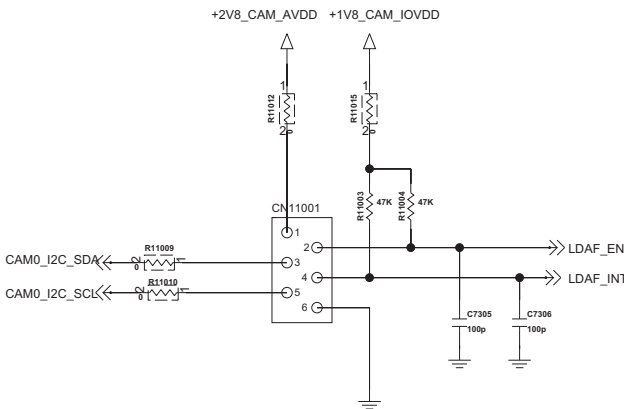


< 7-4-1_VT_Camera_20pin_VGA_1.26M_1.3M_2.4M> Rev_0.3

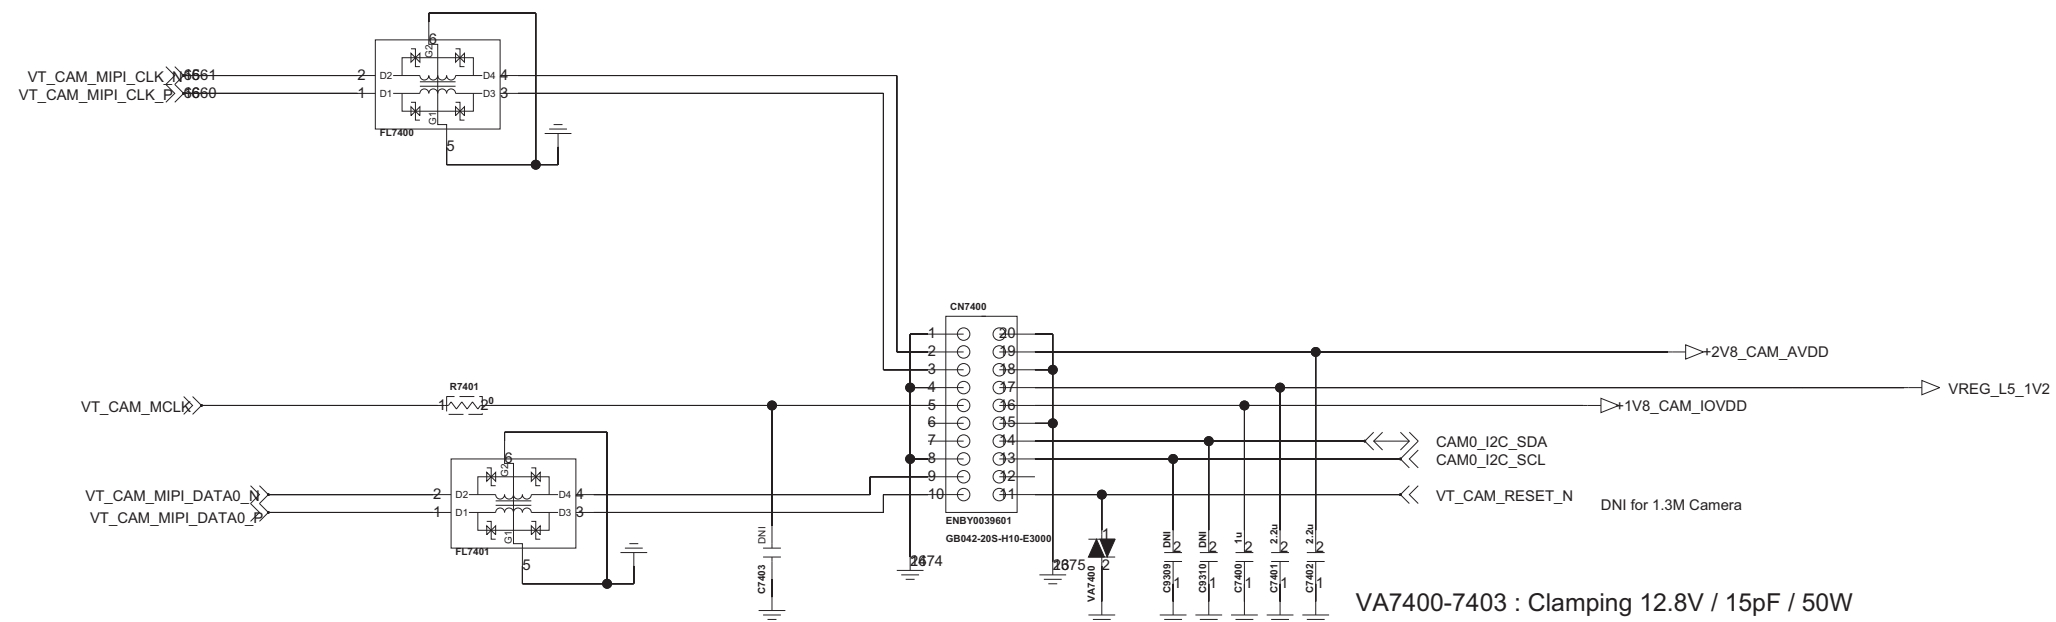

Rev_0.3



<8-1-2-1_Accel_Compass_BMC150>

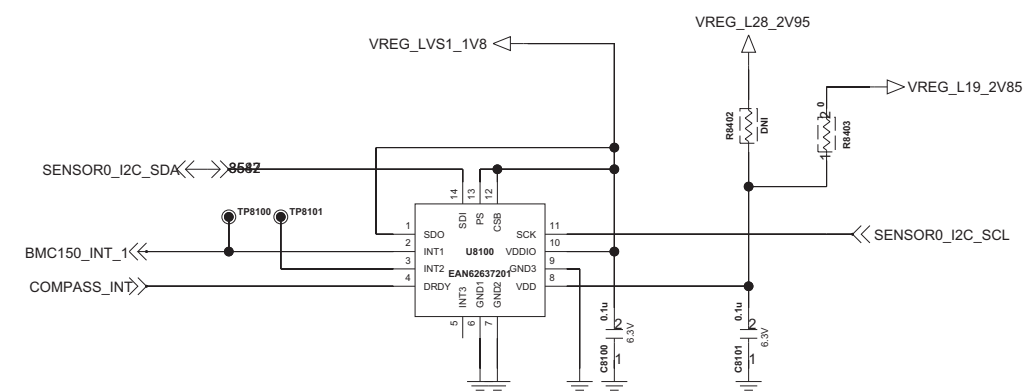


<8-4-1-1_Proximity_APDS-9930-200>
REV.0.3

<8-7-1_Hall IC_BU520XX>

Rev_0.3

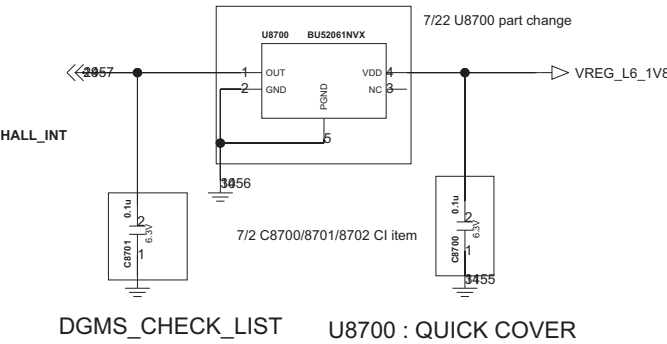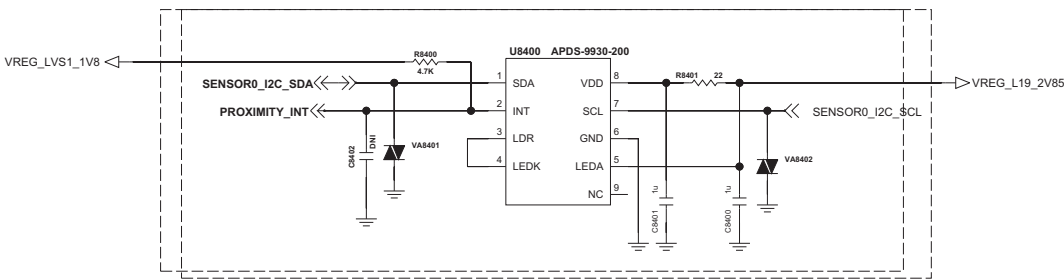


< 8-9-1-2_IRRC_w/o_driver_IC >

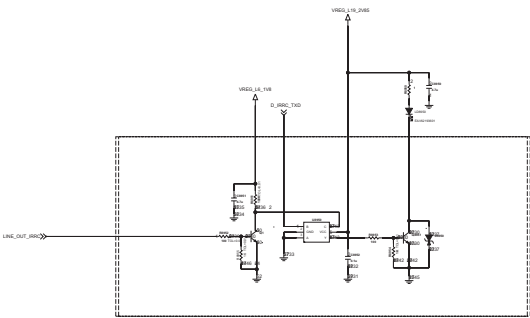

Rev_0.3

<9-1-2_Battery_CNT_4P>

Rev_0.3

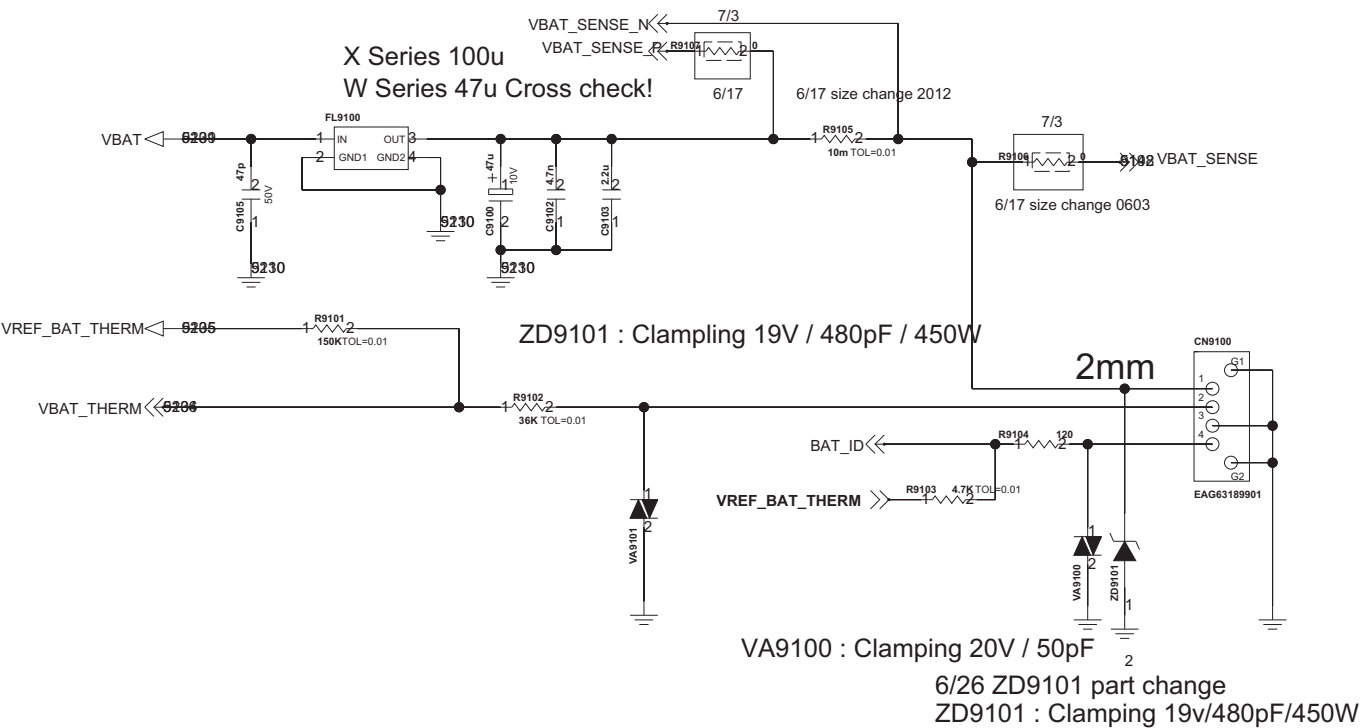


< 9-3-1_JTAG >

Rev_0.3


< 9-5-3_Micro_SD_Combo >

Rev_0.3

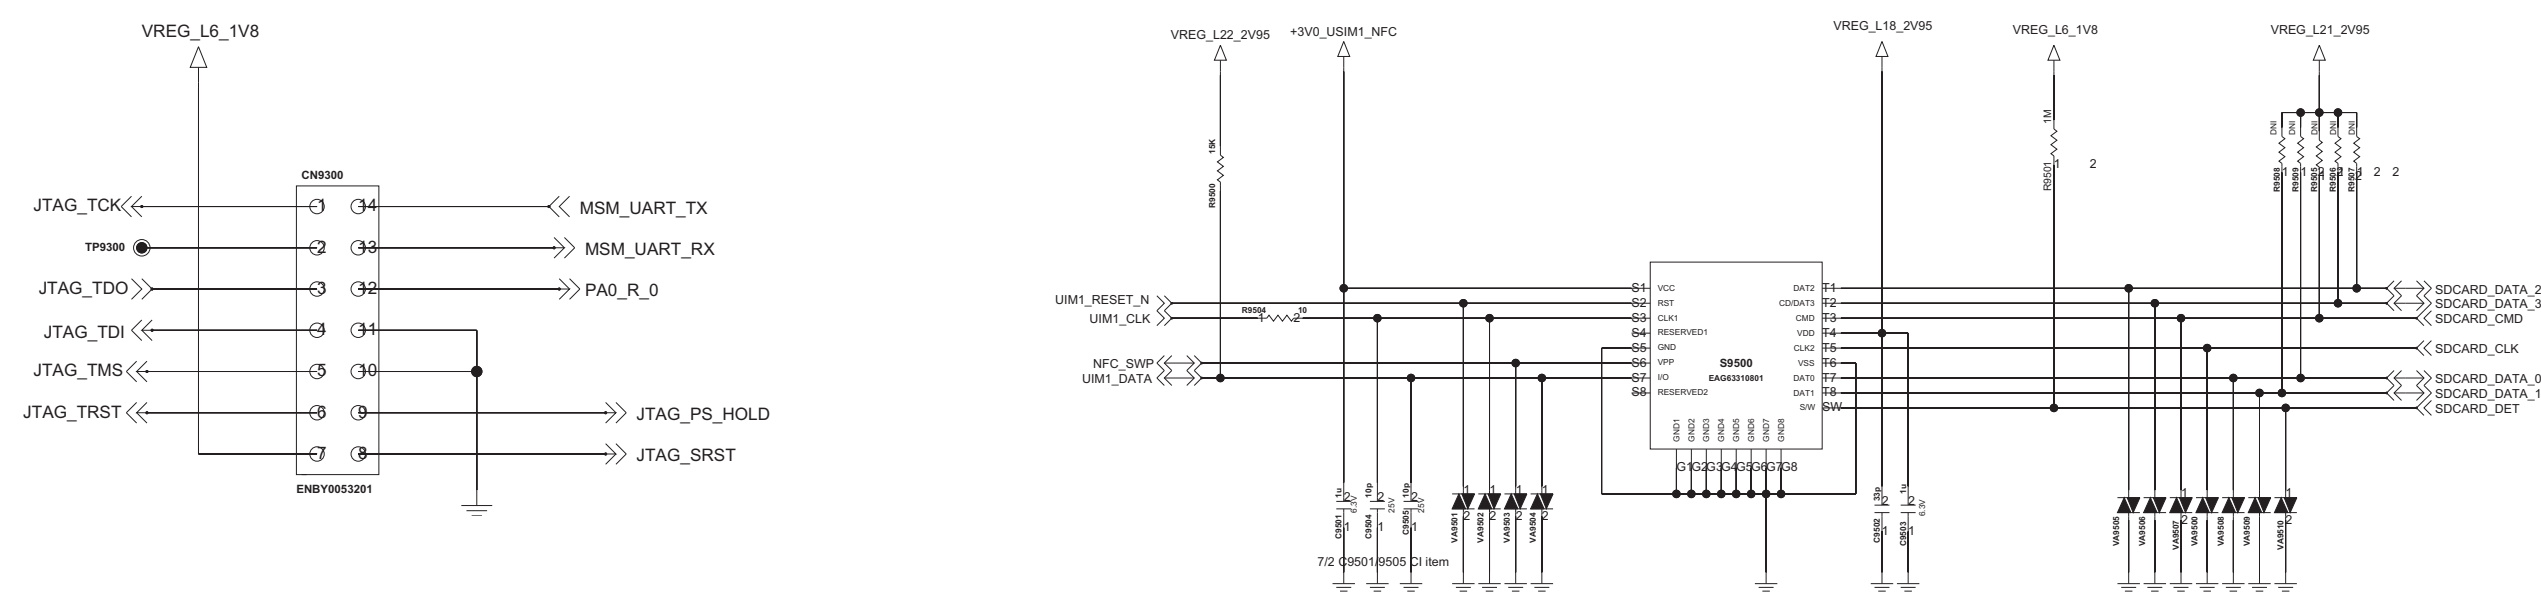

ZD9501,9510 : Clamping 15.5V / 100pF
ZD9500,9502-9509 : Clamping 12.8V / 15pF / 50W


Card Detect	SW1 SW2	SD_CARD_DET
Card Installed		1.8V
Card Not Installed		GND

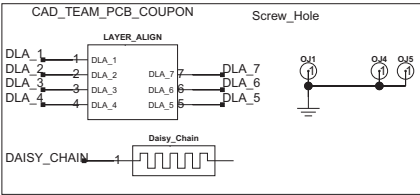

<9-8-3_Flash_LED>


Rev_0.3



LED MODULE (LOW COST)

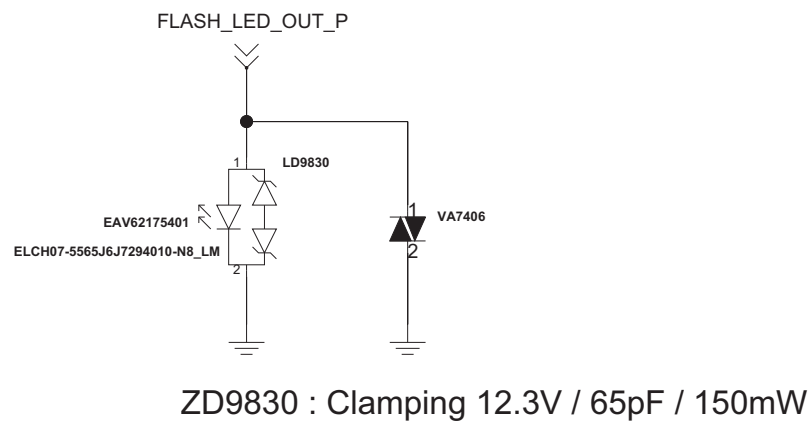

< 9-9-1-1_Motor >


Rev_0.3

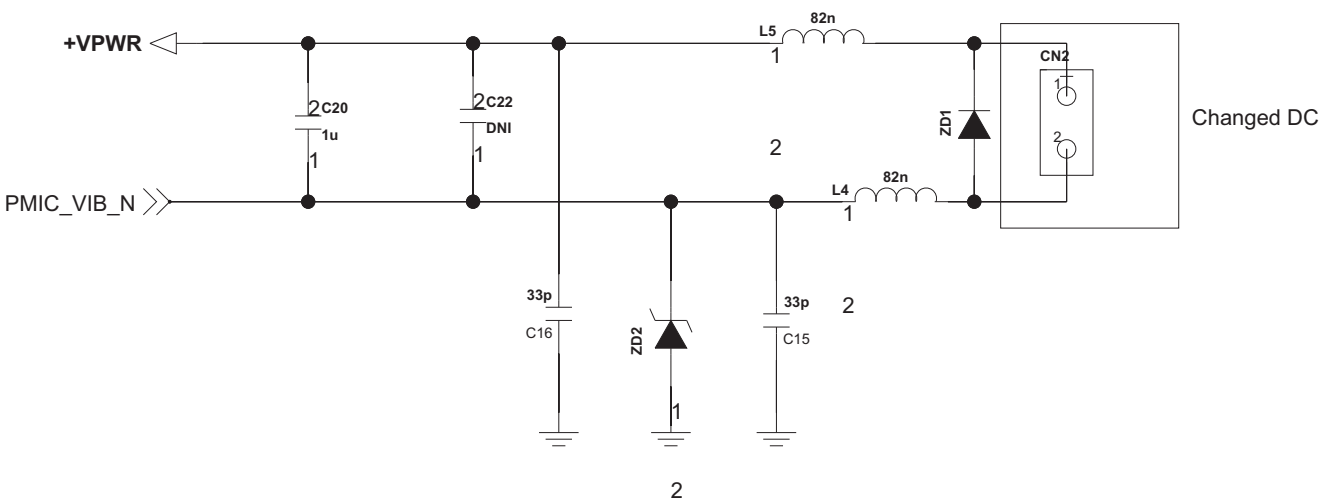

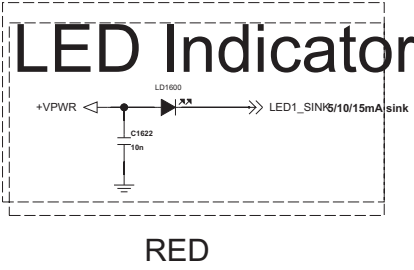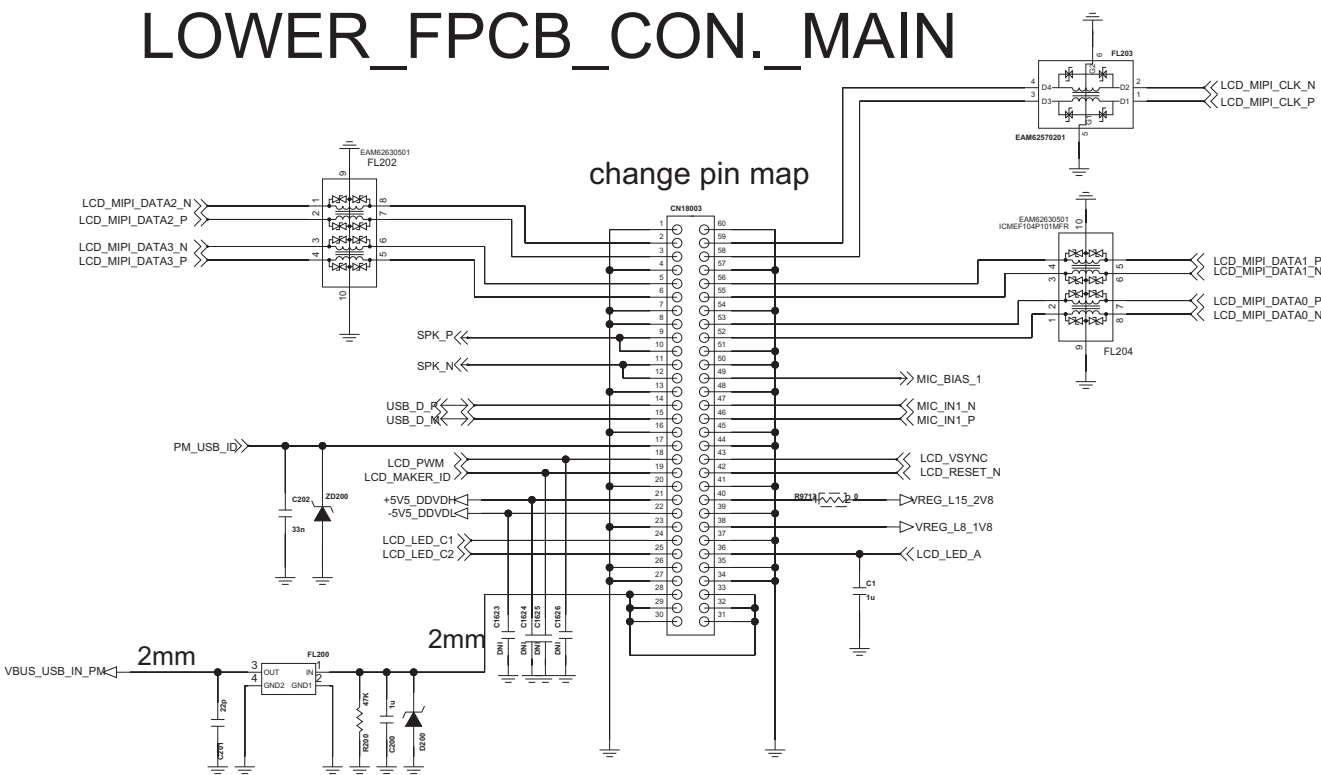


C1


TOP_SHIELD_CAN_CLIP

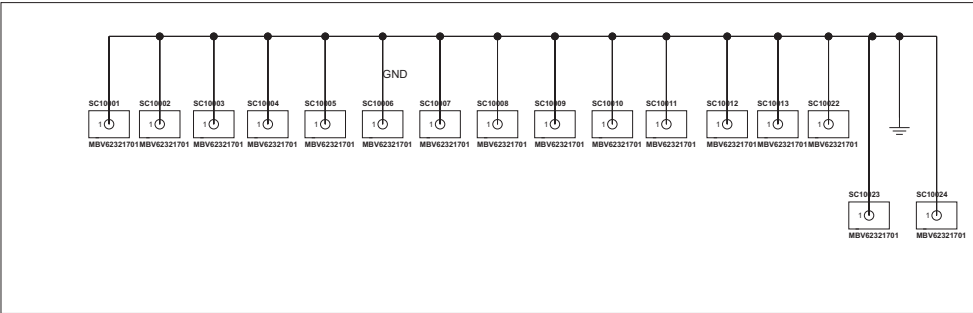

BOT_SHIELD_CAN_CLIP

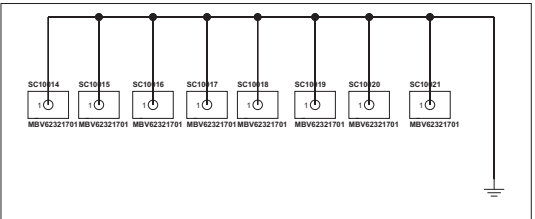


TOP_GND_CONTACT_CLIP

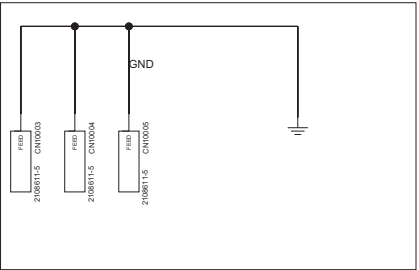


Rev_0.5


Back Volume Key

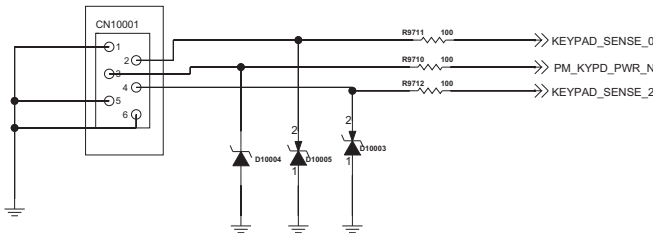

B1_lite Back Key

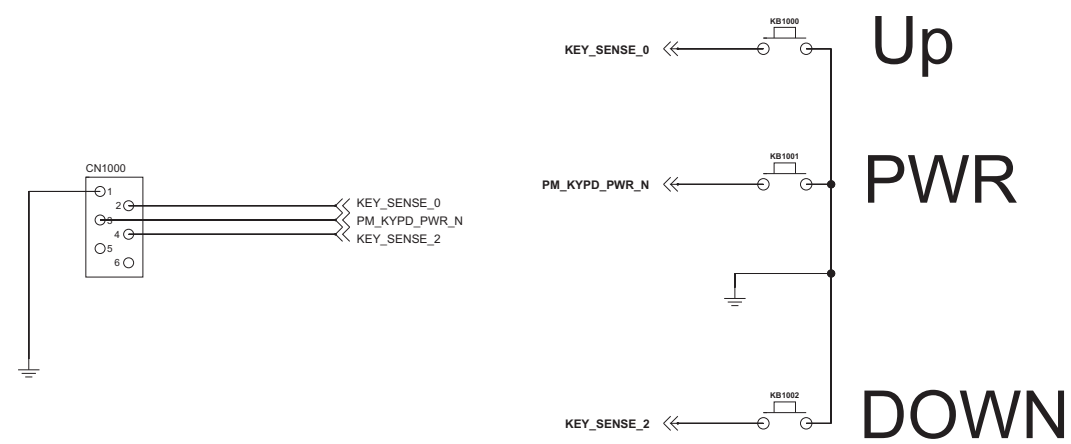


B2_lite LDAF

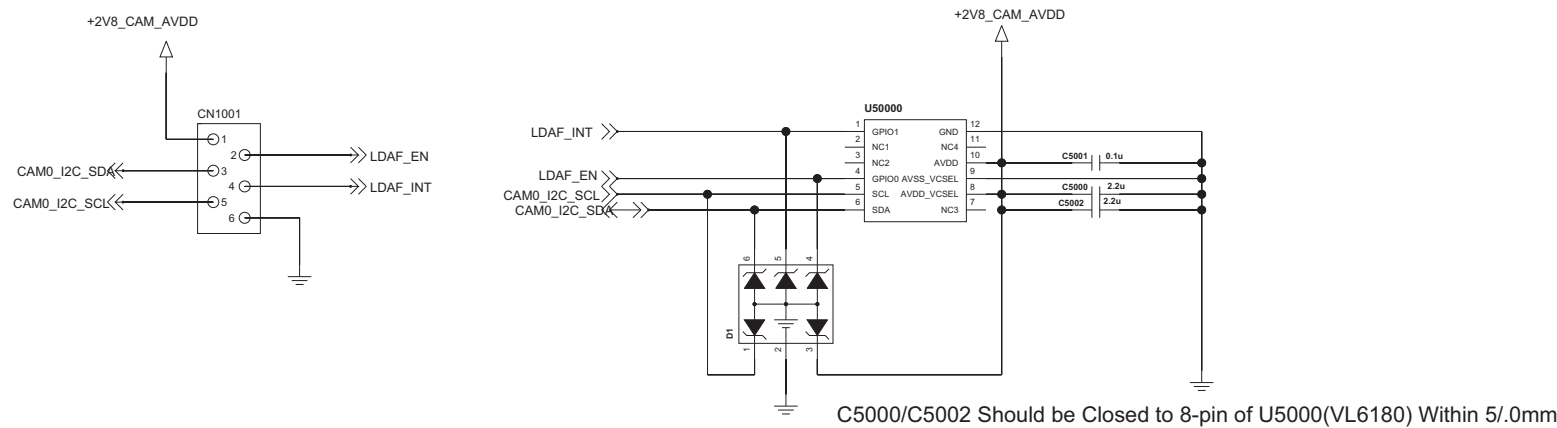


C5000/C5002 Should be Closed to 8-pin of U5000(VL6180) Within 5/.0mm


< 6-9-2_2MIC >Rev_0.3

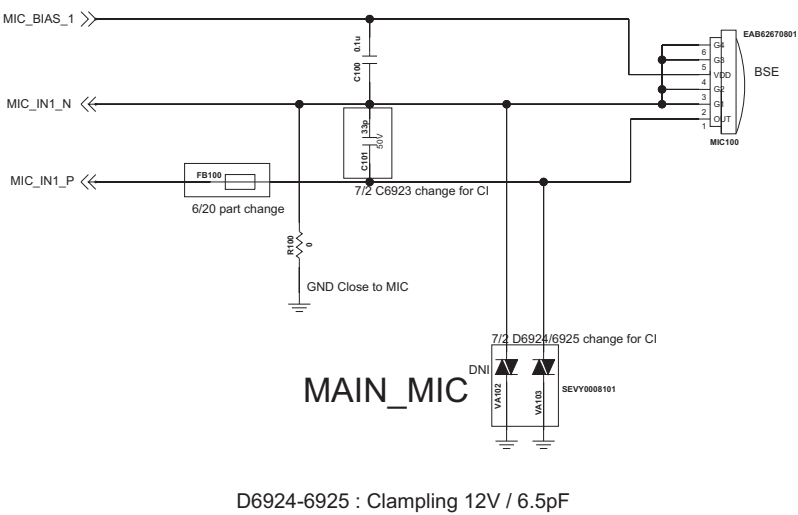


< 6-7-1_Speaker >Rev_0.4

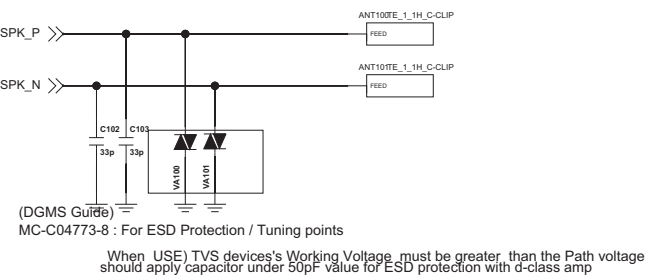

ANT1


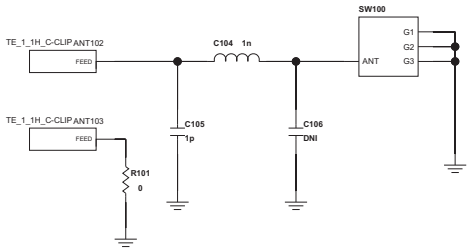


ANT2

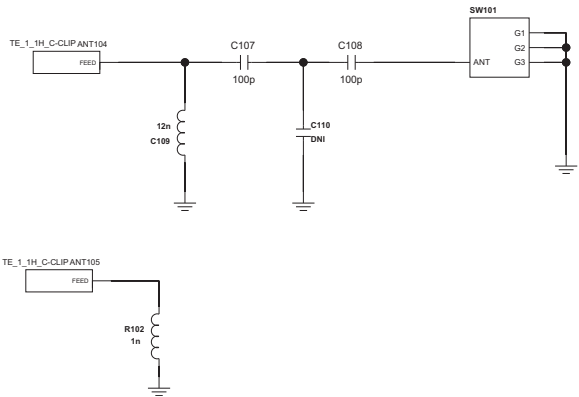


< 9-2-1_IO_USB2.0 >

LOWER FPCB TO MANIN CONNECTOR

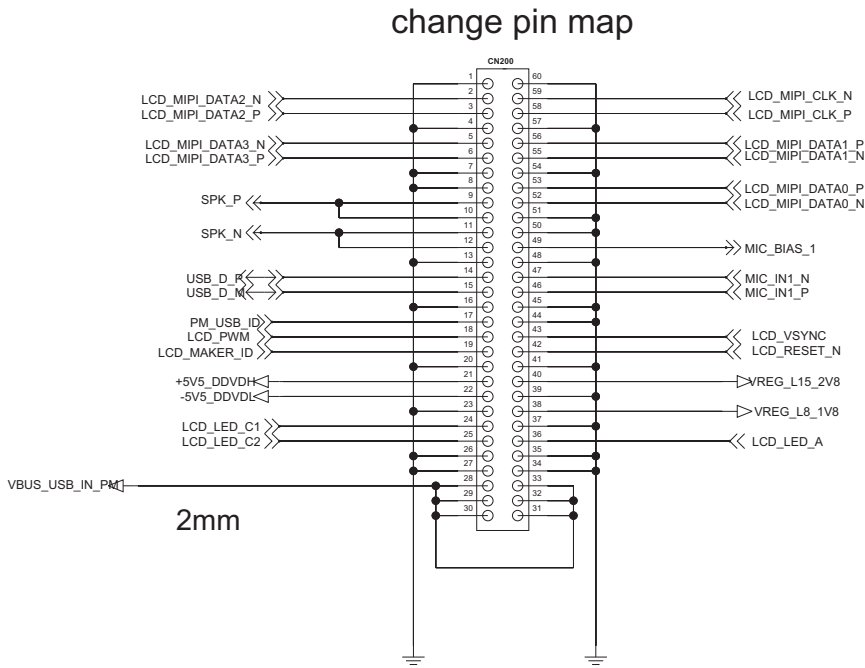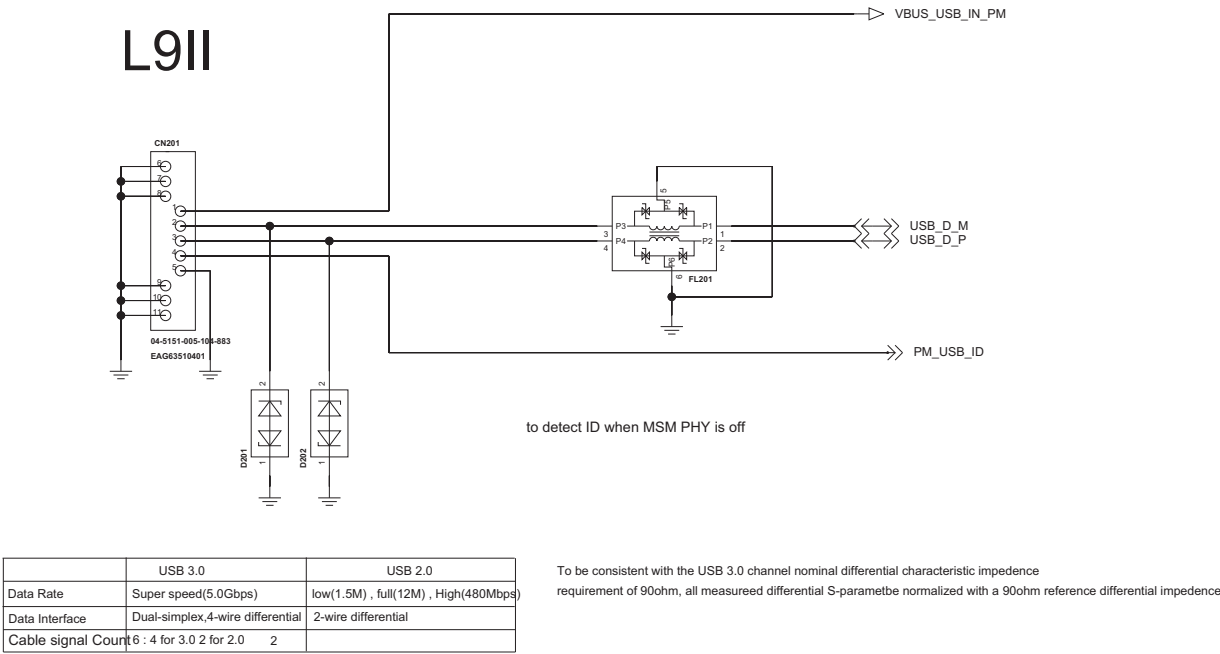

B1_lite_5.7" LCD Connector

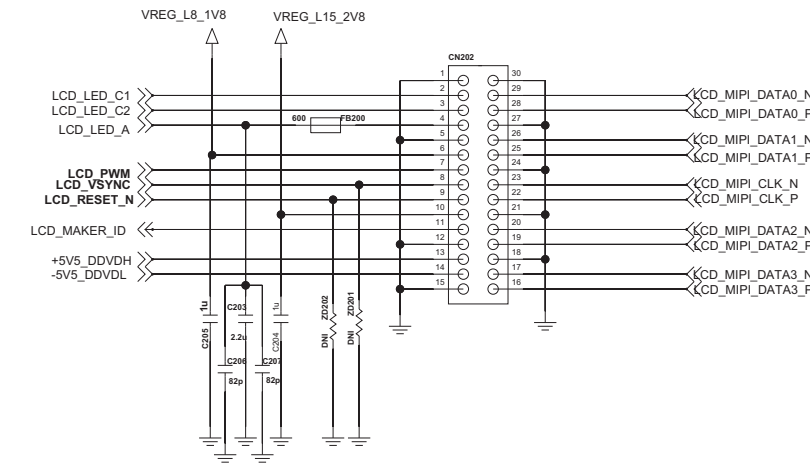

7. BGA PIN MAP

MSM8926 - Top View (upper left quadrant)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
A		GND		GPIO_58		GND		GPIO_59		GPIO_56		GND		GND		GND		VDD_DDR_1P8		GND
B	GND		GPIO_61		VDD_DDR_1P8		GPIO_59		GPIO_54		GND		GND		GND		GND		VDD_DDR_1P2	
C		GPIO_113		GPIO_60		GPIO_57		GND		GPIO_55		GND		GND		GND		VDD_P3		GND
D	SDC1_DATA_5		GPIO_2		GPIO_3		GND		GND		GND		GND		GND		GND		VREF_UM	
E		SDC1_DATA_1		SDC1_DATA_4		GPIO_1				VDD_P5		GND		GND		GND		VDD_P6		GND
F	SDC1_CLK		SDC1_DATA_0				GPIO_9		GND		GND		GND		GND		GND		VDD_USB_1P8	
G		SDC1_DATA_6		SDC1_DATA_2		SDC1_GND		GND		GND		VDD_APC		VDD_APC		VDD_APC		GND		USB_HB2_SYSCLK
H	GND		GND		VDD_DDR_1P2		VDD_SDC_CDC		GND		GND		GND		GND		GND		GND	
J		SDC1_DATA_3				GND		VDD_P7		VDD_APC		VDD_APC		GND		VDD_APC		VDD_APC		VDD_CORE
K	SDC1_DATA_7				GND		VDD_SDC_CDC		GND		GND		GND		GND		GND		GND	
L		SDC2_DATA_1		SDC2_GND		CXD		VDD_APC		VDD_APC		VDD_APC		VDD_MEM		VDD_APC		VDD_APC		VDD_CORE
M	SDC2_DATA_2		SDC2_CLK		SDC2_DATA_0		GND		GND		GND		GND		GND		GND		GND	
N		GND		VREF_SDC		GND		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_PLL2
P	SDC2_DATA_3		GND			GND		GND		GND		GND		GND		GND		GND		GND
R		GPIO_104		GND		VDD_P2		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_MEM
T	GPIO_92		GPIO_103		GPIO_105		GPIO_115		GND		GND		GND		GND		GND		GND	
U		GPIO_102		GPIO_101		VREF_APC_MPM		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_APC		VDD_CORE
V	GPIO_116		GND		TX_DAC0_VREF		VDD_P3		GND		GND		GND		GND		GND		GND	
W		TX_DAC0_OP		GPIO_117		GPIO_118		VDD_APC		VDD_APC		VDD_MEM		VDD_CORE		VDD_CORE		VDD_MEM		VDD_MEM
Y	TX_DAC0_OM				GND		VDD_A2		GND		GND		GND		GND		GND		GND	

 Not Used

7. BGA PIN MAP

MSM8926 - Top View (upper right quadrant)

	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
A		USB_H2_REXT		GPIO_120		GND		GPIO_70		GPIO_51		GND		VDD_DDR_1P8		GND		GND		GND	
B	GND		VDD_P1		GND		CKO_EN		GPIO_67		GPIO_52		VDD_P1		SLEEP_CLK		VDD_DDR_1P2		GND		
C		GPIO_119		GPIO_110		GPIO_114		GPIO_71		GND		GND		PS_HOLD		GPIO_7		GPIO_64		GPIO_66	
D	GND	USB_H32_ID		GPIO_111		PMIC_SPMI_DATA		GND		GND		RESIN_N		GPIO_6		GPIO_50		GPIO_65			
E		USB_H32_DP								GND		RESOUT_N		GND		GND		GND		GND	
F	USB_H32_DM		VDD_USB_CORE		GPIO_112				GPIO_4		GPIO_5		GND		GND		GND		VDD_P1		
G		GND		USB_H32_VBUS1		VDD_GPPROM_PROG		PMIC_SPMI_CLK		GND		GND		GPIO_69		GND		GND		GPIO_100	
H	VDD_USB_3P3		GND		VDD_P4		VDD_P8		GND		VDD_P3		GND		GPIO_63		GND		GND		
J		GND		VDD_P3		RSVD		GND		ESD_VREF_D3		GND		VDD_P5		GND		GPIO_62		GPIO_106	
K	GND		GND		GND		GND		GND		GND		GND		GPIO_72		WLAN_XO		GPIO_107		
L		GND		GND		VDD_CORE		GND		VDD_BB10_CDC		VDD_MEM		GPIO_49						GPIO_108	
M	GND		VDD_MEM		VDD_MEM		VDD_CORE		GND		GND		GND		GPIO_88		GND		VDD_P1		
N		VDD_MEM		GND		VDD_MEM		VDD_CORE		VDD_CORE		VDD_MEM		GND		GND		GPIO_41		GND	
P	GND		VDD_MODEM		VDD_CORE		VDD_MEM		GND		VDD_CORE		ESD_VREF_D1		WLAN_BB_QM		GND		GPIO_44		
R		VDD_MEM		GND		GND		GND		VDD_BB10_CDC		GND		WLAN_BB_QP		GND				GPIO_40	
T	GND		VDD_PLL1		GND		VDD_MEM		VDD_PLL2		GND		VDD_WLAN		GND					GPIO_42	
U		VDD_MODEM		GND		VDD_CORE		GND		GND		WLAN_REXT		WLAN_BB_IM		GND				GND	
V	GND		VDD_CORE		GND		VDD_CORE		GND		GND		GND		WLAN_BB_IP		GPIO_43		VDD_P1		
W		VDD_CORE		GND		GND		GND		VDD_CORE		GND		GND		GND		VDD_DDR_1P2		GPIO_46	
Y	GND		VDD_CORE		GND		VDD_CORE		VDD_CORE		GND		GPIO_25		VDD_P3		GPIO_39		VREF_DQ		

 Not Used

7. BGA PIN MAP

MSM8926 - Top View (lower left quadrant)

AA			ET_DAC_P		TX_DAC0_VREF		GND		VDD_MEM		VDD_MEM		VDD_CORE		VDD_CORE		GND
AB	VDD_DDR_1P8		TX_DAC0_IP		TX_DAC0_IM		GND		GND		GND		GND		GND		GND
AC		VREF_CA		ET_DAC_M		TX_DAC1_OP		TX_DAC1_VREF		VDD_PLL2		GND	VDD_MODEM		VDD_CORE		VDD_PLL1
AD	EBIO_ZQ0		TX_DAC1_IM		TX_DAC1_IP		TX_DAC1_OM		VDD_A2		GND	VDD_MODEM	VDD_MODEM		GND		VDD_MEM
AE		BBRX_CH1_OP		GND		GND		TX_DAC1_VREF				GND	VDD_MODEM		VDD_MODEM		VDD_CORE
AF	BBRX_CH1_OM		BBRX_CH1_IP		BBRX_CH1_IM		GND		VDD_A2		GND		GND		GND		VDD_MEM
AG		BBRX_CH0_IM		BBRX_CH0_OM		BBRX_CH0_OP		VDD_A1		GND		GND		GND		VDD_CORE	
AH	BBRX_CH0_IP		BBRX_CH0_OP		BBRX_CH0_OM		VDD_A1		GND		VDD_MEM	VDD_MEM	VDD_MEM		VDD_MEM		VDD_MEM
AJ		VDD_P1		BBRX_CH2_IM		BBRX_CH2_IP		VDD_A2		VDD_EBIO_CDC		GND	VDD_CORE		GND		VDD_CORE
AK	BBRX_CH2_OM		BBRX_CH2_IM		GND		VDD_A1		GND		VDD_CORE		VDD_CORE		VDD_CORE		VDD_CORE
AL		BBRX_CH2_OP		BBRX_CH2_IP		GND		VDD_P3		GND		VDD_CORE		VDD_MP1_DS1P4		GND	VDD_CORE
AM	GND		GNS5_BB_IM		GND		GND		EBIO_CAL_REXT		GND		VDD_P3				VDD_MP1_DS1P8
AN		VDD_P1		GNS5_BB_IP		GPIO_91		GND		EBIO_VREF_CA		GND		GPIO_78		VDD_P3	
AP	GPIO_90		GNS5_BB_OM		GND		GND		GND				GPIO_82		GPIO_78		GND
AR		GPIO_89		GNS5_BB_OP		GPIO_99		GPIO_94		GPIO_95		GPIO_81				MPI_DS10_LN1_N	
AT	GND		GPIO_98		GPIO_98		GPIO_100		GND		GPIO_80				GND		MPI_DS10_CLK_P
AU		VDD_DDR_1P2		GPIO_97		GPIO_93				GND		GPIO_77				MPI_DS10_LN1_P	
AV	GPIO_96		GPIO_96		GPIO_87		GPIO_84		GND		GPIO_75		GND		GND		MPI_DS10_CLK_N
AW		GND		GND		GPIO_83		GND		GPIO_73		GND			MPI_DS10_LN2_P		VDD_DDR_1P2
AY	GND		GND		GPIO_86		VDD_DDR_1P8		GPIO_79		GPIO_74		VDD_P1		MPI_DS10_LN2_N		VDD_MP1_DS1P2
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
	18	19	20														

 Not Used


7. BGA PIN MAP

MSM8926 - Top View (lower right quadrant)

	VDD_CORE		VDD_CORE		GND		VDD_MEM		VDD_CORE		GND		VDD_P3						AA	
VDD_CORE		VDD_CORE		GND		VDD_CORE		VDD_CORE		GND		GND		GPIO_27		GPIO_10		VDD_DDR1P8	AB	
	GND		VDD_CORE		GND		VDD_MEM		VDD_CORE		GND		GPIO_11		GPIO_26		GPIO_45		GPIO_46	AC
VDD_CORE		VDD_MEM		GND		GND		GND		VDD_EBI0_CDC		GPIO_9		GPIO_31		GPIO_28		GPIO_47	AD	
	GND		VDD_CORE		VDD_PLL1		VDD_MEM		VDD_CORE		VDD_CORE		GPIO_8			GND		GND	GPIO_34	AE
VDD_CORE		VDD_MEM		GND		GND		GND		VDD_MEM		EBI0_VREF_D0						VDD_P1	AF	
	GND		GND		VDD_CORE		VDD_MEM		GND		GND		VDD_P3		GND		GND		GPIO_30	AG
VDD_CORE		VDD_MEM		GND		GND		GND		VDD_MEM		GND		GPIO_32		GND		GPIO_29	AH	
	GND		VDD_MEM		VDD_CORE		VDD_EBI0_CDC		VDD_CORE		GND		GND		GPIO_33		GND		GPIO_34	AJ
VDD_CORE		GND		GND		GND		GND		GND		VDD_P3		GPIO_35		GND		GND	AK	
	GND		GND		VDD_CORE		GND		VDD_CORE		GND		GPIO_38		GND		GND		AL	
VDD_CORE		MPI_DSI_LDO		GND		GND		EBI0_VREF_D2		GND		GND		GPIO_36		GND		VDD_P1	AM	
	GND		MPI_CS10_LN2_P		GND		GND				GND		TCK		GPIO_15		GND		AN	
GND		MPI_CS10_LN2_N		VDD_MIP1_CS1		GND					GND		TRST_N		GPIO_17		GPIO_22		AP	
	MPI_CS10_LN4_P			MPI_CS10_LN0_P		GND		GND					TDO		GPIO_14		GPIO_23		AR	
MPI_DSI1_LN0_N		GND		GND		MPI_CS11_LN0_P		GND					SRST_N			GPIO_20		VDD_P1	AT	
	MPI_CS10_LN4_N		GND		MPI_CS10_LN0_N		GND		GND				MODE_0			VDD_DDR1P2		GPIO_13	GPIO_21	AU
MPI_DSI10_LN0_P		GND		GND		MPI_CS11_LN0_N		GND					MODE_1			GPIO_12		GPIO_16		AV
	MPI_CS10_LN3_P		GND		MPI_CS10_LN1_P		MPI_CS11_LN1_P		GND			VDD_P1		TMS		GPIO_19		GND		AW
VDD_P1		MPI_CS10_LN0_N		MPI_CS10_LN1_N		MPI_CS11_LN1_N		GND		GND		VDD_DDR1P8		TDI		GPIO_18		GND		AY
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	


 Not Used

POP_MEMORY - Top View

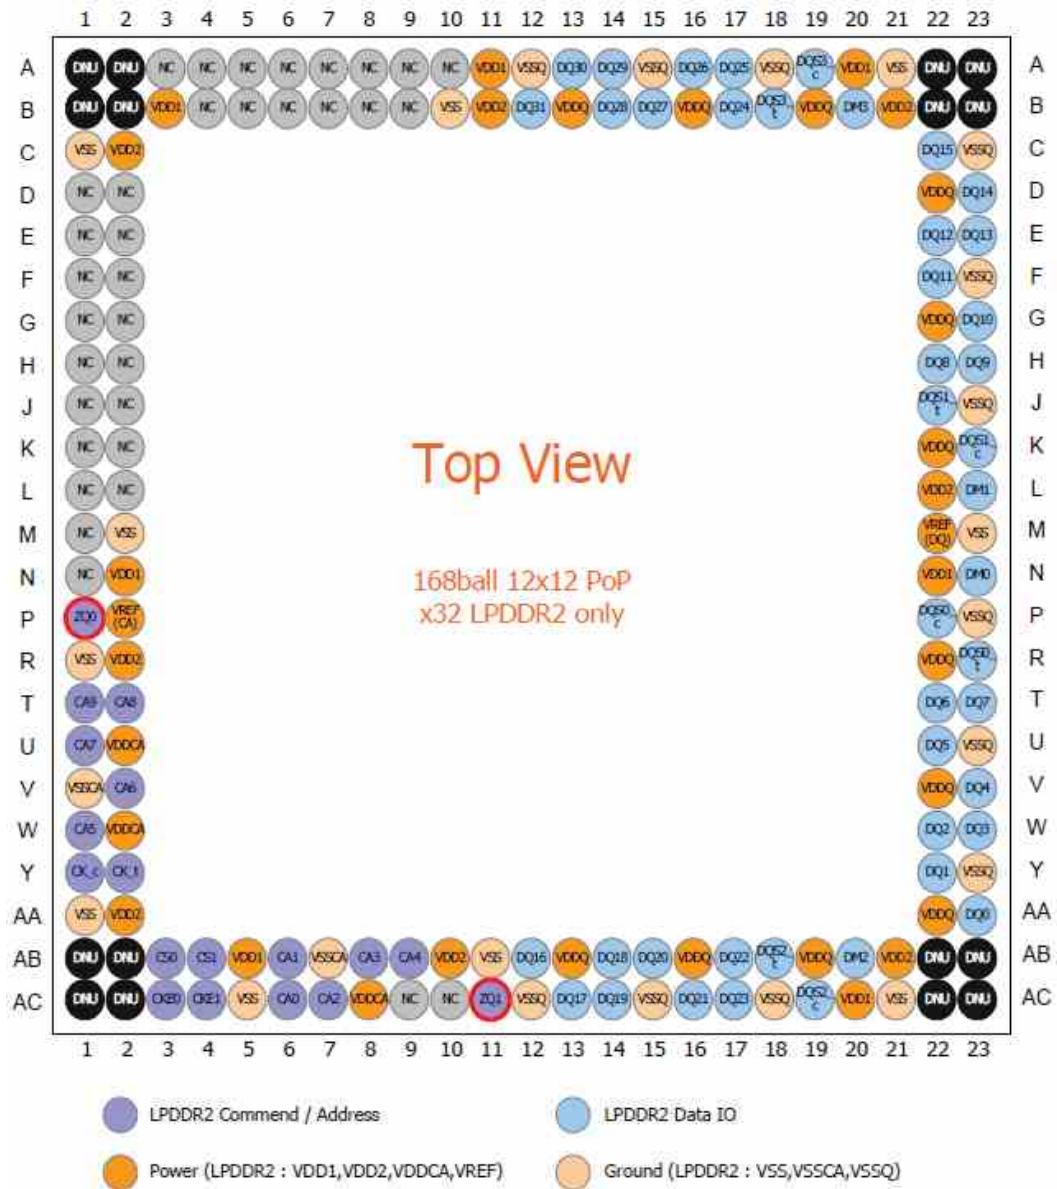

NC Not Used

eMMC - Top View

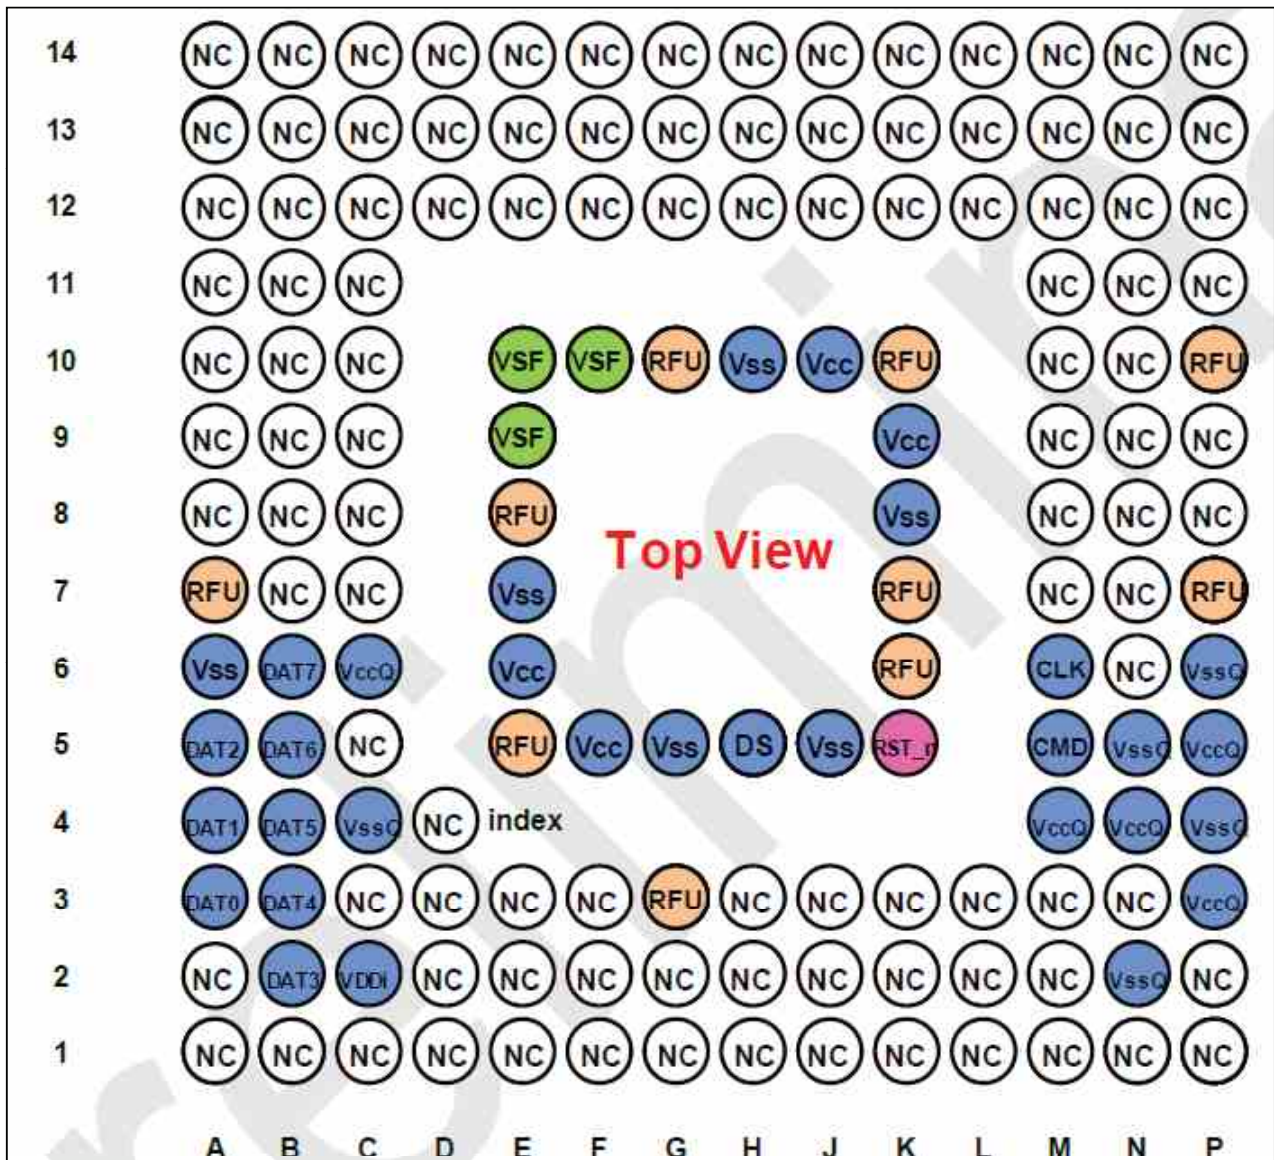

● Not Used

7. BGA PIN MAP

PM8921 - Top View

1 VDD _GR2	2 VREG _L3	3 VREG _L2	4 VDD _GR1	5 XTAL _19M_IN	6 XTAL _19M_OUT	7 VDD _GR6	8 VSW _S1	9 VDD _S1	10 VDD _S1		
11 VDD _GR2	12 VREG _L24	13 RF_CLK1	14 VREG _L13	15 VREG _L1	16 VREG _L11	17 GND _XO	18 VREG _L17	19 VREG _L16	20 VREG _S1	21 VSW _S1	22 GND _S1
23 GND _S1	24 VREG _L26	25 VREG _L5		27 VDD _GR4		29 VREG _L19	30 VREG _L17	31 88_CLK1	32 VREG _L18	33 GND _S1	34 VDD _S2
35 VSW _S1	36 VREG _S3	37 VREG _L4	38 VREG _L10	39 RF_CLK2		41 VDD _GR7	42 88_CLK2	43 VREG _L15	44 88_CLK1 _EN	45 VSW _S2	46 VSW _S2
47 VDD _S3	48 VDD _L25	49 VREG _L14	50 VREG _L28	51 VREG _L23	52 VREG _L22	53 VREG _L21		55 VREG _L20	56 VREG _S2	57 GND _S2	58 VSW _S2
	59 VDD _GR5	60 VDD _GR5	61 VREF _UPDCR	62 GND _XO_BUFF	63 GND _XO_ADC	64 GND	65 GND _DRV	66 VB _DRV_N	67 GND _S2	68 GND _S2	
69 GND _S4	70 VREG _L25	71 VREG _L12	72 AMUX_1	73 AMUX_2	74 GND	75 GND	76 VDDIN	77 PON _RESET_N	78 VREG _S5	79 VDD _S5	80 VSW _S5
81 VSW _S4				85 CSL _PWR_N	86 GND	87 GND	88 SLEEP _CLK1				92 GND _S5
93 VDD _S4	94 VOUT _LV51	95 VREG _S4	96 BMS _CSN	97 USB _ID_IN	98 GND	99 GND	100 PS_HOLD	101 RESIN _IN	102 KPD _PWR_N	103 VLED _FLASH	104 VDD _FLASH
	105 VREG _L8	106 VREG _L8	107 BMS _CBP	108 OPT_2	109 GND_CHG _PUB	110 GND_OVP	111 GND	112 SPM _CLK	113 GND_WLED1	114 GND_WLED1	
115 VDD _GR3	116 VREG _L7	117 GND _REF	118 VREG _L8	119 OPT_1	120 XO _THERM	121 AVDD _BYP	122 GPIO_8	123 SPM _DATA	124 GPIO_1	125 WLED_1	126 VDD _WLED
127 VREG _L27	128 VREG _L9	129 REF _BYP	130 MPP_7	131 BMS _BYP	132 MPP_5		134 GPIO_7	135 GPIO_4	136 GPIO_2	137 OVP _WLED	138 VSW _WLED
139 VBAT	140 BATFET _CP_DRV	141 MPP_8	142 GND _CHG	143 VCHG	144 MPP_6		146 MPP_2		148 GPIO_5	149 GPIO_3	150 GND_WLED
151 VBAT	152 VPH _PWR	153 GND _CHG_HP	154 VSW _CHG	155 VCHG	156 VBAT _SNG	157 MPP_4	158 MPP_3	159 MPP_1	160 GPIO_6	161 USB_IN	162 OVP _OUT
163 VBAT	164 VPH _PWR	165 GND _CHG_HP	166 VSW _CHG		167 VDRV_F	168 LED _CHG		169 VREF _BAT_THM	170 VREF _BYP	171 OVP_CP _DRV	172 USB_IN

Input power management

Output power management

General housekeeping

User interfaces

IC-level interfaces

MPPs and GPIOs


No connection

Power

Ground

Not Used

WCN3660A– TOP View

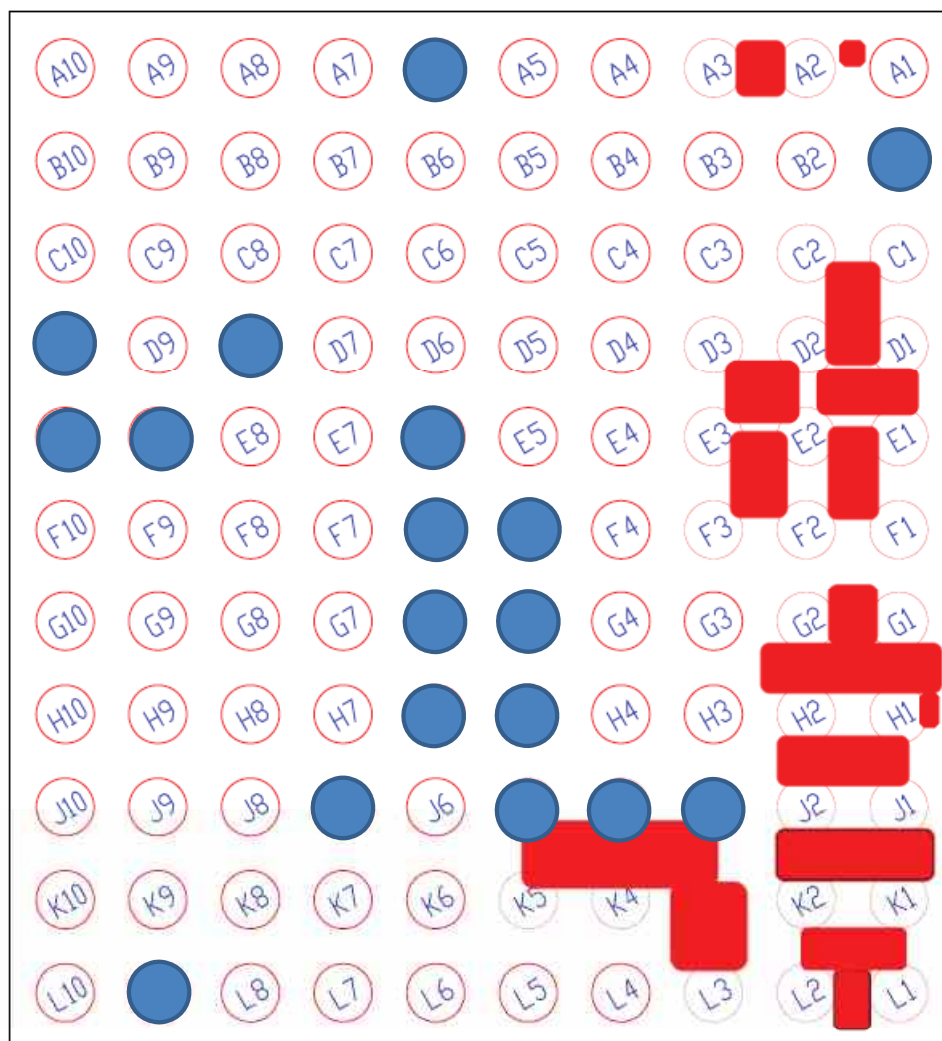

● Not Used

7. BGA PIN MAP

WTR1625 - Top View

	1		2		3		4		5		6		7		8		9
	DRX_MB2_IN		DRX_HMB1_IN		GND		DRX_HB1_IN		DRX_LB1_IN		GND		DRX_LB1_IN		GND		PRX_HB1_IN
10		11		12		13		14		15		16		17		18	19
(GND)		VDD_RF1_O_MB		DRX_HB2_IN		DRX_HB3_IN		VDD_RF1_O_LB_IO		DRX_LB2_IN		DRX_LB3_IN		PRX_HB2_IN		PRX_HB3_IN	PRX_HMB4_IN
	20		21		22		23		24		25		26		27		
	DRX_MB2_IN		GND		VDD_RF1_O_HB		GND		GND		VDD_RF1_P_HB_LO		GND		PRX_MB2_IN		
28		29		30		31		32		33		34		35			
DRX_MB1_IN		DRX_MD_CA_IN		DRX_HB_CA_OUT		VDD_RF1_O_LB		DRX_LD_CA_OUT		PRX_HB_CA_OUT		VDD_RF1_P_HMB		GND			
	36			38		39		40		41		42		43			
	GNSS_RF_INP			VDD_RF1_O_LOM		GND		GND		GND		GND		PRX_MB2_IN			
44		45		46		47		48		49		50		51			
GNSS_RF_INM		GND		GND		GND		VDD_RF1_E_VCO		GND		GND		PRX_MD1_IN			
	52		53		54		55		56		57		58				
	VDD_RF1_O_LNA		GNSS_BB_IM		VDD_RF2_O_BB		GND		GND		VDD_RF1_P_HMB_LO		GND				
59		60		61		62		63		64		65		66			
VDD_RF1_C_BB		GNSS_BB_IP		DRX_BB_OP		VDD_RF2_E_VCO		GND		GND		PRX_LB1_IN					
	66		67		68		69		70		71		72		73		
	GND		GNSS_BB_OP		DRX_BB_OM		GND		GND		RTUNE		VDD_RF1_P_LB		PRX_LB2_IN		
74		75		76		77		78		79		80		81		82	83
VDD_RF1_O_VCO		GND		DRX_BB_F		GND		VDD_RF1_S_PLL		VDD_RF1_F_PLL		VDD_RF2_P_VCO		GND		GND	
	84		85		86		87		88		89		90		91		92
	GND		GNSS_BB_OM		DRX_BB_IM		GND		GND		GND		VDD_RF1_P_VCO		PRX_LB1_CA_OUT		PRX_LB2_IN
93		94		95		96		97		98		99		100		101	102
VDD_K9-1_G_PLL		GND		GNSS_PPRX_DRX		GND		PRX_BB_OM		VDD_K9-2_P_BB		PRX_BB_IP		VDD_K9-2_P_TX		GND	PRX_LB1_IN
	103		104		105		106		107		108		109		110		111
	VDD_DIO		GP_DATA1		GNSS_TX_GNSS		GND		PRX_BB_OP		PRX_BB_IM		ADC_IN		GND		GND
112		113		114		115		116		117		118		119		120	121
GND		GND		VDD_RF2_T_PLL		VDD_RF1_T_SYN		VDD_RF2_FBRX		PDCT_K9-FB		GND		GND		GND	TX_HB2_OUT
	122		123		124		125		126		127		128		129		130
	GND		GP_DATA0		GND		GND		VDD_RF2_T_BB		DAC_HB-F		GND		VDD_RF2_T_DA		TX_HB1_OUT
131		132		133		134		135		136		137		138		139	
XO_IN		GND		GND		GND		VDD_RF1_T_L_O		VDD_RF1_T_LPG		VDD_RF1_T_DA		TX_MB2_OUT		TX_MB3_OUT	
	140		141		142		143		144		145		146		147		
	GND		GND		GND		GND		GND		GND		GND		TX_MD1_OUT		
147		148		149		150		151		152		153		154		155	
VDD_RF2_XO		GND		VDD_RF1_T_VCO		GND		TX_BB_IP		TX_BB_OP		TX_LB2_OUT		TX_LB1_OUT		TX_MB1_OUT	
	156		157		158		159		160		161		162		163		164
	GND		VDD_RF2_T_VCO		GND		GND		TX_BB_OM		TX_LB1_OUT		TX_LB3_OUT		GND		

Not Used

7. BGA PIN MAP

WTR1625L - Top View

	1 DRX_MB3_IN		2 DRX_HMB1_IN		3 GND		4 DRX_HB1_IN		5 DRX_LB1_IN		6 GND		7 DRX_LB1_IN		8 GND		9 PRX_HB1_IN	
10 GND		11 VDD_RF1_D_MB		12 DRX_HB2_IN		13 DRX_HB3_IN		14 VDD_RF1_D_LB_LO		15 DRX_LB2_IN		16 DRX_LB3_IN		17 PRX_HB2_IN		18 PRX_HB3_IN		19 PRX_HMB4_IN
	20 DRX_MB2_IN		21 GND		22 VDD_RF1_D_HB		23 GND				24 GND		25 VDD_RF1_P_HB_LO		26 GND		27 PRX_MB3_IN	
28 DRX_MB1_IN		29 DRX_MD_CA_IN				30 DRX_HB_CA_OUT			31 VDD_RF1_D_LB		32 DRX_LD_CA_OUT		33 PRX_HB_CA_OUT		34 VDD_RF1_P_HMB		35 GND	
	36 GNSS_RF_INP				38 VDD_RF1_D_LOM		39 GND		40 GND				41 GND		42 GND		43 PRX_MB2_IN	
44 GNSS_RF_INM		45 GND		46 GND		47 GND		48 VDD_RF1_S_VCO		49 GND						50 PRX_HB_CA_IN		51 PRX_MB1_IN
	52 VDD_RF1_G_LNA		53 GNSS_BB_IM		54 VDD_RF2_D_BB				55 GND			56 GND		57 VDD_RF1_P_HMB_LO		58 GND		
59 VDD_RF1_O_BB		60 GNSS_BB_IP		61 DRX_BB_OP				62 VDD_RF2_S_VCO		63 GND			64 GND					65 PRX_LB1_IN
	66 GND	67 GNSS_BB_OP		68 DRX_BB_OM				69 GND		70 GND		71 RTUNE		72 VDD_RF1_P_LB		73 PRX_LB3_IN		
74 VDD_RF1_O_VCO		75 GND		76 DRX_BB_IP		77 GND		78 VDD_RF1_S_PLL		79 VDD_RF1_P_PLL		80 VDD_RF2_P_VCO		81 GND		82 GND		83 GND
	84 GND	85 GNSS_BB_OM		86 DRX_BB_IM		87 GND		88 GND		89 GND		90 VDD_RF1_P_VCO		91 PRX_LB_CA_OUT		92 PRX_LB2_IN		
93 VDD_X0-1_G_PLL		94 GND		95 SSBI_PRX_DRX		96 GND		97 PRX_BB_OM		98 VDD_X0-2_P_BB		99 PRX_BB_IP		100 VDD_X0-2_P_RX		101 GND		102 PRX_LD1_IN
	103 VDD_DIO		104 GP_DATA1		105 TX_GNSS		106 GND		107 PRX_BB_OP		108 PRX_BB_IM		109 ADC_IN		110 GND		111 GND	
112 GND		113 GND		114 VDD_RF2_T_PLL		115 VDD_RF1_T_SYN		116 VDD_RF2_P_BRX		117 PDCT_RFFB		118 GND		119 GND		120 GND		121 TX_HB2_OUT
	122 GND		123 GP_DATA0		124 GND		125 GND		126 VDD_RF2_T_BB		127 DAC_REF		128 GND		129 VDD_RF2_T_DA		130 TX_HB1_OUT	
131 X0_IN		132 GND		133 GND				134 GND		135 VDD_RF1_T_LB_O		136 VDD_RF1_T_LPG		137 VDD_RF1_T_DA		138 TX_MB2_OUT		139 TX_MB3_OUT
	140 GND		141 GND				142 GND		143 GND				144 GND		145 GND		146 TX_MD1_OUT	
147 VDD_RF2_XO		148 GND		149 VDD_RF1_T_VCO					150 GND		151 TX_BB_IP		152 TX_BB_OP		153 TX_LB2_OUT		154 TX_LB1_OUT	
	156 GND		157 VDD_RF2_T_VCO		158 GND		159 GND		160 TX_BB_IM		161 TX_BB_OM		162 TX_LB1_OUT		163 TX_LB3_OUT		164 GND	


 Not Used

WCD9302 - Top View

1 NCP_ C1M		2 NCP_ C1P		3 VDD_ BUCK		4 INTR		5 GND	
	6 BUCK_ VOUT1		7 GND_ BUCK		8 RESET_N		9 DMIC0_ CLK		10 VDD_ IO
11 NCP_ VNEG		12 BUCK_ VOUT2		13 BUCK_ VSW		14 I2S_WS		15 I2S_SCK	
	16 HPH_L		17 HPH_REF		18 GND		19 VDD_ DIG		20 SLIMBUS CLK
21 HPH_R		22 CCOMP		23 GND_ CFILT		24 DMIC0_ DATA		25 GND	
	26 EAROP		27 VDD_ TX_RX		28 GND		29 MCLK		30 SLIMBUS DATA
31 EAROM		32 LINE_ OUT2		33 MODE		34 LDO_ HI_CAP		35 VDD_ VBAT	
	36 LINE_ OUT1		37 MBHC_ HSDDET		38 MIC3_ INP		39 MIC1_ INM		40 GND_ SPKDRV
41 MIC4_ INM		42 MIC4_ INP		43 MIC3_ INM		44 MIC1_ INP		45 VDD_ SPKDRV	
			47 MIC2_ INP		48 MIC_ BIAS2		49 SPKR_ DRVP		50 SPKR_ DRVM
				53 MIC2_ INM		54 MIC_ BIAS1		55 GND_ SPKDRV	


 Not Used

PN547 - Top View

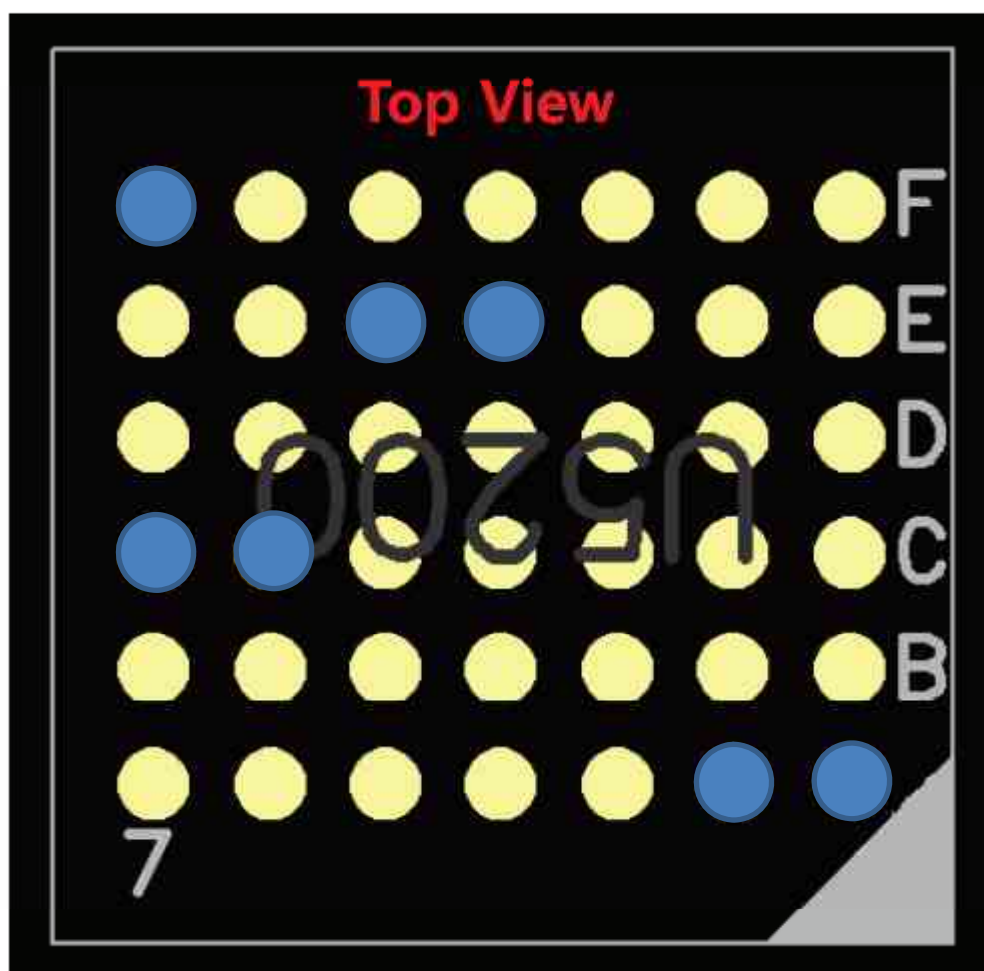


ALL USED


8. PCB LAYOUT

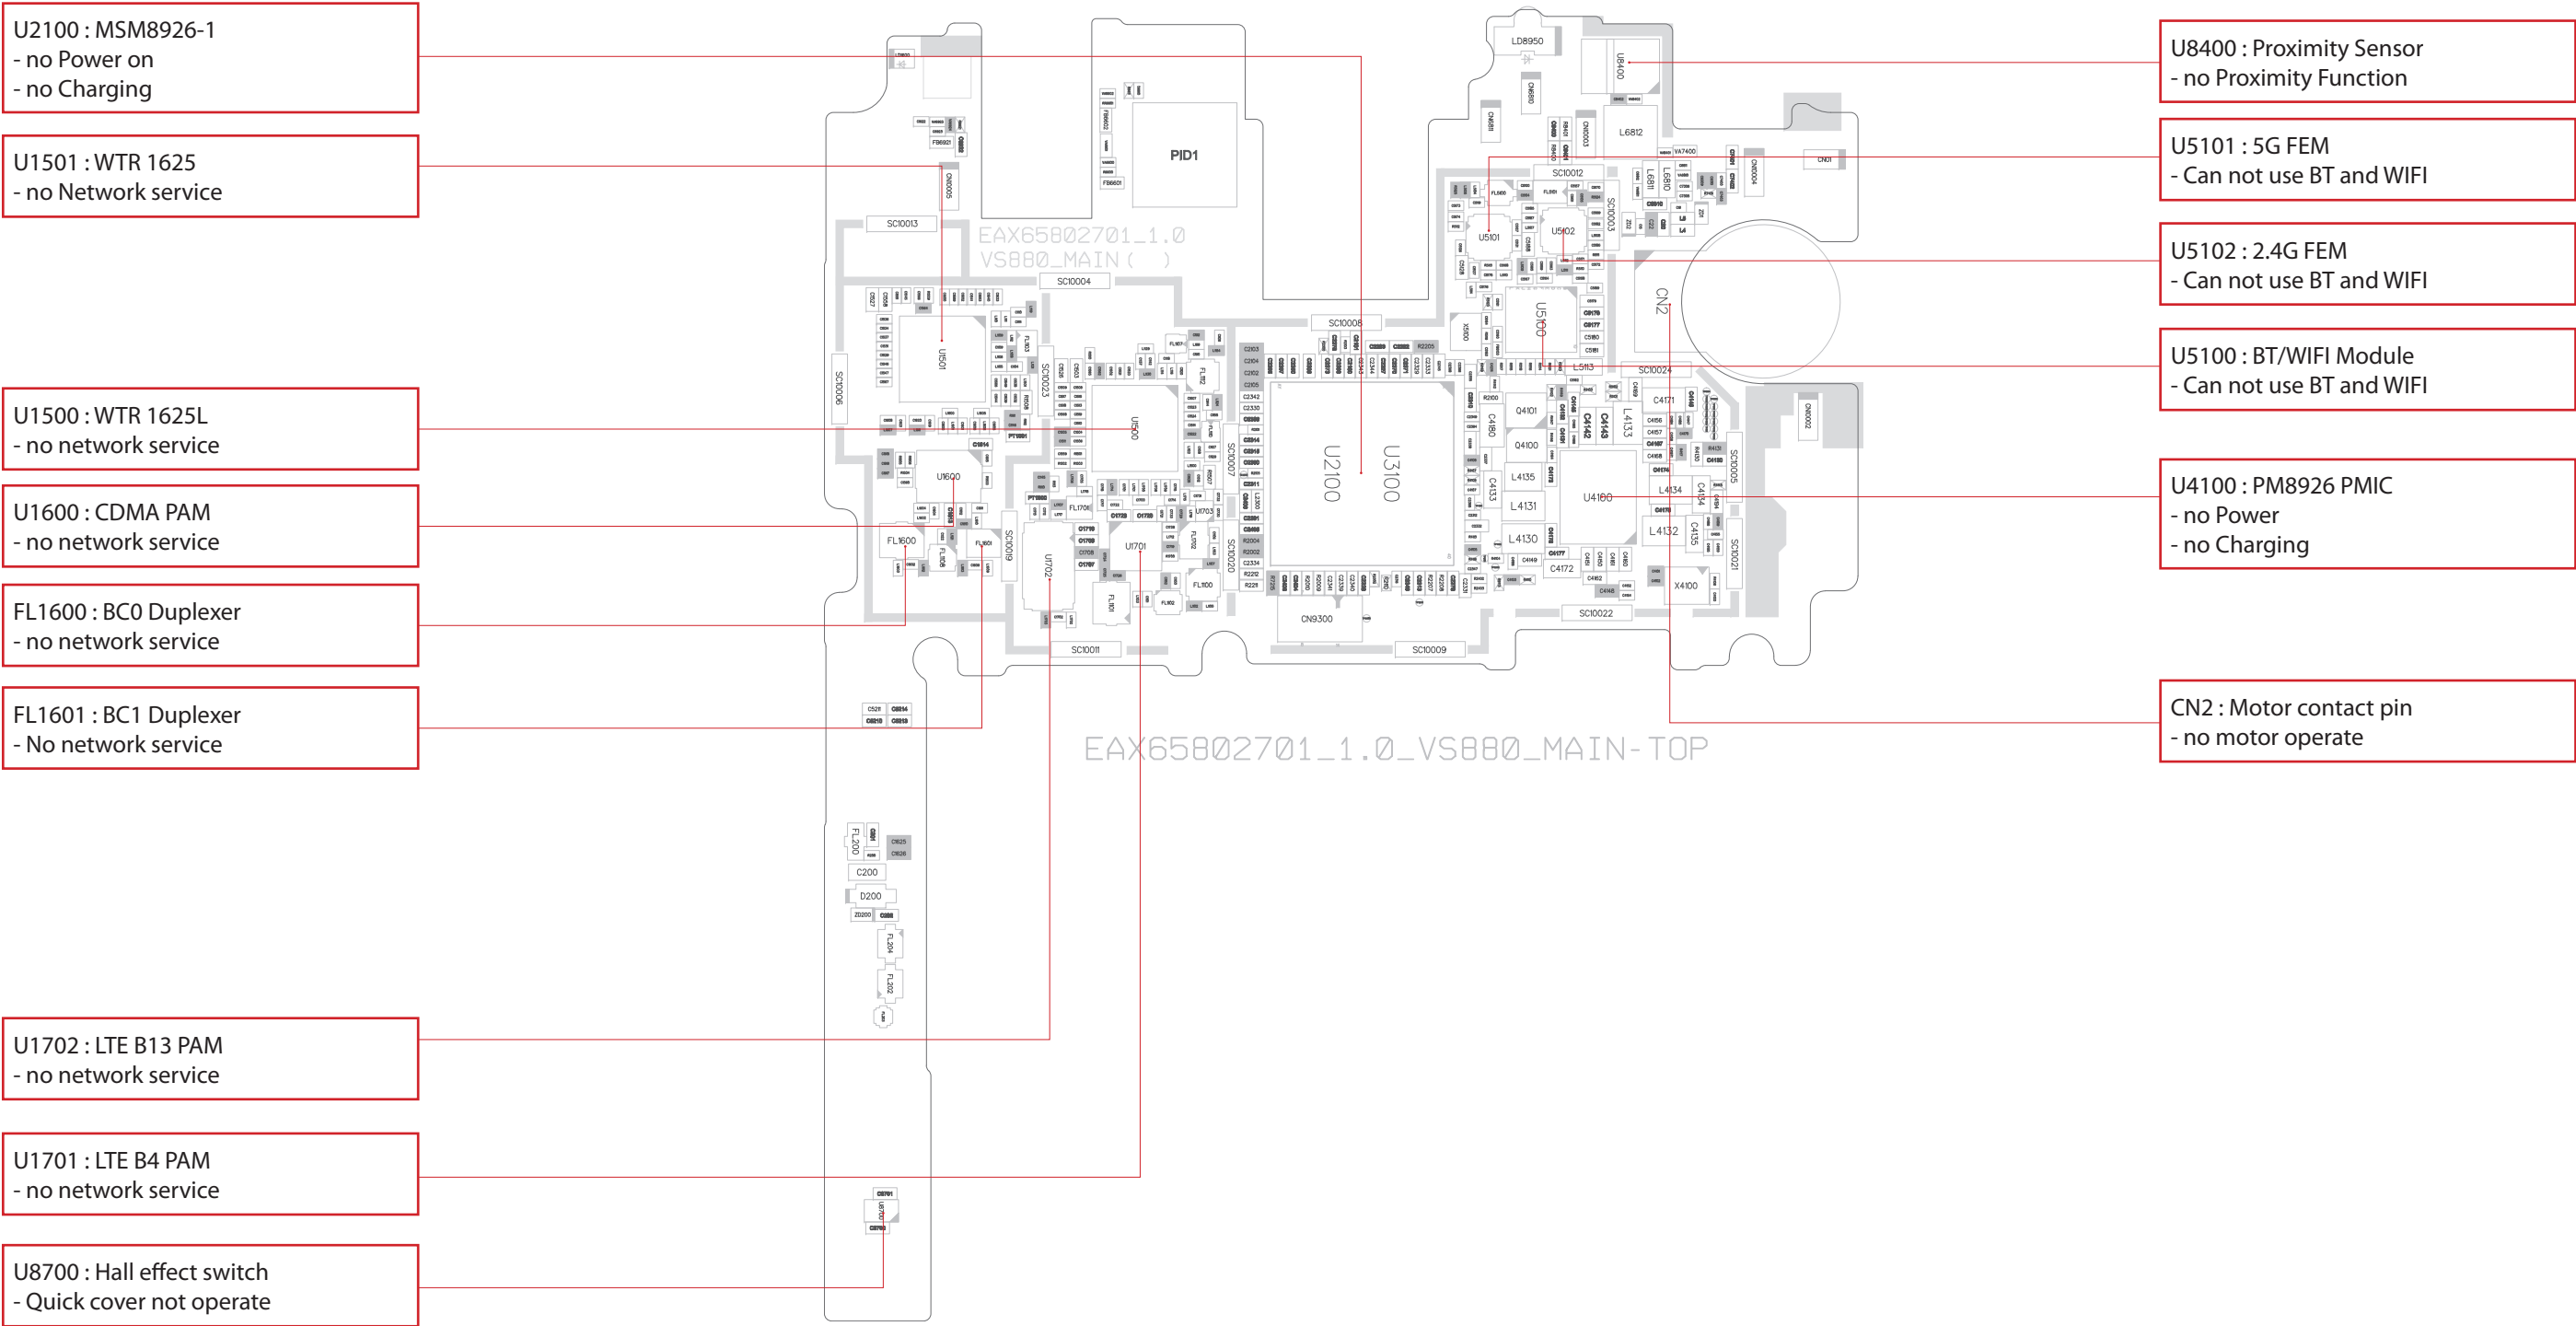


LG-VS880_MAIN_EAX65802701_1.0_TOP

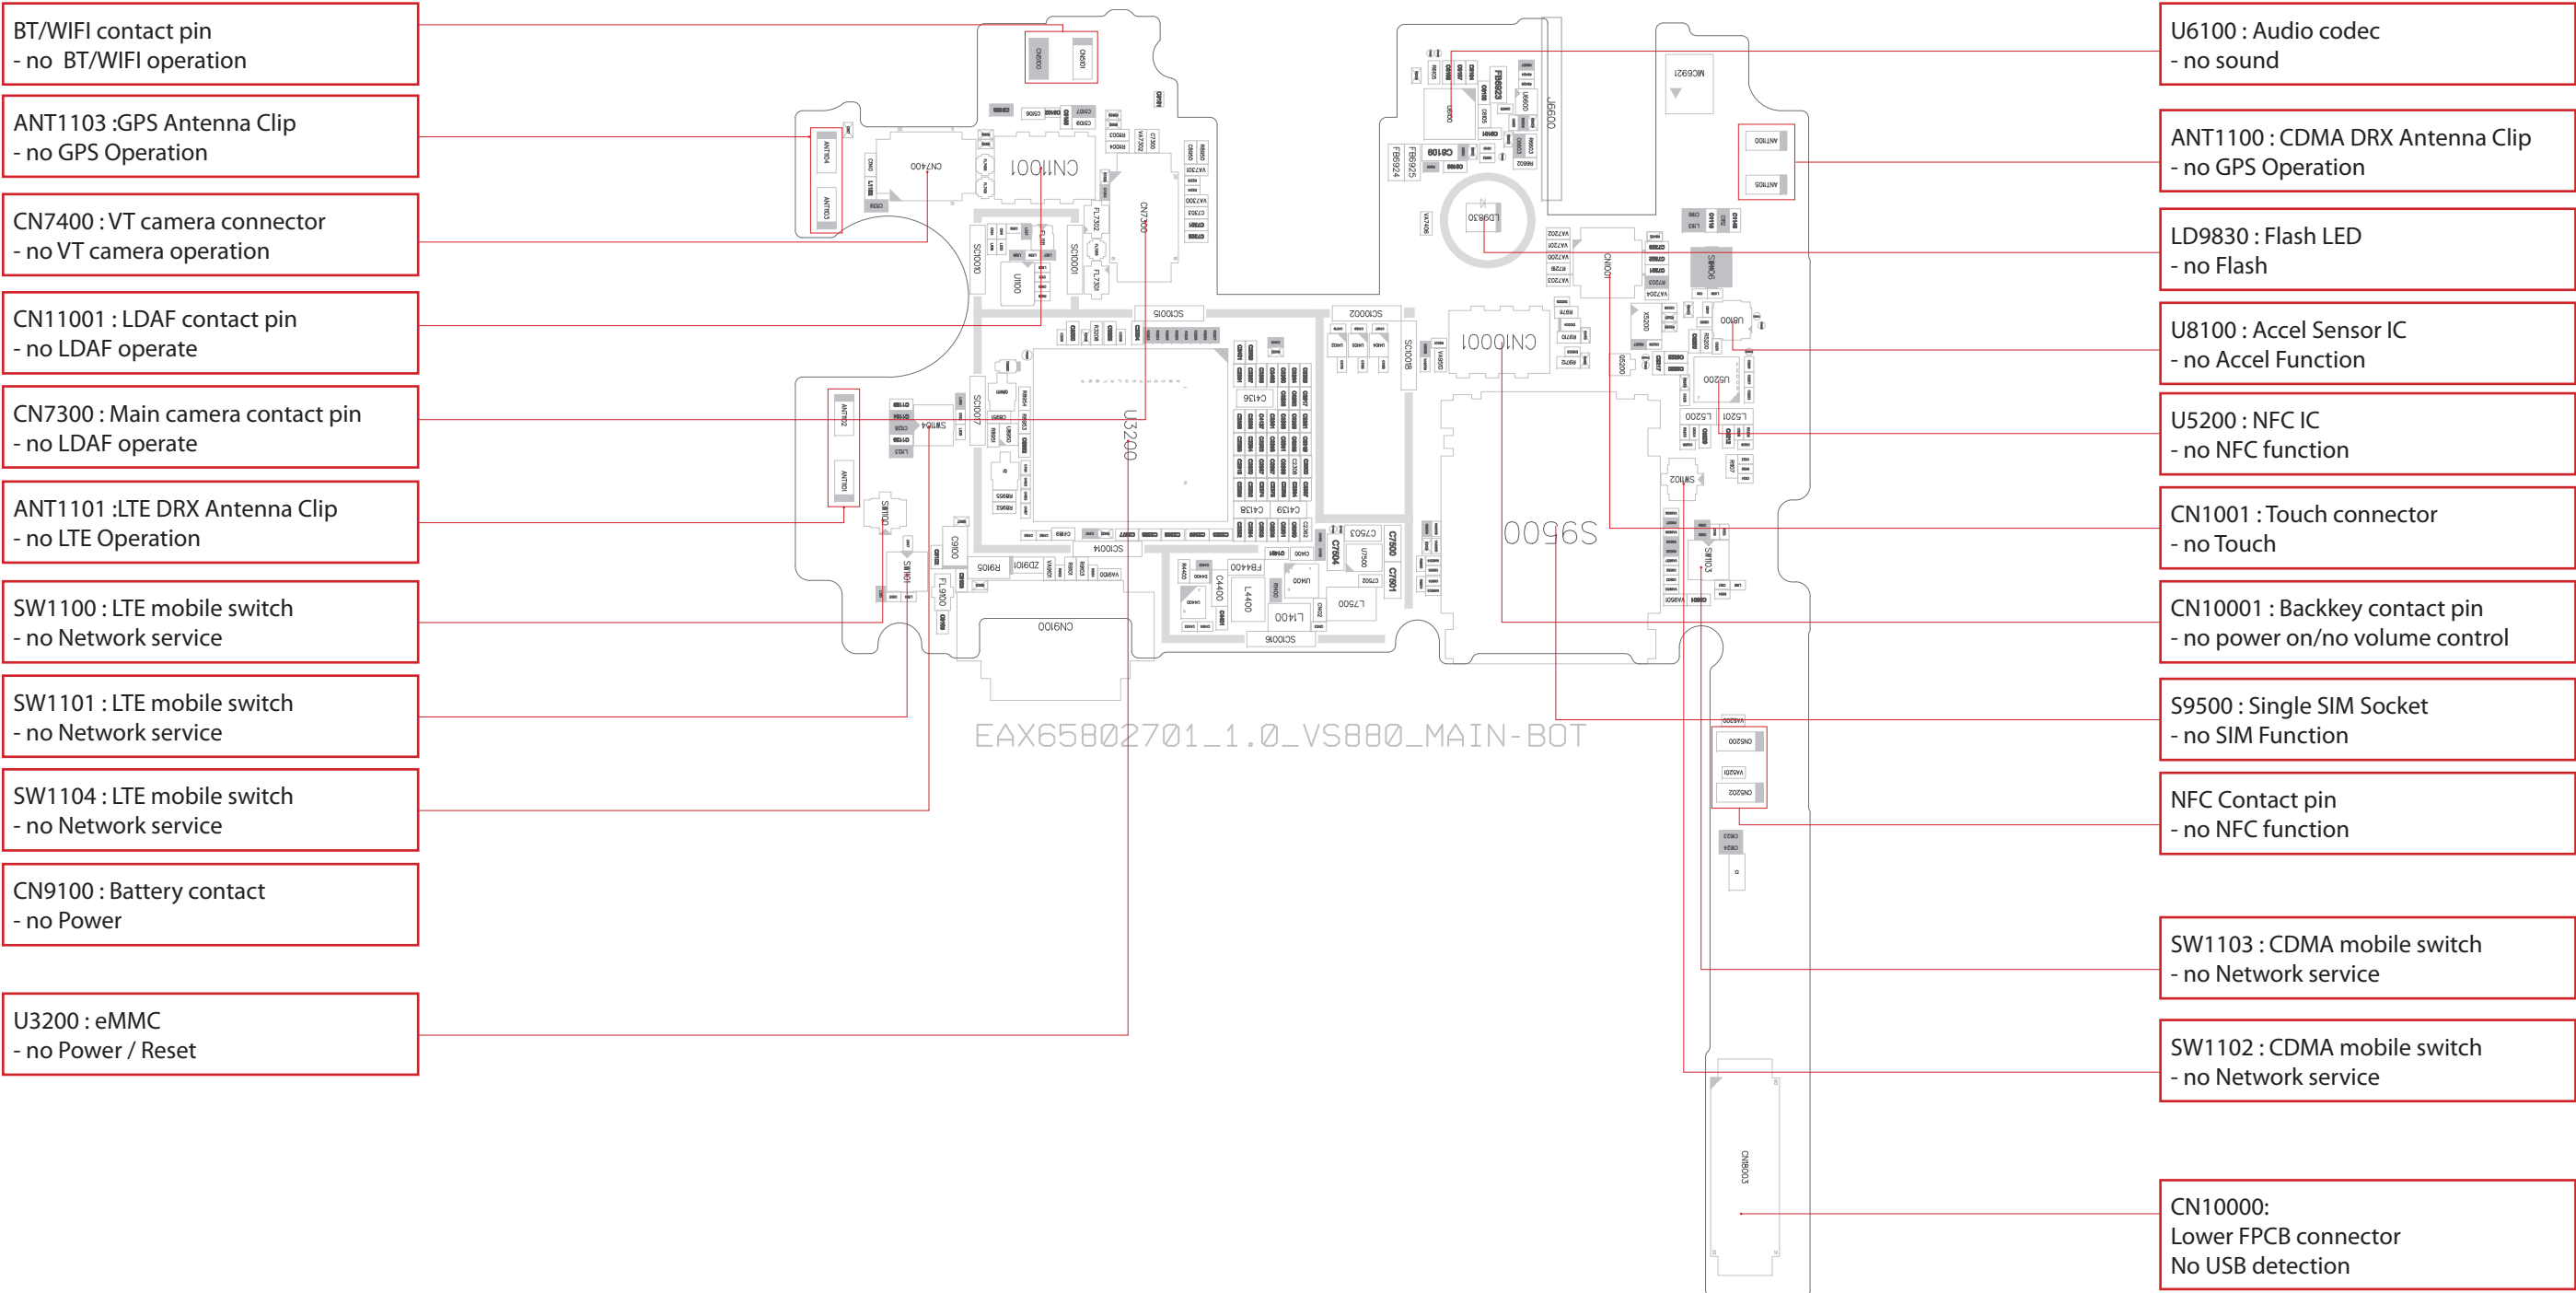


LG-VS880_MAIN_EAX65802701_1.0_BOT

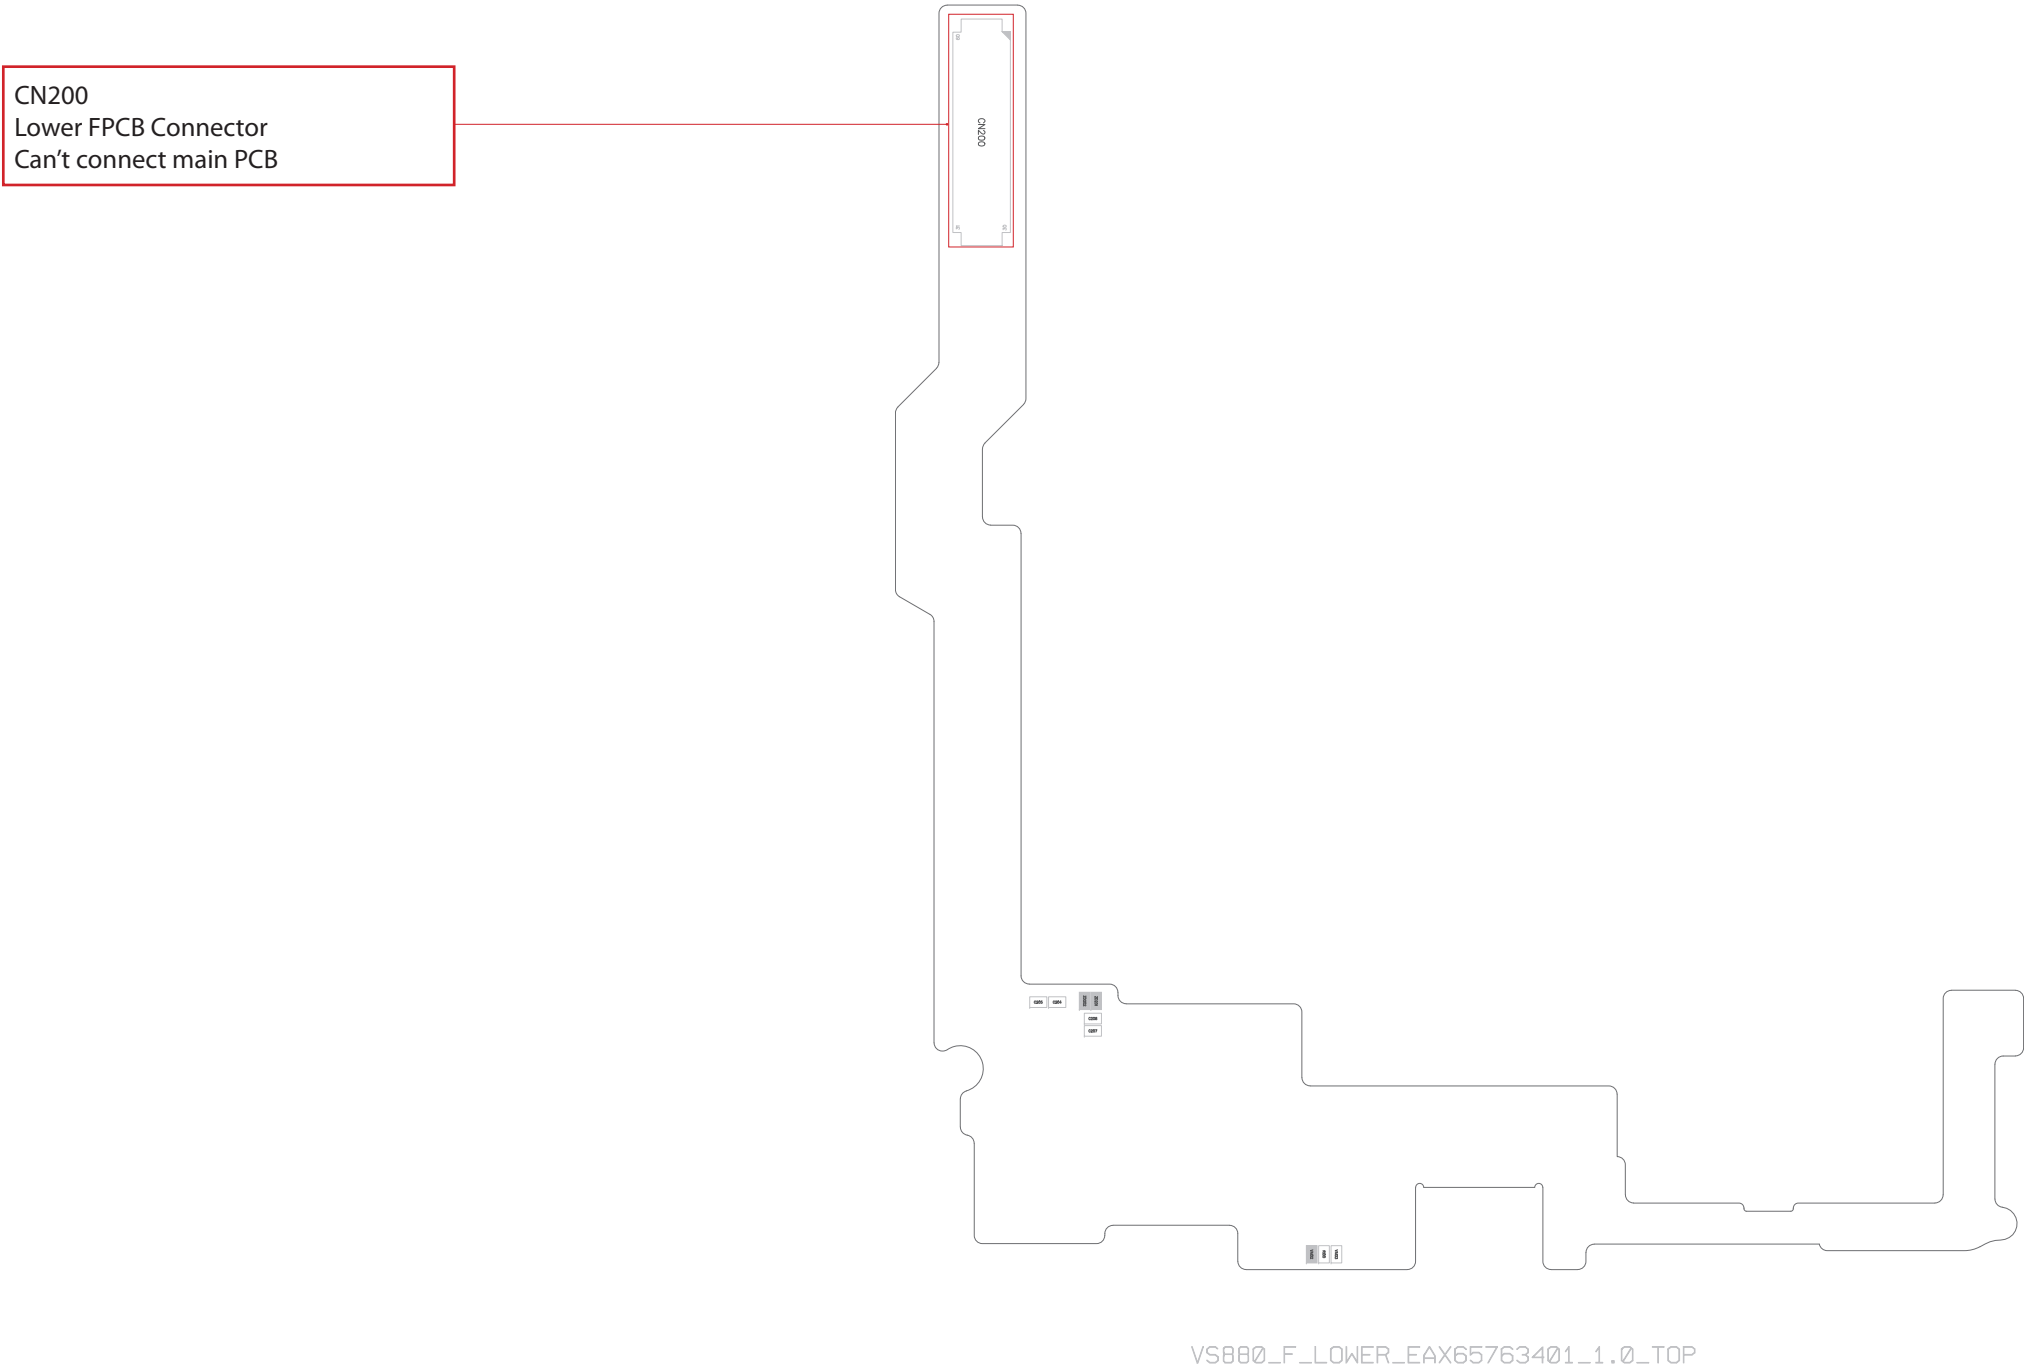


LG-VS880_Lower FPCB_EAX65763401_1.0_TOP

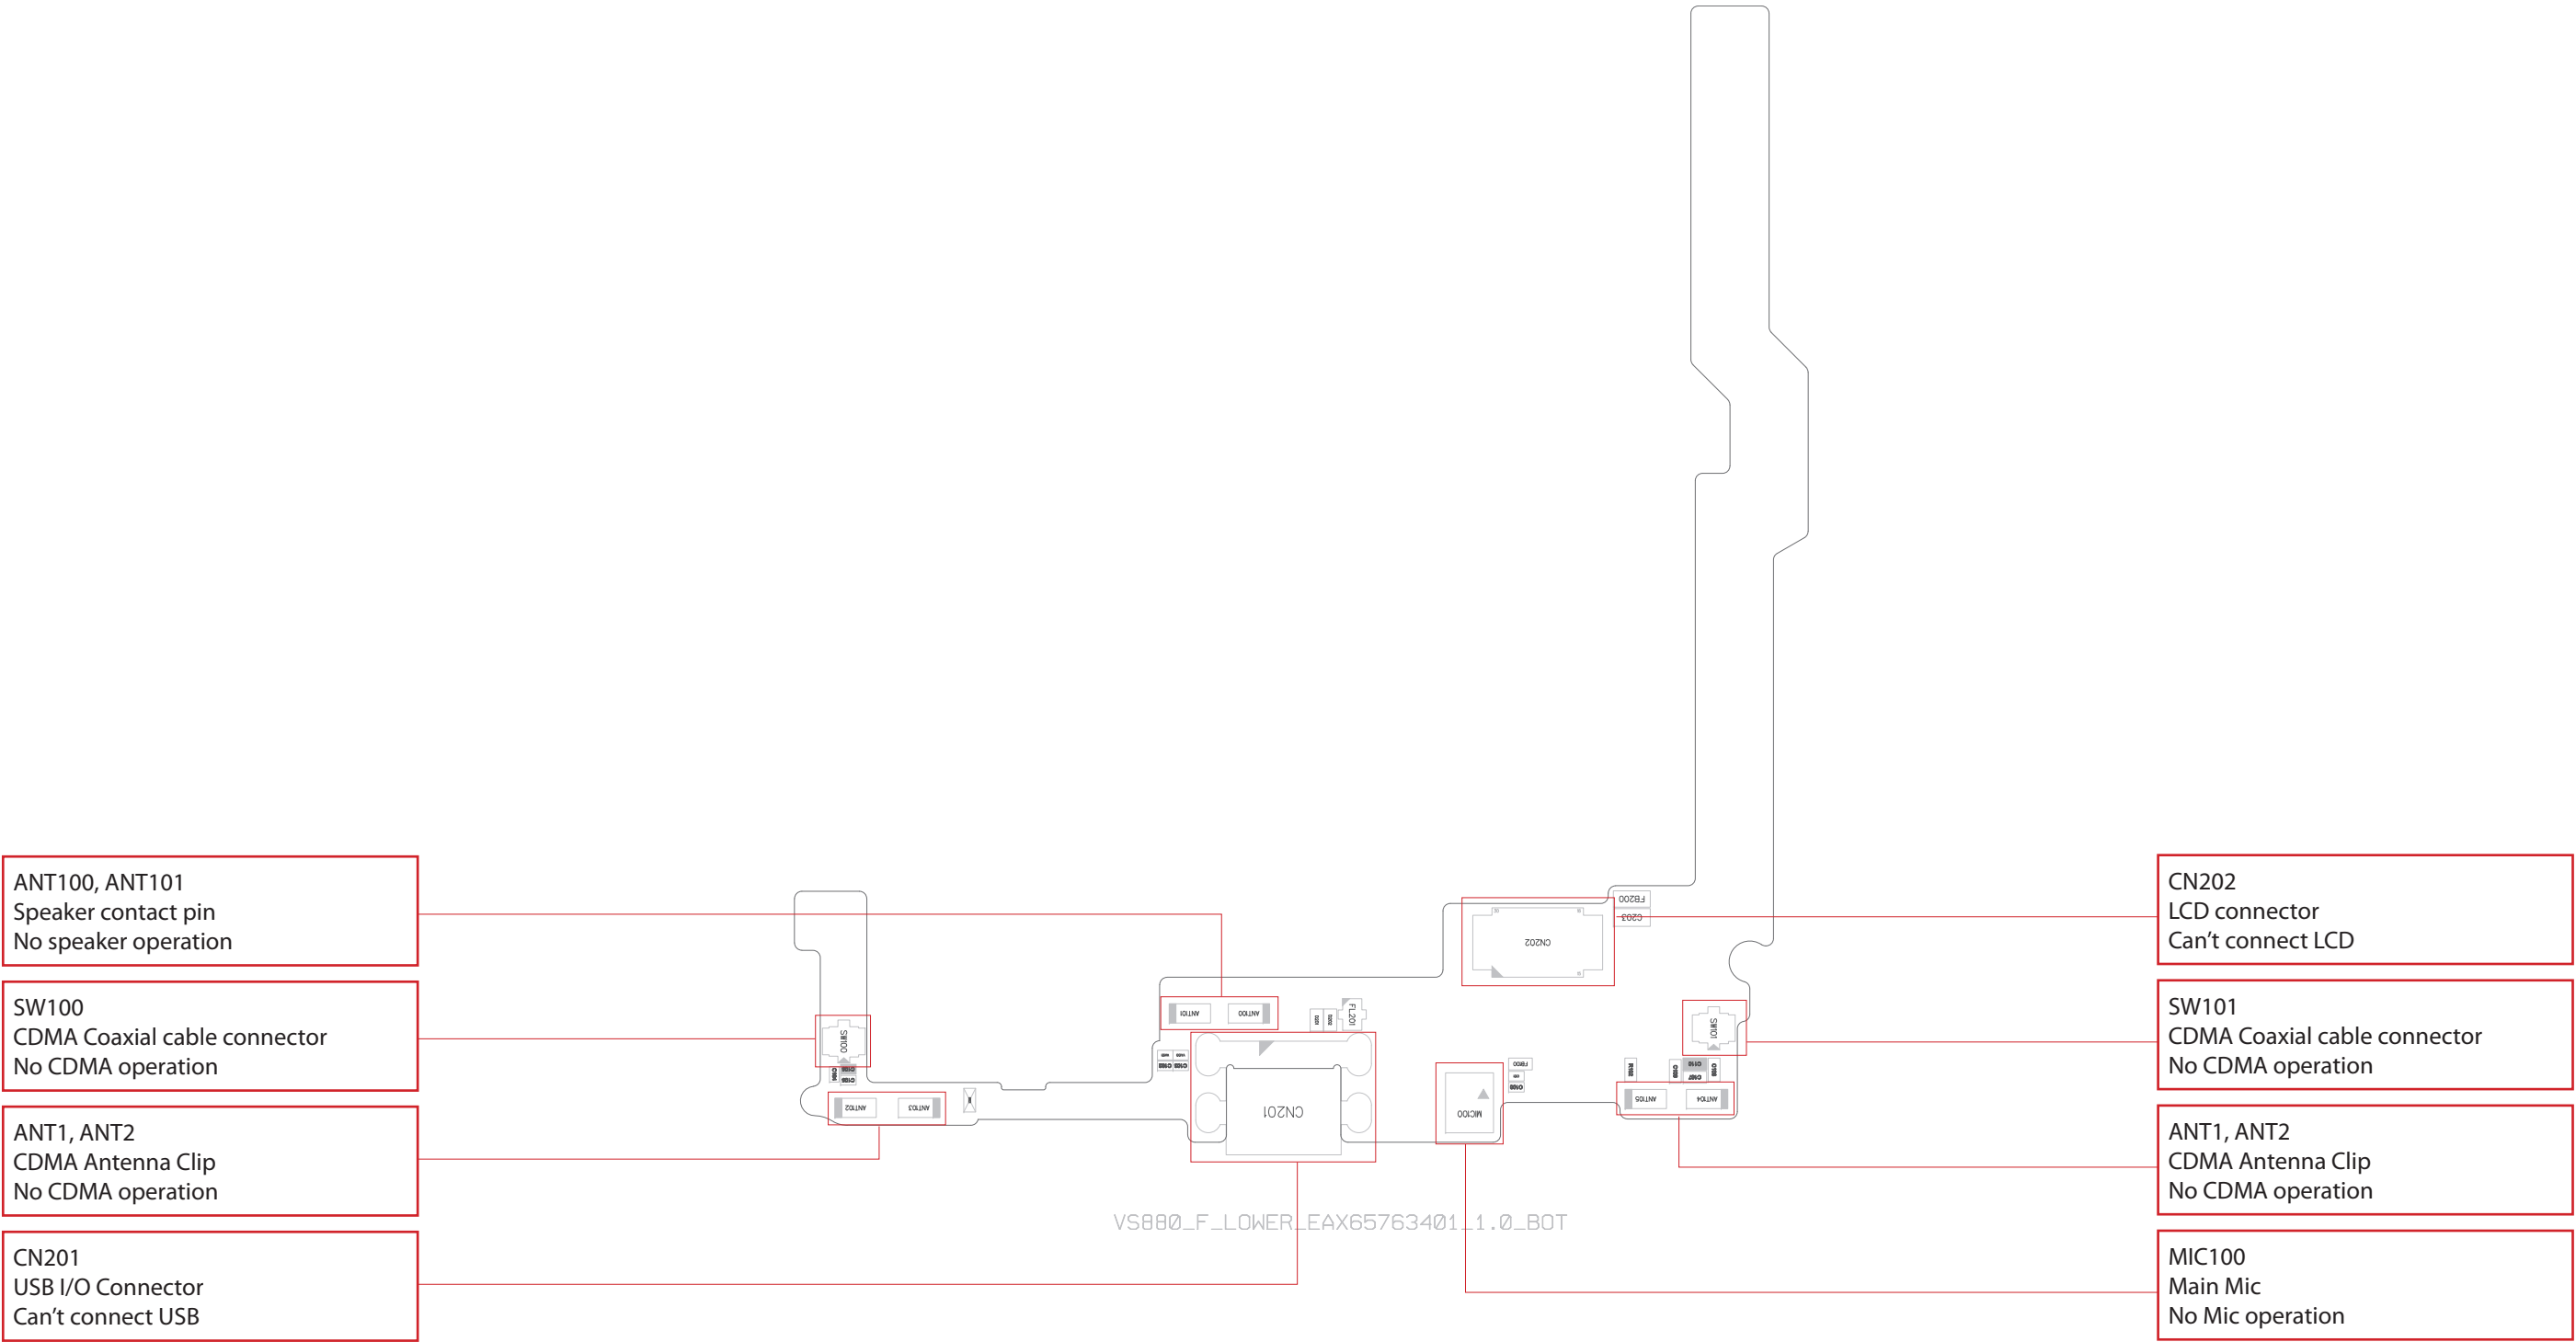


LG-VS880_Lower FPCB_EAX65763401_1.0_BOT

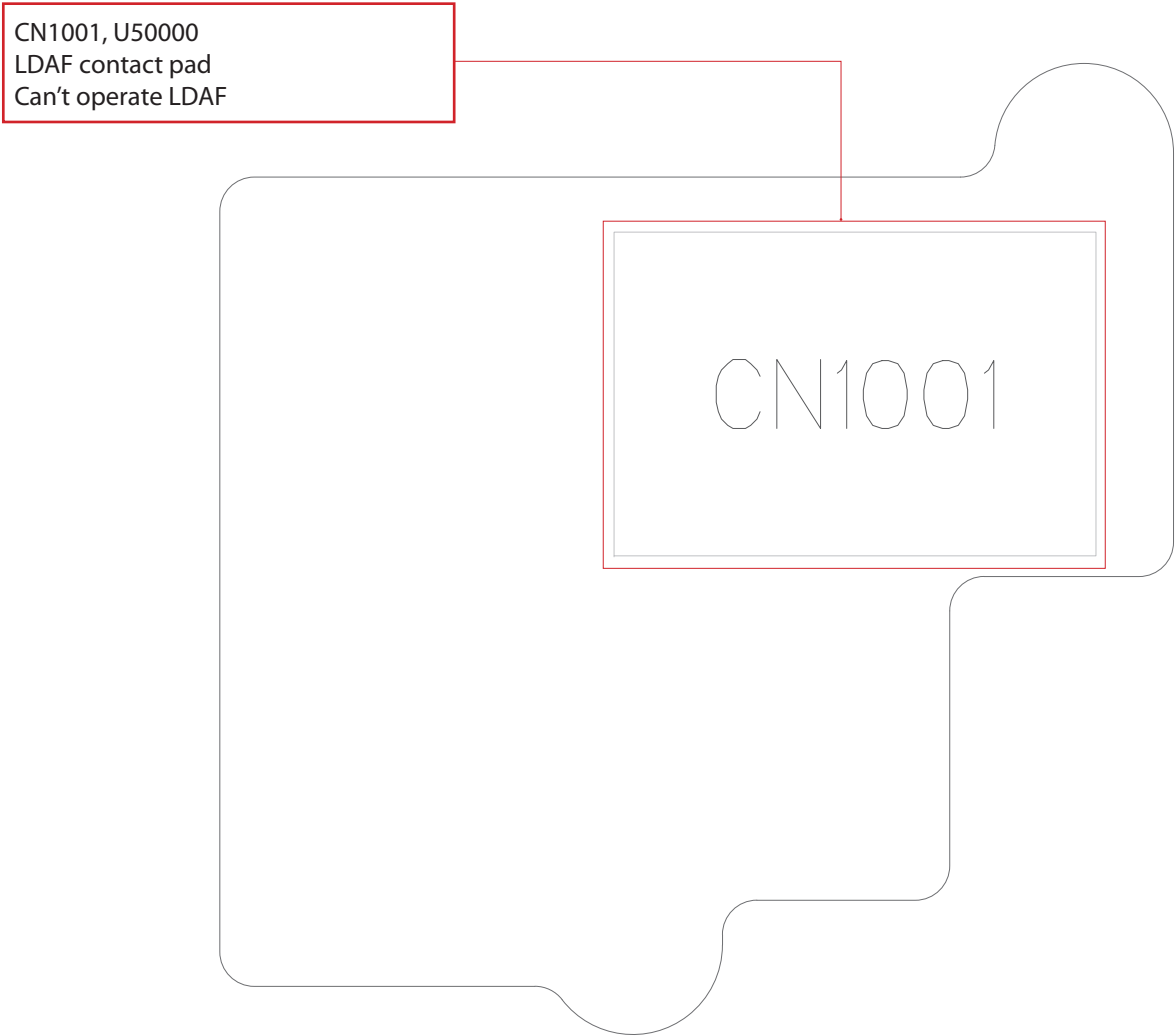


LDAF FPCB_TOP

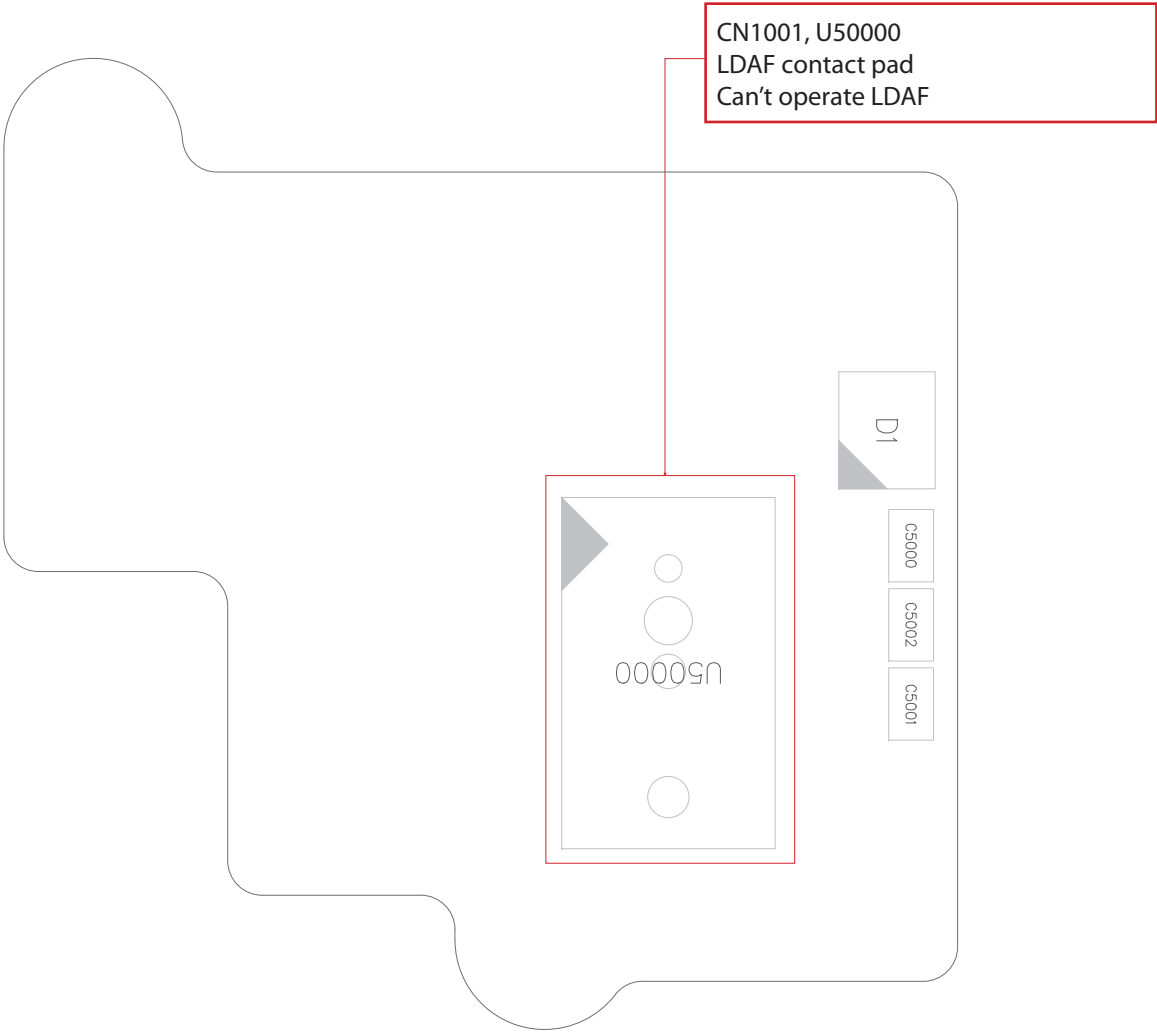

LDAF FPCB_Bottom

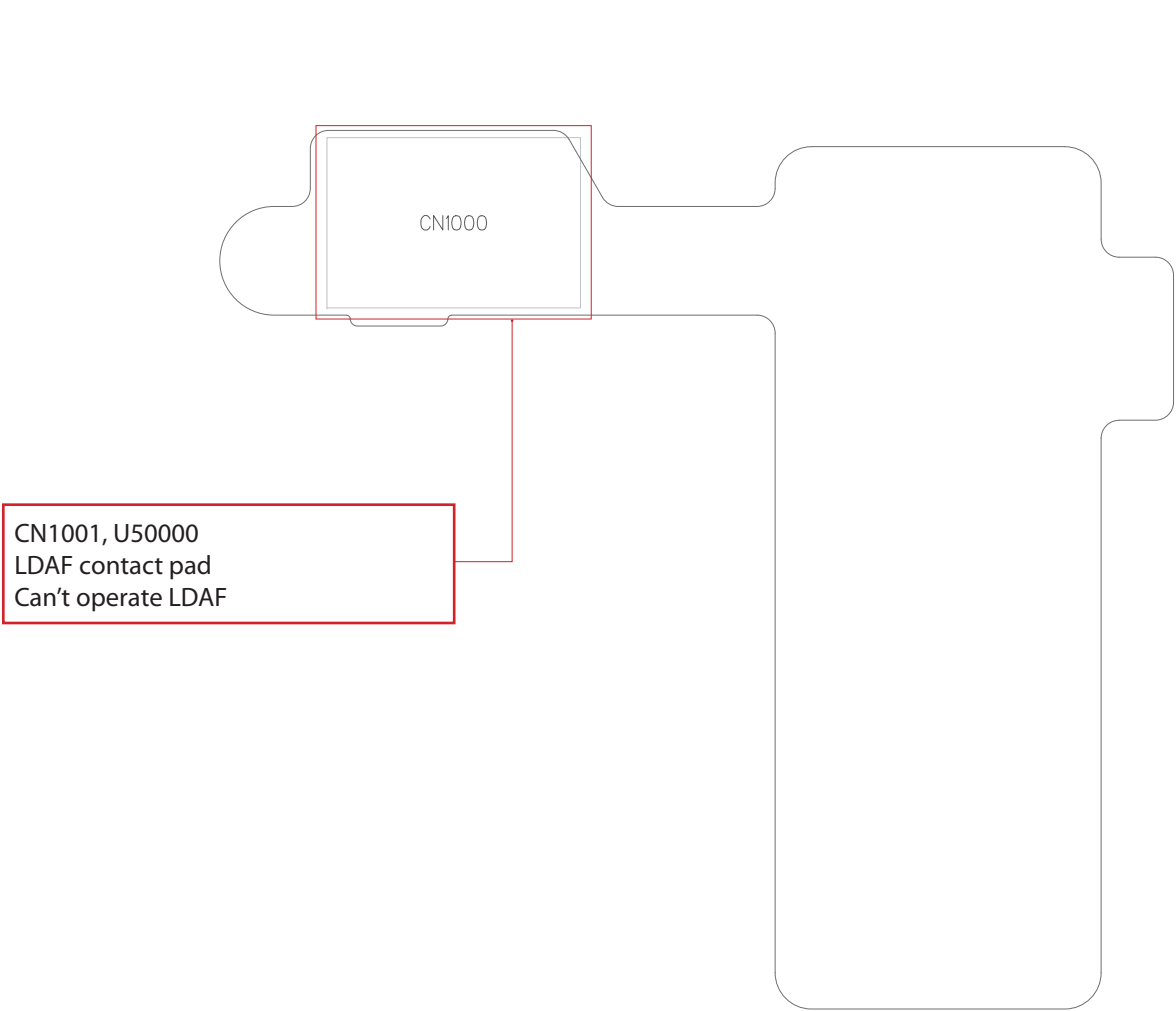

LDAF FPCB_TOP

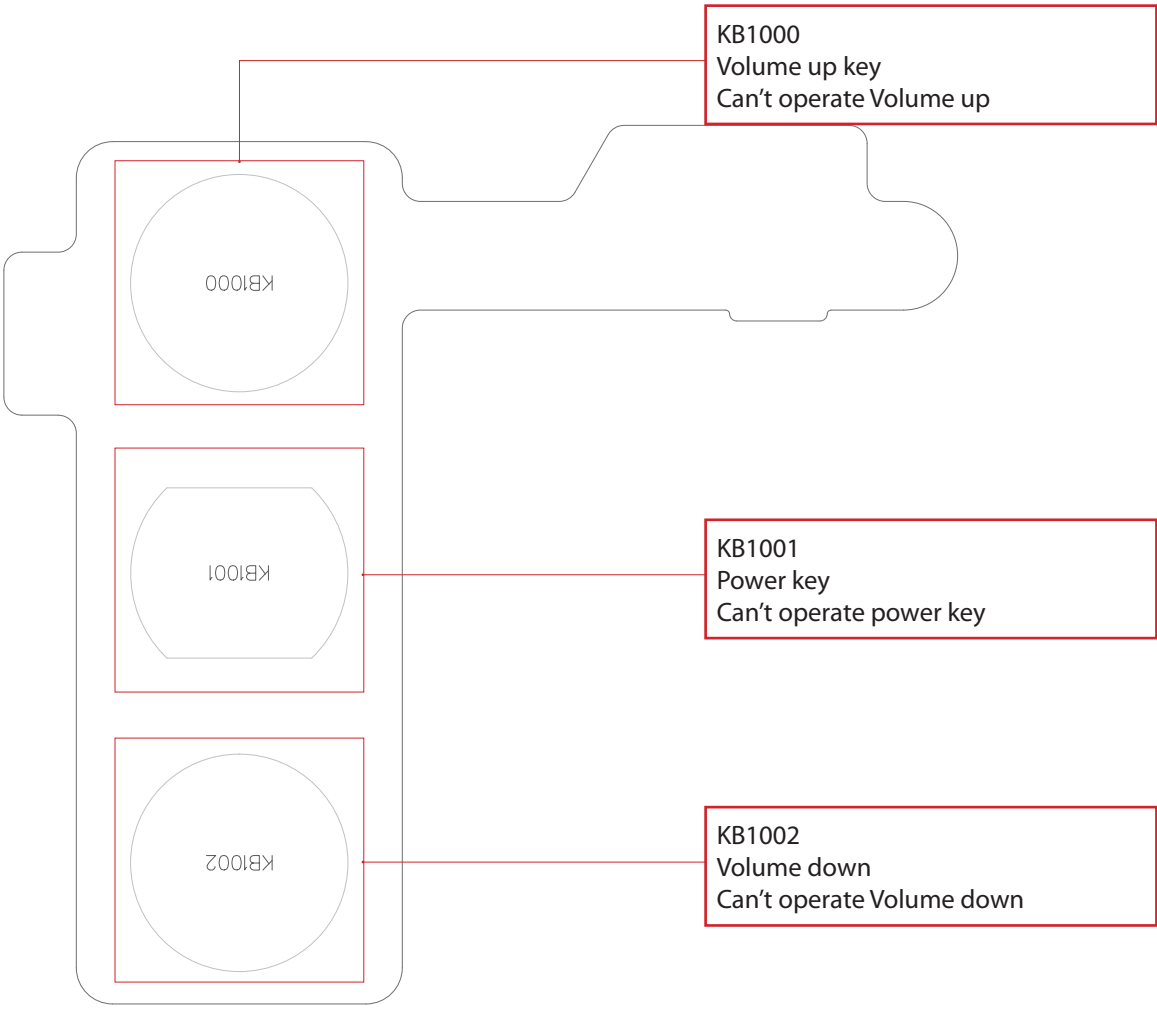


LDAF FPCB_Bottom



CN1001, U50000
LDAF contact pad
Can't operate LDAF



ONE POINT GUIDE : Back key FPCB_Top & Bottom


9. CALIBRATION



CAL INFORMATION		
S/W VERSION		
[TachyonV48] LGV5880 20140702 ALL File Calibration		
Please Check the Version to "B2B"		
H/W		
	Name	Part No.
PIF	PIF200(All Type)	BJAY0024021
USB Cable	USB Cable	RAD32247898
Power Cable	DC Power Cable	RAD32247878
I/O Cable	5P E-SATA_DC_Plug	RAD32167861
RF Cable_Main	MS-156C	BJAY0024004
Power Supply_PIF	Power Supply 5.3V	
Power Supply_Phone	Power Supply 5.0V	
RF Test Equipment	CMW500, RF800A	
NOTICE	1. Use the dummy Battery (Refer to Attached image) 1) Phone states: Power off 2) If do not use the dummy battery, GSM TX fails. 2. Port Setting (Refer to Attached image) 1) Uart Port2 : Use the "LGE CDMA USB Serial Port"	
CMW500 RF Cable connection	Reference to Attached ppt ->How to connect between phone RF switch and RF 800A: It has to be connected as below ->How to connect between CMW500 and RF800A ; It has to connected as below - CMW500 [RF1COM] to RF-800A [left COM], - CMW500 [RF2COM] to RF-800A [Right COM]	

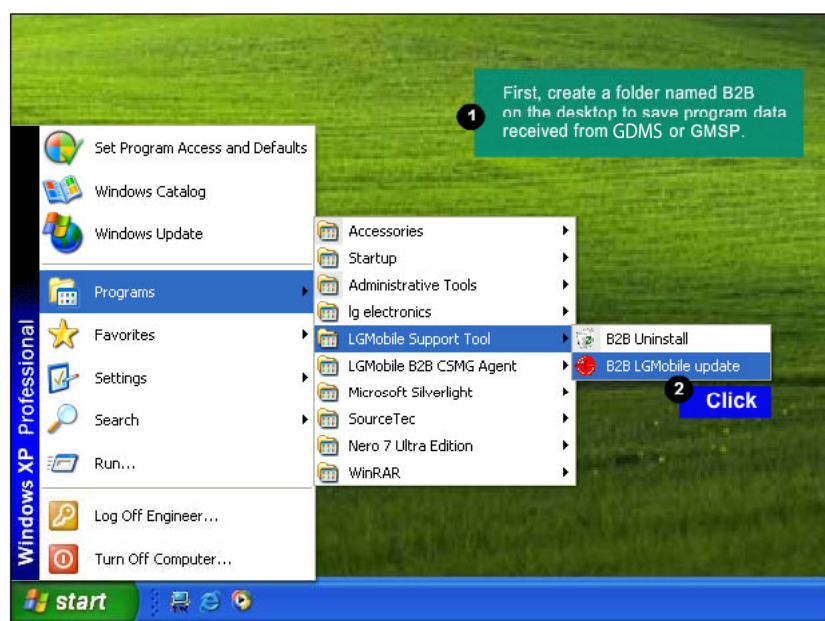

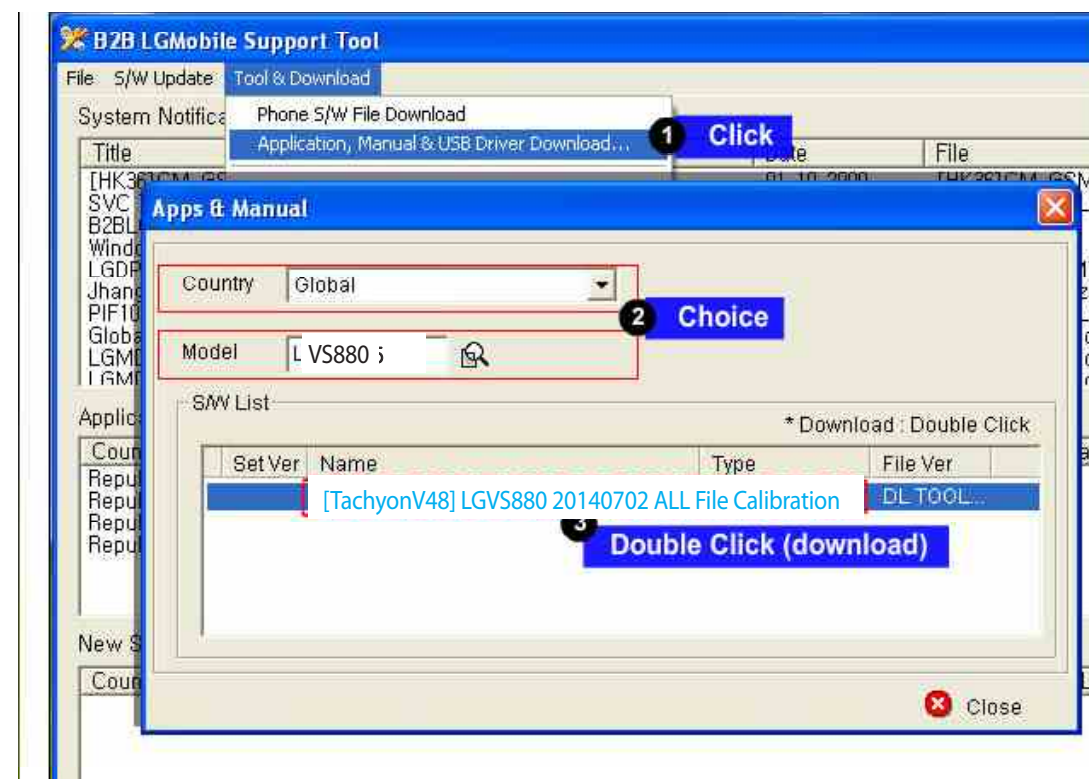
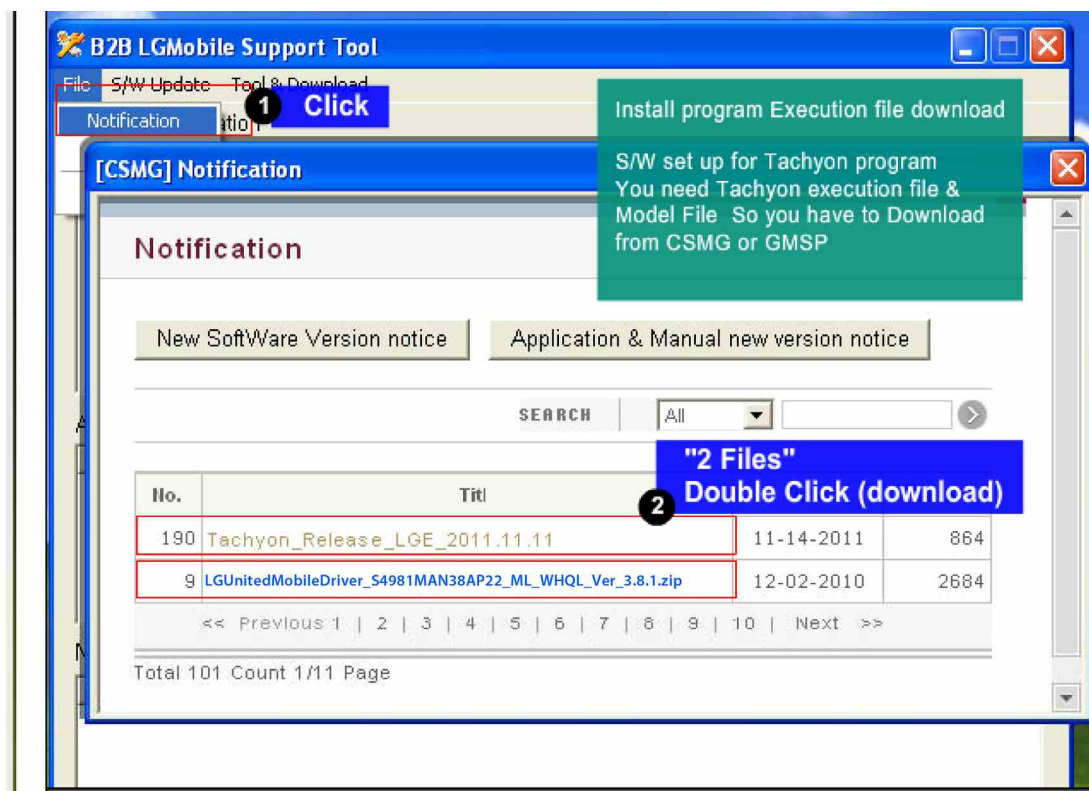


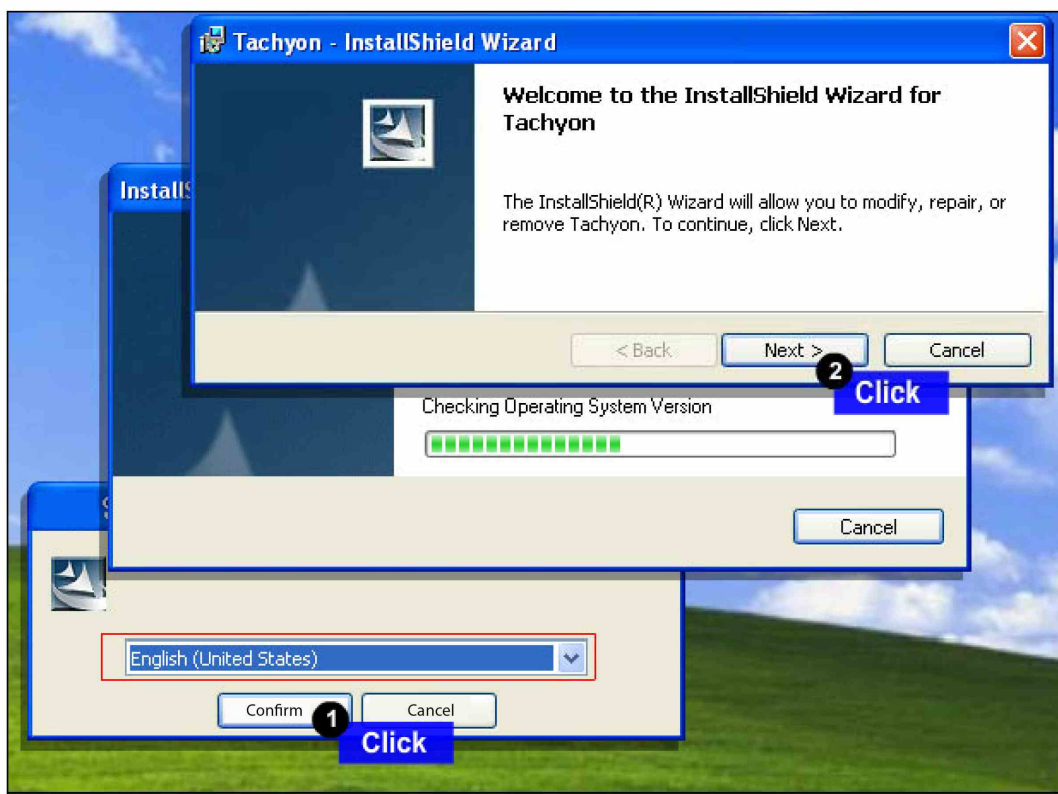
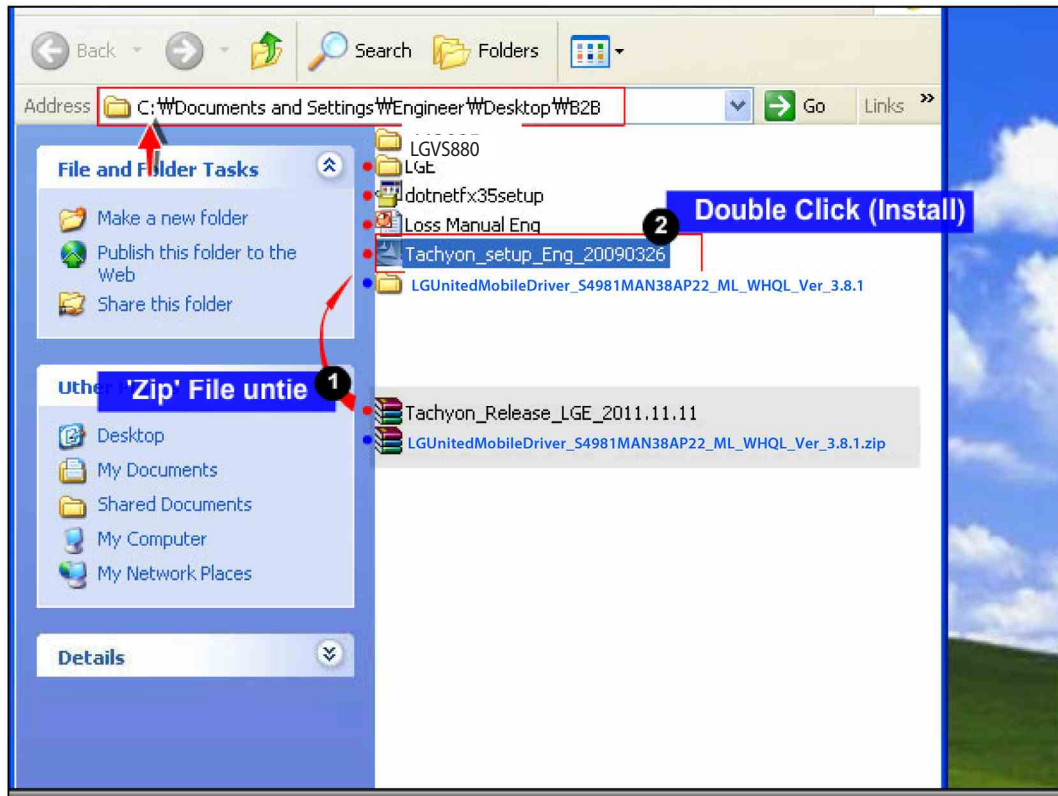


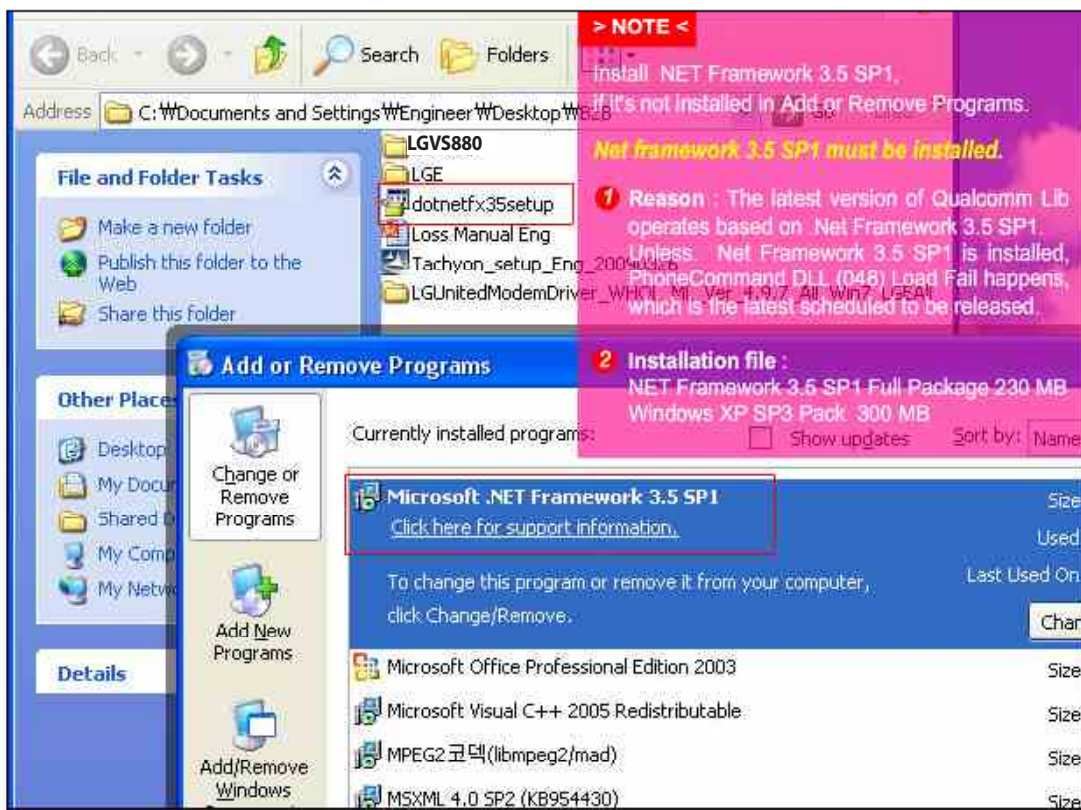

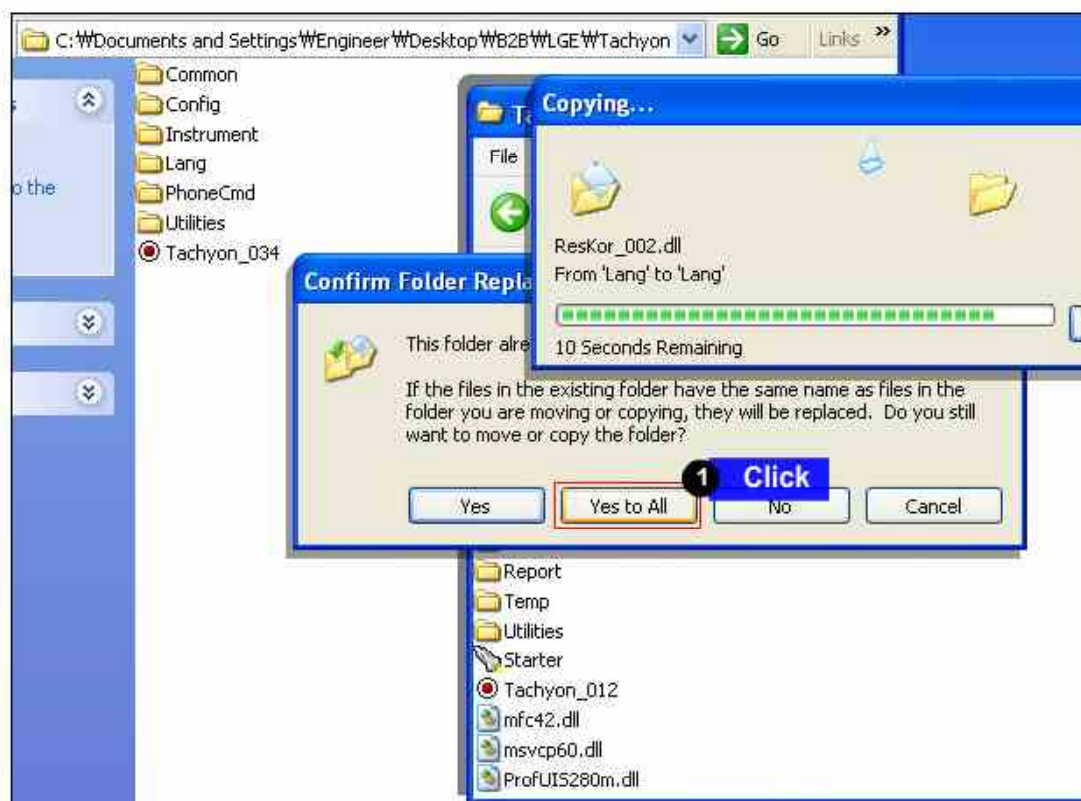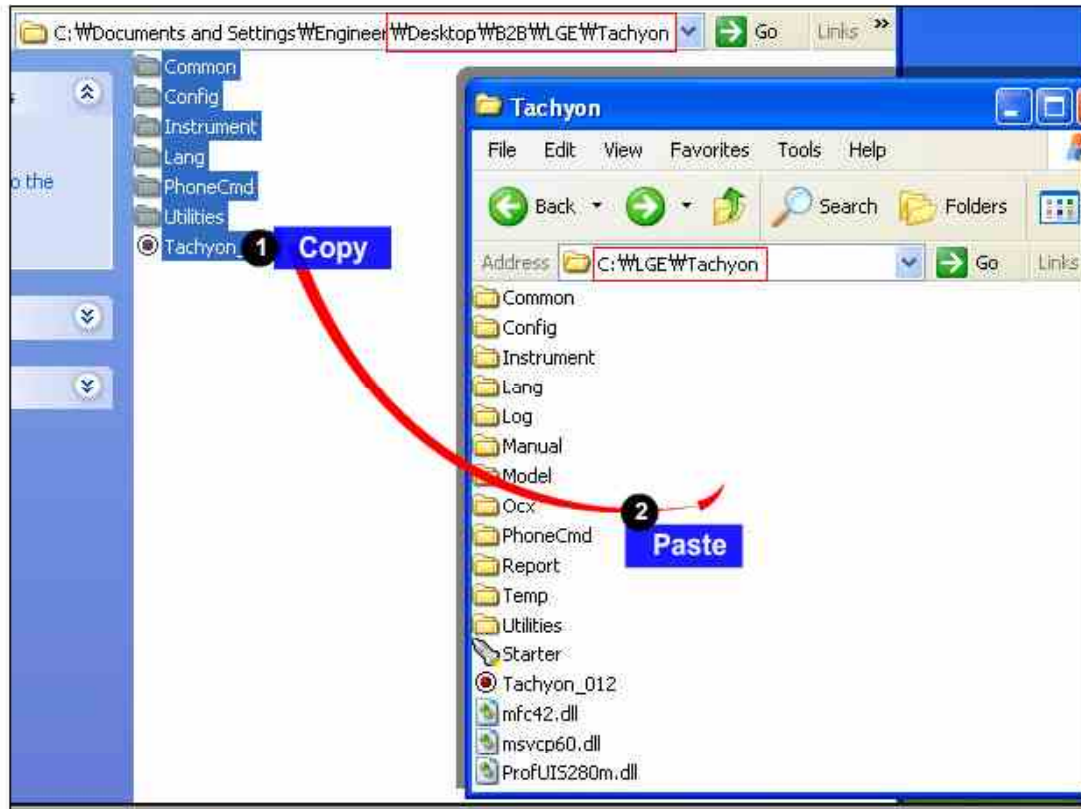


9. CALIBRATION

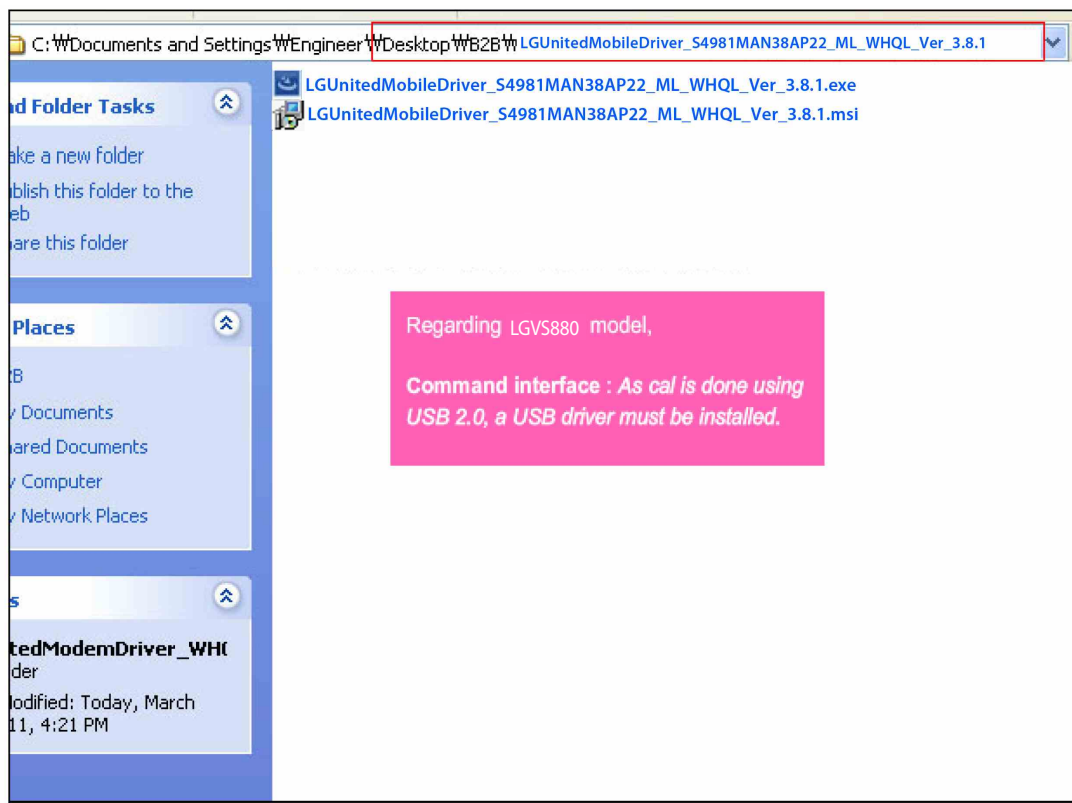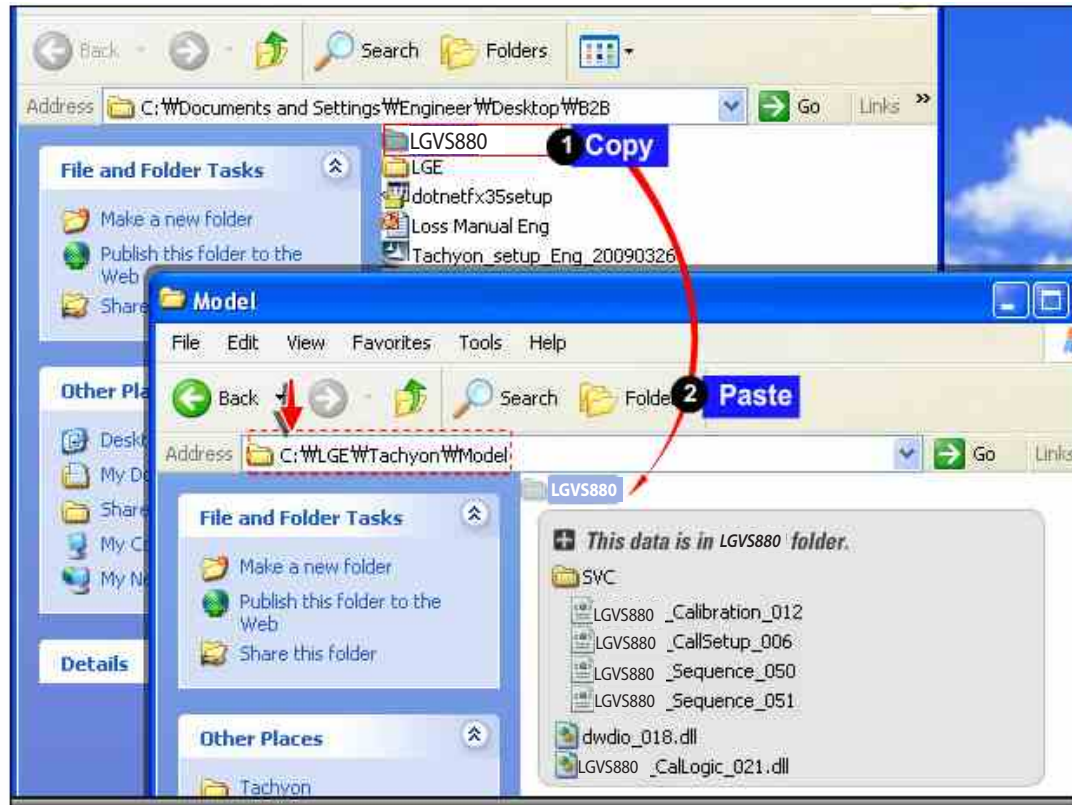


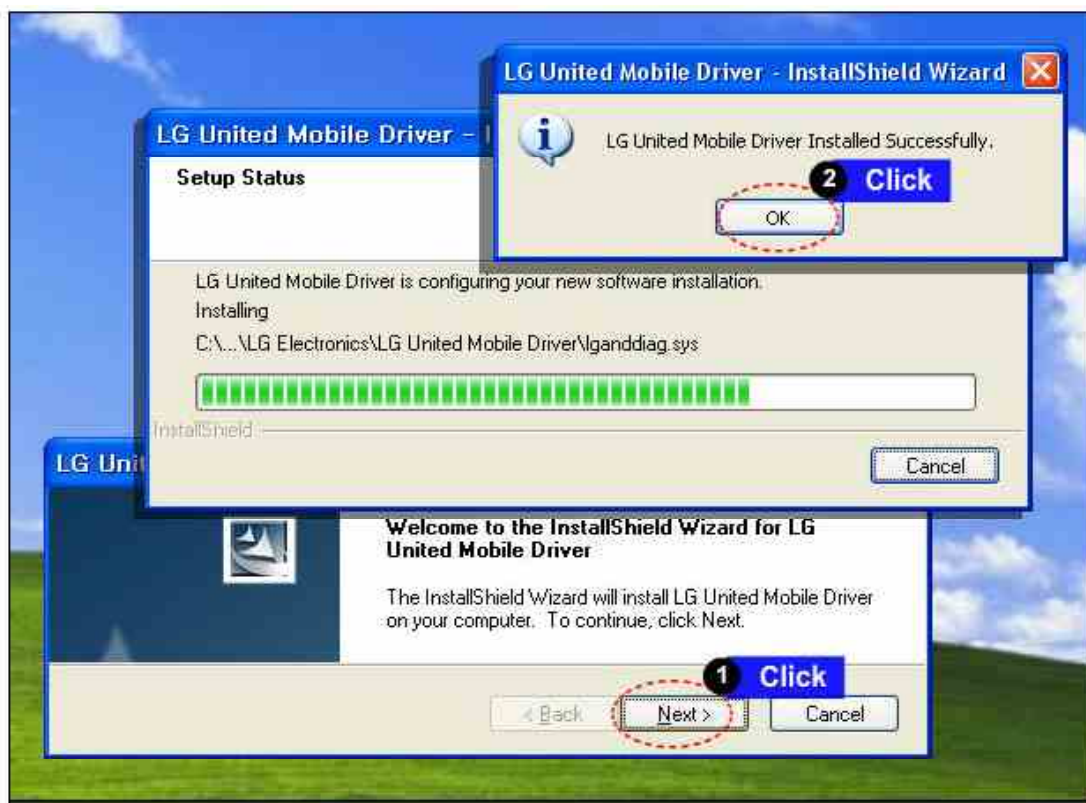
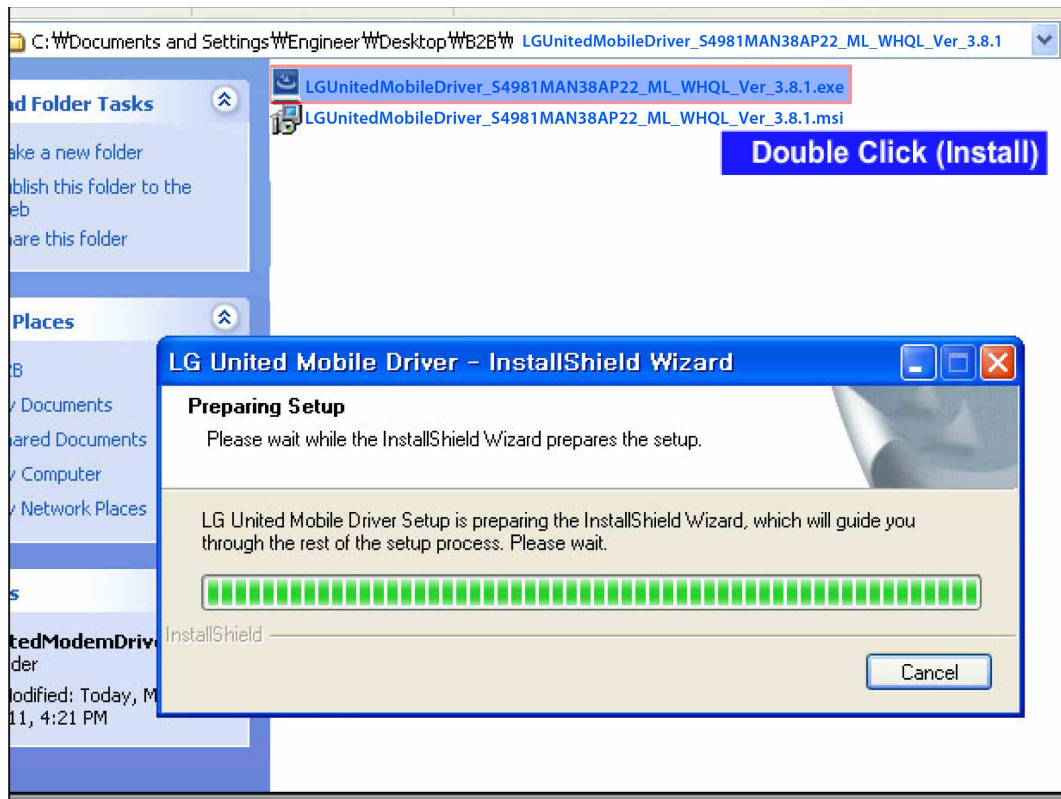




9. CALIBRATION


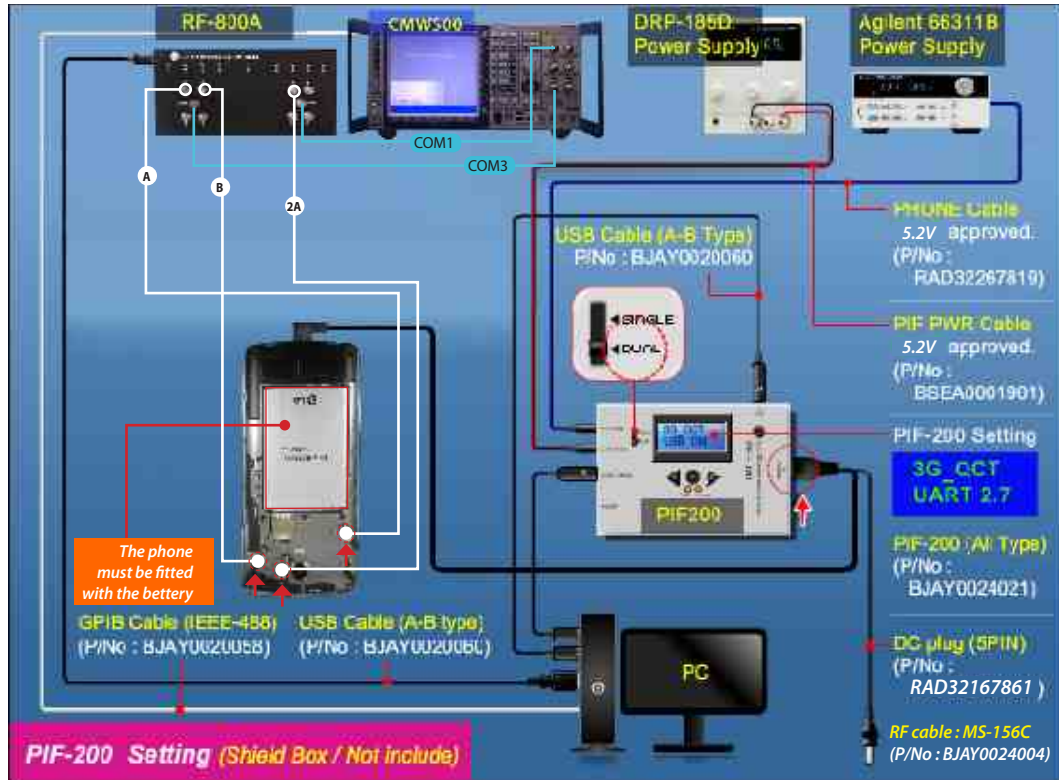


→ This is for example.
You can check "C:\LGE\Tachyon\Model\VS880\Setting Guide" ←


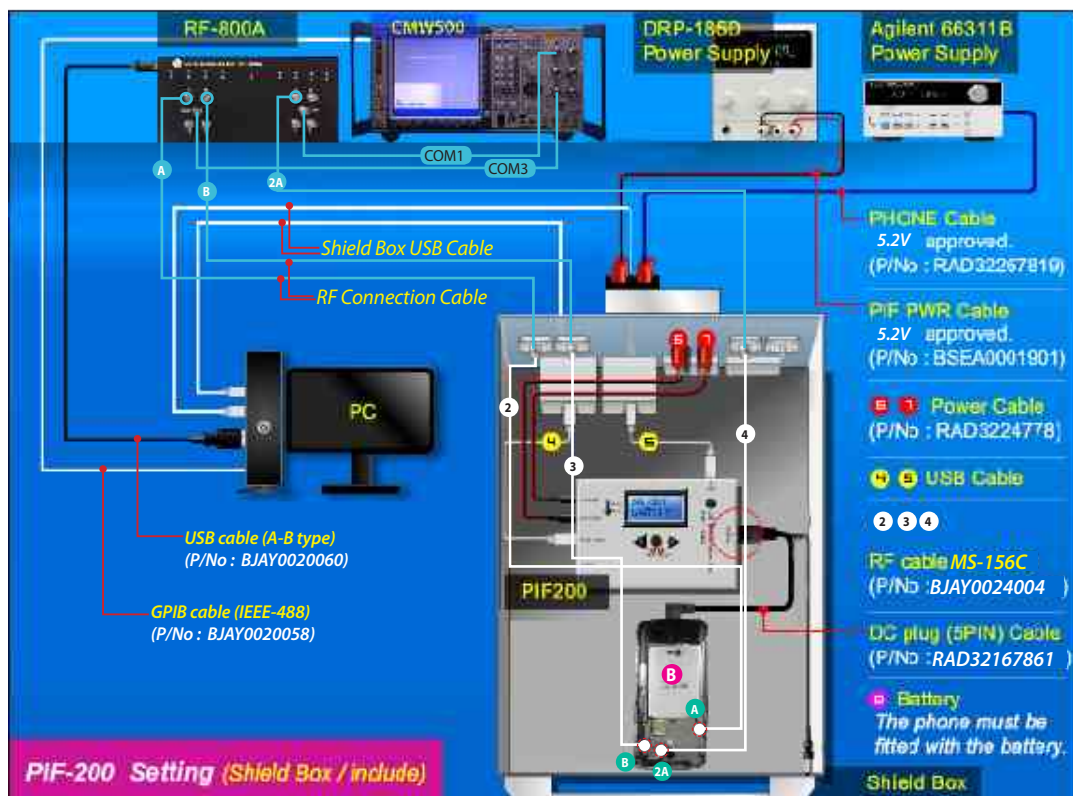


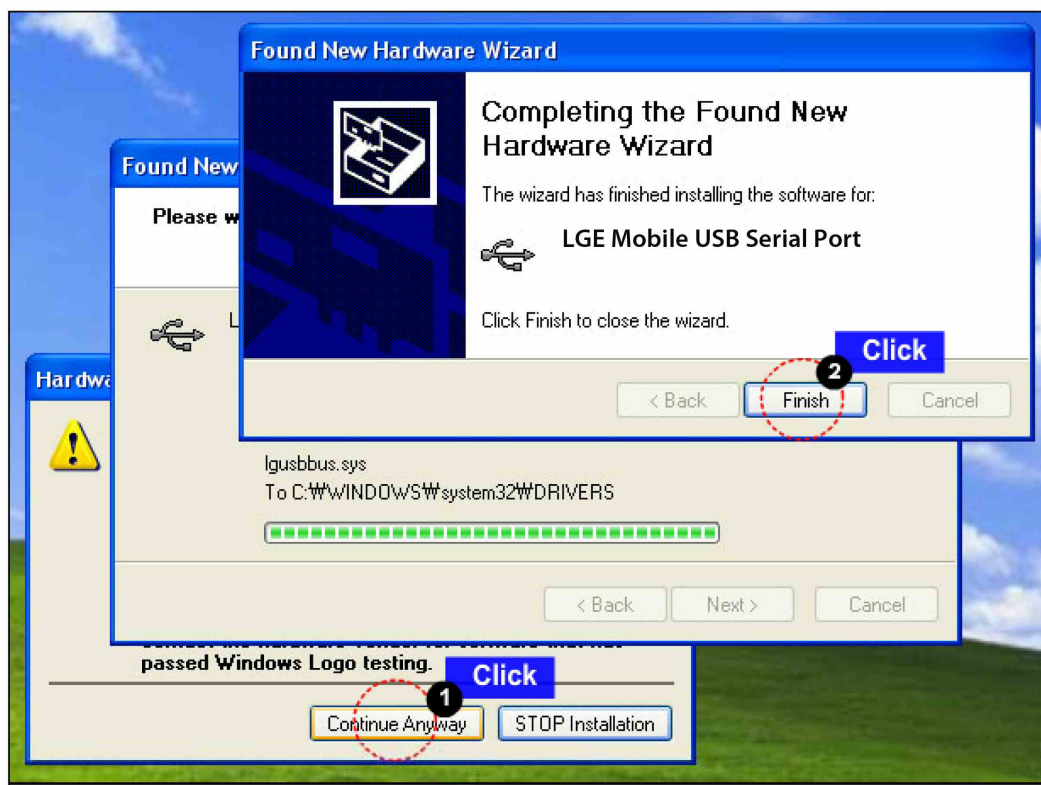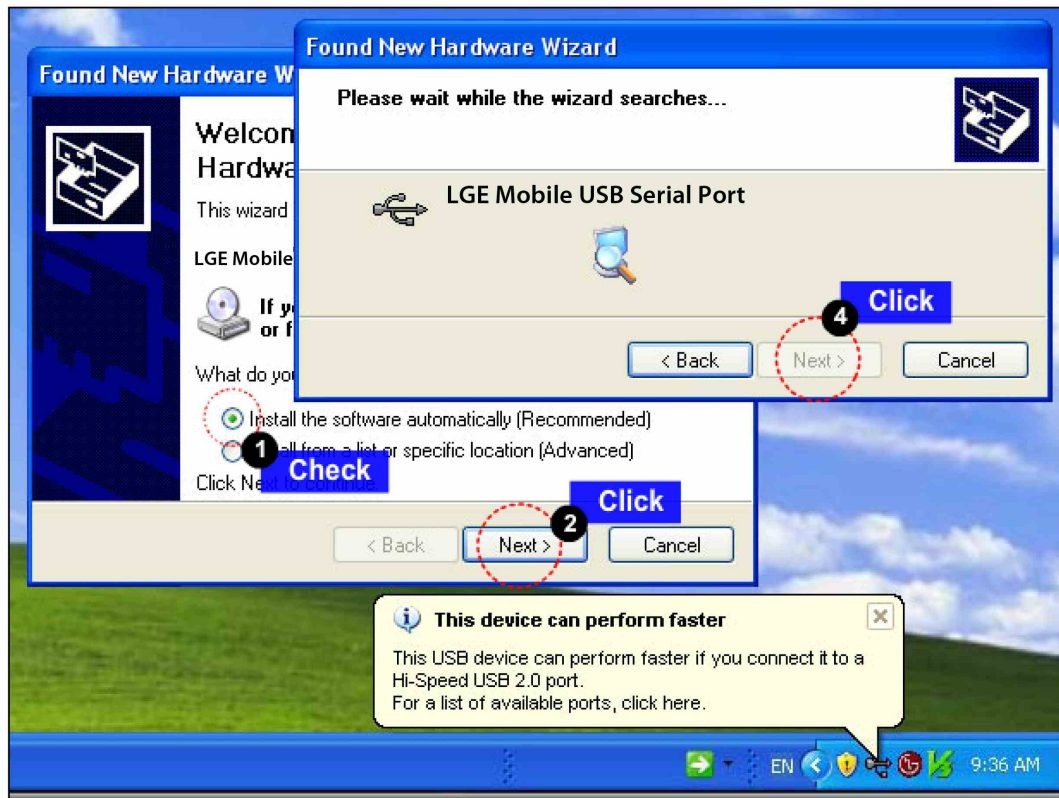

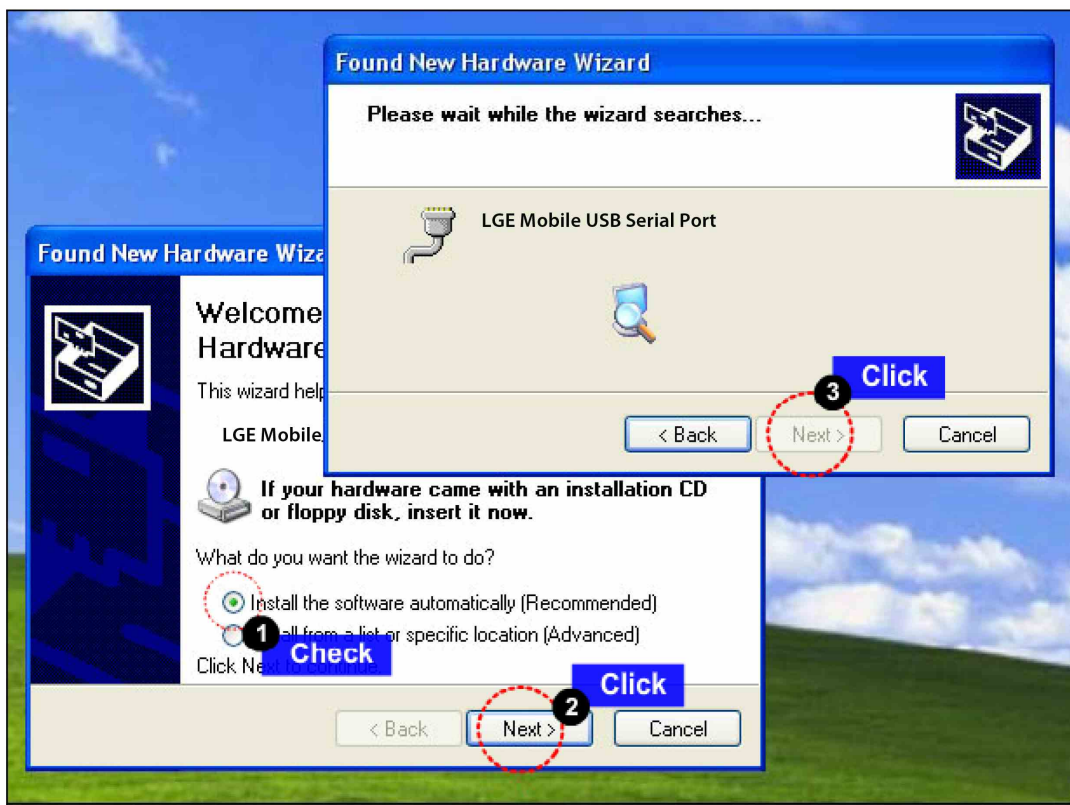
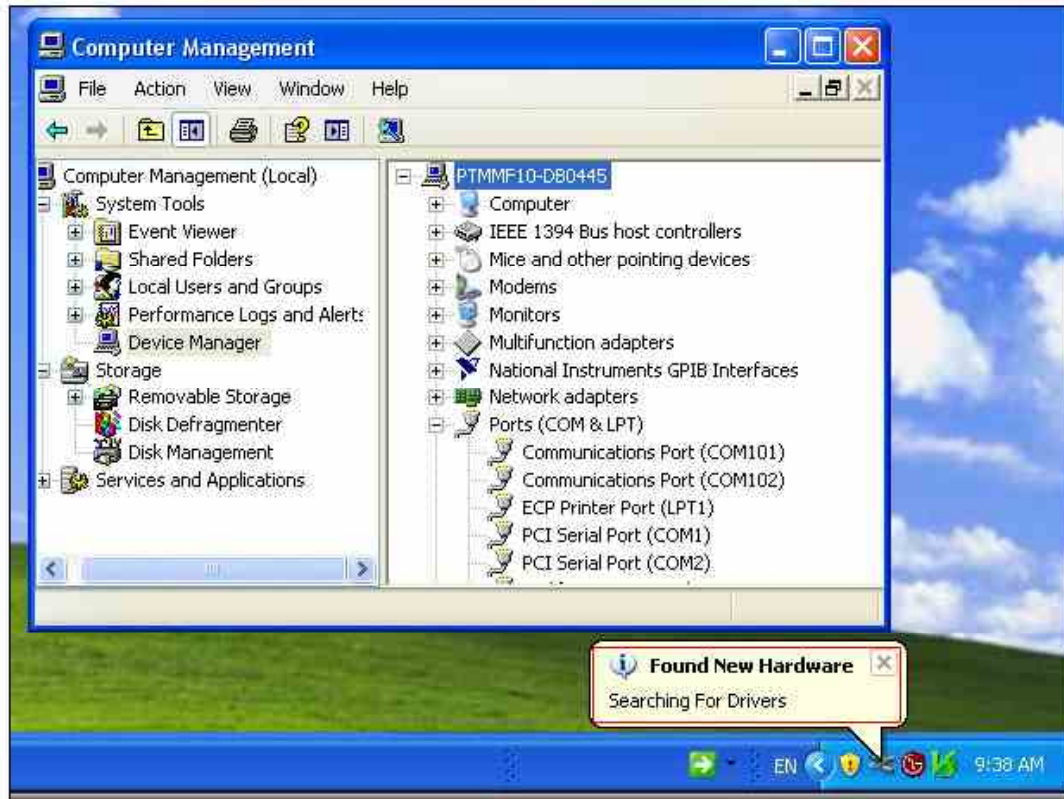


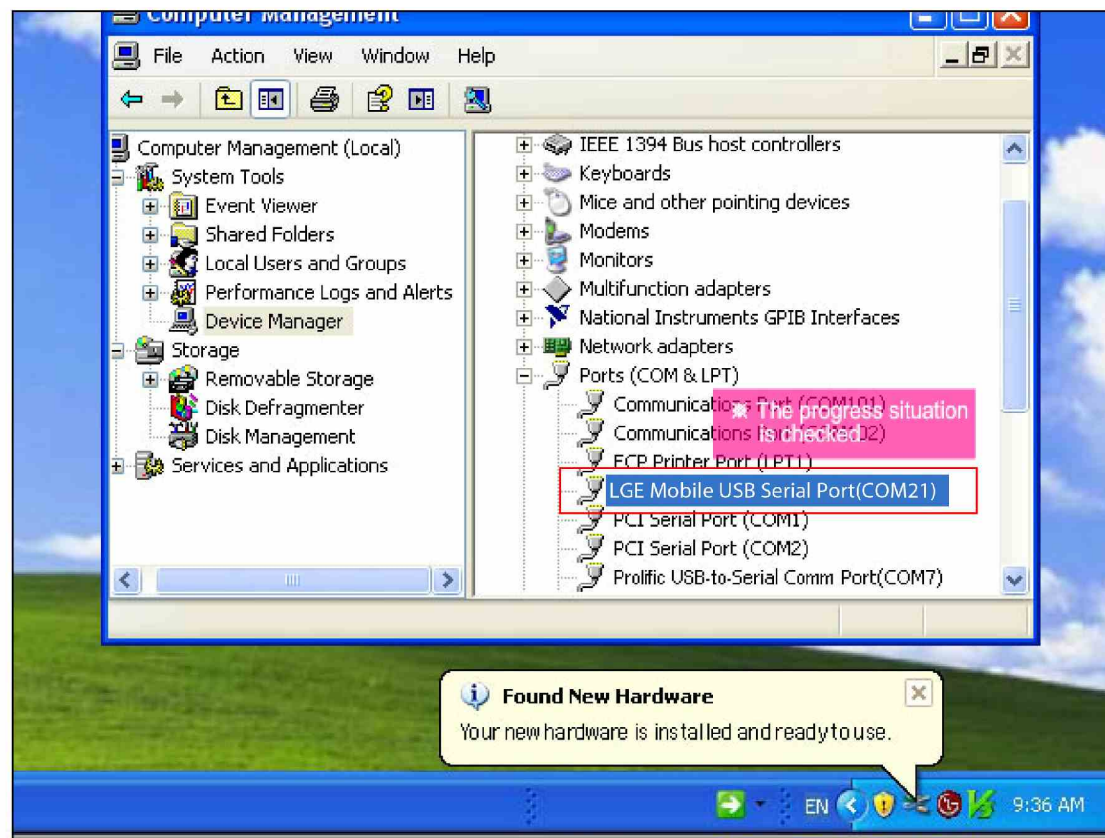
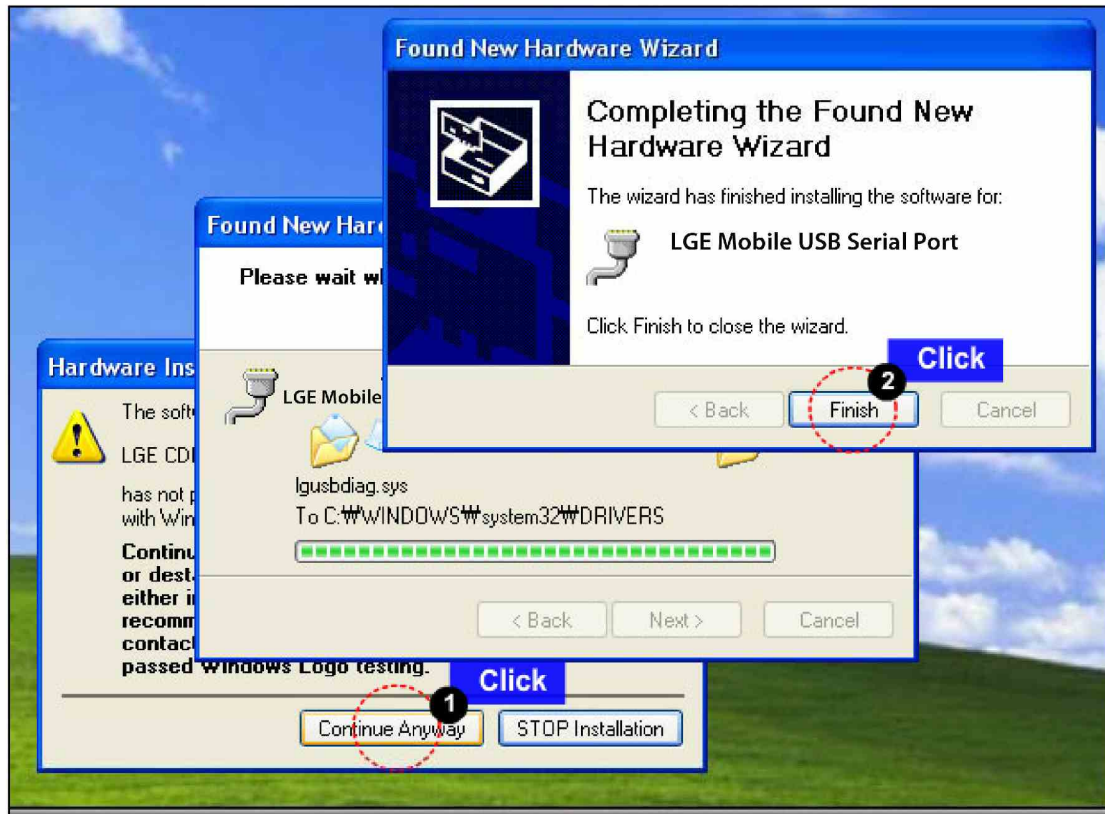




9. CALIBRATION

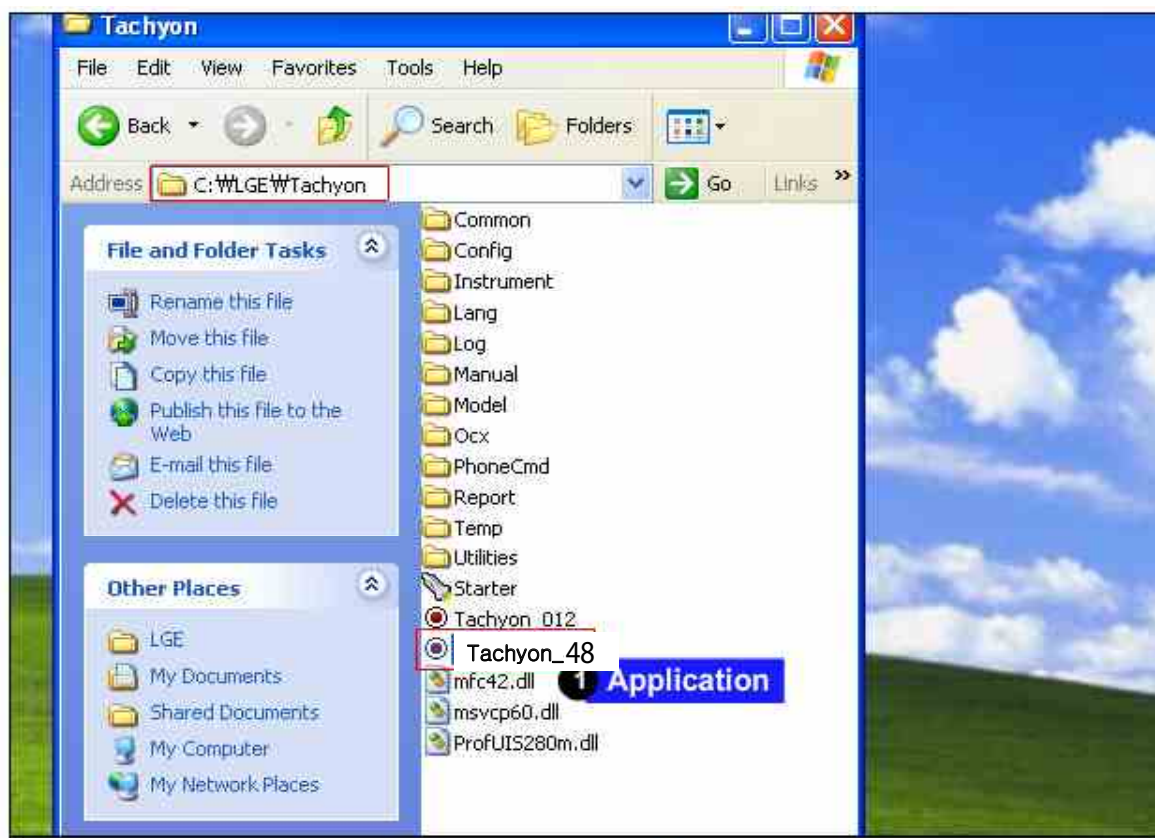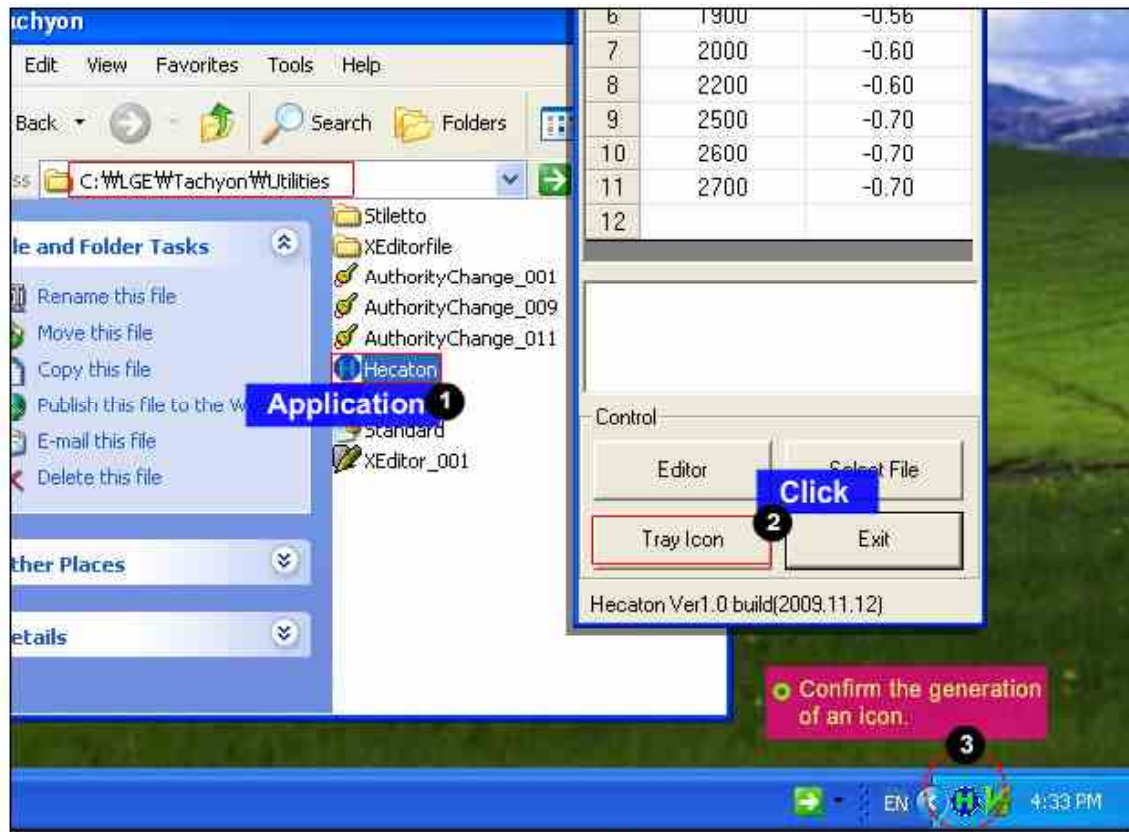



9. CALIBRATION

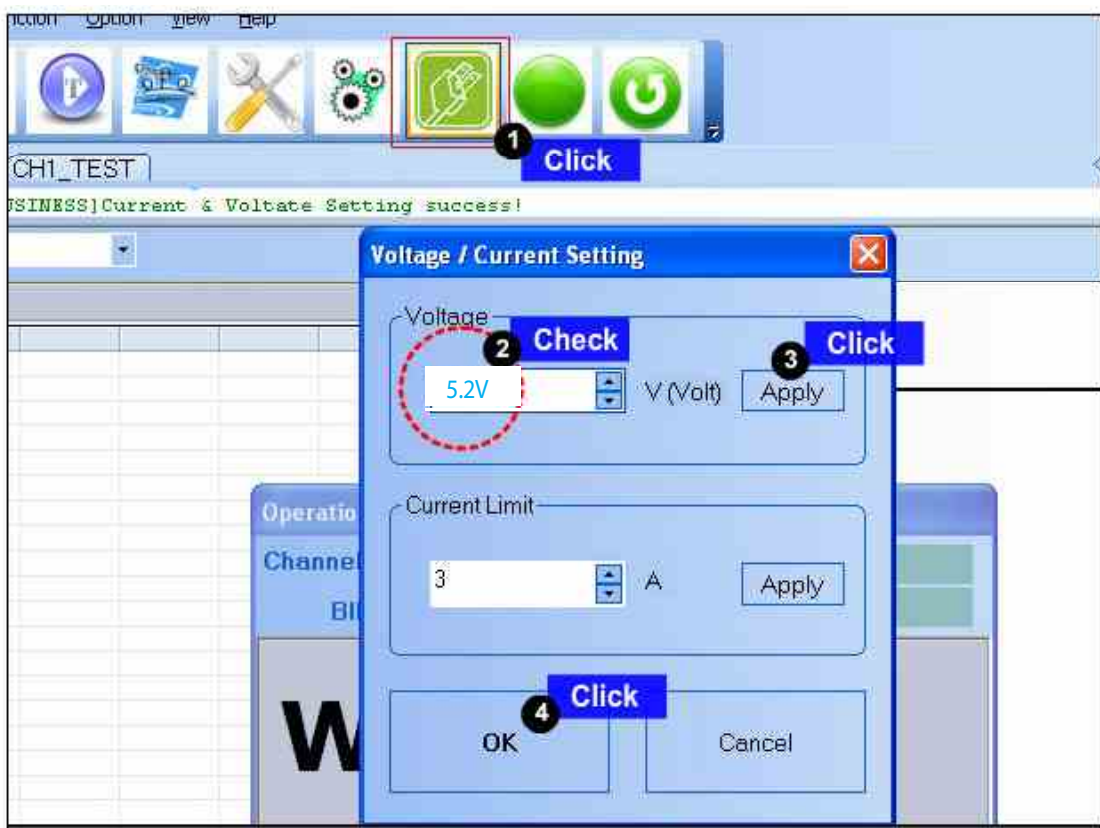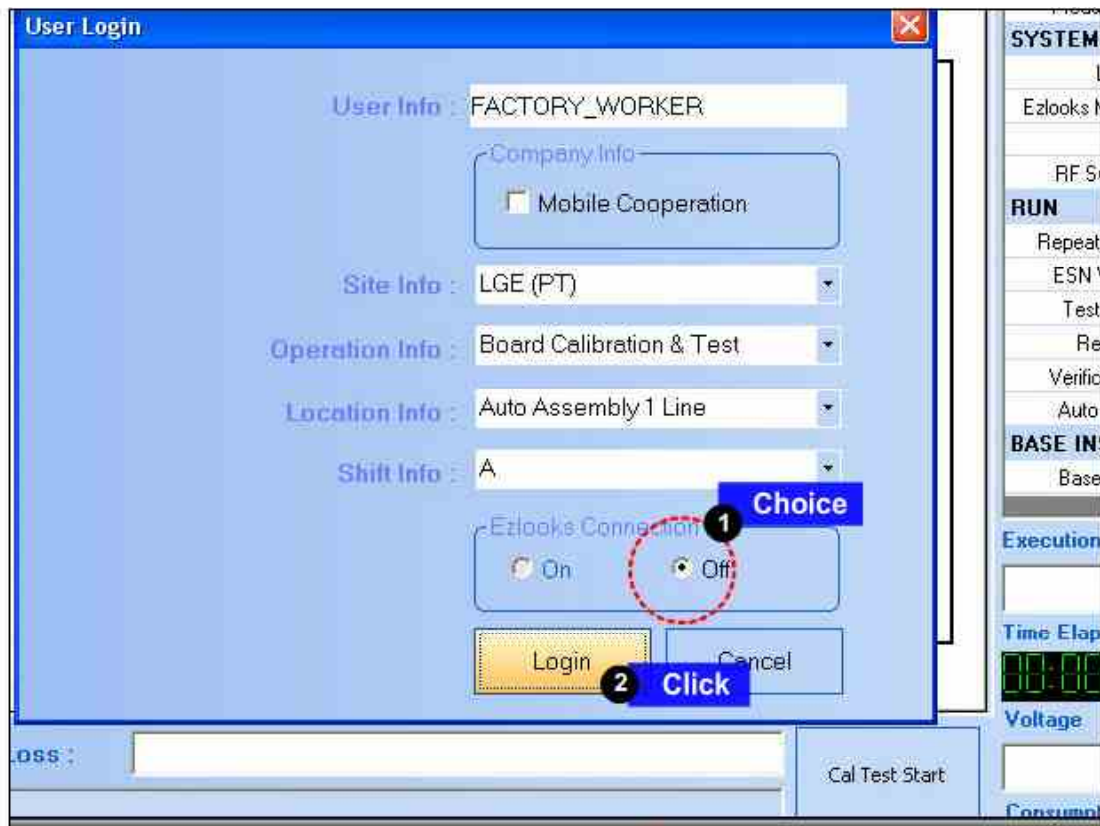

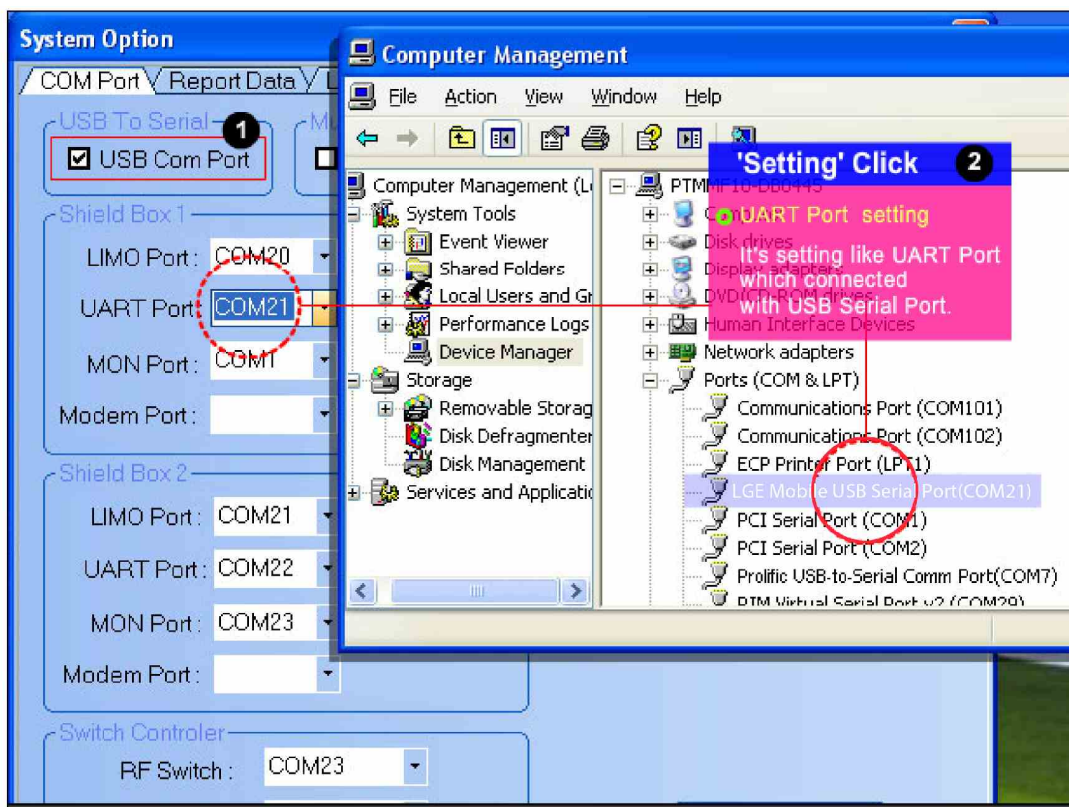
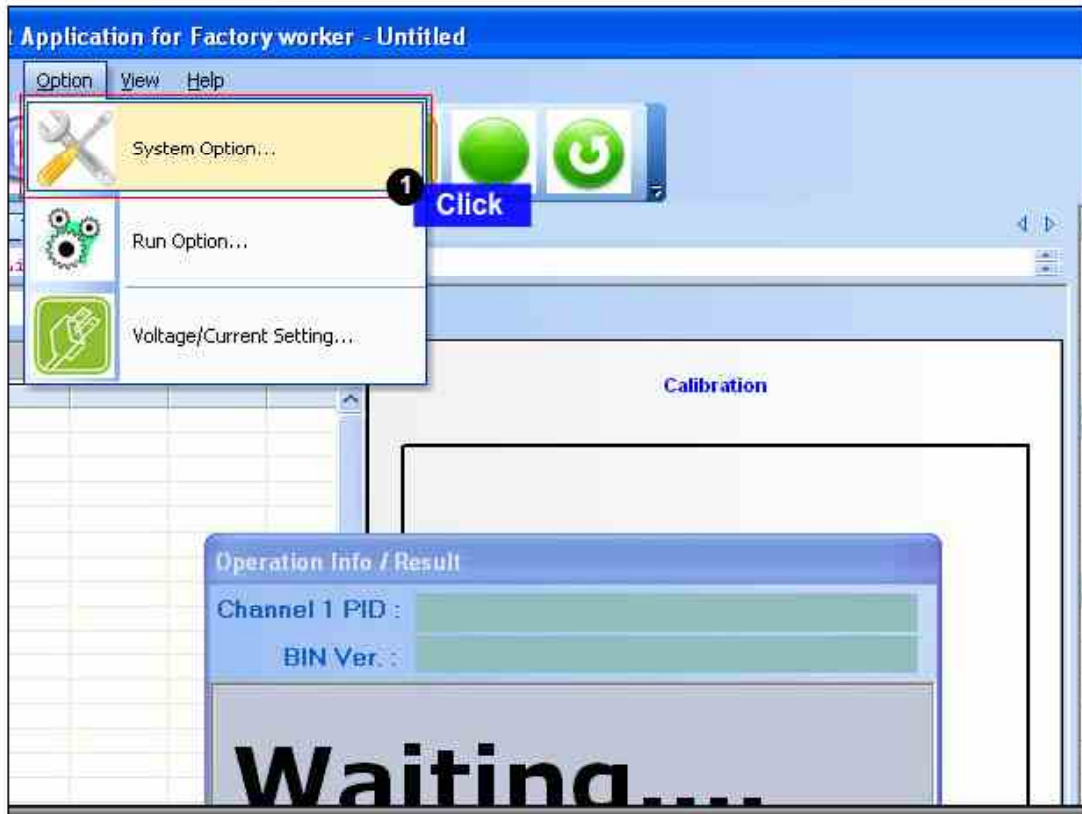


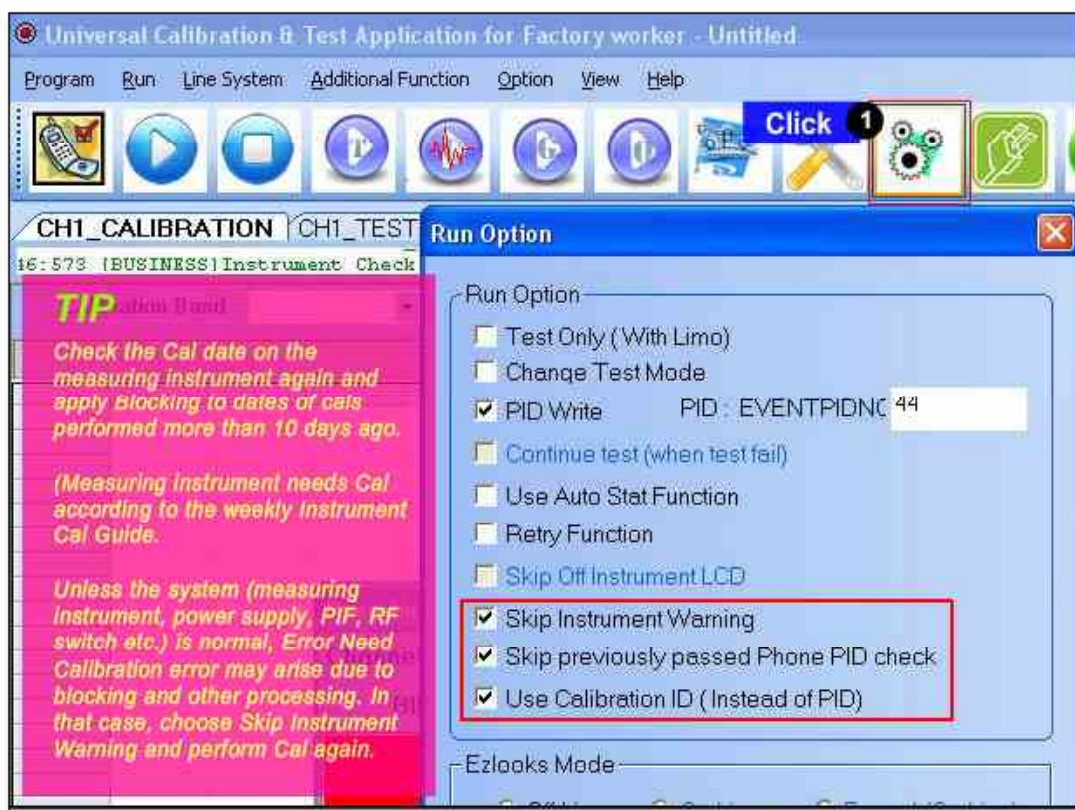
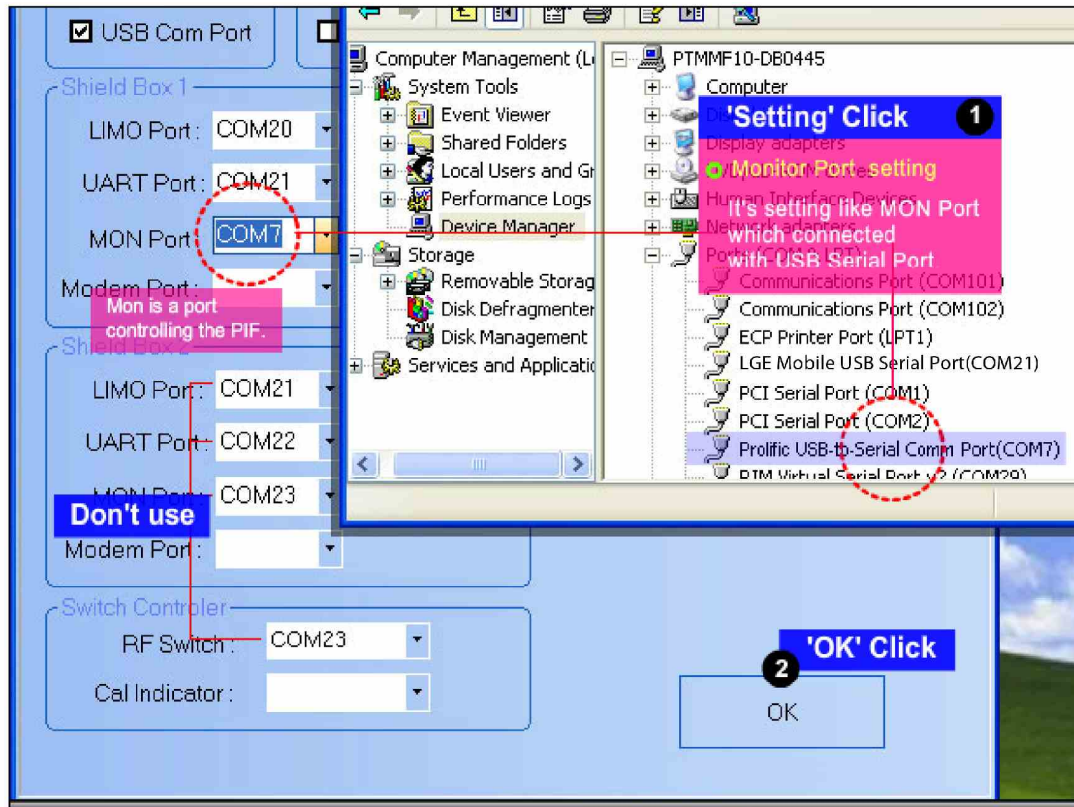


9. CALIBRATION

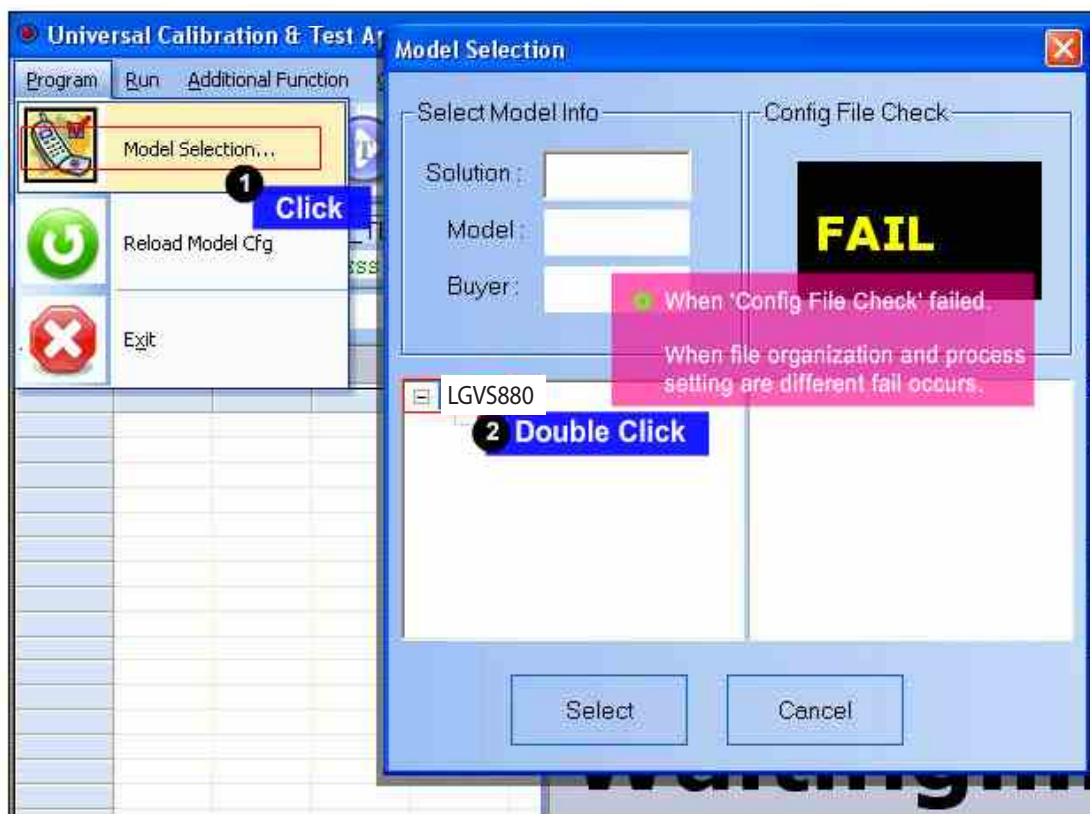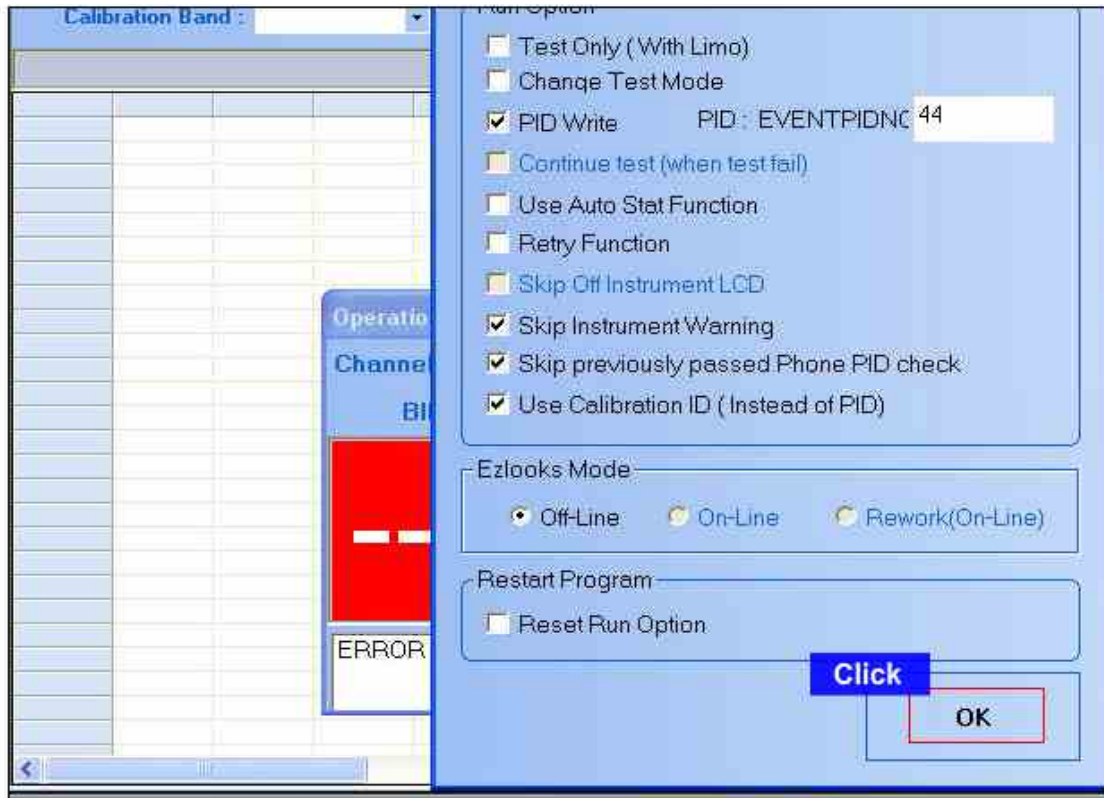

9. CALIBRATION

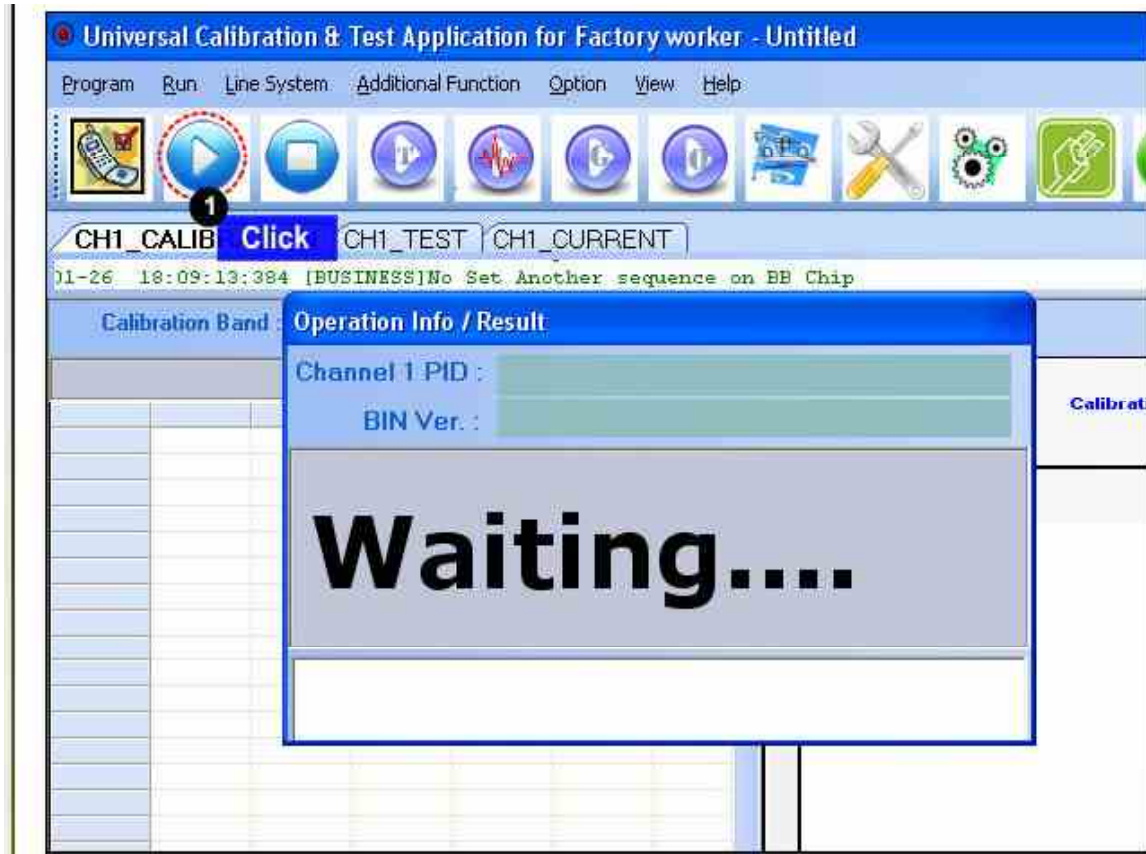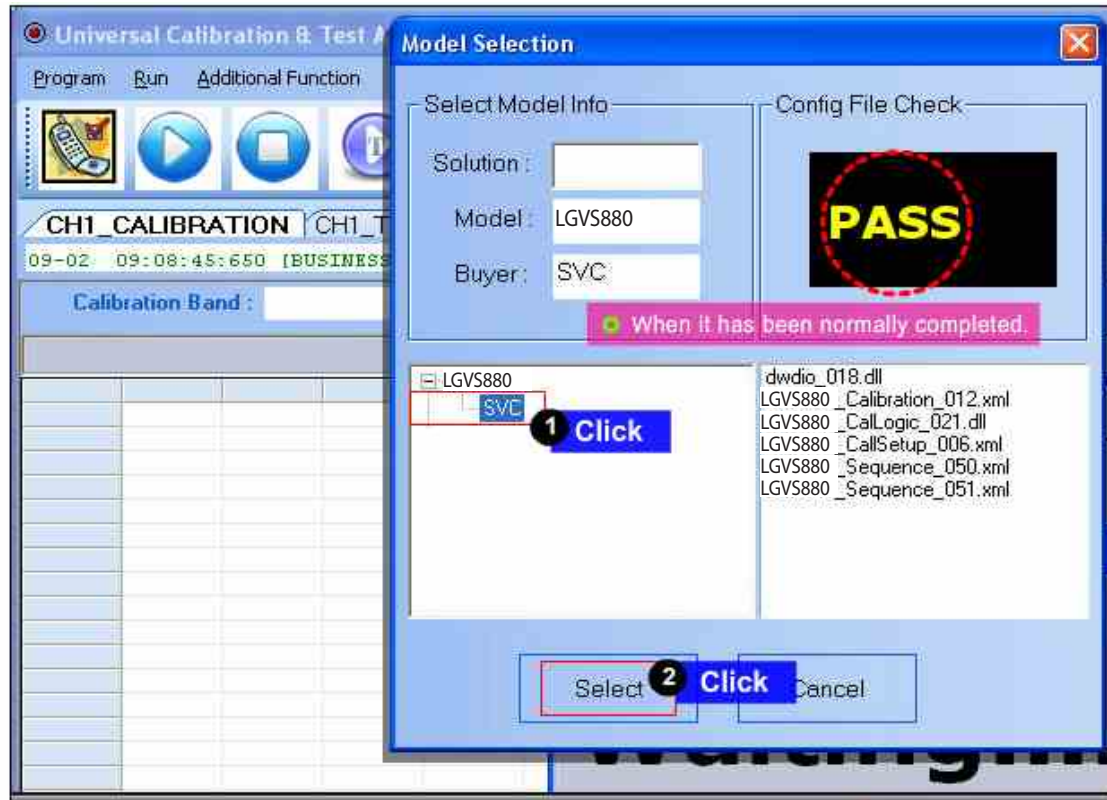

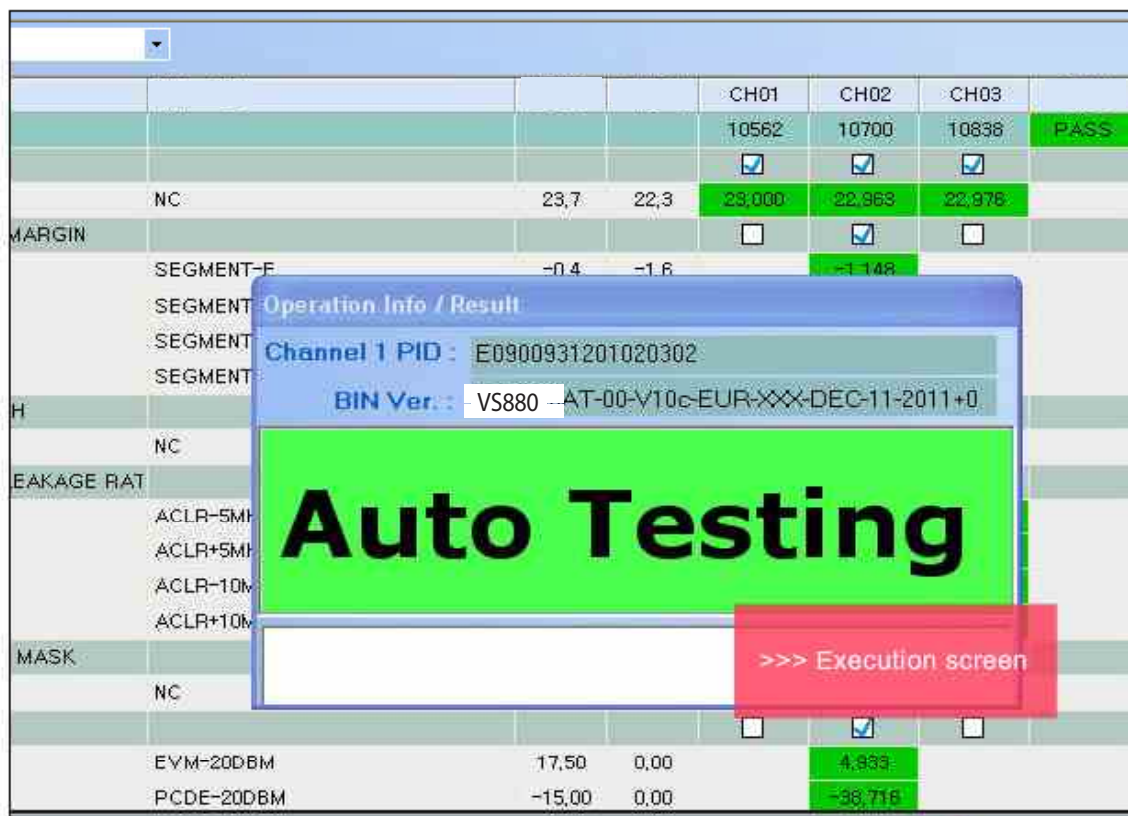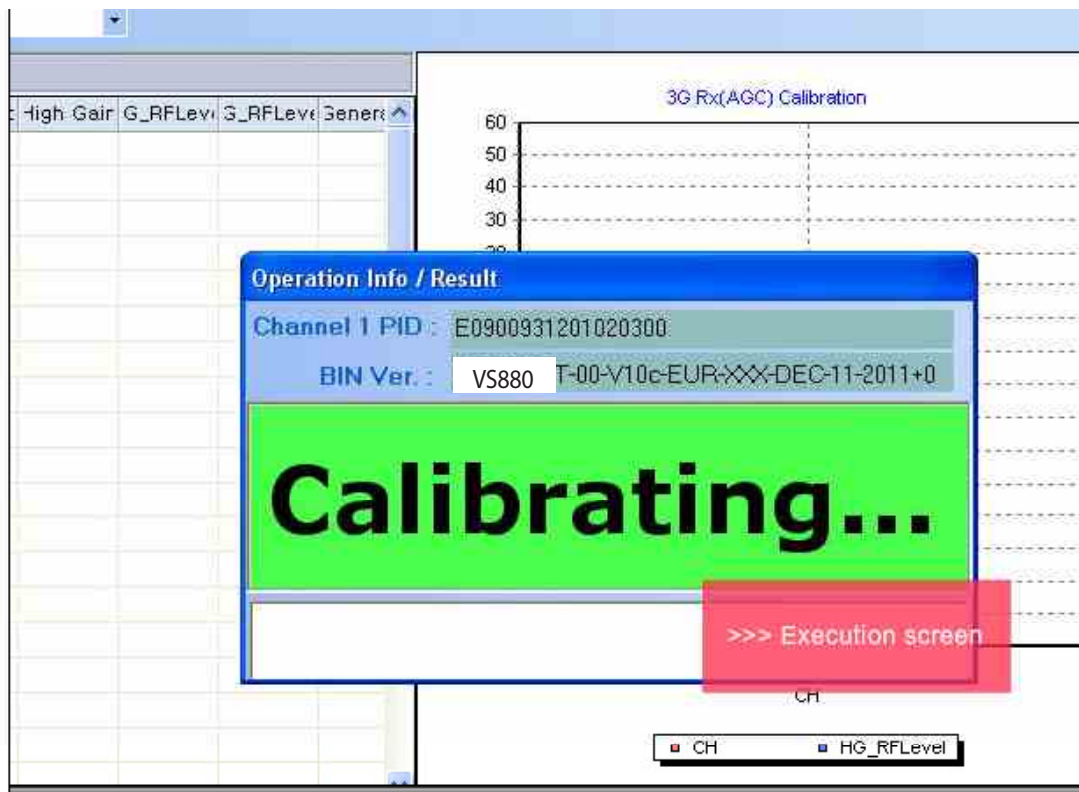

	Condition	USL	LSL	CH01	CH02	CH03	P/F
				10582	10700	10838	PASS
				☒	☒	☒	
	NC	23,7	22,3	23,065	22,963	23,013	
MARGIN				☐	☒	☐	
SEGMENT	Operation Info / Result Channel 1 PID : F0900931201020299 BIN Ver. : VS880 AT-00-V10c-EUR-XXX-DEC-11-2011+0 --- PASS ---						
SEGMENT							
SEGMENT							
SEGMENT							
OTH							
	NC						
LEAKAGE RAT							
ACLR-5M							
ACLR+5M							
ACLR-10M							
ACLR+10M							
IN MASK							
	NC	0,5	-0,5				
Y							☐
	EVM-20DBM	17,50	0,00		-4,320		
	PCDE-20DBM	-15,00	0,00		-38,441		
System Loss :		MySystem(MS).gms RF900 6C.grf					

'PASS' The End

10. DISASSEMBLE GUIDE

1. Disassemble Rear Cover



Take apart the battery cover using notch below


2. Disassemble Battery & Screws



**Screw rear
(8point)**



**Screw Main
Antenna
(3point)**

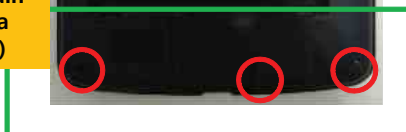

Screw Rear (8point)
Screw Main Antenna (3point)

Take apart the battery using notch below
and remove screw

3. Disassemble Rear Cover



1. Using the tool or hand make gap between Rear Cover and Front cover
2. Insert spatula, in the bottom right of the phone and unhook right, left and top (Back view)



Raise hold up and pull down

3. Disassemble Main Antenna



1. Using the tool or hand make gap between Main Antenna and Front cover
2. Insert spatula, in the bottom right of the phone and unhook right and Bottom part (Back view)



Raise hold up and pull down

4. Disassemble Main-PCB




Take apart the Main-PCB
removing the Cable & Connectors



1.

Take apart the Cable connectors

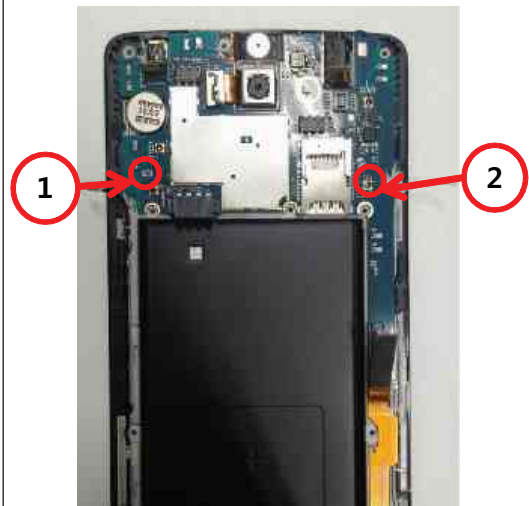


2. Take apart the connectors

5. Complete disassembling LG-VS880




11. EXPLODED VIEW & REPLACEMENT PART LIST

11.1 EXPLODED VIEW(SBOM)

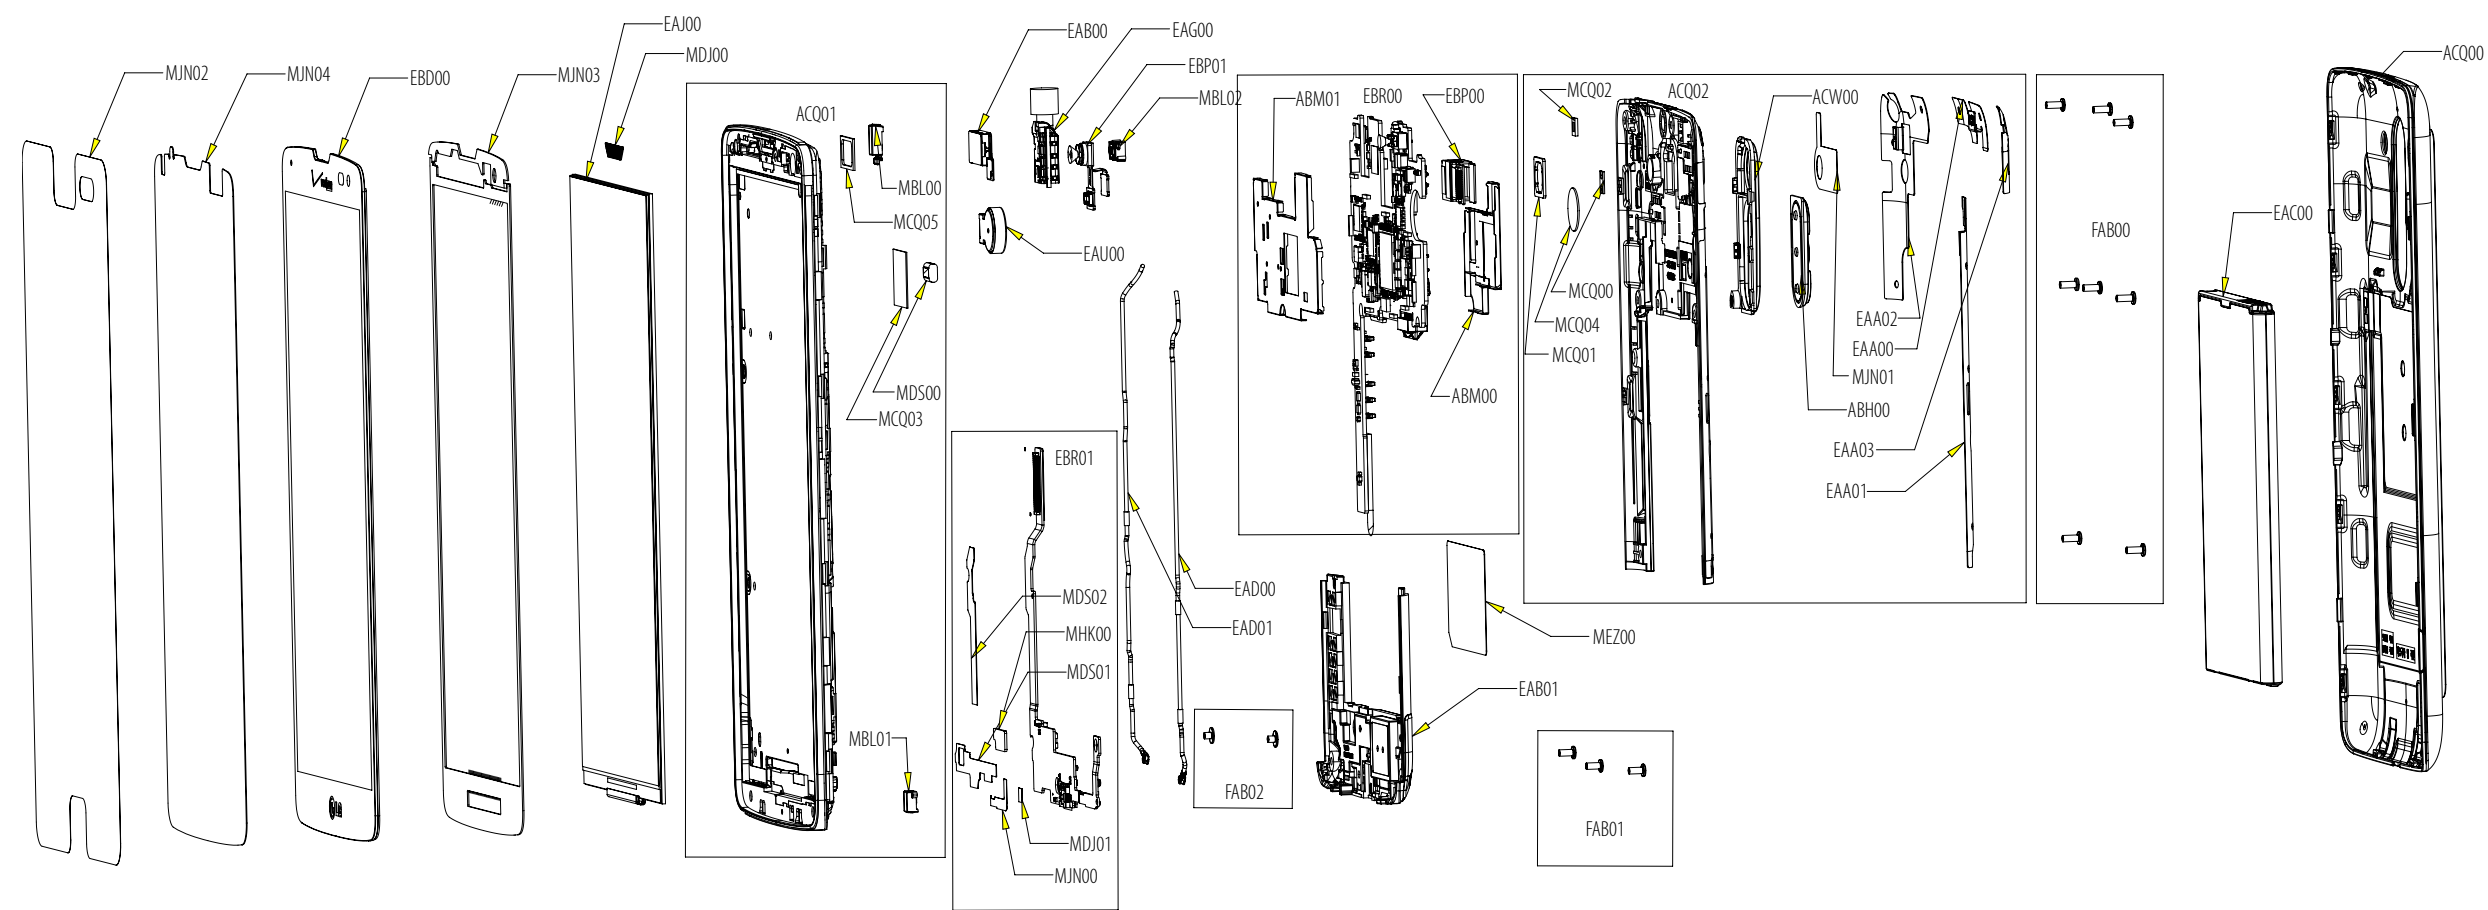

Location	Description	Location	Description	Location	Description	Location	Description
ABH00	Button Assembly	EAB01	Speaker Module	FAB00	Screw, Machine	MDJ00	Filter
ABM00	Can Assembly, Shield	EAC00	Rechargeable Battery, Lithum Ion	FAB01	Screw, Machine	MDJ01	Filter
ABM01	Can Assembly, Shield	EAD00	Cable, Assembly	FAB02	Screw, Machine	MDS00	Gasket
ACQ00	Cover Assembly, Battery	EAD01	Cable, Assmebly	MBL00	Cap	MDS01	Gasket
ACQ01	Cover Assembly, Front	EAG00	Jack, Phone	MBL01	Cap	MDS02	Gasket
ACQ02	Cover Assembly, Rear(SVC)	EAJ00	LCD Module	MBL02	Cap	MEZ00	Label, Approval
ACW00	Decor Assembly	EAU00	Motor, DC	MCQ00	Damper	MHK00	Sheet
EAA00	PIFA Antenna, WiFi	EBD00	Touch Window Assembly	MCQ01	Damper, Camera	MJN00	Tape
EAA01	PIFA Antenna, Multiple	EBP00	Camera Module	MCQ02	Damper	MJN01	Tape, Protect
EAA02	PIFA Antenna, Multiple	EBP01	Camera Module	MCQ03	Damper	MJN02	Tape, Protect
EAA03	PIFA Antenna, GPS	EBR00	PCB Assembly, Main	MCQ04	Damper, Motor	MJN03	Tape, Window
EAB00	Receiver	EBR01	PCB Assembly, Flexible	MCQ05	Damper, Speaker	MJN04	Tape, USP Film


EXPLODED VIEW(ASSY)

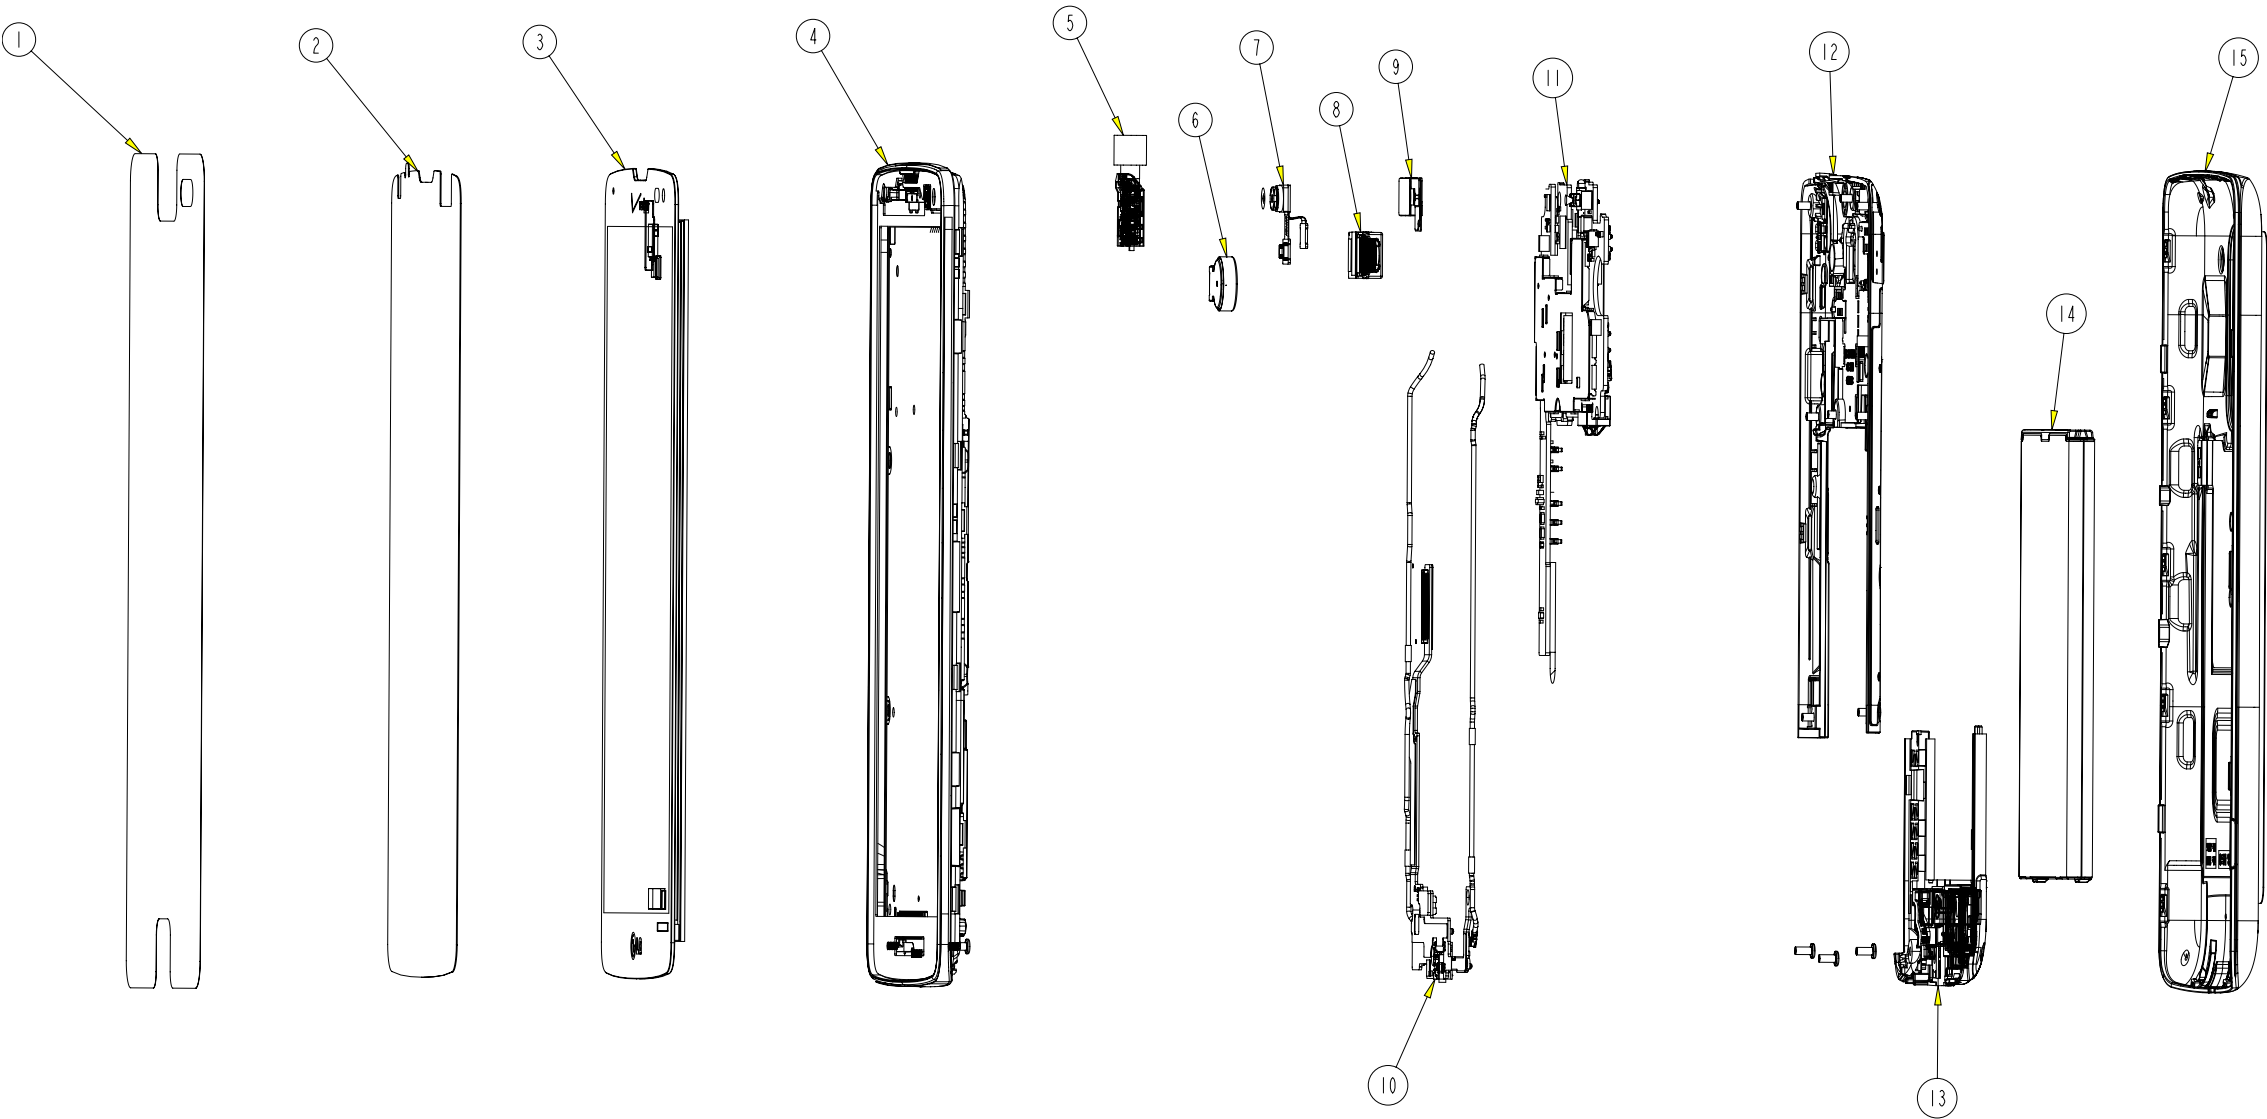

배율 7:10

NO	Part Name	Part Number	NO	Part Name	Part Number
1	TAPE, PROTECTION BAR	MJN69187701	11	PCB ASSY, MAIN	
2	TAPE, PROTECTION WINDOW(USP)	MJN69171201	12	COVER ASSY, REAR	ACQ87078501
3	MODULE, HYBRID TOUCH LCD		13	MAIN ANTENNA MODULE	EAB63248801
4	COVER ASSY, FRONT	ACQ87077601	14	BATTERY	EAC62298702
5	EARJACK	EAG63550001	15	COVER ASSY, BATTERY	ACQ87078601
6	MOTOR	EAU62283801			
7	CAMERA, VT	EBP61641902			
8	CAMERA, MAIN	EBP62101701			
9	RECIEVER	EAB63128301			
10	PCB_ANTENNA	EBR78638701			

EXPLODED VIEW(TOTAL)

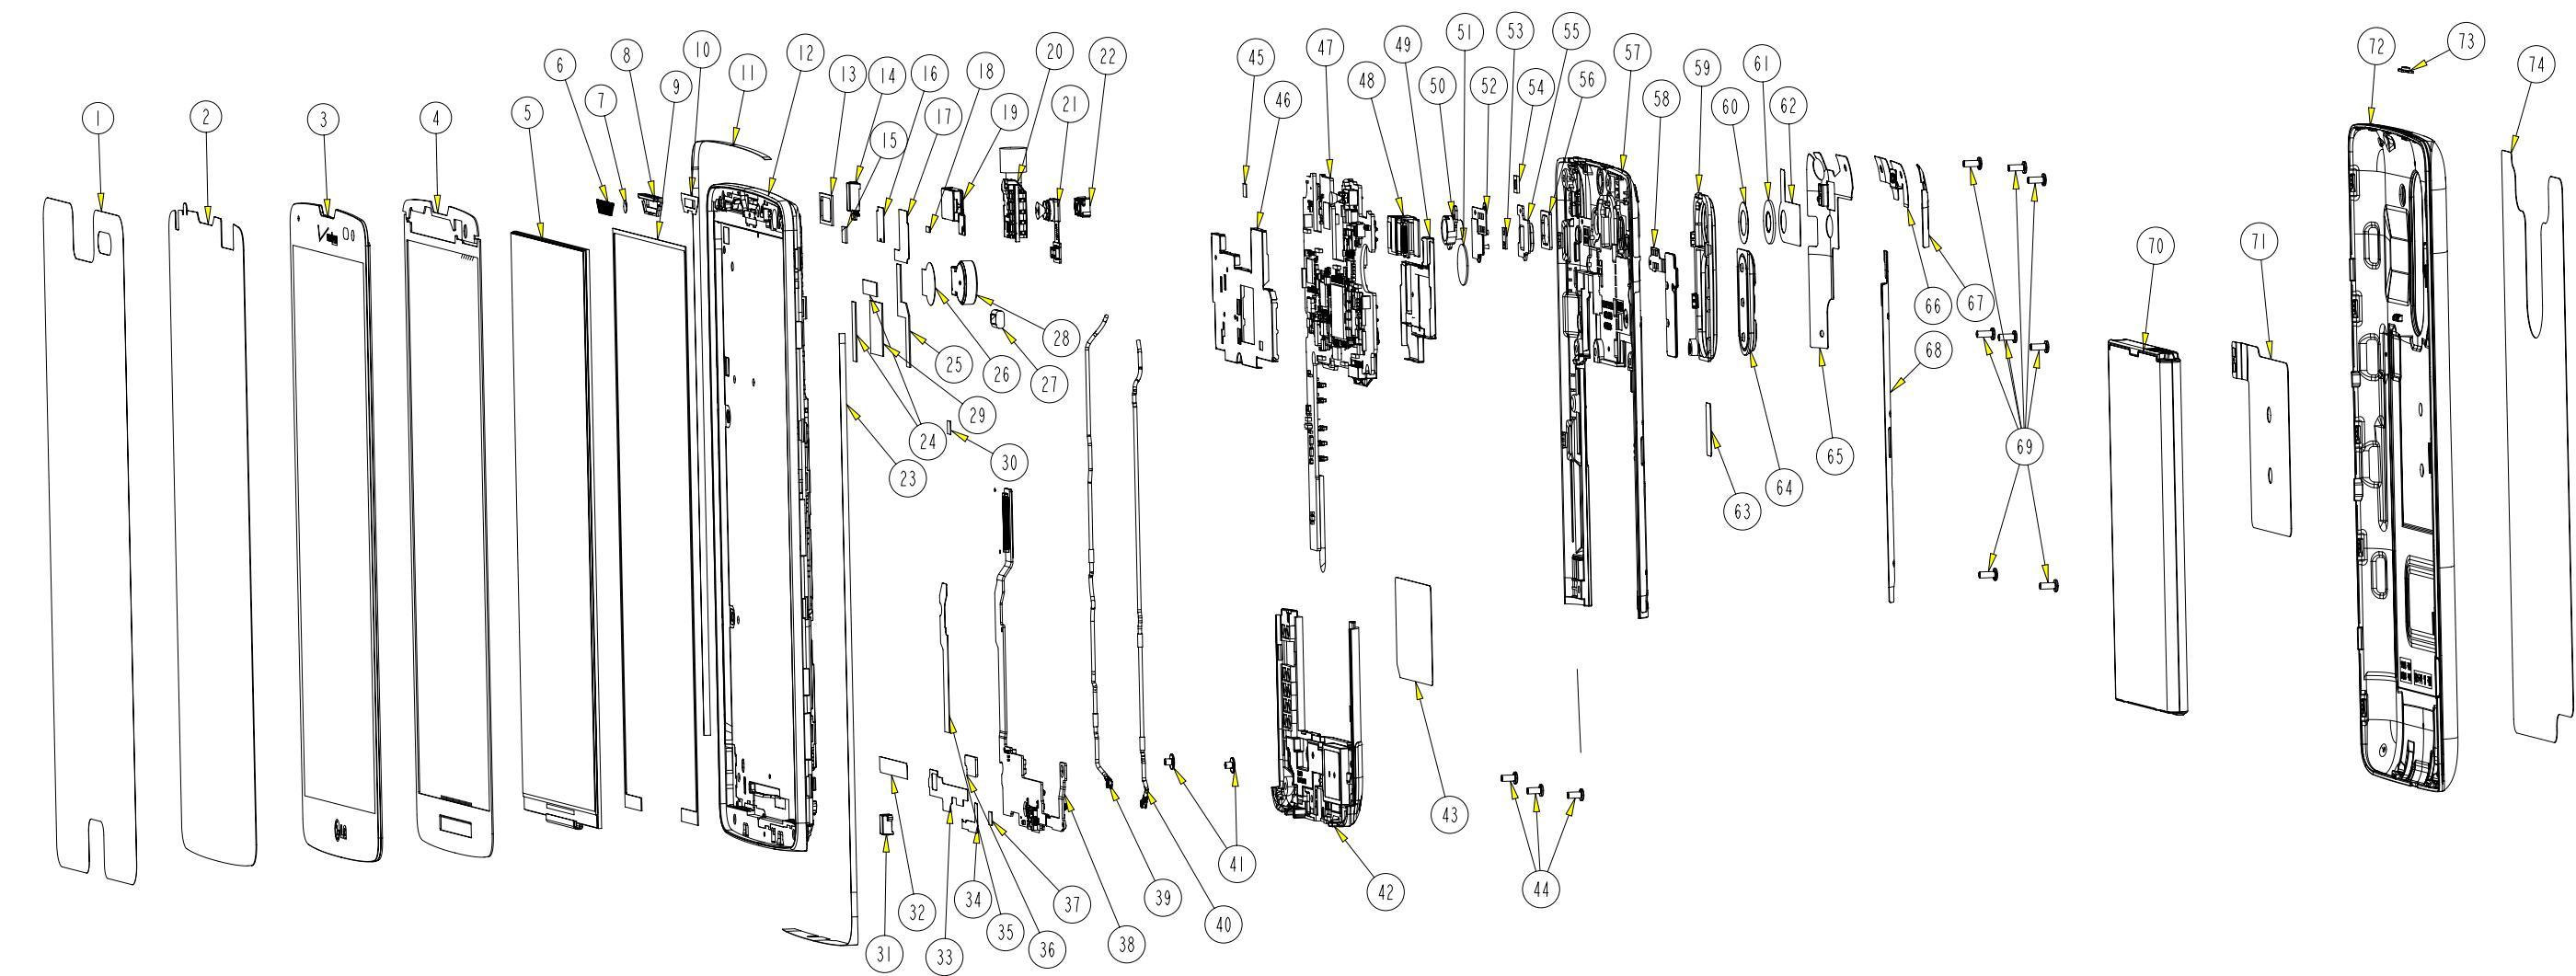

No.	Q'ty	Part No.	Description	No.	Q'ty	Part No.	Description	No.	Q'ty	Part No.	Description	No.	Q'ty	Part No.	Description	No.	Q'ty	Part No.	Description
1	1	MJN69187701	TAPE, PROTECTION BAR	16	1	MJN69171101	Tape, Earjack	31	1	MBL65857701	Cap, MIC BTM	46	1	ABM74476001	Can Assy, TOP	61	1	MKC64899001	WINDOW CAMERA
2	1	MJN69171201	USP Film	17	1	MDS64890901	Gasket, Touch FPCB	32	1	MDS64891001	Gasket LCD FPCB	47	1	EBR78627401	PCB Assy	62	1	MJN69171301	Tape Protection Rear
3	1	EBD61865601	Touch Window	18	1	MDS64891101	Gasket Frame Top	33	1	MDS64891201	Gasket. Sub FPCB 2	48	1	EBP62101701	Camera Main	63	1	MHK64649901	Sheet Rear WC
4	1	MJN69128101	TAPE TOUCH WINDOW	19	1	EAB63128301	Receiver	34	1	MJN69208101	Tape Sub FPCB	49	1	ABM74496101	Can Assy, BTM	64	1	ABH74959701	BUTTON ASSY
5	1	EAJ62669801	LCD Module	20	1	EAG63550001	Earjack	35	1	EAB63248801	Gasket. Sub FPCB 1	50	1	MFB63353101	LENS FLASH	65	1	EAA63324901	Antenna FPCB MRD
6	1	MDJ64264301	Deco Receiver	21	1	EBP61641902	Camera Front (1.3M)	36	1	MHK64745201	Sheet Sub FPCB	51	1	MCQ68008601	PAD MOTOR	66	1	EAA63645901	Antenna FPCB BT / Wifi
7	1	MHK64725201	Sheet, Diffuser	22	1	MBL65857501	Cap, Sensor	37	1	MDJ64284201	Filter MIC BTM	52	1	EBR79038201	FPCB A Plus	67	1	EAA63324801	Antenna FPCB GPS
8	1	MCR65407401	Deco, Front	23	1	MJN69190401	TAPE, PROTECTION Front BTM	38	1	EBR78638701	Sub FPCB Assy	53	1	MCQ68008501	PAD LDAF	68	1	EAA63345101	Antenna FPCB MIMO
9	1	MCQ68008401	PAD LCD BTM	24	2	MDS64870801	Gasket Frame Right	39	1	EAD63185201	Coaxial Cable (WH)	54	1	MCQ68044801	PAD Mic Top	69	1	GMEY0009201	Screw, Machine (3.5mm)
10	1	MJN69208001	Tape, Deco Front	25	1	MDS64793401	Gasket Frame Left	40	1	EAD63166801	Coaxial Cable (BK)	55	1	MKC65218901	Window A Plus	70	1	EAC62298602	Battery
11	1	MJN69208201	TAPE, PROTECTION Front Top	26	1	MJN69207901	Tape, Motor	41	1	GMZZ0019001	Screw, Machine (1.5mm)	56	1	MCQ68024501	PAD CAMERA MAIN	71	1	EAA63345001	Antenna, NFC
12	1	ACQ87077701	Cover Assy, Front (Sub)	27	1	MDS64930601	Gasket Foam	42	1	EAB63248801	Main Antenna Module	57	1	MCK68052901	COVER, REAR	72	1	MCK68053001	Cover, Battery
13	1	MCQ68044501	Pad, Receiver	28	1	EAU62283801	Motor	43	1	MLAA0057303	Approval Label	58	1	EAX65764101	FPCB Key	73	1	MKC64898901	Window, IR LED
14	1	MBL65857601	Cap, MIC TOP	29	1	MCQ68044701	PAD AP	44	1	GMEY0011201	Screw, Machine (3mm)	59	1	ACW74597001	DECO Camera Assy	74	1	MJN69190301	Tape Protection, BC
15	1	MCQ68127301	PAD T Coil	30	1	MLAB0004801	LABEL_A/S (3X3)	45	1	MDJ64084301	Filter MIC Top	60	1	MJN69187301	Tape Window Camera				

11. EXPLODED VIEW & REPLACEMENT PART LIST

11. EXPLODED VIEW & REPLACEMENT PART LIST

11.2 Replacement Parts <Main component>

Note: This Chapter is used for reference, Part order is ordered by SBOM standard on GCSC

Level	Location no	Description	P/N	Specification	Remark
1	AGQ000000	Phone Assembly	AGQ87415901	LGVS880.AVRZZY ZY:Color Unfixed -	
2	ACQ100400	Cover Assembly,EMS	ACQ87039201	LGVS880.AVRZTN TN:TITANIUM -	
5	ABM00	Can Assembly,Shield	ABM74496101	LGVS880.AVRZZY ZZ:Without Color (BTM)	
6	MBK070300	Can,Shield	MBK63793101	PRESS STS 304 0.15 LGVS880.AVRZZY ZZ:Without Color (BTM)	
6	MEV000000	Insulator	MEV65053701	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Can_BTMTM)	
5	ABM01	Can Assembly,Shield	ABM74476001	LGVS880.AVRZZY ZZ:Without Color (TOP-VZW)	
6	MBK070300	Can,Shield	MBK63792901	PRESS STS 304 0.15 LGVS880.AVRZZY ZZ:Without Color (TOP)	
6	MEV000000	Insulator	MEV65014901	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Can_Top)	
5	MDJ000000	Filter	MDJ64084301	COMPLEX LGVS880.AVRZZY ZZ:Without Color -	
6	SC10001 SC10002 SC10010 SC10014 SC10015 SC10016 SC10017 SC10018	Clip	MBV62321701	PRESS STS 301 0.15 LGLU6200.ALGTBK BK:Black -	
6	SC10001 SC10002 SC10010 SC10014 SC10015 SC10016 SC10017 SC10018	Clip	MBV62321701	PRESS STS 301 0.15 LGLU6200.ALGTBK BK:Black -	
6	PID1	Label	MEZ65049701	COMPLEX LGLS720.ASPRTS ZZ:Without Color PID label	
3	FAB00	Screw,Machine	GMEY0009201	GMEY0009201 BH + 2.7mm 3.5mm MSWR3 FZB N N LG ELECTRONICS INC.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
3	FAB020000	Screw,Tapping	FAB32258701	BH + 1 2.7M 3.5M NI PLT ZN	
3	ACQ063300	Cover Assembly,Rear	ACQ87078501	LGVS880.AVRZZY BK:BLACK BLACK -	
4	ACQ02	Cover Assembly, Rear(SVC)	ACQ87089401	LGVS880.AVRZZY BK:BLACK BLACK -	
5	ABH00	Button Assembly	ABH74959701	LGVS880.AVRZZY BK:BLACK BLACK -	
7	MCQ00	Damper	MCQ68008501	COMPLEX LGVS880.AVRZTN ZZ:Without Color (LDAF)	
5	ACW00	Decor Assembly	ACW74597001	LGVS880.AVRZTN TN:TITANIUM (Camera)	
6	MBF000000	Bush	MBF63223801	COMPLEX LGF350L.ALGTWH ZZ:Without Color -	
6	MCR000000	Decor	MCR65407301	MOLD PC LUPOY SC-1004A LGVS880.AVRZZY BK:BLACK BLACK -	
5	MKC041800	Window,IRDA	MKC65218901	MOLD PC 121R LGVS880.AVRZZY ZZ:Without Color (A Plus)	
5	MKC009400	Window,Camera	MKC64899001	CUTTING ACRYL LGVS880.AVRZTN TN:TITAN TITAN -	
5	MJN089300	Tape,Window	MJN69187301	COMPLEX LGVS880.AVRZZY ZZ:Without Color (Cam Window)	
5	MJN01	Tape,Protect	MJN69171301	COMPLEX LGVS880.AVRZTN ZZ:Without Color (REAR)	
5	MHK000000	Sheet	MHK64649901	COMPLEX LGVS880.AVRZTN ZZ:Without Color (REAR WC)	
5	MCK063300	Cover,Rear	MCK68052901	MOLD PC LUPOY SC-1004A LGVS880.AVRZZY BK:BLACK BLACK -	
5	MCQ04	Damper,Motor	MCQ68008601	COMPLEX LGVS880.AVRZTN ZZ:Without Color -	
5	MCQ01	Damper,Camera	MCQ68024501	COMPLEX LGVS880.AVRZZY ZZ:Without Color (Main Cam)	
5	MCQ02	Damper	MCQ68044801	COMPLEX LGVS880.AVRZTN ZZ:Without Color (MIC TOP)	
5	MFB029600	Lens,Flash	MFB63353101	MOLD PC LGVS880.AVRZZY ZZ:Without Color -	
3	ACQ003400	Cover Assembly,Bar	ACQ87039301	LGVS880.AVRZTN TN:TITANIUM -	
4	ACQ117900	Cover Assembly, Bar(Sub)	ACQ87077501	LGVS880.AVRZTN TN:TITANIUM -	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
5	ACQ01	Cover Assembly,Front	ACQ87077601	LGVS880.AVRZTN TN:TITANIUM -	
6	MCQ03	Damper	MCQ68044701	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Main AP)	
6	MJN061100	Tape,Protect	MJN69208201	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Front Top)	
6	MJN020800	Tape,Decor	MJN69208001	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Deco Front)	
6	MJN000001	Tape	MJN69207901	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Motor)	
6	MJN061101	Tape,Protect	MJN69190401	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Front Btm)	
6	MJN000000	Tape	MJN69171101	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Earjack)	
6	MHK000000	Sheet	MHK64725201	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Diffuser)	
6	MCQ05	Damper,Speaker	MCQ68044501	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Receiver)	
6	MDS00	Gasket	MDS64930601	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Foam)	
6	MEV000000	Insulator	MEV65112701	COMPLEX LGVS880.AVRZTN ZZ:Without Color (VT Camera)	
6	ACQ033200	Cover Assembly, Front(Sub)	ACQ87077701	LGVS880.AVRZTN TN:TITANIUM -	
7	MET099500	Insert,Nut	MICE0016902	COMPLEX MECH_COMMON ZZ:Without Color -	
7	MCK032700	Cover,Front	MCK68052801	MOLD PC LUPOY SC-1004A LGVS880.AVRZTN BK:BLACK BLACK -	
7	MDQ000000	Frame	MDQ63837301	CASTING MG LGVS880.AVRZZY ZZ:Without Color -	
6	MBL00	Cap	MBL65857601	PRESS RUBBER SILICON - LGVS880.AVRZZY BK:BLACK BLACK (MIC TOP)	
6	MBL01	Cap	MBL65857701	PRESS RUBBER SILICON - LGVS880.AVRZZY BK:BLACK BLACK (MIC BTM)	
6	MCQ043300	Damper,LCD	MCQ68008401	COMPLEX LGVS880.AVRZTN ZZ:Without Color (LCD BTM)	
6	MEZ000900	Label,After Service	MLAB0004801	COMPLEX LG-LB3300 LGT ZZ:Without Color -	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	MCR000000	Decor	MCR65407401	MOLD PC LUPOY SC-1004A LGVS880.AVRZTN ZZ:Without Color -	
6	MDJ00	Filter	MDJ64264301	COMPLEX LGVS880.AVRZTN BK:Black (Deco Receiver)	
6	MDS000003	Gasket	MDS64793401	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Frame Left)	
6	MDS000004	Gasket	MDS64870801	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Frame Right)	
6	MDS000000	Gasket	MDS64890901	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Touch FPCB)	
6	MDS000001	Gasket	MDS64891001	COMPLEX LGVS880.AVRZTN ZZ:Without Color (LCD FPCB)	
6	MDS000002	Gasket	MDS64891101	COMPLEX LGVS880.AVRZTN ZZ:Without Color (Frame Top)	
5	MJN03	Tape,Window	MJN69128101	COMPLEX LGVS880.AVRZZY ZZ:Without Color (Touch Window)	
4	MJN04	Tape,USP Film	MJN69171201	COMPLEX LGVS880.AVRZTN ZZ:Without Color -	
4	MJN02	Tape,Protect	MJN69187701	COMPLEX LGVS880.AVRZTN ZZ:Without Color (BAR)	
4	MEZ000000	Label	MLAZ0038301	COMPLEX LG-VX6000 ZZ:Without Color PID Label 4 Array PRINTING,	
4	FAB01	Screw,Machine	GMEY0011201	GMEY0011201 BH + 1.4mM 3mM MSWR FZB N N LG ELECTRONICS INC.	
4	FAB02	Screw,Machine	GMZZ0019001	GMZZ0019001 BH + 1.4mM 1.5mM MSWR NI PLT N - BLUECOM.CO., LTD.	
4	MBL02	Cap	MBL65857501	PRESS RUBBER SILICON - LGVS880.AVRZZY BK:BLACK BLACK (Sensor)	
6	MJN00	Tape	MJN69208101	COMPLEX LGVS880.AVRZTN BK:Black -	
6	MDS01	Gasket	MDS64891201	COMPLEX LGVS880.AVRZTN BK:Black -	
6	MDS02	Gasket	MDS64854401	COMPLEX LGVS880.AVRZTN BK:Black -	
6	MDJ01	Filter	MDJ64284201	COMPLEX LGVS880.AVRZTN BK:Black -	
6	MHK00	Sheet	MHK64745201	COMPLEX LGVS880.AVRZTN BK:Black -	
2	MEZ00	Label,Approval	MLAA0057303	COMPLEX LG-SH240 SKTMS ZZ:Without Color -	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
1	AAD000000	Addition Assembly	AAD87039201	LGVS880.AVRZZY ZZ:Without Color -	
2	ACQ00	Cover Assembly,Battery	ACQ87078601	LGVS880.AVRZTN TN:TITANIUM -	
3	MKC041800	Window,IRDA	MKC64898901	MOLD PC 121R LGVS880.AVRZZY ZZ:Without Color -	
3	MJN061100	Tape,Protect	MJN69190301	COMPLEX LGVS880.AVRZTN ZZ:Without Color (BC)	
3	MCK004100	Cover,Battery	MCK68053001	MOLD PC LUPOY SC-1004A LGVS880.AVRZTN TN:TITANIUM (VZW)	
1	AGF000000	Package Assembly	AGF77605501	LGVS880.AVRZTN ZZ:Without Color VS880 Package(B10H_700)_	
2	MEZ000000	Label	MLAZ0050901	COMPLEX KU990.AGBRBK ZZ:Without Color Battery Warning Label (Lithium ion Battery Label)	
2	MAY047100	Box,Master	MAY66771001	COMPLEX LGVS880.AVRZTN ZZ:Without Color VS880 Master Box_1/10	
2	MAY084000	Box,Unit	MAY66776201	COMPLEX LGVS880.AVRZTN ZZ:Without Color VS880 Unit Box (B10H)	
2	MEZ003500	Label,Barcode	MLAC0002010	PRINTING LG-RD2030 WP ZZ:Without Color Reliance New Pallet Label for RLC_pallet label	
2	MEZ047200	Label,Master Box	MLAJ0004402	PRINTING CG300 CGR DG ZZ:Without Color LABEL MASTER BOX(for CGR TDR 2VER. mbox_label) GSM standard_master box label	
2	MEZ084100	Label,Unit Box	MLAQ0017704	PRINTING LGVS980.AVRZBK ZZ:Without Color Unit Box barcode label (76*40)	
2	AGJ000000	Pallet Assembly	AGJ73918302	LGVS880.AVRZTN ZZ:Without Color VS880 VZW Pallet ASSY(B10H_700)	
3	MCQ000000	Damper	MPBZ0036807	COMPLEX KG225 TMU ZZ:Without Color BOX,SW,1 COLOR PBO PBOSWPCN	
3	MCQ007000	Damper,Box	MCQ68145401	COMPLEX LGVS880.AVRZTN ZZ:Without Color VS880 Pallet Sheet_1/700	
3	MCQ000001	Damper	MCQ66991610	BOX TW 70 770 70 1 COLOR L06D.ANTTBK ZZ:Without Color L-06D Option(Case) Cap Angle 1_70*70*770	
3	MBL007000	Cap,Box	MBL66257401	COMPLEX LGVS880.AVRZTN ZZ:Without Color VS880 Pallet CAP_2/700	
3	MGA000000	Pallet	MPCY0005202	COMPLEX LG-TM520 ZZ:Without Color -	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
3	MCQ007001	Damper,Box	MCQ68145402	COMPLEX LGVS880.AVRZTN ZZ:Without Color VS880 Pallet Sleeve_1/700	

11. EXPLODED VIEW & REPLACEMENT PART LIST

11.2 Replacement Parts <Main component>

Note: This Chapter is used for reference, Part order is ordered by SBOM standard on GCSC

Level	Location no	Description	P/N	Specification	Remark
2	EBX000000	Accessory	EBX62028101	BULKSIM-NFC-A BULKSIM-NFC-A REMOVABLE 3FF USIM Gemalto, Inc.	
3	EBR00	PCB Assembly, Main	EBR78627401	LGVS880.AVRZTN 1.0 Main	
4	EBR071500	PCB Assembly, Main, Insert	EBR79582401	LGVS880.AVRZTN 1.1 Main	
5	RAA00	Resin, PC	BRAH0001305	HIFILL 3075B . . NONE	
5	EBP00	Camera Module	EBP62101701	C8AA-Y495A C8AA-Y495A 8M AF, Sony(1/4") IMX219, 8.5x8.5x4.95t, MIPI4, FPCB, 90 degree, 30pin LG INNOTEK CO., LTD	
5	RAA050101	Resin, PC	BRAH0001304	: EFC-3A03-20-MH(Sn99%/Ag0.3%/Cu0.7%)) . . NONE	
4	EBR071800	PCB Assembly, Main, SMT	EBR78638901	LGVS880.AVRZTN 1.0 Main	
5	EBR071600	PCB Assembly, Main, SMT Bottom	EBR78639101	LGVS880.AVRZTN 1.1 Main	
6	C1147	Capacitor, Ceramic, Chip	ECCH0009504	MCH032A180JK 18pF 5% 25V NP0 -55TO+125C 0603 R/TP - ROHM.	
6	C1140	Inductor, Multilayer, Chip	ELCH0004705	1005GC2T8N2JLF 8.2NH 5% - 250mA 0.37OHM 2.8GHZ 8 SHIELD NONE 1.0X0.5X0.5MM R/TP PILKOR ELECTRONICS LTD.	
6	VA9500 VA9505 VA9506 VA9508 VA9509	Varistor	EAF62210001	AVLC10S01005 10V 0% 5pF 0.6X0.3X0.3mm IEC61000-4-2 (ESD) level #4 SMD R/TP AMOTECH CO., LTD.	
6	C5106	Inductor, Multilayer, Chip	ELCH0003847	LQG15HS1N8S02D 1.8NH 0.3NH - 300mA - - 0.1OHM 6GHZ 8 SHIELD NONE 1.0X0.5X0.5MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	C1135	Inductor, Multilayer, Chip	EAP62227001	LG HK 0603 1N2S-T 1.2NH 0.3NH - 450mA - - 0.12OHM 10GHZ 4 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	L1138	Inductor, Multilayer, Chip	EAP62227601	LG HK 0603 6N8J-T 6.8NH 5% - 250mA - - 0.39OHM 3.9GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	L1133	Inductor,Multilayer, Chip	EAP62246201	LG HK 0603 10NJ-T 10NH 5% - 220mA - - 0.51OHM 2.9GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	EAX010000	PCB,Main	EAX65802701	LGVS880.AVRZTN 1.0 FR-4 LX-BUMP 10 0.8 Main	
6	FL7300 FL7400 FL7401	Filter,EMI/Power	EAM62570201	ICMEF062P900MFR COMMON MODE NOISE FILTER - 0.00000000000017F 0H SMD R/TP - INNOCHIPS TECHNOLOGY	
6	VA7200 VA7201 VA7202 VA7203 VA7204 VA7300 VA7301 VA7302	Varistor	SEVY0005402	ICVS0505500FR 5.6V 0% 50F 1.0*0.5*0.55 - SMD R/TP INNOCHIPS TECHNOLOGY	
6	C230 C2302 C2306 C2318 C2319 C2320 C2321 C2325 C2351 C2358 C2360 C2382 C2383 C2384 C2386 C2388 C3204 C7201 C7202 C7203 C9501	Capacitor,Ceramic, Chip	ECCH0004904	GRM155R60J105K 1uF 10% 6.3V X5R -55TO+85C 1005 R/TP - MURATA MANUFACTURING CO.,LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C2307 C2352 C2353 C2354 C2355 C2359 C2363 C2366 C2367 C2368 C2369 C2374 C2375 C2377 C2380 C4137	Capacitor,Ceramic, Chip	ECZH0004402	CL05F104ZO5NNNC 0.1uF -20TO+80% 16V Y5V - 30TO+85C 1005 R/TP - - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	C1400 C1402	Capacitor,Ceramic, Chip	EAE62502901	CL05A106MP5NUNC 10uF 20% 10V X5R - 55TO+85C 1005 R/TP 0.55T max. SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C3201 C3206 C6102 C6110 C8100 C8101	Capacitor,Ceramic, Chip	ECCH0009101	C0603X5R0J104KT00NN 0.1uF 10% 6.3V X5R - 55TO+85C 0603 R/TP - TDK CORPORATION	
6	C9504	Capacitor(High Frequency),Cerami c,Chip	EAE63024201	RMTMK063CG100JT-F_H 10pF 5% 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03, W:0.3+-0.03, T:0.3+-0.03 KOREA TAIYO YUDEN.CO., LTD.	
6	U4400	IC,DC,DC Converter	EAN62626401	LM3630 V2.3 to V5.5 up to V40 0W WLP R/TP 12P 2P10S for LED Backlight , 20mA per 1 string TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C1157 R11009 R11010 R11012 R11015 R1115 R2106 R2108 R4132 R4133 R4150 R5201 R5202 R5208 R6100 R6108 R6606 R6609 R7300 R8403 R9106 R9107	Wire Pad,Short	SAFP0000401	AX3100 ATL SV_SHIPBACK,MAIN,A	
6	FB4400 FB6924 FB6925	Filter,Bead	EAM62633801	MPZ1608S601AT000 600 1.6X0.8X0.8 25% 0.15 1 SMD R/TP 2P - TDK KOREA COOPERATION	
6	C4179 C4187 C4190 C4191 C4192 C4193 C4197 C4199 C5207 C5219 C9503	Capacitor,Ceramic, Chip	ECCH0017301	CL03A105MQ3CSNH 0.000001F 20% 6.3V X5R - 45TO+85C 0603 R/TP - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	C2308 C2362 C4189 C7300 C7303 C8950 C8951	Capacitor,Ceramic, Chip	ECCH0017601	CL05A475MQ5NRNC 4.7uF 20% 6.3V X5R - 55TO+85C 1005 R/TP 0.5MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C6109 C7500 C7501 C7504	Capacitor,Ceramic, Chip	EAE63067401	GRM188R61C475KAAJ 4.7uF -10TO+10% 16V X5R -55TO+85C 1608 R/TP Max 0.95T L:1.6+-0.15 W:0.8+-0.15 T:0.8+-0.15 MURATA MANUFACTURING CO.,LTD.	
6	R2213 R2214	Resistor,Chip	ERHY0009522	MCR006YZPJ332 3.3KOHM 5% 1/20W 0603 R/TP - ROHM.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	R1106	Resistor,Chip	EBC62858401	MCR006YRTF7503 750KOHM 1% 1/20W 0603 R/TP - ROHM CO.,LTD.	
6	X5200	Resonator,Ceramic	EAW61644701	XRCGB27M120F3M10R0 27.12MHZ 30ppm 10pF SMD R/TP 4P MURATA MANUFACTURING CO.,LTD.	
6	C1 C4400	Capacitor,Ceramic, Chip	EAE62505701	CL10A105KB8NNNC 1uF 10% 50V X5R -55TO+85C 1608 R/TP 0.9T max. - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	ANT1100 ANT1101 ANT1102 ANT1103 ANT1104 ANT1105 CN5101	C-Clip	EAG63730501	TE 1.1H C-CLIP 1P ANT TERMINAL STRAIGHT SMD T/REEL AU 2.5 X 1.0X 1.1(L X W X H) SERVEONE CO., LTD.	
6	VA7406 VA9100 VA9101 VA9501	Varistor	SEVY0003601	ICVL0505101V150FR 5.6V 0% 100pF 1.0*0.5*0.55 NONE SMD R/TP INNOCHIPS TECHNOLOGY	
6	C6104	Capacitor,Ceramic, Chip	EAE62962301	GRM155R61A225KE95 2.2uF -10TO+10% 10V X5R -55TO+85C 1005 R/TP 0.5 L:1.0+-0.05 W:0.5+-0.05 T:0.5+-0.05 MURATA MANUFACTURING CO.,LTD.	
6	C5208 C5216 C9502	Capacitor,Ceramic, Chip	ECZH0025916	GRM0335C1E330J 33pF 5% 25V NP0 -55TO+125C 0603 R/TP - - MURATA MANUFACTURING CO.,LTD.	
6	SW1101 SW1103 SW1104	Connector,RF	ENWY0008701	MS-156C NONE STRAIGHT SOCKET SMD T/REEL AU 50OHM 400mDB HIROSE KOREA CO.,LTD	
6	D4400	Diode,Schottky	EAH61992801	PMEG4002EL 600mV 40V 200mA 0SEC 20pF 0W SOD-882 R/TP 2P 1 NXP Semiconductors	
6	C2305 C2381 C2385 C9102	Capacitor,Ceramic, Chip	ECCH0000151	CL05B472KB5NNNC 4.7nF 10% 25V X7R -55TO+125C 1005 R/TP - - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	D10003 D10005	Diode,TVS	EAH61693001	uClamp0541Z 5V 6V min 12V 2A 30W SLP0603P2X3 R/TP 2P 1 SEMTECH INTERNATIONAL AG	
6	C4138 C4139	Capacitor,Ceramic, Chip	ECCH0017501	CL10A226MQ8NRNE 22uF 20% 6.3V X5R -55TO+85C 1608 R/TP 0.8MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C5201 C5215 C5223	Capacitor,Ceramic, Chip	EAE62286801	CL03A104KP3NNNC 0.0000001F 10% 10V X5R -55TO+85C 0603 R/TP 0.3 - SAMSUNG ELECTRO-MECHANICS CO., LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	U3200	IC,MCP,eMMC	EAN63126301	THGBMBG6D1KBAIL 8Gbyte 2.7VTO3.6V,1.7VTO1.95V 11.5x13.0x0.8 TR 153P MLC NAND FBGA 8GB eMMC v5.0 (A19nm 64Gb MLC x 1/11.5x13.0/91.0%) TOSHIBA ELECTRONICS KOREA CORPORATION	
6	C5204 C5218	Capacitor,Ceramic, Chip	EAE62282201	GRM033R71E102KA01D 0.000000001F 10% 25V X7R -55TO+125C 0603 R/TP 0.3+/-0.03 MM - MURATA MANUFACTURING CO.,LTD.	
6	U5200	IC,NFC	EAN62632401	PN5472A2UK/C20803 WLCSP 2.81x2.79x0.56 NFC IC WLCSP R/TP 42P NXP Semiconductors	
6	R5200	Resistor,Chip	ERHZ0000407	MCR01MZP5J105 1MOHM 5% 1/16W 1005 R/TP - ROHM.	
6	C5220 C5222 C6103 C6107 C6108	Capacitor,Ceramic, Chip	ECZH0001215	C1005X5R1A105KT000F 1uF 10% 10V X5R - 55TO+85C 1005 R/TP - TDK KOREA COOPERATION	
6	R7216	Resistor,Chip	ERHZ0000405	MCR01MZP5J103 10KOHM 5% 1/16W 1005 R/TP - ROHM.	
6	L7500	Inductor,Wire Wound,Chip	EAP62107801	1269AS-H-4R7M=P2 4.7UH 20% - 1A 1.3 1.0 0.3OHM - - SHIELD 2.5X2.0X1.0 MM - R/TP TOKO, INC.	
6	C3200 C3205	Capacitor,Ceramic, Chip	EAE62986101	CGB2A1X5R0J225M 2.2uF -20TO20% 6.3V X5R - 55TO+85C 1005 R/TP Max 0.33T L:1.00+-0.15 W:0.5+-0.15 T:0.3+-0.03 TDK KOREA COOPERATION	
6	R6602 R8954 R8955	Resistor,Chip	ERHY0003201	MCR01MZP5F1001 1KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	C1130 C1131 C1148 C6601	Capacitor,Ceramic, Chip	ECCH0009104	C0603C0G1H330JT00NN 33pF 5% 50V C0G - 55TO+125C 0603 R/TP - - TDK CORPORATION	
6	R9500	Resistor,Chip	ERHY0042402	RC0201JR-0715KL 15KOHM 5% 1/20W 0603 R/TP - YAGEO CORPORATION	
6	U6100	IC,Audio Codec	EAN62691301	WCD9302 999 999W WLCSP R/TP 55P MSM8226 Reference QCT CODEC QUALCOMM INCORPORATED.	
6	CN7300	Connector,BtoB	ENBY0040701	GB042-30S-H10-E3000 30P 0.4MM STRAIGHT FEMALE SMD R/TP 1M - LS Mtron Ltd.	
6	R4400	Resistor,Chip	ERHZ0000406	MCR01MZP5J104 100KOHM 5% 1/16W 1005 R/TP - ROHM.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	CN9100	Connector, Terminal Block	EAG63189901	04-9254-004-027-868+ 4P 2.50MM ANGLE DIP R/TP 2.7T KYOCERA CONNECTOR KOREA SALES CO.,LTD.	
6	FB6923	Filter,Bead	EAM62870101	MPZ1608S102A 1000 1.6x0.8x0.8 25% 0.3 0.8 SMD R/TP 2P - TDK CORPORATION	
6	C1403	Capacitor,Ceramic, Chip	ECCH0009226	GRM0335C1E390J 39pF 5% 25V X7R -55TO+125C 0603 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	C4178 C4196 C4198 C6605	Capacitor,Ceramic, Chip	EAE62762301	CL03A105MP3NSNC 1uF 20% 10V X5R -55TO+85C 0603 R/TP 0.33 MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C1115 C1125 C1149 C1150 C5155 L1152	Capacitor,Ceramic, Chip	ECZH0000813	C1005C0G1H101JT 100pF 5% 50V C0G -55TO+125C 1005 R/TP - TDK KOREA COOPERATION	
6	R9710 R9711 R9712	Resistor,Chip	ERHY0003301	MCR01MZP5J101 100OHM 5% 1/16W 1005 R/TP - ROHM.	
6	U1100	IC,RF Amplifier	EAN62581401	SFMG2B0D001 1.5~3.1V 0 0 0W 0W 0 0 MCM R/TP 8P Gain : 17.2dB NF : 0.85dB WISOL.CO.,LTD	
6	VA9502 VA9503 VA9504 VA9507	Varistor	SEVY0008102	EVLC5S01015 5.5V 0% 15pF 0.6*0.3*0.33 NONE SMD R/TP AMOTECH CO., LTD.	
6	C2356	Capacitor,Ceramic, Chip	ECZH0001216	C1005X5R1A224KT000E 220nF 10% 10V X5R -55TO+85C 1005 R/TP - TDK KOREA COOPERATION	
6	U8100	IC,Acceleration Sensor	EAN62637201	BMC150 Accelerometer with Geomagnetic Sensor 2.2X2.2X1.0 LGA R/TP 14P Accelerometer with Geomagnetic Sensor BOSCH SENSORTEC GMBH	
6	MIC6921	Microphone,Condenser	EAB62670801	MOE-C110R38-K1 -38DB 300OHM OMNI 1.5 TO 3.6V 3.76x2.95x1.1 SMD BSE CO., LTD.	
6	C1103 C1111 C1121 C1123 C1124 C1132 C1134 C4403 C4404 C5102 C5191	Capacitor,Ceramic, Chip	ECCH0009103	C0603C0G1H101JT00NN 100pF 5% 50V C0G -55TO+125C 0603 R/TP - TDK CORPORATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	L1400	Inductor,Wire Wound,Chip	EAP62286801	1285AS-H-1R5M 1.5UH 20% - 1.8A 1.8 1.9 0.144OHM - - SHIELD 2.0X1.6X1.0MM - R/TP TOKO, INC.	
6	C2324	Capacitor,Ceramic, Chip	ECZH0001107	C1005X7R1E562KT000F 5.6nF 10% 25V X7R - 55TO+125C 1005 R/TP - - TDK KOREA COOPERATION	
6	C5209 C5212	Capacitor,Ceramic, Chip	EAE63144601	GRM1555C1H271J 270pF +-5% 50V C0G - 55TO+125C 1005 R/TP Max 0.55T L:1.0+-0.05 W:0.5+-0.05 T:0.5+-0.05 MURATA MANUFACTURING CO.,LTD.	
6	C2303 C2323 C2389 C2401 C5217	Capacitor,Ceramic, Chip	ECZH0001217	GRM155R60J474K 470nF 10% 6.3V X5R - 25TO+70C 1005 BK-DUP - MURATA MANUFACTURING CO.,LTD.	
6	S9500	Card Socket	EAG63310801	1041681610 Micro-SD, UIMDupliSocket 16P STRAIGHT DIP T/REEL - MOLEX	
6	C2301 C2361	Capacitor,Ceramic, Chip	ECCH0002003	C1005JB1C333KT000F 33nF -10TO+10% 16V X7R -55TO+125C 1005 R/TP - - TDK CORPORATION	
6	C2317 C2357	Capacitor,Ceramic, Chip	ECCH0002002	C1005X7R1A473KT000F 47nF 10% 10V X7R - 55TO+125C 1005 R/TP 0.5+-0.05 - TDK CORPORATION	
6	CN10001 CN11001	Terminal Block	ENZY0025801	KQ13L2-6R KQ13L2-6R,6,1.0 mm,ETC6.6x4x1.35(t),Stroke:-0.65,Touch window Contact CNT HIROSE KOREA CO.,LTD	
6	U4105	IC,LDO Voltage Regulator	EAN62496301	TLV70718 V2 to V5.5 V1.8 0W QFN R/TP 4P EUSY0355501 RP103K181D ,Richo Pin to Pin TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	
6	R8952 R8953	Resistor,Chip	ERHZ0000201	MCR01MZP5F1000 100OHM 1% 1/16W 1005 R/TP - ROHM.	
6	CN5200 CN5202	C-Clip	EAG63652101	2108613-5 1P ANT TERMINAL STRAIGHT SMD T/REEL AU 2.9X1.0X2.4(L X W X H) SERVEONE CO., LTD.	
6	C7503	Capacitor,Ceramic, Chip	ECCH0005602	GRM188R61C225K 2.2uF 10% 16V X5R - 55TO+85C 1608 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	SW1100 SW1102	Connector,RF	ENWY0004001	W.FL-R-SMT-1(40) 0.40MM STRAIGHT SOCKET SMD R/TP AU 50OHM 1.3DB HIROSE KOREA CO.,LTD	
6	Q1,Q8951	TR,Bipolar	EQBN0020501	KTC4075E NPN 5V 60V 50V 150mA 100NA 700 100mW ESM R/TP 3P KEC CORPORAITION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	L1104 L1118 L1135 L1136 L1139	Inductor,Multilayer, Chip	EAP62108901	LQP03TN47NJ02D 47NH 5% - 100mA - - 3.6OHM 1.3GHZ 9 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	C9105	Capacitor,Ceramic, Chip	ECCH0000122	MCH155A470JK 47pF 5% 50V NP0 -55TO+125C 1005 R/TP - ROHM Semiconductor KOREA CORPORATION	
6	R11003 R11004	Resistor,Chip	ERHZ0000486	MCR01MZP5J473 47KOHM 5% 1/16W 1005 R/TP - ROHM.	
6	D10004	Diode,TVS	EDTY0010002	PESD5V0S1UL 5V 6.4V min. 20V 15A 150W SOD- 882 R/TP 2P 1 STC CORP.	
6	R4105 R8402	Wire Pad,Open	SAFO0000401	AX3100 ATL SV_SHIPBACK,MAIN,A,0OHM DNI	
6	C5200	Capacitor,Ceramic, Chip	ECZH0001210	C1005Y5V1A474ZT000F 470nF -20TO+80% 10V Y5V -30TO+85C 1005 R/TP - TDK KOREA COOPERATION	
6	C6105 C7502	Capacitor,Ceramic, Chip	EAE62506501	CL05A475MP5NRNC 4.7uF 20% 10V X5R - 55TO+85C 1005 R/TP - - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	CN1001	Connector,BtoB	ENBY0051001	GB042-10S-H10-E3000 10P 0.4MM STRAIGHT FEMALE SMD R/TP 1M - LS Mtron Ltd.	
6	U7500	IC,DC,DC Converter	EAN62731801	TPS65132 2.5V to 5.5V +4.0V to +6.0V, -4.0V to - 6.0V 0W WCSP R/TP 15P Dual Output LCD Bias, Output Current: 80mA Max., 15-Ball CSP Package TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	
6	C8952	Capacitor,Ceramic, Chip	EAE62685201	C1005X5R1E104K 0.1uF 10% 25V X5R -55TO+85C 1005 R/TP 0.55T max. TDK KOREA COOPERATION	
6	C2304 C2387 C2402	Capacitor,Ceramic, Chip	ECCH0000179	GRM155R71C223K 22nF 10% 16V X7R -55TO+85C 1005 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	R5203 R5206	Resistor,Chip	ERHY0009302	MCR006YZPF1001 1KOHM 1% 1/20W 0603 R/TP - ROHM.	
6	R9501	Resistor,Chip	ERHY0009507	MCR006YZPJ105 1MOHM 5% 1/20W 0603 R/TP - ROHM.	
6	R9102	Resistor,Chip	EBC62235801	RC0603F363CS 36KOHM 1% 1/20W 0603 R/TP - SAMSUNG ELECTRO-MECHANICS CO., LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C2322 C2326	Capacitor,Ceramic, Chip	EAE62685701	GRM155R71H103KA88D 10nF 10% 50V X7R - 55TO+125C 1005 R/TP 0.55T max. - MURATA MANUFACTURING CO.,LTD.	
6	U4102 U4104	IC,LDO Voltage Regulator	EAN62669801	TLV70728PDQNR V2 to V5.5 V2.8 0W QFN R/TP 4P - TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	
6	R3208	Resistor,Chip	ERHZ0000203	MCR01MZP5F1002 10KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	U8950	IC,Gate	EAN62415501	SN74AUP1T97DSFR 0~3.6V 0.000004 LEVEL SHIFTER SON-6 R/TP 6P Configurable Gate Logic TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	
6	FL7301 FL7302	Filter,EMI/Power	EAM62630501	ICMEF104P101MFR COMMON MODE NOISE FILTER - 0.00000000000017F 0H SMD R/TP - INNOCHIPS TECHNOLOGY	
6	C9100	Capacitor,TA,Confo rmal	EAE62748401	F981A476MSAFZH 47uF 20% 10V 9.4UA - 55TO+125C 50HM 2.2X1.25X0.9MM NONE SMD R/TP 0.9T max. UNITEC ELECTRONICS CO. LTD.	
6	R9504	Resistor,Chip	ERHY0009502	MCR006YZPJ100 10OHM 5% 1/20W 0603 R/TP - ROHM.	
6	L4400	Inductor,Wire Wound,Chip	EAP62367801	VLS252010HBT-100M-LR 10UH 20% - 750mA 0.78 0.75 0.516OHM - - SHIELD 2.5X2.0X1.0 MM - R/TP TDK KOREA COOPERATION	
6	C5205 C5206	Capacitor(High Frequency),Cerami c,Chip	EAE62947001	GRM0335C1E100J_H 10pF 5% 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 :0.6+-0.03 W:0.3+-0.03 T:0.3+-0.03 MURATA MANUFACTURING CO.,LTD.	
6	R9104	Resistor,Chip	ERHY0009543	MCR006YZPJ121 120OHM 5% 1/20W 0603 R/TP - ROHM.	
6	R1107	Resistor,Chip	ERHY0000298	RC0402JR-073M3L 3.3MOHM 5% 1/16W 1005 R/TP - YAGEO CORPORATION	
6	C6106	Capacitor, Ceramic,Chip	ECCH0002001	C1005JB0J104KT000F 0.1uF 10% 6.3V X5R - 30TO+85C 1005 R/TP - - TDK CORPORATION	
6	R1104	Resistor,Chip	ERHY0009526	MCR006YZPJ472 4.7KOHM 5% 1/20W 0603 R/TP - ROHM.	
6	CN7400	Connector,BtoB	ENBY0039601	GB042-20S-H10-E3000 20P 0.4MM STRAIGHT SOCKET SMD R/TP 1M - LS Mtron Ltd.	
6	U6600	IC,Analog Switch	EAN62578201	FSA5157L6X 1.65 to 5.5V 60NSEC 20NSEC 180mW MICROPAC R/TP 6P - FAIRCHILD SEMICONDUCTOR HONG KONG LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	R9101	Resistor,Chip	ERHZ0000222	MCR01MZP5F1503 150KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	R6425	Resistor,Chip	ERHY0023001	MCR006YZPF3004 3MOHM 1% 1/20W 0603 R/TP - ROHM.	
6	D8950	Diode,TVS	EDTY0008501	PG05DBTFC 5V 5.8V 17V 5A 100mW TFSC R/TP 2P 1 KEC CORPORATION	
6	C7301 C7302	Capacitor,Ceramic, Chip	ECCH0000198	CL05A225MQ5NSNC 2.2uF 20% 6.3V X5R - 55TO+85C 1005 R/TP . SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R9105	Resistor,Chip	ERHY0035601	PMR10EZPFU10L0 0.01OHM 1% 1/2W 2012 R/TP - ROHM.	
6	R8951	Resistor,Chip	ERHZ0000204	MCR01MZP5F1003 100KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	CN18003	Connector,BtoB	ENBY0036801	GB042-60S-H10-E3000 60P 0.40MM STRAIGHT SOCKET SMD R/TP 1M - LS Mtron Ltd.	
6	C1141	Capacitor(High Frequency),Cerami c,Chip	EAE63023901	RMTMK063CG3R9BT-F_H 3.9pF 0.1PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03, W:0.3+-0.03, T:0.3+-0.03 KOREA TAIYO YUDEN.CO., LTD.	
6	C9505	Capacitor,Ceramic, Chip	ECCH0009514	MCH032A(AN)100DK 10pF 0.5PF 25V X7R - 55TO+125C 0603 R/TP - ROHM.	
6	R1108	Inductor,Multilayer, Chip	EAP62246001	LG HK 0603 3N3S-T 3.3NH 0.3NH - 320mA - - 0.23OHM 6.7GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	R6603	Resistor,Chip	ERHZ0000211	MCR01MZP5F1201 1.2KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	C4401 C9103	Capacitor,Ceramic, Chip	ECCH0007804	CL05A225MP5NSNC 2.2uF 20% 10V X5R - 55TO+85C 1005 R/TP 0.5MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	U1400	IC,DC,DC Converter	EAN62788501	LM3263 2.7V to 5.5V 0.4V to 3.6V 0W MICRO SMD R/TP 16P MIPI RFFE, 2G/3G/4G, 2.5A Max.(PWM), 2.7 MHz (typ.), 16-bump micro SMD TEXAS INSTRUMENTS KOREA LTD, HONGKONG BRANCH.	
6	VA5200 VA5201	Varistor	SEVY0010501	IECS0505C040FR 10V 0% 4E-12F 1.0x0.5x0.3 IEC61000-4-1 (ESD) level #4 SMD R/TP INNOCHIPS TECHNOLOGY	
6	R6424	Resistor,Chip	ERHY0017901	RC0201JR-07330KL 330KOHM 5% 1/20W 0603 R/TP - YAGEO CORPORATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C1401 C6101	Capacitor,Ceramic, Chip	ECCH0000182	GRM155R61A104K 0.1uF 10% 10V X5R - 55TO+85C 1005 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	R9103	Resistor,Chip	ERHZ0000286	MCR01MZP5F4701 4.7KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	LD9830	LED,Flash	EAV62175401	ELCH07-5565J6J7294010-N8(LM) WHITE 2.95~4.05V 1.5A(Pulse) 350mA(DC) 200lm(Min) 240lm(Typ) X(0.3084~0.3325) Y(0.3003~0.3967) 6W(Pulse Mode) 2016 R/TP 2P - EVERLIGHT ELECTRONICS CO., LTD.	
6	C4183	Capacitor,Ceramic, Chip	EAE62726601	CL03A225MQ3CRNC 2.2uF -20TO20% 6.3V X5R - 55TO+85C 0603 R/TP 0.3T - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	Q5200	FET	EBK61691601	SSM3K15AMFV N-CHANNEL MOSFET 30V +-20 100mA 60HM 150mW VESM R/TP 3P TOSHIBA ELECTRONICS KOREA CORPORATION	
6	VA9510	Varistor	SEVY0007901	ICVS0505481FR 5.6V 0% 480F 1.0*0.5*0.55 NONE SMD R/TP INNOCHIPS TECHNOLOGY	
6	C5109	Inductor,Multilayer, Chip	ELCH0003842	LQG15HSR10J02D 100NH 5% - 150mA - - 1.25OHM 600MHZ 8 SHIELD NONE 1.0X0.5X0.5MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	FL9100	Filter,EMI/Power	SFEY0015301	NFM18PC104R1C3 ESD/EMI 0HZ 0.1uF 0H SMD R/TP - MURATA MANUFACTURING CO.,LTD.	
6	FL1111	Filter,Saw	EAM62633001	SFHG89DQ102 1575.42@GPS/1601.72@GLONASS 1.4x1.1x0.5t SMD R/TP 5P WISOL.CO.,LTD	
6	L5200 L5201	Inductor,Multilayer, Chip	EAP62167601	MLG1608SR39JT 390NH 5% - 1mA - - 3OHM 300MHZ 10 SHIELD 0 1.6X0.8X0.8MM R/TP TDK KOREA COOPERATION	
6	ZD9101	Diode,Zener	EDNY0013602	EDZVT2R5.1B 4.98V 4.98TO5.2V 80OHM 150mW EMD2 R/TP 2P 1 ROHM Semiconductor KOREA CORPORATION	
6	R8950	Resistor,Chip	ERHZ0000434	MCR01MZP5J1R0 1OHM 5% 1/16W 1005 R/TP - ROHM.	
6	R6105	Resistor,Chip	ERHZ0000237	MCR01MZP5F2002 20KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	C4136	Capacitor,Ceramic, Chip	EAE63602001	ZRB18AR60J476M 47uF -20TO20% 6.3V X5R - 55TO+85C 1608 R/TP L:1.6+-0.2, W:0.8+-0.2, T:1.0+-0.2 Max 1.2T, Murata Acoustic Noise MLCC ZRB MURATA MANUFACTURING CO.,LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	L1126	Inductor,Multilayer, Chip	EAP62227301	LG HK 0603 2N2S-T 2.2NH 0.3NH - 360mA - - 0.19OHM 8.8GHZ 4 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	R1105	Resistor,Chip	ERHY0009505	MCR006YZPJ103 10KOHM 5% 1/20W 0603 R/TP - ROHM.	
5	EBR071700	PCB Assembly, Main,SMT Top	EBR78639001	LGVS880.AVRZTN 1.1 Main	
6	C1604 L1103 L1603	Inductor,Multilayer, Chip	EAP62227801	LG HK 0603 12NJ-T 12NH 5% - 190mA - - 0.68OHM 2.7GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	C5205 C5206	Capacitor(High Frequency),Ceramic,Chip	EAE62947001	GRM0335C1E100J_H 10pF 5% 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 :0.6+-0.03 W:0.3+-0.03 T:0.3+-0.03 MURATA MANUFACTURING CO.,LTD.	
6	C5168	Capacitor,Ceramic, Chip	ECCH0009208	GRM0335C1ER50C 0.5pF 0.25PF 25V X7R - 55TO+125C 0603 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	L1133	Inductor,Multilayer, Chip	EAP62246201	LG HK 0603 10NJ-T 10NH 5% - 220mA - - 0.51OHM 2.9GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	C1602	Inductor,Multilayer, Chip	EAP62246101	LG HK 0603 4N7S-T 4.7NH 0.3NH - 280mA - - 0.3OHM 5.3GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	L1604	Capacitor(High Frequency),Ceramic,Chip	EAE62946501	GRM0335C1E3R9B_H 3.9pF 0.1PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03 W:0.3+-0.03 T:0.3+-0.03 MURATA MANUFACTURING CO.,LTD.	
6	C1130 C1131 C1148 C6601	Capacitor,Ceramic, Chip	ECCH0009104	C0603C0G1H330JT00NN 33pF 5% 50V C0G - 55TO+125C 0603 R/TP - - TDK CORPORATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C2307 C2352 C2353 C2354 C2355 C2359 C2363 C2366 C2367 C2368 C2369 C2374 C2375 C2377 C2380 C4137	Capacitor,Ceramic, Chip	ECZH0004402	CL05F104ZO5NNNC 0.1uF -20TO+80% 16V Y5V - 30TO+85C 1005 R/TP - - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	U4100	IC,PMIC	EAN62739601	PM8926 2.5 to 4.5V adj 0W CSP R/TP 172P - QUALCOMM INCORPORATED.	
6	C5201 C5215 C5223	Capacitor,Ceramic, Chip	EAE62286801	CL03A104KP3NNNC 0.0000001F 10% 10V X5R - 55TO+85C 0603 R/TP 0.3 - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	C4180	Capacitor,Ceramic, Chip	EAE62767801	JDK212BBJ476MD 47uF -20TO20% 6.3V X5R - 55TO+85C 2012 R/TP 0.85T - TAIYO YUDEN CO.,LTD	
6	C4179 C4187 C4190 C4191 C4192 C4193 C4197 C4199 C5207 C5219 C9503	Capacitor,Ceramic, Chip	ECCH0017301	CL03A105MQ3CSNH 0.000001F 20% 6.3V X5R - 45TO+85C 0603 R/TP - SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	C6104	Capacitor,Ceramic, Chip	EAE62962301	GRM155R61A225KE95 2.2uF -10TO+10% 10V X5R -55TO+85C 1005 R/TP 0.5 L:1.0+-0.05 W:0.5+-0.05 T:0.5+-0.05 MURATA MANUFACTURING CO.,LTD.	
6	FL7301 FL7302	Filter,EMI/Power	EAM62630501	ICMEF104P101MFR COMMON MODE NOISE FILTER - 0.00000000000017F 0H SMD R/TP - INNOCHIPS TECHNOLOGY	
6	C4401 C9103	Capacitor,Ceramic, Chip	ECCH0007804	CL05A225MP5NSNC 2.2uF 20% 10V X5R - 55TO+85C 1005 R/TP 0.5MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C1403	Capacitor,Ceramic, Chip	ECCH0009226	GRM0335C1E390J 39pF 5% 25V X7R -55TO+125C 0603 R/TP - MURATA MANUFACTURING CO.,LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	R1509 R1510	Resistor,Chip	EBC62035901	RC0201FR-071RL 10HM 1% 1/20W 0603 R/TP - YAGEO CORPORATION	
6	C6106	Capacitor,Ceramic, Chip	ECCH0002001	C1005JB0J104KT000F 0.1uF 10% 6.3V X5R - 30TO+85C 1005 R/TP - - TDK CORPORATION	
6	C2308 C2362 C4189 C7300 C7303 C8950 C8951	Capacitor,Ceramic, Chip	ECCH0017601	CL05A475MQ5NRNC 4.7uF 20% 6.3V X5R - 55TO+85C 1005 R/TP 0.5MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	FL1702	Filter,Duplexer	EAM62673201	LJ37C 2132.5 MHz 2112.4 to 2152.6 MHz 1732.5 MHz 1712.4 to 1752.6 MHz 1.9dB typ / 2.4dB max 1.3dB typ / 2.0dB max 2.0x1.6x0.47t DUAL SMD R/TP 9P EPCOS PTE LTD.	
6	D200	Diode,TVS	EAH61872601	PESD12VS1UA 12V 13.3V min. 19V 22.5A 360mW SOD323 R/TP 2P 1 NXP Semiconductors	
6	C1103 C1111 C1121 C1123 C1124 C1132 C1134 C4403 C4404 C5102 C5191	Capacitor,Ceramic, Chip	ECCH0009103	C0603C0G1H101JT00NN 100pF 5% 50V C0G - 55TO+125C 0603 R/TP - - TDK CORPORATION	
6	C5137	Capacitor,Ceramic, Chip	ECCH0009515	MCH032CN151KK 150pF 10% 25V X7R - 55TO+125C 0603 R/TP - ROHM.	
6	C1609 L1114 L1116 L5114	Inductor,Multilayer, Chip	EAP61767801	LQP03TN2N4B02D 2.4NH 0.1NH - 500mA - - 0.20HM 6GHZ 14 SHIELD NONE 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	R1108	Inductor,Multilayer, Chip	EAP62246001	LG HK 0603 3N3S-T 3.3NH 0.3NH - 320mA - - 0.23OHM 6.7GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	C5159 C5161	Capacitor,Ceramic, Chip	EAE62762401	CL03A224KP3NNNC 220nF 10% 10V X5R - 55TO+85C 0603 R/TP 0.33 MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	PT1000 PT1001	Thermistor,NTC	EBG61306601	NTCG104EF104FT 100KOHM 1% 35V 35A 4.25MK SMD R/TP - TDK CORPORATION	
6	C5211	Capacitor,Ceramic, Chip	ECCH0000120	MCH155A390J 39pF 5% 50V NP0 -55TO+125C 1005 R/TP - ROHM Semiconductor KOREA CORPORATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C1702 C1718 L1712	Inductor,Multilayer, Chip	EAP62226201	LQP03TG4N7J02D 4.7NH 5% - 250mA - - 0.72OHM 6GHZ 12 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	FL1600	Filter,Duplexer	EAM62870001	B8616 881.5MHz 869.0to894.0MHz 836.5MHz 824.0to849.0MHz 2.1/2.8dB 1.5/2.7dB 2.5x2.0x0.53t DUAL SMD R/TP 9P EPCOS PTE LTD.	
6	L1122	Inductor,Multilayer, Chip	EAP62348201	0603GC3T27NJLF 27NH 5% - 50mA - - 1.7OHM 1.6GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP PILKOR ELECTRONICS LTD.	
6	C1147	Capacitor,Ceramic, Chip	ECCH0009504	MCH032A180JK 18pF 5% 25V NP0 -55TO+125C 0603 R/TP - ROHM.	
6	C5100 C5101	Capacitor,Ceramic, Chip	ECCH0009506	MCH032A270JK 27pF 5% 25V NP0 -55TO+125C 0603 R/TP - ROHM.	
6	VA7406 VA9100 VA9101 VA9501	Varistor	SEVY0003601	ICVL0505101V150FR 5.6V 0% 100pF 1.0*0.5*0.55 NONE SMD R/TP INNOCHIPS TECHNOLOGY	
6	C5204 C5218	Capacitor,Ceramic, Chip	EAE62282201	GRM033R71E102KA01D 0.000000001F 10% 25V X7R -55TO+125C 0603 R/TP 0.3+/-0.03 MM - MURATA MANUFACTURING CO.,LTD.	
6	C5157 L1153 L1708 L5104	Inductor,Multilayer, Chip	EAP62107901	LQP03TG1N5C02D 1.5NH 0.2NH - 600mA - - 0.15OHM 6GHZ 13 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	FL1100 FL1112	Filter,Separator,Sp dt	EAM62430001	LFD21892MDPFC065 0.55 13 3 - MURATA MANUFACTURING CO.,LTD.	
6	U8400	IC,Proximity	EAN62568201	APDS-9930-200 High T Proximity and Ambient Light Sensor 3.36X4.94X3.45 COB R/TP 8P High T Proximity and Ambient Light Sensor AVAGO TECHNOLOGIES INTERNATIONAL SALES PTE. LIMITED	
6	LD8950	LED,Chip	EAV62193601	IR26-61C/L261/TR8(LM) CLEAR 1.2~1.5V(If=20mA) 65mA 2.0~5.0 940nm(Typ.) 100mW 3012 R/TP 2P - EVERLIGHT ELECTRONICS CO., LTD.	
6	L6810 L6811	Inductor,Wire Wound,Chip	ELCH0003806	LQW18AN82NG00D 82NH 2% - 250mA 0.6OHM 2KHZ 34 NON SHIELD 1.6X0.8X0.8MM - R/TP MURATA MANUFACTURING CO.,LTD.	
6	C9505	Capacitor,Ceramic, Chip	ECCH0009514	MCH032A(AN)100DK 10pF 0.5PF 25V X7R - 55TO+125C 0603 R/TP - ROHM.	
6	R8401	Resistor,Chip	ERHZ0000441	MCR01MZP5J220 22OHM 5% 1/16W 1005 R/TP - ROHM.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	R1502 R1503 R1505 R1506	Resistor,Chip	ERHY0009503	MCR006YZPJ101 100OHM 5% 1/20W 0603 R/TP - ROHM.	
6	C202	Capacitor,Ceramic, Chip	ECCH0000161	MCH153CN333KK 33nF 10% 16V X7R -55TO+125C 1005 R/TP - - ROHM Semiconductor KOREA CORPORATION	
6	C4138 C4139	Capacitor,Ceramic, Chip	ECCH0017501	CL10A226MQ8NRNE 22uF 20% 6.3V X5R - 55TO+85C 1608 R/TP 0.8MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	FL1108	Filter,Separator	EAM62630801	DPX162170DT-8122B1 0.5 @LB / 0.7 @HB 15 @LB / 20 @HB - - TDK CORPORATION	
6	C5176 L5108	Inductor,Multilayer, Chip	EAP62225901	LQP03TG1N0C02D 1NH 0.2NH - 600mA - - 0.15OHM 6GHZ 12 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	C6105 C7502	Capacitor,Ceramic, Chip	EAE62506501	CL05A475MP5NRNC 4.7uF 20% 10V X5R - 55TO+85C 1005 R/TP - - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	CN10003 CN10004 CN10005	C-Clip	EAG63652201	2108611-5 1P ANT TERMINAL STRAIGHT SMD T/REEL AU 2.9X1.0X1.7(L X W X H) SERVEONE CO., LTD.	
6	R1105	Resistor,Chip	ERHY0009505	MCR006YZPJ103 10KOHM 5% 1/20W 0603 R/TP - ROHM.	
6	R1104	Resistor,Chip	ERHY0009526	MCR006YZPJ472 4.7KOHM 5% 1/20W 0603 R/TP - ROHM.	
6	L1610	Inductor,Multilayer, Chip	EAP62227401	LG HK 0603 3N9S-T 3.9NH 0.3NH - 300mA - - 0.27OHM 6GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	R1112 R1113 R4106	Resistor,Chip	ERHY0009536	MCR006YZPF1003 100KOHM 1% 1/20W 0603 R/TP - ROHM.	
6	C20 C5179	Capacitor,Ceramic, Chip	EAE62685301	CL05A105KA5NQNC 1uF 10% 25V X5R -55TO+85C 1005 R/TP 0.6T max. Samsung(1.0+-0.1 0.5+-0.1 0.5+-0.1) Murata (1.0+-0.05 0.5+-0.05 0.5+-0.05) SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	U1500	IC,RF Transceiver,4G	EAN62697301	WTR1625L WTR1625L 2G/3G/4G GSM/GPRS/EDGE,1X, 1xEV-DO ,WCDMA , TD-SCDMA , HSPA+/DC-HSPA+ , LTE (FDD) ,TD-LTE, 164pin CSP R/TP 164P QUALCOMM INCORPORATED.	
6	LD1600	LED,Chip	EAV61915501	16-219ASURC/S1230/TR8(LM) RED 2.35V 25mA 45mcd 633.5nm 60mW 1005 R/TP 2P - EVERLIGHT ELECTRONICS CO., LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C1526 C1558	Capacitor,Ceramic, Chip	ECCH0007805	CL05A106MQ5NUNC 10uF 20% 6.3V X5R - 55TO+85C 1005 R/TP 0.5+-0.05 - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R9501	Resistor,Chip	ERHY0009507	MCR006YZPJ105 1MOHM 5% 1/20W 0603 R/TP - ROHM.	
6	R200	Resistor,Chip	ERHY0009527	MCR006YZPJ473 47KOHM 5% 1/20W 0603 R/TP - ROHM.	
6	VA6600 VA6602 VA6810 VA6811 VA6925 VA8401 VA8402	Varistor	SEVY0008101	EVLC5S01033 EVLC5S01033 EVLC5S01033,5.5 V, ,SMD ,Vdc 5.5, Vb 10~15.6, Cp 17.9 at 1MHz, 0.6*0.3*0.33 , ,5.5 , ,23.1~42.9 ,0.6*0.3*0.33 ,[empty] ,SMD ,R/TP AMOTECH CO., LTD. AMOTECH CO., LTD.	
6	R1501 R1504	Resistor,Chip	EBC62115901	RC0603J680CS 68OHM 5% 1/20W 0603 R/TP - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R1507 R1508	Resistor,Chip	EBC62236701	RC0402FR-074K75L 4.75KOHM 1% 1/16W 1005 R/TP 0.4T max. YAGEO CORPORATION	
6	C1157 R11009 R11010 R11012 R11015 R1115 R2106 R2108 R4132 R4133 R4150 R5201 R5202 R5208 R6100 R6108 R6606 R6609 R7300 R8403 R9106 R9107	Wire Pad,Short	SAFP0000401	AX3100 ATL SV_SHIPBACK,MAIN,A	
6	L1126	Inductor,Multilayer, Chip	EAP62227301	LG HK 0603 2N2S-T 2.2NH 0.3NH - 360mA - - 0.19OHM 8.8GHZ 4 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	L1138	Inductor,Multilayer, Chip	EAP62227601	LG HK 0603 6N8J-T 6.8NH 5% - 250mA - - 0.39OHM 3.9GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C5173 C5174 C5175	Capacitor,Ceramic, Chip	ECCH0009212	GRM0335C1E4R7C 4.7pF 0.25PF 25V C0G - 55TO+125C 0603 R/TP - - MURATA MANUFACTURING CO.,LTD.	
6	R5114 R5115 R5116 R5117 R5118	Resistor,Chip	ERHY0009550	MCR006YZPF4702 47KOHM 1% 1/20W 0603 R/TP - ROHM.	
6	R2009 R2010 R2207 R2208	Resistor,Chip	ERHZ0000465	MCR01MZP5J332 3.3KOHM 5% 1/16W 1005 R/TP - ROHM.	
6	C6109 C7500 C7501 C7504	Capacitor,Ceramic, Chip	EAE63067401	GRM188R61C475KAAJ 4.7uF -10TO+10% 16V X5R -55TO+85C 1608 R/TP Max 0.95T L:1.6+-0.15 W:0.8+-0.15 T:0.8+-0.15 MURATA MANUFACTURING CO.,LTD.	
6	L1719	Inductor,Multilayer, Chip	EAP61866301	LG HK0603 5N1S-T 5.1NH 0.3NH - 270mA - - 0.33OHM 5GHZ 5 SHIELD 0 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	L4132 L4133	Inductor,Wire Wound,Chip	EAP62526501	TFM201610GHM-1R0MTAA 1UH 20% - 3A 3.6 3 0.06OHM - - SHIELD 2.0X1.6X1.0 MM - R/TP TDK KOREA COOPERATION	
6	U1703	IC,RF Amplifier	EAN63028601	BGA7M1N6 1.5V-3.6V 0 0 0W 0W 0 1 Leadless plastic R/TP 6P Operating frequencies: 1805 - 2200 MHz, 0.7 x 1.1, INFINEON TECHNOLOGIES (ASIA PACIFIC) PTE LTD.	
6	C3201 C3206 C6102 C6110 C8100 C8101	Capacitor,Ceramic, Chip	ECCH0009101	C0603X5R0J104KT00NN 0.1uF 10% 6.3V X5R - 55TO+85C 0603 R/TP - TDK CORPORATION	
6	R5110 R5111 R5112 R5113	Resistor,Chip	EBC62316201	RC0603F224CS 220KOHM 1% 1/20W 0603 R/TP - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R4113	Resistor,Chip	ERHY0009547	MCR006YZPF2003 200KOHM 1% 1/20W 0603 R/TP - ROHM.	
6	C5214 C6810	Capacitor,Ceramic, Chip	ECZH0000830	C1005C0G1H330JT000F 33pF 5% 50V NP0 - 55TO+125C 1005 R/TP - TDK KOREA COOPERATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C2300,C2302 C2306,C2318 C2319,C2320 C2321,C2325 C2351,C2358 C2360,C2382 C2383,C2384 C2386,C2388 C3204,C7201 C7202,C7203 C9501	Capacitor,Ceramic, Chip	ECCH0004904	GRM155R60J105K 1uF 10% 6.3V X5R -55TO+85C 1005 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	C4178 C4196 C4198 C6605	Capacitor,Ceramic, Chip	EAE62762301	CL03A105MP3NSNC 1uF 20% 10V X5R - 55TO+85C 0603 R/TP 0.33 MM - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C1721 C1722 C5185	Capacitor,Ceramic, Chip	ECCH0009109	C0603X7R1H331KT00NN 330pF 10% 50V X7R - 55TO+125C 0603 R/TP - TDK CORPORATION	
6	ZD2,ZD200	Diode,TVS	EDTY0009101	ESD9X5.0ST5G 5V 6.2 12.3V 8.7A 107W SOD528 R/TP 2P 1 ON SEMICONDUCTOR	
6	R2101 R2103 R2105	Resistor,Chip	EBC61856201	RC0201FR-07240RL 240OHM 1% 1/20W 0603 R/TP - YAGEO CORPORATION	
6	C1101 L1100	Inductor,Multilayer, Chip	EAP62226901	LG HK 0603 1N0S-T 1NH 0.3NH - 470mA - - 0.110HM 10GHZ 4 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	L4135	Inductor,Wire Wound,Chip	EAP62187401	MAKK2016T1R0M 1UH 20% - 2.2A 2.2 2.45 0.075OHM - - SHIELD 2.0X1.6X1.0MM - R/TP TAIYO YUDEN CO.,LTD	
6	C5162	Capacitor,Ceramic, Chip	ECCH0032801	GRM033R60J224M 0.00000022F 20% 6.3V X5R - 55TO+85C 0603 R/TP 0.3MM - MURATA MANUFACTURING CO.,LTD.	
6	L1700 L1702	Inductor,Multilayer, Chip	EAP62108501	LQP03TG18NJ02D 18NH 5% - 160mA - - 2.28OHM 2.8GHZ 11 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	U2100	IC,Digital Baseband Processor,4G	EAN62967501	MSM8926-1 784 pNSP, Quad CA7 1.2GHz,28nm LP,12x12 PoP,1x600MHz LPDDR3, CAT4(CA), EVDO, HSPA+(42/11Mbps),TD- SCDMA,1080p@30fps,Adreno 305 NSP R/TP 784P QUALCOMM INCORPORATED.	
6	FL1107	Filter,Saw	EAM62771001	B9876 2140.0MHz 1.1x0.9x0.45t SMD R/TP 5P EPCOS PTE LTD.	
6	FB6601 FB6602 FB6921	Filter,Bead	SFBH0008102	BLM15HD182SN1D 1800 ohm 1.0X0.5X0.5 25% 2.2 ohm 0.2A SMD R/TP 2P 0 MURATA MANUFACTURING CO.,LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	CN9300	Connector,BtoB	ENBY0053201	24-5804-014-000-829+ 14P 0.40MM STRAIGHT FEMALE SMD R/TP 900mm - KYOCERA CONNECTOR KOREA SALES CO.,LTD.	
6	C4100	Capacitor,Ceramic, Chip	ECZH0025920	GRM033R71C102K 1nF 10% 16V X7R -55TO+125C 0603 R/TP - - MURATA MANUFACTURING CO.,LTD.	
6	FB5100	Filter,Bead	EAM62230101	BLM03AX121SN1 120 ohm 0.6X0.3X0.3 25% 0.23 ohm 0.45A SMD R/TP 2P 0 MURATA MANUFACTURING CO.,LTD.	
6	FL1701	Filter,Saw	SFSY0040901	SAFEA782MAL0F00 782MHz 1.4*1.1*0.5 SMD R/TP 5P MURATA MANUFACTURING CO.,LTD.	
6	FL7300 FL7400 FL7401	Filter,EMI/Power	EAM62570201	ICMEF062P900MFR COMMON MODE NOISE FILTER - 0.0000000000017F 0H SMD R/TP - INNOCHIPS TECHNOLOGY	
6	C1401 C6101	Capacitor,Ceramic, Chip	ECCH0000182	GRM155R61A104K 0.1uF 10% 10V X5R - 55TO+85C 1005 R/TP - MURATA MANUFACTURING CO.,LTD.	
6	C1158	Capacitor(High Frequency),Ceramic,Chip	EAE63043401	RMTMK063CG1R2BT-F_H 1.2pF 0.1PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03, W:0.3+-0.03, T:0.3+-0.03 KOREA TAIYO YUDEN.CO., LTD.	
6	R1600,R1700	Resistor,Chip	ERHY0042409	RC0201FR-0749R9L 49.9OHM 1% 1/20W 0603 R/TP - YAGEO CORPORATION	
6	U1501	IC,RF Transceiver,4G	EAN62697201	WTR1625 WTR1625 2G/3G GSM/GPRS/EDGE,1X, 1xEV-DO,WCDMA,TD-SCDMA, HSPA+/DC-HSPA+ CSP R/TP 164P QUALCOMM INCORPORATED.	
6	L1105 L1112 L1600	Inductor,Multilayer, Chip	EAP62227701	LG HK 0603 8N2J-T 8.2NH 5% - 230mA - - 0.45OHM 3.4GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	R4105 R8402	Wire Pad,Open	SAFO0000401	AX3100 ATL SV_SHIPBACK,MAIN,A,0OHM DNI	
6	FL1103	Filter,Saw,Dual	EAM62870901	SFR881AB002 881.5MHz/1960.0MHz 1.5x1.1x0.6t SMD R/TP 10P WISOL.CO.,LTD	
6	R5119	Resistor,Chip	ERHY0009515	MCR006YZPJ221 220OHM 5% 1/20W 0603 R/TP - ROHM.	
6	L4130 L4131	Inductor,Multilayer, Chip	EAP62545901	MIPSZ2016DR24FHS 240NH 20% - 4A 4 4 0.022OHM 0HZ - SHIELD - 2.0X1.6X1.0 MM R/TP FDK CORPORATION.	
6	C201	Capacitor,Ceramic, Chip	ECCH0000115	MCH155A220JK 22pF 5% 50V NP0 -55TO+125C 1005 R/TP - ROHM Semiconductor KOREA CORPORATION	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	C5220 C5222 C6103 C6107 C6108	Capacitor,Ceramic, Chip	ECZH0001215	C1005X5R1A105KT000F 1uF 10% 10V X5R - 55TO+85C 1005 R/TP - TDK KOREA COOPERATION	
6	C7301 C7302	Capacitor,Ceramic, Chip	ECCH0000198	CL05A225MQ5NSNC 2.2uF 20% 6.3V X5R - 55TO+85C 1005 R/TP . SAMSUNG ELECTRO- MECHANICS CO., LTD.	
6	U1702	IC,Power Amplifier	EAN62457201	AFEM-7613 3.2V to 4.2V 0 0 0W 0W 0 1 SMD R/TP 17P Band13 PAD, 5.5*3*0.93, 2gain mode AVAGO TECHNOLOGIES INTERNATIONAL SALES PTE. LIMITED	
6	L1500 L1501	Inductor,Multilayer, Chip	EAP62246401	LG HK 0603 22NJ-T 22NH 5% - 150mA - - 1OHM 1.8GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	C4171	Capacitor,Ceramic, Chip	EAE62542701	CL21A226MPCLRNC 22uF 20% 10V X5R - 55TO+85C 2012 R/TP 0.95T max. - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R2100	Resistor,Chip	ERHZ0000235	MCR01MZP5F2000 200OHM 1% 1/16W 1005 R/TP - ROHM.	
6	U8700	IC,Hall Effect Switch	EAN62682901	BU52061NVX Hall IC 1.2X1.6 SSON R/TP 4P - ROHM Semiconductor KOREA CORPORATION	
6	L5113	Inductor,Multilayer, Chip	EAP62110401	MIPSTZ1608D2R2B 2.2UH 30% - 400mA 0.4 0.5 0.39OHM 0HZ - SHIELD - 1.6X0.8MM R/TP FDK CORPORATION.	
6	C1400 C1402	Capacitor,Ceramic, Chip	EAE62502901	CL05A106MP5NUNC 10uF 20% 10V X5R - 55TO+85C 1005 R/TP 0.55T max. SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	L6812	Inductor,Wire Wound,Chip	EAP62368801	LQH3NMN122M03E 1.2mH 20% - 80mA - - 46.8OHM - - SHIELD 3.0X3.0X1.5MM - R/TP MURATA MANUFACTURING CO.,LTD.	
6	C5208 C5216 C9502	Capacitor,Ceramic, Chip	ECZH0025916	GRM0335C1E330J 33pF 5% 25V NP0 -55TO+125C 0603 R/TP - - MURATA MANUFACTURING CO.,LTD.	
6	C1611	Capacitor,Ceramic, Chip	ECCH0042006	GRM0335C1ER60BZ01D 0.6pF 0.1PF 25V C0G - 55TO+125C 0603 R/TP 0.30+-0.03 - MURATA MANUFACTURING CO.,LTD.	
6	C4183	Capacitor,Ceramic, Chip	EAE62726601	CL03A225MQ3CRNC 2.2uF -20TO20% 6.3V X5R - 55TO+85C 0603 R/TP 0.3T - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	FL1110	Filter,Saw	EAM62890501	B9899 751.0MHz 1.1x0.9x0.4t SMD R/TP 5P EPCOS PTE LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	L4134	Inductor,Wire Wound,Chip	EAP62366601	TFM201610GHM-2R2M 2.2UH 20% - 1.9A 2.4 1.9 0.152OHM - - SHIELD 2.0X1.6X1.0MM - R/TP TDK Electronics KOREA CORPORATION	
6	C4131	Capacitor,Ceramic, Chip	ECCH0000155	MCH153CN103KK 10nF 10% 16V X7R -55TO+125C 1005 R/TP - ROHM Semiconductor KOREA CORPORATION	
6	L1609	Inductor,Multilayer, Chip	EAP62108201	LQP03TG3N3C02D 3.3NH 0.2NH - 400mA - - 0.32OHM 6GHZ 13 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	L4,L5	Inductor,Multilayer, Chip	ELCH0001425	LL1005-FHL82NJ 82NH 5% - 150mA 1.9OHM 1.15GHZ 10 SHIELD NONE 1.0X0.5X0.5MM R/TP TOKO, INC.	
6	L1129	Inductor,Multilayer, Chip	EAP62226301	LQP03TG5N6J02D 5.6NH 5% - 250mA - - 0.88OHM 6GHZ 12 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	FL1102	Filter,Dielectric	SFDY0003102	LFL18628MTC2C221 LPF 628.5MHZ 317MHz SMD R/TP 6P MURATA MANUFACTURING CO.,LTD.	
6	X4100	Crystal	EAW61883401	X1E0002910001 19.2MHZ 10PPM 7F - SMD R/TP EPSON TOYOCOM CORP	
6	Q4100	FET	EBK62031701	SSM6N57NU N-CHANNEL MOSFET 30V +-12 4A 0.063OHM 1W DFN R/TP 6P TOSHIBA ELECTRONICS KOREA CORPORATION	
6	FL5100	Filter,Separator	EAM62511801	LFD182G45DCJD247 0.35 @2.4GHz / 0.5 @ 5GHz - - 2.4G(LPF)/5G(BPF) for QCT WiFi Chipset - Mirror type of LFD182G45DCHD277 for BCM MURATA MANUFACTURING CO.,LTD.	
6	FL9100	Filter,EMI/Power	SFEY0015301	NFM18PC104R1C3 ESD/EMI 0HZ 0.1uF 0H SMD R/TP - MURATA MANUFACTURING CO.,LTD.	
6	R2211,R2212	Resistor,Chip	ERHY0003601	MCR01MZP5J272 2.7KOHM 5% 1/16W 1005 R/TP - ROHM.	
6	ANT1100 ANT1101 ANT1102 ANT1103 ANT1104 ANT1105 CN5101	C-Clip	EAG63730501	TE 1.1H C-CLIP 1P ANT TERMINAL STRAIGHT SMD T/REEL AU 2.5 X 1.0X 1.1(L X W X H) SERVEONE CO., LTD.	
6	L1717 L5110	Inductor,Multilayer, Chip	EAP62186301	LQP03TG1N8C02D 1.8NH 0.2NH - 500mA - - 0.2OHM 6GHZ 13 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	U5101	Module, FEM(Front End Module)	EAT61775101	RFFM8502 0DBM,0DBM,0DBM 0DB,0DB,0DB 0%,0%,0% 0A,0A,0A 0A 0DB 0DBM 0DBM 16P 2.5x2.5x0.4MM WiFi FEM, 5GHz, SPDT/PA/LNA, 802.11a/n, for BCM4334 RF MICRO DEVICES INC	
6	U5100	IC,WiFi	EAN63049901	BCM4334LKUBG WiFi(11a/b/g/n, Dual, HT40)+BT4.0+FM Rx, 4.08x4.48x0.55, 40nm, B3 WLBGA R/TP 109P Broadcom International Distribution Company	
6	D6610	Diode,TVS	EAH62033201	UCLAMP3311Z 3.3V 3.65V min. 7.5V 4A 30W SLP0603P2X3A R/TP 2P 1 SEMTECH INTERNATIONAL AG	
6	C4172	Capacitor,Ceramic, Chip	EAE62522101	CL10A226MP8NUNE 22uF 20% 10V X5R - 55TO+85C 1608 R/TP 1.05T max. - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	C5210 C5213	Capacitor,Ceramic, Chip	ECCH0000129	MCH155A121JK 120pF 5% 50V NP0 -55TO+125C 1005 R/TP -- ROHM Semiconductor KOREA CORPORATION	
6	C4146	Capacitor,Ceramic, Chip	EAE63222701	C1005X5R1A474K 470nF -10TO+10% 10V X5R - 55TO+85C 1005 R/TP Max 0.55T L:1.0+-0.05 W:0.5+-0.05 T:0.5+-0.05 TDK KOREA COOPERATION	
6	C1709	Capacitor,Ceramic, Chip	ECZH0001122	C1005X7R1H681KT000F 680pF 10% 50V X7R - 55TO+125C 1005 R/TP - TDK KOREA COOPERATION	
6	U1701	IC,Power Amplifier	EAN62666601	SKY77764 3.0V to 4.5V 0 0 0W 0W 0 1 SMD R/TP 10P 3*3, LTE Band3/4/9, 3mode(16dB,23dB,28dB), 47.5% at 28.6dBm SKYWORKS SOLUTIONS INC.	
6	C1106 C1126 L1110 L1605 L1709	Inductor,Multilayer, Chip	EAP62245901	LG HK 0603 2N7S-T 2.7NH 0.3NH - 340mA -- 0.21OHM 7.7GHZ 5 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	
6	U3100	IC,Mobile SDRAM	EAN62949801	H9TKNNNAADMPLR-NGM 8GBIT LPDDR2 1.14VTO1.3V 533MHz 5500ns FBGA TR 168P 12Gb LPDDR2 PoP 168ball 1-Channel (29nm 4Gb x 3) HYNIX SEMICONDUCTOR INC.	
6	C1 C4400	Capacitor,Ceramic, Chip	EAE62505701	CL10A105KB8NNNC 1uF 10% 50V X5R -55TO+85C 1608 R/TP 0.9T max. - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	R5121	Resistor,Chip	EBC61856101	RC0201JR-0722RL 22OHM 5% 1/20W 0603 R/TP - YAGEO CORPORATION	
6	U1600	IC,Power Amplifier	EAN62827601	ACPM-920502-TR1 3.2V to 4.35V 0 0 0W 0W 0 2 SMD R/TP 16P 3*4 CDMA(BC0/BC10 & BC1) Dual, with CPL, GPIO AVAGO TECHNOLOGIES INTERNATIONAL SALES PTE. LIMITED	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	FL5101	Filter,Ceramic	EAM62250401	LFB212G45CG7D227 BPF 2.45KHZ 100Hz SMD R/TP 3P MURATA MANUFACTURING CO.,LTD.	
6	FL1601	Filter,Duplexer	EAM62810601	SAYRF1G88BC0B0A 1960MHz 1930to1990MHz 1880MHz 1851.25to1908.75MHz 3.2typ/4.0max 2.3typ/3.0max 2.0x1.6x0.6t DUAL SMD R/TP 9P MURATA MANUFACTURING CO.,LTD.	
6	R8400	Resistor,Chip	ERHY0000254	MCR01MZP5J472 4.7KOHM 5% 1/16W 1005 R/TP - ROHM.	
6	C2301 C2361	Capacitor,Ceramic, Chip	ECCH0002003	C1005JB1C333KT000F 33nF -10TO+10% 16V X7R -55TO+125C 1005 R/TP - - TDK CORPORATION	
6	C1728 C5119	Capacitor(High Frequency),Ceramic,Chip	EAE62945801	GRM0335C1E1R0C_H 1pF 0.25PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03 W:0.3+-0.03 T:0.3+-0.03 MURATA MANUFACTURING CO.,LTD.	
6	L2300	Inductor,Multilayer, Chip	EAP62447401	MLP1005V2R2T_ 2.2UH 20% - 50mA 0.05 0.350 1.3OHM 0HZ - SHIELD - 1.0X0.5X0.55MM R/TP TDK KOREA COOPERATION	
6	C1717	Capacitor,Ceramic, Chip	ECCH0042201	CL03C020CA3GNNH 2pF 0.25PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 SAMSUNG ELECTRO-MECHANICS CO., LTD.	
6	Q4101	FET	EBK62032201	SIA929DJ P-CHANNEL MOSFET -30V +-12 -4.5A 0.12OHM 1.2W DFN R/TP 6P VISHAY INTERTECHNOLOGY ASIA PTE LTD	
6	L5107	Inductor,Multilayer, Chip	EAP62226401	LQP03TG6N8J02D 6.8NH 5% - 200mA - - 1.15OHM 5.4GHZ 12 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
6	FL1101	Filter,Saw	EAM62352101	857031 826 2.5*2.0*0.56 SMD R/TP 13P TRIQUINT SEMICONDUCTOR INC.	
6	C1622	Capacitor,Ceramic, Chip	ECCH0009106	C0603X7R1C103KT 10nF 10% 10V X7R - 55TO+125C 0603 R/TP - TDK CORPORATION	
6	U5102	Module, FEM(Front End Module)	EAT61733701	RFFM8202 0DBM 0DB 0% 0A 0A 0DB 0DBM 0DBM 16P 2.5x2.5x0.4MM 2.4GHz WiFi FEM, SP3T/PA/LNA, 802.11b/g/n, BT, for BCM4334 RF MICRO DEVICES INC	
6	R8951	Resistor,Chip	ERHZ0000204	MCR01MZP5F1003 100KOHM 1% 1/16W 1005 R/TP - ROHM.	
6	X5100	Crystal	EAW61645401	Q22FA1280013000 37.4MHZ 10PPM 12F , SMD R/TP EPSON TOYOCOM CORP	
6	L1701	Inductor,Multilayer, Chip	EAP62246601	LG HK 0603 47NJ-T 47NH 5% - 100mA - - 1.9OHM 1.3GHZ 4 SHIELD - 0.6X0.3X0.3MM R/TP TAIYO YUDEN CO.,LTD	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
6	D4400	Diode,Schottky	EAH61992801	PMEG4002EL 600mV 40V 200mA 0SEC 20pF 0W SOD-882 R/TP 2P 1 NXP Semiconductors	
5	SAD010000	Software,Mobile	SAD34624001	- - Base VS88010A - NORTH AMERICA QCT -	
5	EAA00	PIFA Antenna,WiFi	EAA63645901	1SUBL032B SINGLE -5DB 5:1 FPCB Type - BT Tape IMTECH	
5	EAA01	PIFA Antenna,Multiple	EAA63345101	ACG-00031 MULTI -5DB 5:1 FPCB Type - MRD Tape ACE TECHNOLOGIES CORPORATION	
5	EAA02	PIFA Antenna,Multiple	EAA63324901	ACG-00032 MULTI -5DB 5:1 FPCB Type - MRD Tape ACE TECHNOLOGIES CORPORATION	
5	EAA03	PIFA Antenna,GPS	EAA63324801	ACG-00294 SINGLE -5DB 5:1 FPCB Type - GPS Tape ACE TECHNOLOGIES CORPORATION	
5	EAX010700	PCB,Flexible	EAX65764101	LGVS880.AVRZTN 1.0 POLYI Multi 2 .2 Flexible	
5	EBR070501	PCB Assembly,Flexible	EBR79038201	LGVS880.AVRZTN 1.0 Flexible	
6	EBR070100	PCB Assembly, Flexible,Insert	EBR79592901	LGVS880.AVRZTN 1.0 Flexible	
6	EBR070400	PCB Assembly, Flexible,SMT	EBR79038301	LGVS880.AVRZTN 1.0 Flexible	
7	EBR070200	PCB Assembly, Flexible,SMT Bottom	EBR79038401	LGVS880.AVRZTN 1.0 Flexible	
8	EAX010700	PCB,Flexible	EAX65902501	LGVS880.AVRZTN 1.0 POLYI Multi 2 .2 Flexible	
8	U50000	IC,Proximity	EAN63405901	VL6180 TOF sensor, Proximity,Ambient light, measurable range : 0~10cm,0.3~100kLux 4.8x2.8x1.0mm LGA R/TP 12P - ST MICROELECTRONICS ASIA PACIFIC PTE LTD.	
8	C4183	Capacitor,Ceramic, Chip	EAE62726601	CL03A225MQ3CRNC 2.2uF -20TO20% 6.3V X5R - 55TO+85C 0603 R/TP 0.3T - SAMSUNG ELECTRO-MECHANICS CO., LTD.	
8	C3201 C3206 C6102 C6110 C8100 C8101	Capacitor,Ceramic, Chip	ECCH0009101	C0603X5R0J104KT00NN 0.1uF 10% 6.3V X5R - 55TO+85C 0603 R/TP - TDK CORPORATION	
8	D1	Diode,TVS	EAH61794301	ESD5205P6T6G 5V 5.5V min. 10V 2UA 0W SOT- 963 R/TP 6P 5 ON SEMICONDUCTOR	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
4	EAB00	Receiver	EAB63128301	EMR1207SWB6 50mW 32OHM 110DB 50HZTO7KHZ FPCB - EM-TECH	
4	EAD00	Cable,Assembly	EAD63166801	WFL-2LP-04N2-A111.5CALG UFL-LP-066 UFL-LP-066 0.03M 2 BLACK N N HIROSE KOREA CO.,LTD	
5	EBD00	Touch Window Assembly	EBD61865601	STWC-L0060B CAPACITIVE TOUCH GFF Atmel mXT 540S 5.7" B to B Black SUNTEL CO.,LTD.	
5	EAJ00	LCD Module	EAJ62669801	LM570HN1A HD 5.7INCH 1280X720 450CD COLOR 70% 16/9 1000:1 60Hz Inverter N LED 2D - TOVIS CO.,LTD	
4	EAG00	Jack,Phone	EAG63550001	HG05-AB3600 5P 4P ANGLE TR 3.5M BLACK 5P Left Side Contact C-Cut HYUPJIN I&C CO.,LTD.	
4	EAU00	Motor,DC	EAU62283801	TLE-1030MFS 3V 100mA 0A 12KRPM 0RPM 0SEC 0GF.CM 34OHM 푸난현특립전자유한공사	
4	EBR01	PCB Assembly,Flexible	EBR78638701	LGVS880.AVRZTN 1.0 Flexible	
5	EBR070100	PCB Assembly, Flexible,Insert	EBR79584301	LGVS880.AVRZTN 1.0 Flexible	
5	EBR070400	PCB Assembly, Flexible,SMT	EBR78627501	LGVS880.AVRZTN 1.0 Flexible	
6	EBR070300	PCB Assembly, Flexible,SMT Top	EBR78638801	LGVS880.AVRZTN 1.0 Flexible	
7	C206 C207	Capacitor,Ceramic, Chip	ECCH0009105	C0603C0G1H820JT00NN 82pF 5% 50V NP0 - 55TO+125C 0603 R/TP - - TDK CORPORATION	
7	VA6600 VA6602 VA6810 VA6811 VA6925 VA8401 VA8402	Varistor	SEVY0008101	EVLC5S01033 EVLC5S01033 EVLC5S01033,5.5 V, ,SMD ,Vdc 5.5, Vb 10~15.6, Cp 17.9 at 1MHz, 0.6*0.3*0.33 , ,5.5 , ,23.1~42.9 ,0.6*0.3*0.33 ,[empty] ,SMD ,R/TP AMOTECH CO., LTD. AMOTECH CO., LTD.	
7	C4179 C4187 C4190 C4191 C4192 C4193 C4197 C4199 C5207 C5219 C9503	Capacitor,Ceramic, Chip	ECCH0017301	CL03A105MQ3CSNH 0.000001F 20% 6.3V X5R - 45TO+85C 0603 R/TP - SAMSUNG ELECTRO- MECHANICS CO., LTD.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
7	R100	Resistor,Chip	ERHY0009501	MCR006YZPJ000 0OHM 5% 1/20W 0603 R/TP - ROHM.	
7	CN200	Connector,BtoB	ENBY0036701	GB042-60P-H10-E3000 60P 0.40MM STRAIGHT PLUG SMD R/TP 1M - LS Mtron Ltd.	
6	EBR070200	PCB Assembly, Flexible,SMT Bottom	EBR78627601	LGVS880.AVRZTN 1.0 Flexible	
7	C109	Inductor,Multilayer, Chip	ELCH0003819	LQG15HS12NJ02D 12NH 5% - 300mA - - 0.28OHM 3GHZ 8 SHIELD NONE 1.0X0.5X0.5MM R/TP MURATA MANUFACTURING CO.,LTD.	
7	R102	Inductor,Multilayer, Chip	ELCH0001412	LL1005-FHL1N8S 1.8NH 0.3NH - 400mA 0.14OHM 15GHZ 8 SHIELD NONE 1.0X0.5X0.5MM R/TP TOKO, INC.	
7	C102,C103	Capacitor,Ceramic, Chip	ECCH0009206	GRM0335C1E680J 68pF 5% 25V X7R -55TO+125C 0603 R/TP - MURATA MANUFACTURING CO.,LTD.	
7	EAX010700	PCB,Flexible	EAX65763401	LGVS880.AVRZTN 1.0 POLYI SBL 6 .3 Flexible	
7	C3201 C3206 C6102 C6110 C8100 C8101	Capacitor,Ceramic, Chip	ECCH0009101	C0603X5R0J104KT00NN 0.1uF 10% 6.3V X5R - 55TO+85C 0603 R/TP - TDK CORPORATION	
7	CN7300	Connector,BtoB	ENBY0040701	GB042-30S-H10-E3000 30P 0.4MM STRAIGHT FEMALE SMD R/TP 1M - LS Mtron Ltd.	
7	C203	Capacitor,Ceramic, Chip	EAE63541901	GRM188R61H225K 2.2uF -10TO+10% 50V X5R - 55TO+85C 1608 R/TP Max 1.0T L:1.6+-0.2 W:0.8+-0.2 T:0.8+-0.2 MURATA MANUFACTURING CO.,LTD.	
7	ANT1100 ANT1101 ANT1102 ANT1103 ANT1104 ANT1105 CN5101	C-Clip	EAG63730501	TE 1.1H C-CLIP 1P ANT TERMINAL STRAIGHT SMD T/REEL AU 2.5 X 1.0X 1.1(L X W X H) SERVEONE CO., LTD.	
7	D201 D202	Diode,TVS	EDTY0012101	PESD5V0F1BL 5.5V 6V min 11V 2.5A - SOD-882 R/TP 2P 1 STC CORP.	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
7	C1157 R11009 R11010 R11012 R11015 R1115 R2106 R2108 R4132 R4133 R4150 R5201 R5202 R5208 R6100 R6108 R6606 R6609 R7300 R8403 R9106 R9107	Wire Pad,Short	SAFP0000401	AX3100 ATL SV_SHIPBACK,MAIN,A	
7	VA6600 VA6602 VA6810 VA6811 VA6925 VA8401 VA8402	Varistor	SEVY0008101	EVLC5S01033 EVLC5S01033 EVLC5S01033,5.5 V, ,SMD ,Vdc 5.5, Vb 10~15.6, Cp 17.9 at 1MHz, 0.6*0.3*0.33 , ,5.5 , ,23.1~42.9 ,0.6*0.3*0.33 ,[empty] ,SMD ,R/TP AMOTECH CO., LTD. AMOTECH CO., LTD.	
7	MIC6921	Microphone,Conde nser	EAB62670801	MOE-C110R38-K1 -38DB 300OHM OMNI 1.5 TO 3.6V 3.76x2.95x1.1 SMD BSE CO., LTD.	
7	C1115 C1125 C1149 C1150 C5155 L1152	Capacitor,Ceramic, Chip	ECZH0000813	C1005C0G1H101JT 100pF 5% 50V C0G - 55TO+125C 1005 R/TP - TDK KOREA COOPERATION	
7	C1130 C1131 C1148 C6601	Capacitor,Ceramic, Chip	ECCH0009104	C0603C0G1H330JT00NN 33pF 5% 50V C0G - 55TO+125C 0603 R/TP - - TDK CORPORATION	
7	SW1100 SW1102	Connector,RF	ENWY0004001	W.FL-R-SMT-1(40) 0.40MM STRAIGHT SOCKET SMD R/TP AU 50OHM 1.3DB HIROSE KOREA CO.,LTD	
7	FL201	Filter,EMI/Power	EAM62272401	ICMEF112P500MFR COMMON MODE NOISE FILTER 0HZ 0.0000000000001F 0H SMD R/TP - INNOCHIPS TECHNOLOGY	

11. EXPLODED VIEW & REPLACEMENT PART LIST

Level	Location no	Description	P/N	Specification	Remark
7	C1728 C5119	Capacitor(High Frequency),Ceramic,Chip	EAE62945801	GRM0335C1E1R0C_H 1pF 0.25PF 25V C0G - 55TO+125C 0603 R/TP 0.3+-0.03 L:0.6+-0.03 W:0.3+-0.03 T:0.3+-0.03 MURATA MANUFACTURING CO.,LTD.	
7	FB6601 FB6602 FB6921	Filter,Bead	SFBH0008102	BLM15HD182SN1D 1800 ohm 1.0X0.5X0.5 25% 2.2 ohm 0.2A SMD R/TP 2P 0 MURATA MANUFACTURING CO.,LTD.	
7	CN201	Connector,I/O	EAG63510401	04-5151-005-104-883 5P 0.65MM STRAIGHT RECEPTACLE DIP R/TP - KYOCERA ELCO KOREA SALES CO.,LTD.	
7	FB4400 FB6924 FB6925	Filter,Bead	EAM62633801	MPZ1608S601AT000 600 1.6X0.8X0.8 25% 0.15 1 SMD R/TP 2P - TDK KOREA COOPERATION	
7	C5176 L5108	Inductor,Multilayer, Chip	EAP62225901	LQP03TG1N0C02D 1NH 0.2NH - 600mA - - 0.15OHM 6GHZ 12 SHIELD - 0.6X0.3X0.3MM R/TP MURATA MANUFACTURING CO.,LTD.	
4	EBP01	Camera Module	EBP61641902	CW1346-APQH5 CW1346-APQH5 1.3M Sony 1/7.8 HD, 0deg, FPCB 5mm, Con. Top COWELL ELECTRONICS CO.,LTD	
4	EAB01	Speaker Module	EAB63248801	EME1511DH01 Nd-Fe-B 700mW 8OHM 88DB 950HZ 67.16x36.96x5.2 FPCB EM-TECH	
4	EAD01	Cable,Assembly	EAD63185201	WFL-2LP-04N1-A119.5CALG UFL-LP-066 UFL-LP-066 0.03M 2 WHITE N N HIROSE KOREA CO.,LTD	
3	EAA030100	PIFA Antenna,RF	EAA63345001	BNF13A069 SINGLE -5DB 5:1 FPCB Type - NFC Tape AT&C CO.,LTD	
2	EAD010000	Cable,Assembly	EAD62290205	LG0143 USB USB 1.0M 5 BLACK UL N ningbo broad telecommunication co.,Ltd	

11. EXPLODED VIEW & REPLACEMENT PART LIST

11.3 Accessory

Note: This Chapter is used for reference, Part order is ordered by SBOM standard on GCSC

Level	Location no	Description	P/N	Specification	Remark
2	EAC00	Rechargeable Battery, Lithium Ion	EAC62298602	BL-47TH-LGC-VZW 3.8V 3.2AH 640mAh 80x57x4.7 83x57x4.95 BLACK. Bar - LG Chem, LTD.	
2	EAY060000	Adapters	EAY62768911	MCS-01WD_VERIZON 90Vac~264Vac 4.75Vdc~5.25Vdc (At the end of USB Socket) 1.2A 50/60Hz UL WALL 2P USB - DONG DO ELECTRONICS CO., LTD	
2	AFN053800	Manual Assembly, Operation	AFN76575501	LGVS880.AVRZTN BK:Black Manual assy for LGVS880.VRZ	
3	MBM062604	Card, Quick Reference	MBM64520605	PRINTING LGVS880.AVRZTN ZZ:Without Color PSWG(Product Safety & Warranty Guide)_ B2 Lite_VS880.VZW	
3	MBM062602	Card, Quick Reference	MBM64520603	PRINTING LGVS880.AVRZTN ZZ:Without Color GSG_ B2 Lite_VS880.VZW	
3	MBM062601	Card, Quick Reference	MBM64520602	PRINTING LGVS880.AVRZTN ZZ:Without Color QRG(Quick Reference Guide) Spanish_ B2 Lite_VS880.VZW	
3	MBM062600	Card, Quick Reference	MBM64520601	PRINTING LGVS880.AVRZTN ZZ:Without Color QRG(Quick Reference Guide) English_ B2 Lite_VS880.VZW	
3	MBM062603	Card, Quick Reference	MBM64520604	PRINTING LGVS880.AVRZTN ZZ:Without Color ICI(Important Consumer Information)_ B2 Lite_VS880.VZW	
3	MBM068900	Card, Service Guide	MBM64579101	PRINTING LGVS880.AVRZTN ZZ:Without Color RF(Radio Frequency) B2 Lite_VS880.VZW	
2	MFL000000	Manual	MFL68641101	PRINTING LGVS880.AVRZTN BK:BLACK BLACK -	