Quasi-Zenith Satellite System

Interface Specification

Positioning Technology Verification Service

(IS-QZSS-TV-003)

(December 27, 2019)

Cabinet Office

<u>Disclaimer of Liability</u>

The Cabinet Office, Government of Japan ("CAO") and Quasi-Zenith Satellite System Services Inc. make the User Interface Specification (IS-QZSS) ("Document") available to the public to promote the services using Quasi-Zenith Satellite System ("QZSS") by development of receivers, applications and so on, and also are aiming for high accuracy and convenience with respect to satellite positioning services and message services of QZSS (collectively "Services"). The Services are freely available to any user. However, the receivers and/or applications developed based on this Document may not receive signals or may receive incorrect signals due to no warranty of the Services. You are therefore highly recommended to ensure appropriate measures to avoid accidents such as redundancy, backup and fail-safe, if you develop receivers and/or applications using the Services for the purpose that will possibly give an impact to human life, body and properties. The Services may be suspended or changed without prior notice in accordance with the decision by Government of Japan. This Document and the Services are available subject to the following terms and conditions. You may use this Document only if you agree to such terms and conditions. You shall be deemed to agree such terms and conditions by using this Document.

(1) With respect to this Document and the information included in this Document, the Cabinet Office, Government of Japan ("CAO") and Quasi-Zenith Satellite System Services Inc. ("QSS") disclaim all warranties of any kind, express or implied, including but not limited to, the followings:
  i) warranty of accuracy, completeness, usefulness, and fitness for a particular request or purpose;
  ii) warranty that this Document and the information included in this Document will not be changed in to the future; and
  iii) warranty that this Document and the information included in this Document do not infringe any third party's intellectual property rights.

(2) With respect to satellite positioning services and message services (collectively "Services"), CAO and QSS disclaim all warranties of any kind, express or implied, from any cause whether it is related to Quasi-Zenith Satellite System, other outside systems or not, including but not limited to, the followings:
  i) warranty as to service area, accuracy, availability, continuity, and integrity described in this Document;
  ii) warranty of usefulness, and fitness for a particular request or purpose; and
  iii) warranty that the use of Services does not infringe any third party's intellectual property rights.

(3) To the extent permitted by applicable laws, CAO and QSS shall not be responsible and liable for any damages and losses, including but not limited to, direct, indirect, incidental, special or consequential damages, whether under contractual liability, product liability, strict liability, tort liability or otherwise (including intent or negligence), caused by the use of this Document, the information included in this Document and the Services, the inability to use the Services, or the change of this Document and the information included in this Document.

<u>Document subject to the disclaimer of liability</u>

Revision History

Rev. No.	Date	Page	Revisions
001 Draft Edition	March 25, 2016		Draft edition
	July 12,2016	-	Adds Disclaimer of Liability
001	April 13, 2018	-	First release
002	December 19,2018	5	・Updates Minimum Signal Strength for QZS-3 ・Corrects typographical error(L1S → L5S) in 3.1.8.
003	December 27, 2019	7	Table 3.2-1 ・Deletes the explanatory note of PRN Number. ・Reassigns PRN Number from 196 to 184. ・Reassigns PRN Number from 197 to 189. ・Reassigns PRN Number from 200 to 185. ・Adds Assignment of PRN Number 186.
		8	Table 3.2-2 ・Reassigns PRN Number from 196 to 184. ・Reassigns PRN Number from 197 to 189. ・Reassigns PRN Number from 200 to 185. ・Adds Assignment of PRN Number 186.

"TBD" in this document is an abbreviation of "To be determined". The items marked "TBD" have not been determined yet but will be determined in the future.

Table of Contents

1. Scope

This document describes the interface specifications of the positioning technology verification service (PTV) between the space segment of QZSS and the user segment. The interface specifications described herein include the signal characteristics and message specifications.

The content of system, service and availability are described in the applicable document (1) "PS-QZSS-001 Quasi-Zenith Satellite System Performance Standard".

2. Relevant Documents

2.1. Applicable Documents

The following documents constitute part of this document within the scope as defined in this document.

(1) PS-QZSS-001 Quasi-Zenith Satellite System Performance Standard

3. Signal Specifications

3.1. RF Characteristics

3.1.1. Signal Structure

The signal structure, PRN code characteristic and message characteristics are shown in Table 3.1-1, Table 3.1-2, and Table 3.1-3.

Table 3.1-1 Signal Structure

Frequency Band	Signal Name	Modulation Method	PRN Code Name	Overlay Code Name	Message Name
L5	L5S	QPSK	I5S	-	L5S
			Q5S	Neuman-Hoffman	-

Table 3.1-2 PRN Code Characteristics

PRN Code Name	Chip Rate	Length	Period	Overlay Code
I5S	10.23 Mcps	10,230 chips	1 ms	-
Q5S	10.23 Mcps	10,230 chips	1 ms	Neuman-Hoffman Length:20bits Period:1ms

Table 3.1-3 Message Characteristics

Message Name	Bit Rate	Symbol Rate	Period (Minimum Frame)	Encoding Method
L5S	250 bps	500 sps	1 sec	CRC Convolutional code

3.1.2. Frequency

The frequency band, nominal center frequency and occupied bandwidth of L5S signals are shown in Table 3.1-4.

However, the reference frequency (f_0) = 10.23 MHz is offset by the nominal $\Delta f/f_0$ = -5.399E-10 to compensate for the frequency difference between the ground surface and satellite orbit due to the relativistic effect. For this reason, the center frequency in the satellite orbit is not exactly precise. For example, the L5 band signal is offset by -0.6352Hz (nominal).

Table 3.1-4 Center Frequency and Occupied Bandwidth

Frequency Band (Signal Name)	Nominal center frequency	Block II
L5 band (L5S)	1176.45 MHz	24.9 MHz (±12.45 MHz)

3.1.3. Modulation Method

3.1.3.1. L5S

L5S signals are modulated by QPSK. The modulation method is shown in Figure 3.1-1.

L5S navigation messages and PRN codes are modulated by exclusive-OR (modulo 2 addition) and then modulated with L5 carrier waves by QPSK.
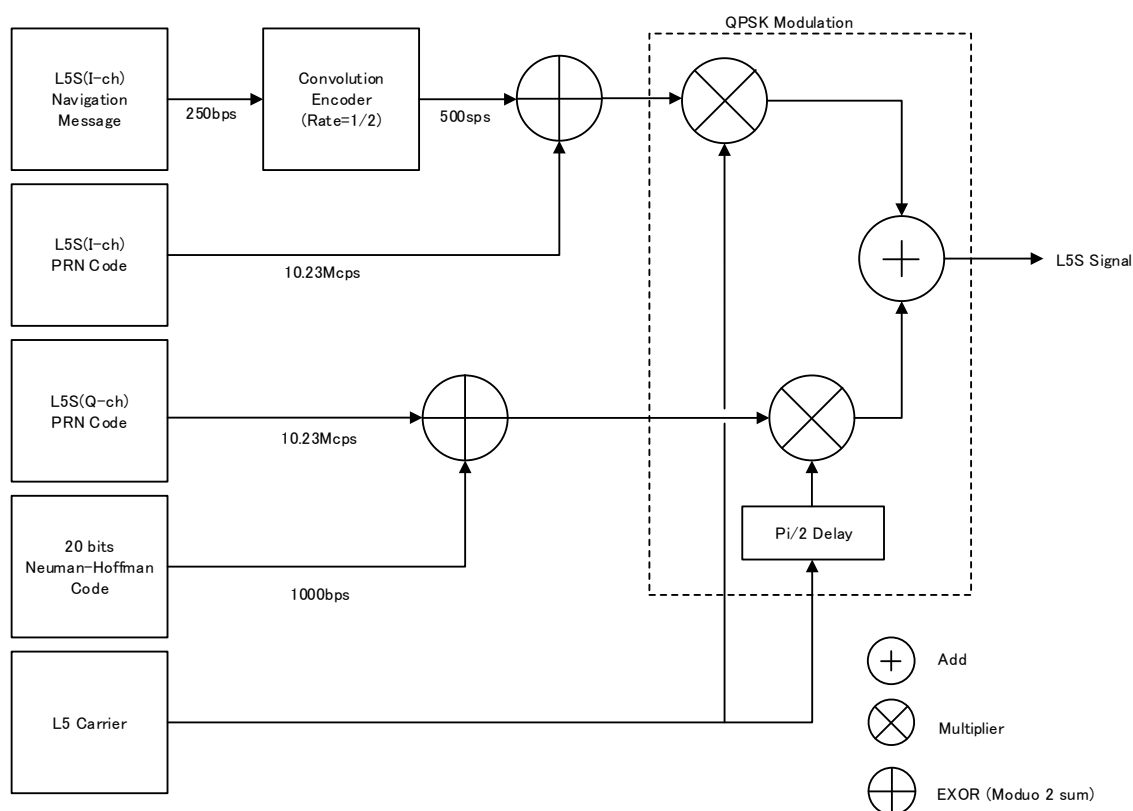

Figure 3.1-1 L5S Modulation

3.1.4. Correlation Loss

Correlation loss is defined as the energy ratio of carrier wave to output signals obtained by theoretically modulating the output signals by reverse diffusion.

The correlation loss values are as shown below:

- Block II: 1.0 dB or less

3.1.5. Carrier Phase Noise

For L5S signals, the spectral density of the phase noise of the unmodulated carrier wave before superposition of the PRN code and navigation message, shall be such that a phase-locked loop (PLL) with single-sided bandwidth of 10Hz will be able to track the carrier phase to the following values:

- Block II: 0.1 rad (RMS)

3.1.6. Spurious

For L5S signals, the spurious transmission of the unmodulated carrier wave before superposition of the PRN code and navigation message, shall be as follows:

- Block II: -40 dB or less

3.1.7. Phase Relationship within Signals

For L5 signals, the phase relationships between I-channel and Q-channel of L5S are shown in Figure 3.1-2.

The I-channel had 90° phase lag from the Q-channel. The accuracy is ± 5°.
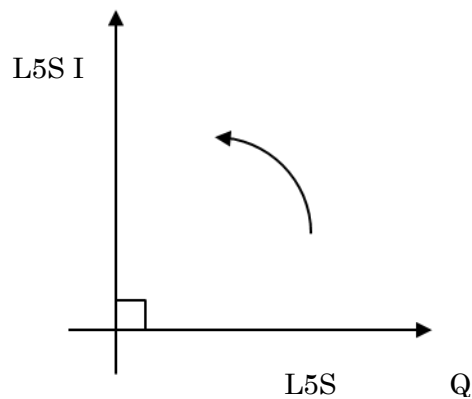

Figure 3.1-2 Phase relationship of L5S

3.1.8. Minimum Signal Strength

The minimum received power is measured at a ground-based isotropic antenna with a gain of 0dBi for circularly polarized wave reception, when L5S signals are received from a satellite with an elevation angle of 10° or more. The power is shown in Table 3.1-5.

Table 3.1-5 Minimum Signal Strength

Signal Name	Block II
L5S	SV Number =3：-162.6dBW Other SV Number：-157.0 dBW

3.1.9. Polarization Property

L5S signals are right-hand circularly polarized.

At the center frequency of each signal, the axial ratio (power ratio of the long axis to short axis) of the ellipse of the circularly polarized wave is within the beam range ± 10° from the boresight direction and is shown in Table 3.1-6.

Table 3.1-6 Axial Ratio of the Ellipse of the Circularly Polarized Wave

Signal Name	Block II
L5S	2.0 dB or less

3.1.10. Group Delay Property
3.1.10.1. Group Delay Between Signals

L5S signals have, no group delay between signals.

3.1.10.2. Group Delay Between Signals of the Same Frequency

L5S signals have no group delay between signals of same frequency

For L5S signals, no specifications are defined for the group delay between signals of the same frequencies.

3.1.11. PRN Code Jitter

The jitter with the PRN code zero-crossing interval shall be as follows:

- 2.0 ns or less (3σ).

For PRN codes, the average time difference between the rising edge and the falling edge shall be as follows:

- 1.0 ns or less

3.1.12. Code Carrier Coherence

(1) Short-term code carrier coherence
   The short-term (less than 10 sec) difference between the code pseudo range rate and the Doppler frequency shall be less than 0.015 m/sec (1σ).

(2) Long-term code carrier coherence
   The long-term (less than 100 sec) difference between the code phase pseudo range and the carrier phase pseudo range shall be less than 0.255 m (1σ).

(3) Short-term L1/L5 coherence
   The short-term (less than 10 sec) difference between the L1 Doppler frequency and the L5 Doppler frequency shall be less than 0.015 m/sec (1σ).

(4) Long-term L1/L5 coherence
   The long-term (less than 100 sec) difference between the L1 carrier phase pseudo range and the L5 carrier phase pseudo range shall be less than 0.255 m (1σ).

3.2. PRN Codes

3.2.1. PRN Number Assignment

The assignment of the PRN numbers by satellite categories are shown in Table 3.2-1.

Table 3.2-1 Assignment of PRN Number by satellite categories

PRN Number	Satellite Category	Block Assignment	SV Number	Remarks
184	QZO	Block IIQ	2	
189	GEO	Block IIG	3	
185	QZO	Block IIQ	4	
186	QZO	Block IIA-Q	5	

3.2.2. L5S Code

PRN codes of I5S and Q5S signals have 1ms in length at a chipping rate of 10.23Mbps, for total length of 10230 chips. In addition, Q5S has a Neuman-Hoffman (NH) code with a bit rate of 1kbps(cycle: 1ms) and a length of 20bits (20ms).The 20-bit NH code of Q5S is as follows:

1st   Last

20-bit NH code = 0000 0100 1101 0100 1110

The PRN codes are generated as shown in Figure 3.2-1. The code pattern of each PRN number is generated with the XB code advance and the initial XB code state shown in Table 3.2-2.
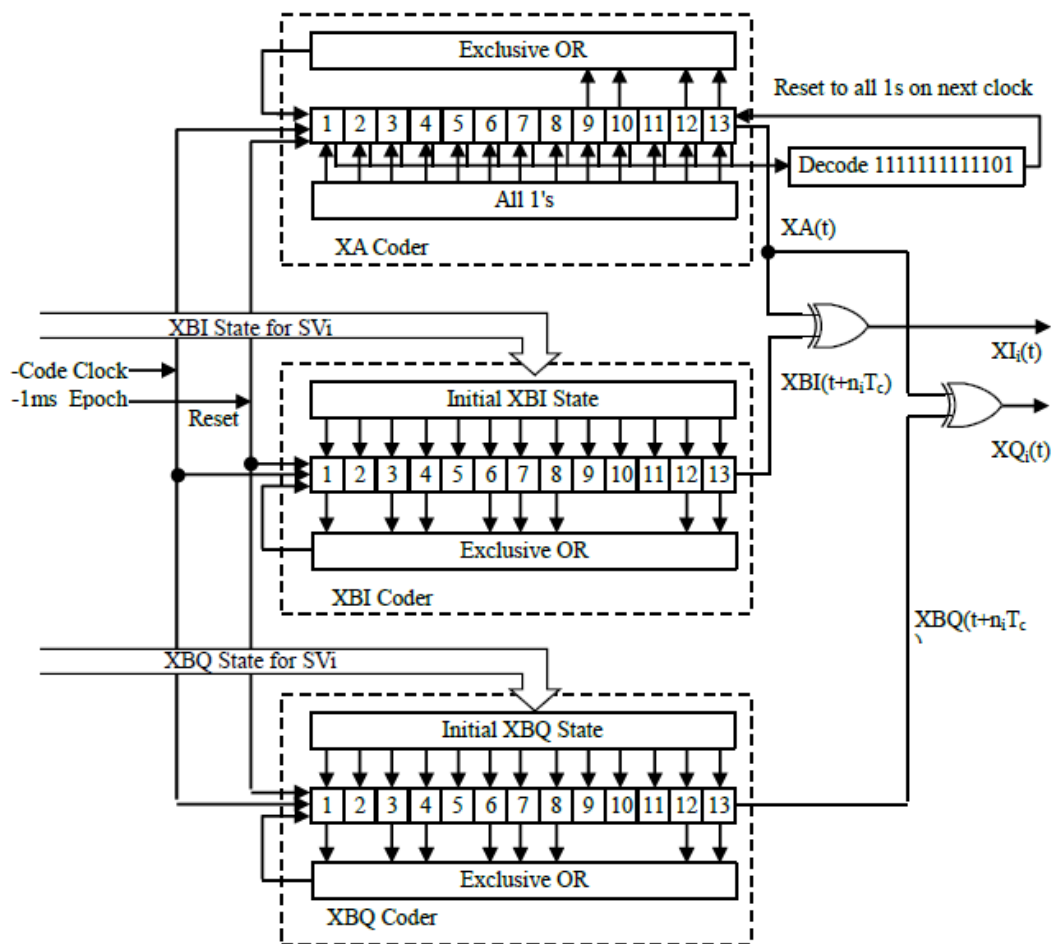
Figure 3.2-1 L5S Code Generator

Table 3.2-2 L5S PRN Code phase assignment

PRN Number	XB Code Advance (Chips)		Initial XB Code State	
	I5	Q5	I5	Q5
184	0645	0977	1111000100010	0011111111000
189	0923	1266	0010011111101	1101011100011
185	2401	0681	0101001000011	0010001101101
186	1639	4273	0011101111100	0001100110011

3.2.3. Non-Standard Codes

L5S signals have no non-standard codes.

4. Message Specifications
4.1. L5S
4.1.1. Message Configuration
4.1.1.1. Overview

Each message are transmitted by L5S signal consists of 250 bits shown in Figure 4.1-1. The single message is transmitted in one second (250bps).

Each message consist of 8-bit preamble (PAB),6-bit message type (MT), 212-bit data field (DATA FIELD) and a 24-bit CRC (CRC). The message transmission sequence is not specified, each message may be transmitted in one-second period..
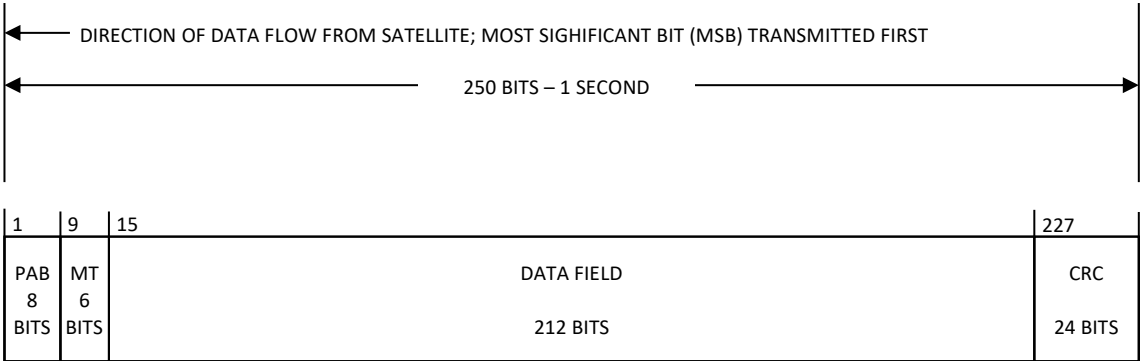
DIRECTION OF DATA FLOW FROM SATELLITE; MOST SIGHIFICANT BIT (MSB) TRANSMITTED FIRST

250 BITS – 1 SECOND

1	9	15	227
PAB 8 BITS	MT 6 BITS	DATA FIELD 212 BITS	CRC 24 BITS

Figure 4.1-1 Message Block Format

4.1.1.2. Timing
(1) Transmission Satellite

PTV message may be different for each satellite

(2) Transmission Interval

The transmission interval is dependent on the number of PTV users.

4.1.1.3. Cyclic Redundancy Check (CRC)

The 24-bit CRC bit string is generated by the following generator polynomical g(X)

$$g(X) = X^{24} + X^{23} + X^{18} + X^{17} + X^{14} + X^{11} + X^{10} + X^7 + X^6 + X^5 + X^4 + X^3 + X + 1$$

4.1.1.4. Forward Error Correction (FEC)

The bit string will be Forward Error Correction (FEC) encoded by a 1/2 rate convolutional code. 250-bps messages are encoded to 500-sps symbols. The convolutional coding will be constraint length 7, with a convolutional encoder logic arrangement as shown in Figure 4.1-2. The G1 symbol is selected on the output as the first half of a 4-millisecond data bit period and the G2 symbol is the second half.
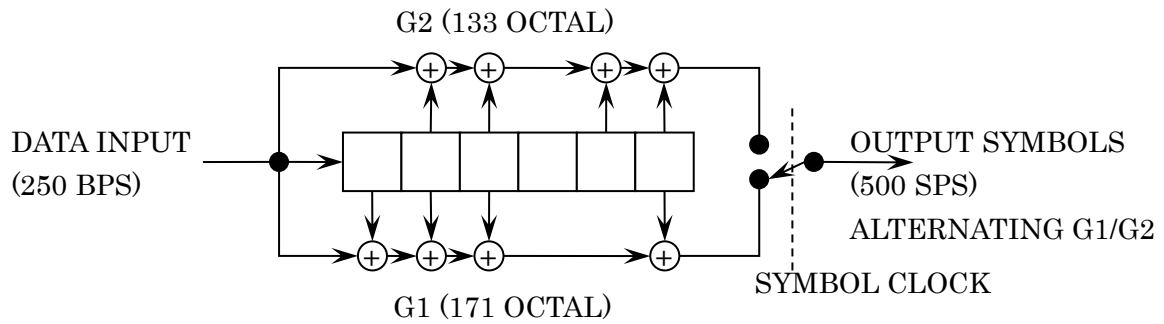

Figure 4.1-2 FEC method

4.1.2. Message Contents

4.1.2.1. Overview

As described in Section 4.1.1.1. , each positioning technology verification message provided by the L5S signal consists of a preamble, a message type, a data field, and a CRC parity. Its message field shall be defined by the users of this service.

4.1.2.2. Common Section

All message types contain the common parameters shown in Figure 4.1-3 and Table 4.1-1.

1	9
PAB	MT
8 BITS	6 BITS

Figure 4.1-3 Common Sections Format

Table 4.1-1 Parameter Definitions of Common Sections

Parameter	Description	Effective Range	Number of Bits	LSB	Units
PAB	Preamble	-	8	-	-
MT	Message type	0-63	6	1	-

(1) Preamble

The beginning of each message is the 8-bit preamble consists of the following three patterns repeated in sequence:

Pattern A: 01010011
Pattern B: 10011010
Pattern C: 11000110

The first bit in the "Pattern A" preamble is synchronous with the epoch of the 6-second L1C/A signal (signal for GPS and QZSS satellite positioning services) navigation message subframe "Pattern B" comes after "Pattern A". "Pattern C" comes after "Pattern B". After that, the sequence returns to "Pattern A".

FEC encoding is transformed for preambles in the same coding (See Section 4.1.1.4). Accordingly, while the preamble indicates the beginning of the message block, it cannot be used for signal acquisition prior to FEC decoding or for bit synchronization.

(2) Message type

Message type shall be defined by PTV users. However, Message type 63 shall be used as a null message.

4.1.2.3. Message Type 63: Null Message

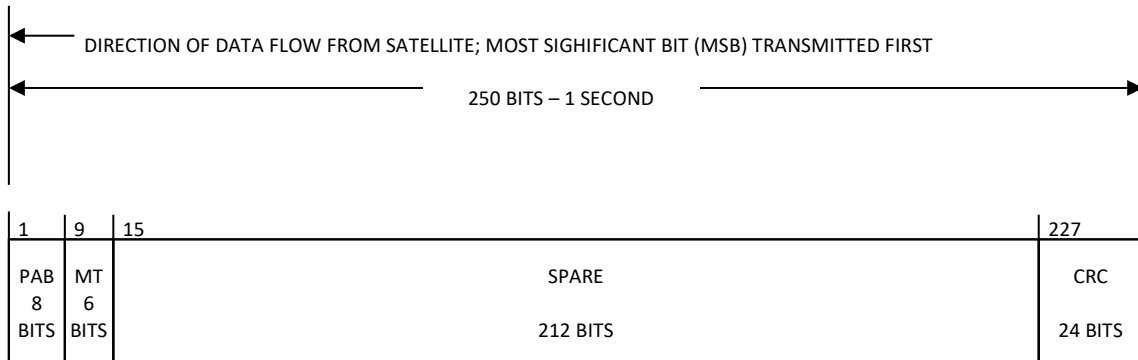Figure 4.1-4 shows the data format and Table 4.1-2 shows its parameter definitions.

DIRECTION OF DATA FLOW FROM SATELLITE; MOST SIGHIFICANT BIT (MSB) TRANSMITTED FIRST

250 BITS – 1 SECOND

1	9	15	227
PAB 8 BITS	MT 6 BITS	SPARE 212 BITS	CRC 24 BITS

Figure 4.1-4 Message Type 63: Null Message Format

Table 4.1-2 Parameter Definitions

Parameter	Description	Effective Range	Number of Bits	LSB	Units
-	PAB and MT (see 4.1.2.2.)	-	-	-	-
Spare	Spare	-	212	1	-
-	CRC (see 4.1.1.3.)	-	-	-	-

(1) Spare

Fix to "0" for spare.