Standard frame
maximum Ethernet V2 frame size : 1500 bytes.

⇓

Anything bigger than this is classified as Jumbo frame

⇓

generally mean a frame with max size of 9000 bytes.

- Assume to have 4 EC2 instances – A, B, C, D.

Standard Jumbo.

All frames have static part known as frame overhead. regardless of the size of the frame.

→ Frame payload : size varies on the data - frame is carrying

	Max
Standard	1500 bytes
Jumbo	9000 bytes.

There is always a space b/w 2 frames : time where nothing is sent. This is used to demarcate frames.

- In normal frames, high ratio of overhead to payload size : pretty inefficient. Also, have more frames → ↑ space b/w frames ↓ ↑ wasted time on the medium.

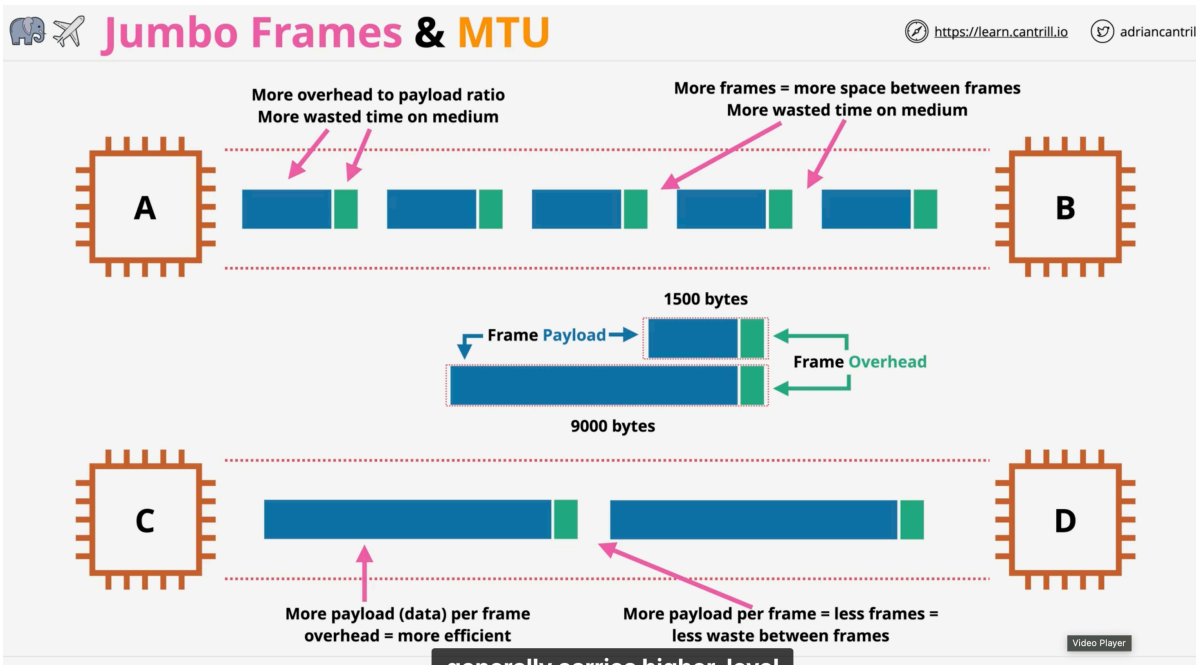

Aware

Else fragmentation

Since Ethernet (layer 2) carries high-level data inside frames. If we're communicating b/w 2 devices using IP (for ex.) — make sure every step supports same size of jumbo frames

⇒ Not everything within AWS supports jumbo frames.

Jumbo Frames & MTU

https://learn.cantrill.io adriancantril

- Traffic outside of a single VPC
- Traffic over an inter-region VPC peering connection
- .. same region peering
- Traffic over VPN connections
- Traffic over an internet gateway
- Direct Connect
- TGW ... up to 8500

Virtual Pvt cloud – logically isolated pvt n/w created inside a public cloud.