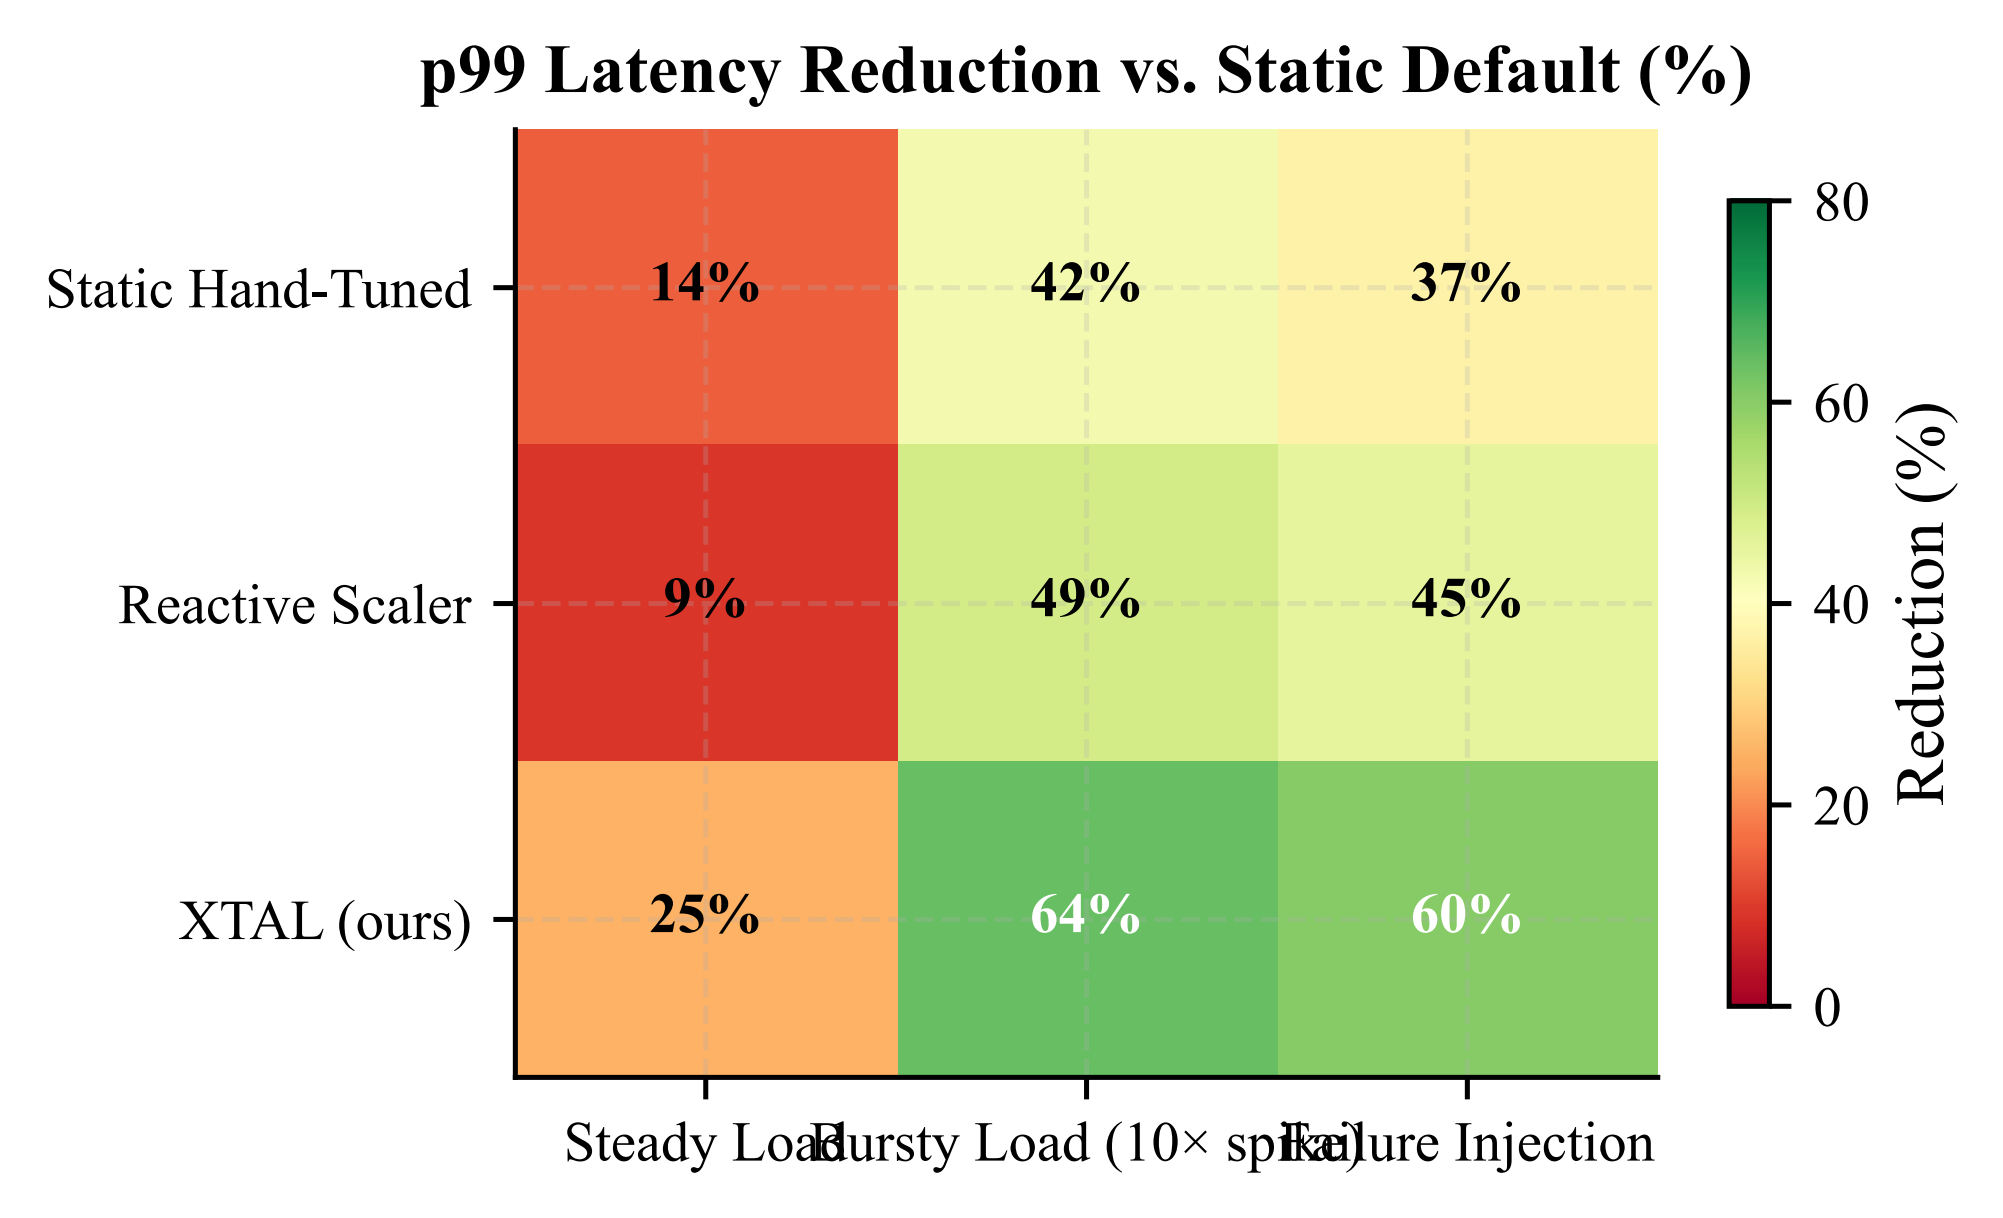
p99 Latency Reduction vs. Static Default (%)
Static Hand-Tuned
Reactive Scaler
XTAL (ours)
14%
42%
37%
9%
49%
45%
25%
64%
60%
Steady Load
Bursty Load (10× spikes)
Failure Injection
Reduction (%)
0
20
40
60
80