


RFID readers (shared SPI bus, individual SDA/SS)

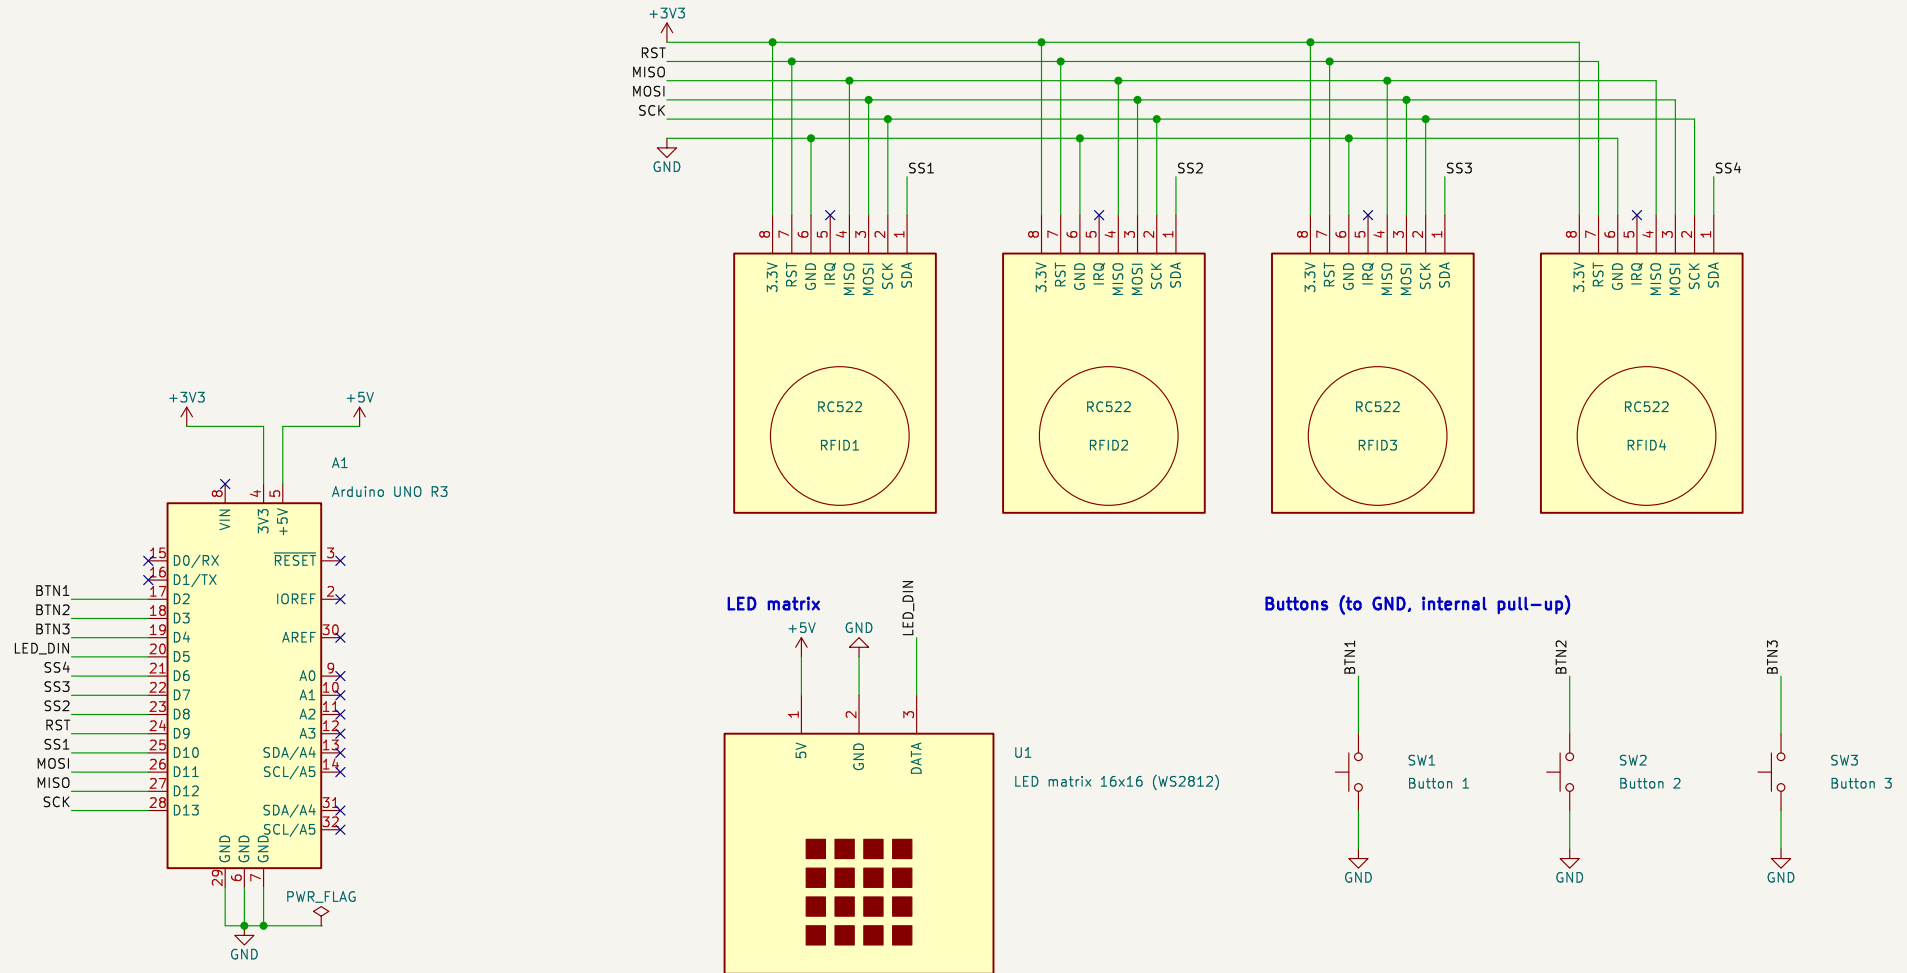

Notes:

- Power the RC522 from 3.3 V – NOT 5 V!
- SCK/MOSI/MISO and RST are shared by all 4 readers, SDA/SS is individual per reader.
- The IRQ pin of the readers is not used.
- Button 1 (D2) = confirm. Buttons use INPUT_PULLUP, pressed = LOW.
- Only D2 and D3 are interrupt pins on the UNO.
- Pin assignment of buttons 2/3 (D3/D4) is a suggestion.
- At low brightness the matrix can run from the UNO's 5V pin; for high brightness use an external 5V power supply (common ground!).

Arduino UNO, 4x RC522 RFID, 16x16 WS2812 matrix, 3 buttons

Sheet: /

File: mastermind.kicad_sch

Title: Mastermind – Schematic

Size: A4 Date: 2026-09-24

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Rev: 1.0

Id: 1/1