

INTERNATIONAL STANDARD

**Compression and mechanical connectors for power cables –
Part 1-3: Test methods and requirements for compression and mechanical
connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to
30 kV ($U_m = 36$ kV) tested on non-insulated conductors**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

INTERNATIONAL STANDARD

**Compression and mechanical connectors for power cables –
Part 1-3: Test methods and requirements for compression and mechanical
connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to
30 kV ($U_m = 36$ kV) tested on non-insulated conductors**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.060.20

ISBN 978-2-8322-5647-3

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Normative references	8
3 Terms and definitions	8
4 Symbols	10
5 General	11
5.1 Definition of classes.....	11
5.2 Conductor	11
5.3 Connectors and installation procedure	12
5.4 Range of approval.....	12
6 Electrical tests	13
6.1 Installation	13
6.1.1 General	13
6.1.2 Through connectors and terminations	14
6.1.3 Branch connectors.....	14
6.2 Measurements	14
6.2.1 General	14
6.2.2 Electrical resistance measurements.....	14
6.2.3 Temperature measurements	15
6.3 Heat cycling test	15
6.3.1 General	15
6.3.2 First heat cycle	15
6.3.3 Second heat cycle	16
6.3.4 Subsequent heat cycles.....	17
6.4 Short-circuit test	18
6.4.1 General	18
6.4.2 Aluminium conductors with cross-sectional areas below 1 000 mm ² and copper conductors with cross-sectional areas below 630 mm ²	18
6.4.3 Aluminium conductors with cross-sectional areas ≥ 1 000 mm ² and copper conductors with cross-sectional areas ≥ 630 mm ²	19
6.5 Assessment of results	19
6.6 Requirements	19
6.7 Examples of electrical test loop configurations and associated parameters	20
7 Mechanical test	26
7.1 General.....	26
7.2 Method	26
7.3 Requirements	27
8 Test report.....	27
8.1 General.....	27
8.2 Electrical tests	27
8.3 Mechanical test.....	27
Annex A (normative) Equalizers and their preparation.....	28
A.1 Requirements for equalizers	28
A.2 Recommendations for welding equalizers	28
Annex B (normative) Measurements	30

B.1	Potential measuring positions for typical connectors	30
B.2	Temperature measurement	30
B.3	Equivalent conductor resistance	30
Annex C	(informative) Recommendations to decrease uncertainties of measurement	31
C.1	Handling the test loop	31
C.2	Measurements, instruments and readings	31
Annex D	(normative) Calculation of adiabatic short-circuit current.....	32
Annex E	(informative) Determination of the value of the short-circuit current.....	33
Annex F	(normative) Calculation method.....	34
F.1	General.....	34
F.2	Measurements made.....	34
F.3	Connector resistance factor k	34
F.4	Initial scatter δ	35
F.5	Mean scatter β	35
F.6	Change in resistance factor of each connector.....	37
F.6.1	General	37
F.6.2	Line of best fit.....	37
F.6.3	Confidence interval δ_i	37
F.6.4	Change in resistance factor D	38
F.7	Resistance factor ratio λ	38
F.8	Maximum temperatures $\theta_{\max}$	38
Annex G	(informative) Explanation on assessment of results of electrical tests on connectors	39
G.1	History	39
G.2	Short examination of the assessment methods of IEC 61238-1 compared with the Italian standard CEI 20-28 and the British standard BS 4579-3	39
G.3	The IEC 61238-1 method of assessing test results.....	40
Annex H	(informative) Electrical tests on cable terminal lugs for application in separable connectors.....	42
H.1	Principle	42
H.2	Lengths.....	42
H.3	Temperature measurement	42
H.4	Median connector	43
H.5	Electrical test parameters	43
Bibliography		44
Figure 1	– Example of second heat cycle profile	17
Figure 2	– Typical electrical test loops for through connectors and terminal lugs.....	22
Figure 3	– Typical electrical test loop for branch connectors	23
Figure 4	– Typical cases of resistance measurements	26
Figure A.1	– Preparation of equalizers	29
Figure E.1	– Determination of equivalent RMS value of current during the short-circuit test ..	33
Figure F.1	– Graphic example of assessment of a Class A individual connector.....	36
Figure H.1	– Test arrangement	43
Table 1	– Minimum period of temperature stability	16
Table 2	– Electrical resistance measurements during the electrical test	18

Table 3 – Electrical test requirements	20
Table 4 – Selection of tensile force withstand values for the mechanical test	27
Table D.1 – Material properties	32
Table G.1 – Summary of assessed behaviour of a tested connector.....	40

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**COMPRESSION AND MECHANICAL
CONNECTORS FOR POWER CABLES –****Part 1-3: Test methods and requirements for compression and mechanical
connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV)
up to 30 kV ($U_m = 36$ kV) tested on non-insulated conductors**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61238-1-3 has been prepared by IEC technical committee 20: Electric cables.

This first edition, together with IEC 61238-1-1 and IEC 61238-1-2, cancels and replaces IEC 61238-1:2003.

This edition includes the following significant technical changes with respect to IEC 61238-1:2003:

- a) The scope has been widened to cover connectors for conductors from 10 mm² down to 2,5 mm² and has been limited to 1 200 mm² for connectors for copper and aluminium conductors because test experience and applications are rare for conductors of larger cross-sectional areas.

- b) A new mechanical class has been introduced to satisfy the demand for connectors subjected to higher mechanical forces than those specified in Class 1 for conductors of larger cross-sectional areas.
- c) For the electrical test, a maximum elevated heating current has been set in order to avoid unrealistic current densities during the test which may change the properties of tested connectors.
- d) For the short-circuit test, the method of calculation and requirements have been updated.
- e) For the mechanical test, the methods and requirements have been updated.
- f) A proposal for an electrical test on cable terminal lugs for application in separable connectors has been introduced.

The text of this standard is based on the following documents:

FDIS	Report on voting
20/1790/FDIS	20/1805/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61238 series, published under the general title *Compression and mechanical connectors for power cables*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

INTRODUCTION

The IEC 61238 series has been divided into the following parts:

- Part 1-1: Test methods and requirements for compression and mechanical connectors for power cables for rated voltages up to 1 kV ($U_m = 1,2$ kV) tested on non-insulated conductors
- Part 1-2: Test methods and requirements for insulation piercing connectors for power cables for rated voltages up to 1 kV ($U_m = 1,2$ kV) tested on insulated conductors
- Part 1-3: Test methods and requirements for compression and mechanical connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV) tested on non-insulated conductors

This Part 1-3 of IEC 61238 deals with type tests for compression and mechanical connectors for use on copper or aluminium conductors of power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV).

When a design of connector meets the requirements of this document, then it is expected that in service:

- a) the resistance of the connection will remain stable within specified limits;
- b) the temperature of the connector will be of the same order or less than that of the conductor during current heating;
- c) if the intended use demands it, application of short-circuit currents will not affect a) and b);
- d) independently from the electrical performance, conforming axial tensile strength will ensure an acceptable mechanical performance for the connections to the cable conductors.

It should be stressed that, although the object of the electrical and mechanical tests specified in this document is to prove the suitability of connectors for most operating conditions, they do not necessarily apply to situations where a connector may be raised to a high temperature by virtue of connection to a highly rated plant, to corrosive conditions, or where the connector is subjected to external mechanical stresses such as excessive vibration, shock and large displacement after installation. In these instances, the tests in this document may need to be supplemented by special tests agreed between supplier and purchaser.

This document does not invalidate existing approvals of products achieved on the basis of national standards and specifications and/or the demonstration of satisfactory service performance. However, products approved according to such national standards or specifications cannot directly claim approval to this document.

Once successfully completed, these tests are not repeated unless changes are made in material, manufacturing process and design which might adversely change the connector performance characteristics.

COMPRESSION AND MECHANICAL CONNECTORS FOR POWER CABLES –

Part 1-3: Test methods and requirements for compression and mechanical connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV) tested on non-insulated conductors

1 Scope

This part of IEC 61238 applies to compression and mechanical connectors for power cables for rated voltages above 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV), for example buried cables or cables installed in buildings, having

- a) conductors complying with IEC 60228 having nominal cross-sectional areas between 2,5 mm² and 1 200 mm² for copper and between 16 mm² and 1 200 mm² for aluminium, excluding Milliken conductors;
- b) a maximum continuous conductor temperature not exceeding 90 °C.

This document is not applicable to connectors for overhead line conductors nor to connectors with a sliding contact.

The object of this document is to define the type test methods and requirements which apply to compression and mechanical connectors for power cables with copper or aluminium conductors. The reference method is to perform the tests on unused conductors.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-461, *International Electrotechnical Vocabulary – Part 461: Electric cables* (available at <http://www.electropedia.org>)

IEC 60228, *Conductors of insulated cables*

IEC 60493-1, *Guide for the statistical analysis of ageing test data – Part 1: Methods based on mean values of normally distributed test results*

IEC 60949:1988, *Calculation of thermally permissible short-circuit currents, taking into account non-adiabatic heating effects*
IEC 60949:1988/AMD1:2008

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-461 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

connector

<of cables> device for connecting a conductor to an equipment terminal or for connecting two or more conductors to each other

[SOURCE: IEC 60050-461:2008, 461-17-03, modified – the definition has been revised.]

3.2

through connector

device for connecting two consecutive lengths of conductor together

[SOURCE: IEC 60050-461:2008, 461-17-04, modified – the term "joint ferrule" has been deleted and the definition revised.]

3.3

branch connector

device for connecting a branch conductor to a main conductor at an intermediate point on the latter

[SOURCE: IEC 60050-461:2008, 461-17-05, modified – the term "branch ferrule" has been deleted and in the definition "metallic" has been deleted.]

3.4

termination

device fitted to the end of a cable conductor to ensure electrical connection with other parts of the system

[SOURCE: IEC 60050-461:2008, 461-10-01, modified – "conductor" has been added and "and to maintain insulation up to the point of connection" has been deleted.]

3.5

terminal lug

device to connect a cable conductor to other electrical equipment

[SOURCE: IEC 60050-461:2008, 461-17-01, modified – "metallic" has been deleted.]

3.6

palm

<of terminal lug> part of a terminal lug used to make the connection to electrical equipment

[SOURCE: IEC 60050-461:2008, 461-17-07]

3.7

barrel

<of terminal lug, of connector> part of a device into which the conductor to be connected is introduced

[SOURCE: IEC 60050-461:2008, 461-17-06]

3.8

reference conductor

length of unjointed bare conductor or conductor with the insulation removed, which is included in the test loop and which enables the reference temperature and reference resistance to be determined

3.9

equalizer

arrangement used in the test loop to ensure a point of equipotential and uniform current distribution in a stranded conductor

3.10

compression jointing

method of securing a connector to a conductor by using a special tool to produce permanent deformation of the connector and the conductor

3.11

mechanical jointing

method of securing a connector to a conductor, for example by means of a bolt or screw acting on the latter or by alternative methods

3.12

median connector

connector which during the first heat cycle records the third highest temperature of the six connectors in the test loop

3.13

conductor

<of a cable> part of a cable which has the specific function of carrying current

[SOURCE: IEC 60050-461:2008, 461-01-01]

3.14

family of connectors

group of connectors of a manufacturer to be considered of the same design criteria, the same material characteristic and the same installation procedure

4 Symbols

A	nominal cross-sectional area of the conductor
D	change in the resistance factor of the connector
I	direct current flowing through a connection during resistance measurement
I_{RMS}	equivalent RMS short-circuit current
I_{N}	alternating current necessary to maintain the reference conductor at its equilibrium temperature
I_{r}	direct current flowing through the reference conductor/conductors during resistance measurement
k	connector resistance factor: ratio of the resistance of a connector to that of the resistance of the equivalent length of the reference conductor
k_0	initial connector resistance factor: ratio of the resistance of a connector to that of the resistance of the equivalent length of the reference conductor at cycle no. 0
$l_{\text{a}}, l_{\text{b}}, l_{\text{j}}$	lengths of each connector assembly associated with the measurement positions in the test set-up after installation
l_{r}	length of the reference conductor between measurement positions
R	measured resistance value of connector/conductor installation under an electrical test corrected to 20 °C
R_{r}	measured resistance value of the reference conductor corrected to 20 °C
R_{j}	length related calculated resistance value of a connector under an electrical test corrected to 20 °C

t_1	heating time
t_2	time necessary for the connectors and the reference conductor to cool to a value equal to or less than 35 °C
U	potential difference between measurement positions while current I is applied
U_r	potential difference between measurement positions on a reference conductor while current I_r is applied
α	temperature coefficient of resistance at 20 °C
β	mean scatter of the connector resistance factors
δ	initial scatter of the connector resistance factors
λ	resistance factor ratio: the actual resistance factor of the connector at each measurement stage divided by its initial resistance factor
θ	temperature of a connector
$\theta_{\max}$	maximum temperature recorded on a connector over the total period of test during heat cycling
θ_R	temperature of the reference conductor determined in the first heat cycle
θ_{ref}	temperature of the related reference conductor at the moment of measuring $\theta_{\max}$

5 General

5.1 Definition of classes

Although it is not possible to define precisely the service conditions for all applications, the following requirements have been identified.

a) Electrical requirements:

Class A

Connectors related to this document are intended for electricity distribution or industrial networks in which they can be subjected to short-circuits of relatively high intensity and duration.

b) Mechanical requirements:

Class 1

Connectors subjected to a mechanical pull-out force related to the conductor nominal cross-sectional area and material (according to Table 4) but limited to 20 kN pull-out force. These are, for example, connectors for underground cable joints.

Class 2

Connectors subjected to a mechanical pull-out force above 20 kN and related to the conductor nominal cross-sectional area and material (according to Table 4). This class is only applicable to conductor nominal cross-sectional areas $\geq 400 \text{ mm}^2$ copper and $\geq 630 \text{ mm}^2$ aluminium. These are, for example, connectors in cable installations where thermomechanical forces are estimated to exceed 20 kN.

Hence, the three classes correspond to the following tests:

Class A: heat cycling and short-circuit tests;

Class 1: mechanical test with limited maximum tensile force;

Class 2: mechanical test with no maximum tensile force.

5.2 Conductor

The following information shall be recorded in the test report:

- conductor material;
- nominal cross-sectional area, dimensions and shape;
- detail of conductor construction shall be given when known, or can be determined by inspection, for example:
 - class according to IEC 60228 (solid, stranded and flexible);
 - compacted or non-compacted for stranded conductor;
 - number and arrangement of strands;
 - type of plating, if applicable;
 - type of impregnation, water blocking, etc., if applicable.

5.3 Connectors and installation procedure

The following information shall be recorded in the test report:

- the assembly method or the installation instruction that is to be used;
- tooling, dies and any necessary setting;
- if not part of the delivered product, for example at cable conductor termination: bolts, nuts, washers, lubricant, torque, etc.;
- preparation of contact surfaces, if applicable, for example cleaning, brushing and/or greasing of inner and/or outer conductor and/or connector surfaces;
- identification of the connector, for example name of the supplier, drawing, reference number, type.

5.4 Range of approval

In general, tests made on one type of connector/conductor combination apply to that arrangement only. However, to limit the number of tests, using the same conductor material, the following is permitted:

- a connector which can be used on stranded round conductors or on stranded sector-shaped conductors which have been rounded, is approved for both types if satisfactory results are obtained on a compacted round conductor;
- a connector which covers a range of consecutive cross-sectional areas shall be approved, if satisfactory results are obtained on the smallest and the largest cross-sectional area;
- if a connector is a through connector for two conductors of different cross-sectional areas, shapes, or materials, and if the jointing method and the connector barrels used have already been tested separately for each cross-sectional area, no additional test is necessary. If not, and if it is required for bimetallic through connectors, additional tests shall be made using the conductor having the highest temperature of the two conductors, as reference conductor;
- if a type test for a range taking mechanical connector is passed on the biggest possible conductor cross-sectional area, this result is also valid for similar connector designs with the same material of the connector body but bigger outer diameter provided that the design of the conductor clamping channel (inner diameter, shape, etc.), quantity and design of clamping screws (torque, material, size, shear-off characteristic, etc.) are identical;
- if a manufacturer can clearly demonstrate that common and relevant connector design criteria were used for a family of connectors, conformity to this document is achieved by successfully testing the largest, the smallest and two intermediate connector sizes;

exception no.1: for a family of connectors consisting of five sizes, only the largest connector, the smallest connector, and one connector of a representative intermediate size need to be tested;

exception no.2: for a family of connectors consisting of four sizes or less, only the largest connector and the smallest connector need to be tested;

- if conformity to this document is achieved by successfully testing a connector on dry conductor then approval is achieved for the same conductor used in an impregnated paper insulated cable;
- for connectors where one or both sides are designed for a range of cross-sectional areas, and a common clamping or crimping arrangement serves for the connection of the different cross-sectional areas, then mechanical tests on conductors with the largest and smallest cross-sectional areas shall be carried out according to Clause 7;
- if conformity to this document is achieved by successfully testing a mechanical connector on round stranded aluminium conductors, this type test approval can be applied to solid aluminium conductors of the same cross-sectional area(s);
- if conformity to this document is achieved by successful testing of a through connector, this type test approval can apply to the barrel of a termination which uses the same design criteria. Approval of the complete termination can be achieved if the termination connection does not influence the barrel performance, proven through design parameters, drawings or through thermal verification test;
- if conformity to this document is achieved by successfully testing a connector on a conductor with water blocking, approval is achieved for the same conductor without any water blocking but not for the same conductor with different types of water blocking.

6 Electrical tests

6.1 Installation

6.1.1 General

All conductors of the same cross-sectional area in the test loop shall be taken from the same conductor length.

For each series of tests, six connectors shall be installed in accordance with the manufacturer's instructions, on a bare conductor or on a conductor that has had the insulation removed before assembly, to form a test loop together with the corresponding reference conductor.

For stranded conductors, potential differences between the strands at potential measuring positions can cause errors in measuring electrical resistance. Equalizers according to Annex A shall be used to overcome this problem and to ensure uniform current distribution in the reference conductor and between connectors at the equalizer positions. The recommended method is to prepare equalizers on the test loop before installing connectors.

The test loop shall be installed in a location where the air is calm.

The ambient temperature of the test location shall be between 15 °C and 30 °C.

For conductor cross-sectional areas above 1 000 mm², increasing the ambient temperature range of the test location between 15 °C and 40 °C is allowed. At the end of the cooling phase the ambient temperature shall be between 15 °C and 30 °C.

In the case of solid conductors, the potential measuring positions shall be as close as possible to the connector in order to reduce I_a and I_b close to zero.

The test loop may be of any shape according to Figures 2 or 3 provided that it is arranged in such a way that there is no adverse effect from the floor, walls and ceiling, other test loops and adjacent test branches.

To facilitate the short-circuit test, the loop may be disassembled as shown in Figure 2 b). In this case, the sectioning connections shall not influence the temperatures of the test objects during heating.

Retightening of bolts or screws of the connectors under test is not permitted.

6.1.2 Through connectors and terminations

The test loop shown in Figure 2 indicates the dimensions that shall be used.

Where terminal lugs or mechanical connectors for terminal bars are to be tested, they shall be bolted to linking bars in accordance with the manufacturer's instructions or the relevant standards/specifications defining methods and instructions for fastening terminations. These linking bars shall, at the point of connection, be of the same dimensions and thickness as the palm, and also of the same material.

It may be necessary to adjust the thermal characteristics of the linking bar outside the point of connection, to achieve the temperatures specified in 6.3.

For terminal lugs, the use of linking bars is the recommended test method although it is alternatively possible to test terminal lugs with palms connected directly to palms.

If it is requested that the terminal lug test includes an evaluation of the performance of the bolted palm when connected to a specified plant terminal, then the linking bar method shall be used and the linking bar ends, or an intermediate piece, shall be defined and described in material, size and surface coating.

NOTE Recommendations for testing cable terminal lugs for application in separable connectors, based on the terminal lug method, are given in Annex H.

6.1.3 Branch connectors

When the branch connector is intended for a branch nominal cross-sectional area equal to the main, or a cross-sectional area immediately above or below the main, it is treated as a through connector between the main and the branch, the test method for through connectors and Figures 2 a) or 2 b) are applicable. In other cases, the test loop shall be as shown in Figure 3. Where a type of connector makes it necessary for the main conductor to be cut, that part of the connector which acts as a through connector, shall also be tested as for through connectors.

6.2 Measurements

6.2.1 General

Measurements shall be made at stages throughout the test according to Table 2.

NOTE Recommendations to decrease uncertainties of measurements are given in Annex C.

6.2.2 Electrical resistance measurements

The resistance measurements shall be made under steady temperature conditions of both the test loop and test location. The ambient temperature shall be between 15 °C and 30 °C.

The recommended method is to pass a direct current of up to 10 % of the estimated heat cycling current, through the connectors and the reference conductor, without significantly increasing the temperature and to measure the potential difference between two specific potential measuring positions. The ratio of potential difference and direct current is the electrical resistance between those two positions.

To decrease the uncertainty of the resistance measurement, it is recommended that the direct current is adjusted to the same value throughout the electrical test.

For branch conductors assembled in accordance with Figure 3, the whole of the measuring current shall flow through that part of the connector whose potential difference is being measured. Switches or disconnecting terminals may be provided for this purpose.

Thermoelectric voltages may affect the uncertainty of low resistance measurements (of the order of $10\ \mu\Omega$). If this is suspected, the recommended method is to take two resistance measurements with the direct measuring current reversed between readings. The mean of the two readings is then the actual resistance of the sample.

The potential measuring positions shall be as indicated in Figure 4 and Annex B. The various lengths shall be measured individually to enable the actual connector resistances to be determined. The temperature of connector and reference conductor shall be recorded when resistance measurements are made. For direct comparison, the resistance values shall be corrected to $20\ ^\circ\text{C}$. Information on the recommended method is also given in Annex B. Temperature measurements at these positions shall be made during the heat cycling test.

Indirect resistance readings:

- voltage measurements shall have a device uncertainty within $\pm 0,5\ \%$ or $\pm 10\ \mu\text{V}$, by taking the greater value;
- current measurements shall have a device uncertainty within $\pm 0,5\ \%$ or $\pm 0,1\ \text{A}$, by taking the greater value.

Direct resistance readings:

Resistance measurements shall have a device uncertainty within $\pm 1\ \%$ or $\pm 0,5\ \mu\Omega$, whichever is the greater when the instrument is calibrated against a certified standard resistance.

6.2.3 Temperature measurements

Temperatures of both connectors and reference conductors shall be measured at the positions indicated in Figure 4. The recommended method of temperature measurement is to use thermocouples. The temperature measurements shall have a device uncertainty within $\pm 2\ \text{K}$.

6.3 Heat cycling test

6.3.1 General

The heat cycling test shall be made with alternating current.

In the case of DC applications, direct current might be used.

6.3.2 First heat cycle

The object of the first heat cycle is to determine the reference conductor temperature to be used for subsequent cycles and also to identify the median connector (see 3.12) at equilibrium.

Equilibrium is reached when the reference conductor and the connectors do not vary in temperature by more than $\pm 2\ \text{K}$ during application of the heating current. Minimum periods to maintain temperature stability are defined in Table 1.

a) Through connectors and terminations

Current is circulated in the test loop, bringing the reference conductor to $120\ ^\circ\text{C}$ at equilibrium.

If the temperature of the median connector is equal to or greater than 100 °C, the reference conductor temperature for subsequent heat cycles shall be deemed to be 120 °C. If not, then the current shall be increased until the median connector temperature reaches 100 °C at equilibrium, subject to the reference conductor temperature not exceeding 140 °C. If the temperature of the median connector does not reach 100 °C, even with a reference conductor temperature of 140 °C, the test shall be continued at that temperature. The measured reference conductor temperature θ_R shall then be used for subsequent heat cycles ($120\text{ °C} \leq \theta_R \leq 140\text{ °C}$).

Where linking bars are used for terminal lugs, the temperature at the midpoint of the bar linking the palms should also be measured. This temperature should be equal to the temperature of the reference conductor θ_R , with a tolerance of $\pm 5\text{ K}$.

b) Branch connectors

Where it is necessary to use the circuit shown in Figure 3, current shall be circulated in the test loop, bringing the main reference conductor and the three branch reference conductors to 120 °C at equilibrium. To achieve this, the currents in the three branches shall be adjusted by current injection or impedance control. If the temperature of the median connector according to definition 3.12 is then equal to or greater than 100 °C, the reference conductor temperature for subsequent heat cycles shall be deemed to be 120 °C. If not, then the current shall be increased in the loop until the median connector temperature reaches 100 °C at equilibrium, provided the reference conductors do not exceed 140 °C. It may be necessary at this stage, and also at intervals throughout the test, to adjust the current in an individual branch so as to ensure that each branch reference temperature is the same as the main reference temperature with a tolerance of $\pm 2\text{ K}$. The measured reference conductor temperature θ_R on the main and branch conductors, shall then be used for subsequent heat cycles ($120\text{ °C} \leq \theta_R \leq 140\text{ °C}$).

Table 1 – Minimum period of temperature stability

Nominal conductor cross-sectional area A (mm ²)	for aluminium:	$A \leq 300$	$300 < A \leq 630$	$630 < A \leq 1\,000$	$A > 1\,000$
	for copper:	$A \leq 240$	$240 < A \leq 400$	$400 < A \leq 800$	$A > 800$
Minimum period (min)		15	20	30	60

6.3.3 Second heat cycle

The object of this second heat cycle is to determine the heat cycle duration and temperature profile which will be used on the test loop for all subsequent heat cycles. Current is circulated in the loop until the main reference conductor temperature reaches the value θ_R determined in 6.3.2, with a tolerance of $^{+6}_0\text{ K}$ and the median connector temperature is stable within a band of 2 K over a 10 min period and does not differ by more than 3 K compared to the temperature measured during the first heat cycle.

For branch connectors that need to use the circuit shown in Figure 3, current is circulated in the loop until the branch reference conductor temperature reaches the value θ_R determined in 6.3.2, with a tolerance of $^{+6}_0\text{ K}$ and the main reference conductor temperature reaches the value θ_R determined in 6.3.2, with a tolerance of $^{+6}_{-4}\text{ K}$. The median connector temperature is stable within a band of 2 K over a 10 min period and does not differ by more than 3 K compared to the temperature measured during the first heat cycle.

At the beginning of the heat cycle, an elevated current up to 150 % of I_N may be used as the preferred method, to reduce the heating period. The current shall thereafter be decreased or regulated to a mean value of the current close to I_N to ensure stable conditions during the median-connector control period. It may be necessary to use more than one cycle to determine the second heat cycle.

The reference conductor temperature shall be the control parameter, in order to keep the temperature profile during the heat cycling test. In this way, the fluctuation of the ambient temperature will not affect the temperature profile of the reference conductor within the tolerances given in this document.


The determined heating profile of the reference conductor containing the characteristics of temperatures during time, as shown in Figure 1, shall be recorded and reproduced for all subsequent heat cycles.

The heating period t_1 is followed by a cooling period t_2 to bring the temperatures of all connectors and the reference conductor to values $\leq 35^\circ\text{C}$.

It may be necessary in subsequent heat cycles to adjust t_2 to ensure that the temperature conditions are reached, in particular during the measurement of resistances in order to respect the conditions of 6.2.2.

If accelerated cooling is used, it shall act on the whole of the loop, and use air within ambient temperature limits.

The total period $t_1 + t_2$ constitutes a heat cycle (see Figure 1).

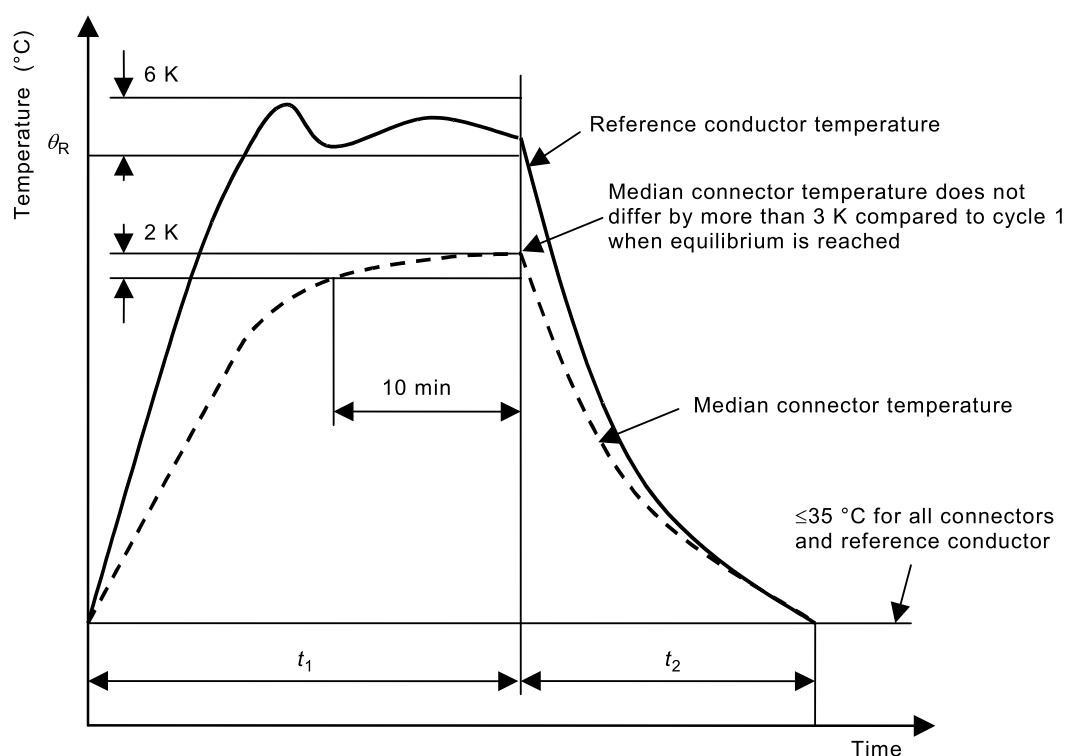

IEC

Figure 1 – Example of second heat cycle profile

6.3.4 Subsequent heat cycles

A total of 1 000 heat cycles shall be made according to 6.3.3. After the cooling period of the cycles indicated in Table 2, the resistance and temperature of each connector and each reference conductor shall be recorded as described in 6.2. The maximum temperature of each connector during the cycle just prior to or following the resistance measurements shall also be recorded.

Table 2 – Electrical resistance measurements during the electrical test

Class A
Cycle no. 0, before the first heat cycle, see 6.3.2 after cycle no. 200, before the short-circuit test after cycle no. 200 and after the short-circuit test after cycle no. 250 ^a then after 75 cycle intervals ^a (in total 14 measurements)
^a A tolerance of ± 10 cycles may be used for collecting measurements.

6.4 Short-circuit test

6.4.1 General

The short-circuit test shall be made with alternating current.

After finishing 200 heat cycles, six short-circuit currents shall be applied on each connector.

After each short-circuit current application, the test loop shall be cooled to a temperature ≤ 35 °C.

The measured initial reference conductor temperature, the current and the duration, as well as the Joule integral of each short-circuit current application shall be recorded in the test report.

When through connectors are used to connect different conductors in the same test, the conductor with the highest nominal electrical resistance per unit length shall be used as reference conductor.

When branch connectors are used, the short-circuit current shall be applied from main conductor to branch conductor for each connector under test.

As stated in 6.1.1, the test loop may be disassembled for this test. Since the short-circuit test is intended to reproduce the thermal effects of high currents only, the recommended method is to use a concentric return conductor in order to reduce the electro-dynamic forces. The test arrangements shall be described in the test report.

For aluminium conductor nominal cross-sections $> 400 \text{ mm}^2$ and for copper $> 300 \text{ mm}^2$ pre-heating up to 90 °C may be used. However, for nominal cross-sectional areas exceeding 630 mm² copper or 1000 mm² aluminium, the defined parameters (45 kA and 5 s) are insufficient to reach 250 °C.

When determining the short-circuit current RMS value, a device taking into account the DC component should be used. Alternatively, the determination of the I^2t can be obtained using the method described in Annex E, noting this method does not take into account the DC component of the current.

NOTE The measured final reference conductor temperature can be recorded in the test report for information.

6.4.2 Aluminium conductors with cross-sectional areas below 1 000 mm² and copper conductors with cross-sectional areas below 630 mm²

The short-circuit test current level shall be such that it raises the reference conductor from a temperature ≤ 35 °C to a temperature between 250 °C and 270 °C.

The duration of the short-circuit test current shall be $(1^{+0,5}_{-0,1})$ s with a maximum current of 25 kA.

If the required short-circuit test current exceeds this value, a longer duration ≤ 5 s with a current between 25 kA and 45 kA shall be used.

The minimal applicable adiabatic Joule integral $I^2_{AD}t$, which raises the temperature of the reference conductor to 250 °C, shall be calculated according to the formula in Annex D, as well as the maximum applicable adiabatic Joule integral $I^2_{AD}t$, necessary to reach a final temperature of 270 °C.

The adiabatic Joule integral $I^2_{AD}t$ used for each short-circuit current application, during the short-circuit test, shall be between both previous calculated values of Joule integrals $I^2_{AD}t$.

NOTE To allow adjustment of the current for the short-circuit test, the first short-circuit test current can be extended to achieve a final temperature between 250 °C and 280 °C.

6.4.3 Aluminium conductors with cross-sectional areas $\geq 1\,000\text{ mm}^2$ and copper conductors with cross-sectional areas $\geq 630\text{ mm}^2$

A short-circuit test current of 45 kA for 5 s shall be applied.

6.5 Assessment of results

An individual connector resistance factor k enables a common method of connector assessment to be made over the range of conductor cross-sectional areas applicable to this document. The parameters listed below shall be calculated according to Annex F:

- the connector resistance factor k shall be calculated according to Clause F.2, for each of the six connectors at all the measurement intervals listed in Table 2;
- the initial scatter δ , between the six initial values of k_0 , measured before heat cycling, shall be calculated according to Clause F.3;
- the mean scatter β , between the six values of k , averaged over the last 11 measurement intervals, shall be calculated according to Clause F.4;
- the change in resistance factor D for each of the six connectors shall be calculated according to Clause F.5. D is the change in the value of k taken over the last 11 measurement intervals, calculated as a fraction of the mean value of k in this interval;
- the resistance factor ratio λ shall be calculated according to Clause F.6;
- the maximum temperature $\theta_{\max}$ on each connector shall be recorded according to Clause F.7.

NOTE An explanation of assessing the results of the electrical test on connectors can be found in Annex G.

6.6 Requirements

The six connectors shall satisfy the requirements shown in Table 3. If one connector out of the six does not satisfy one or more of the requirements, a re-test may be carried out. In this event, all six new connectors shall satisfy the requirements.


If more than one connector out of the six do not satisfy one or more of the requirements, no re-test is permitted and the type of connector shall be deemed as not conforming to this document.

Table 3 – Electrical test requirements


Parameter	Designation	Text reference	Maximum value
Initial scatter	δ	Clause F.4	0,30
Mean scatter	β	Clause F.5	0,30
Change in resistance factor	D	Clause F.6	0,15
Resistance factor ratio	λ	Clause F.7	2,0
Maximum temperature	$\theta_{\max}$	Clause F.8	θ_{ref}
NOTE Specified values are based on experience.			

6.7 Examples of electrical test loop configurations and associated parameters


See Figures 2, 3 and 4.

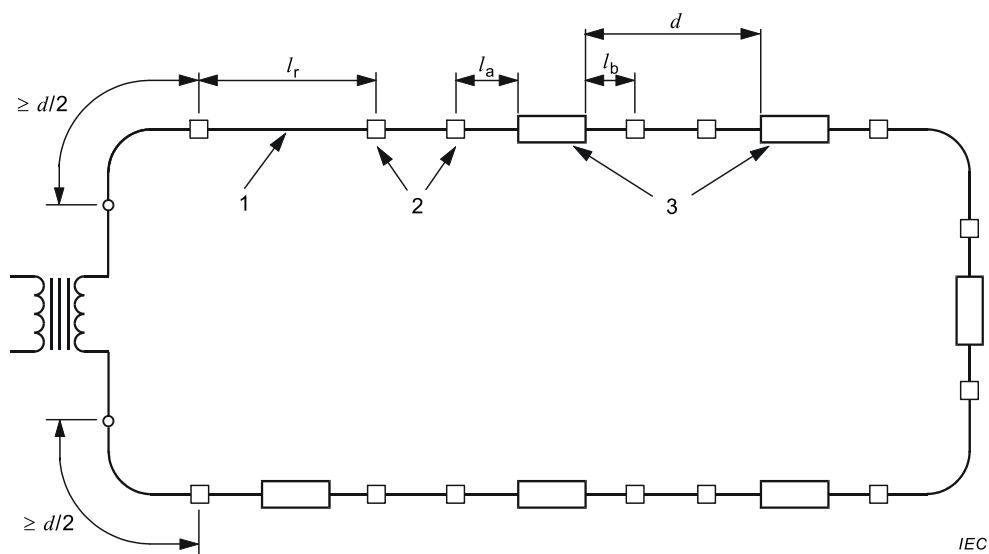

a) Through connectors – principle test loop

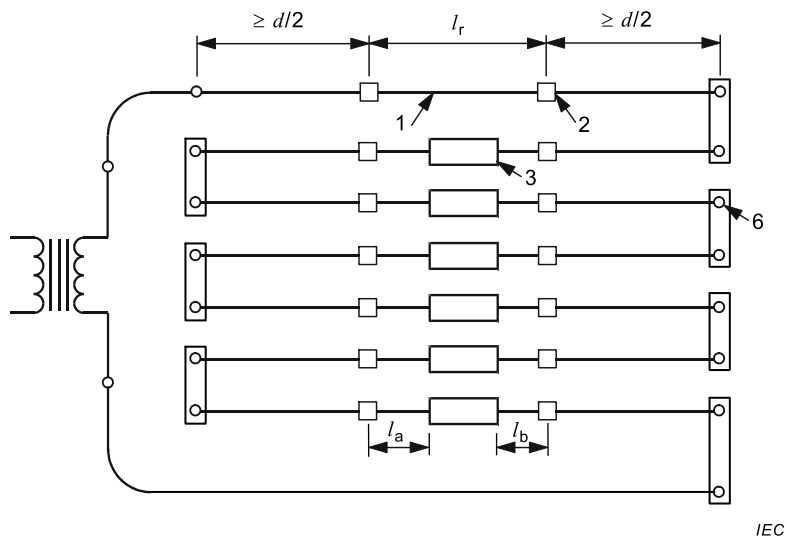

b) Through connectors with separable sections according to 6.1.1

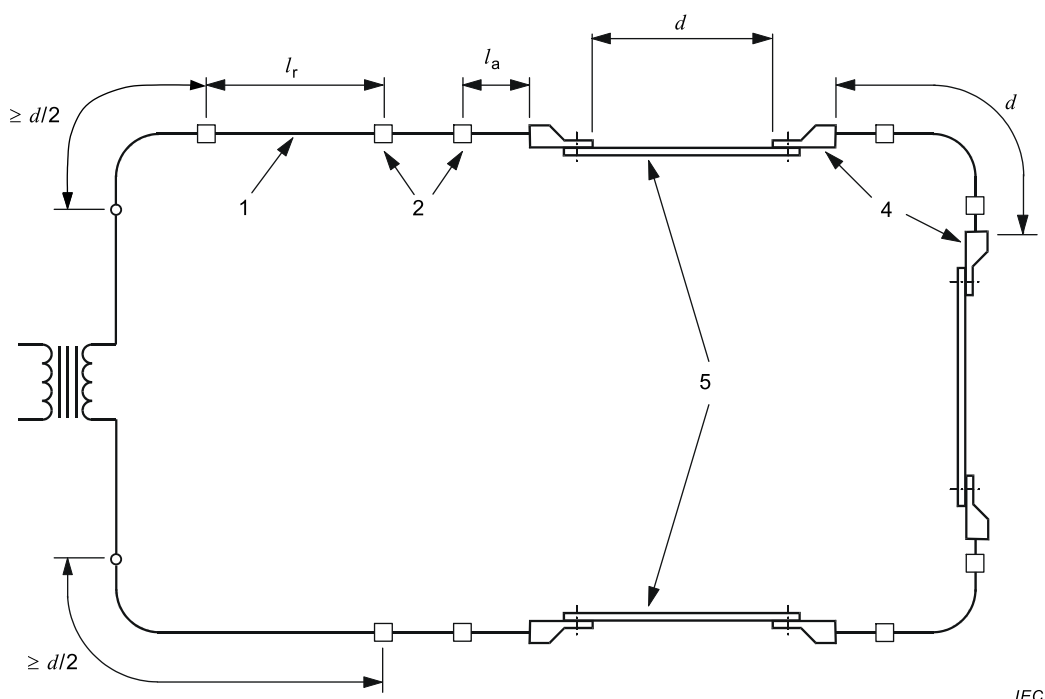

c) Terminal lugs – principle test loop

where:

$$d \geq 80 \sqrt{A} \text{ or } 500 \text{ mm, whichever is the greater}$$

A is the corresponding conductor nominal cross-sectional area, in mm²

$$l_r \geq l_a + l_b + l_j \text{ (for } l_j, \text{ see Figure 4)}$$


For stranded conductors:

$$l_a, l_b \approx 15 \sqrt{A} \text{ or } 150 \text{ mm, whichever is the greater}$$

Key

- 1 reference conductor
- 2 equalizers (for stranded conductors)
- 3 through connectors
- 4 terminal lugs
- 5 linking bars
- 6 disconnecting terminals

Figure 2 – Typical electrical test loops for through connectors and terminal lugs

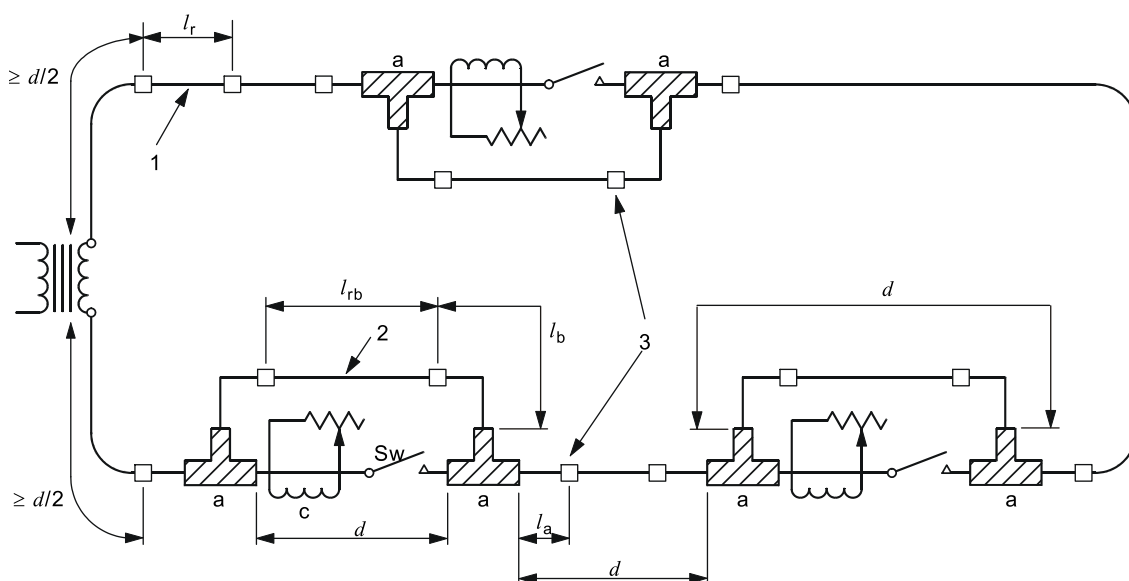

IEC

where:

$d \geq 80 \sqrt{A}$ or 500 mm, whichever is the greater

A is the main conductor cross-sectional area, in mm^2

$l_r, l_{rb} \geq l_a + l_b + l_j$ (for l_j , see Figure 4)


For stranded conductors:

$l_a, l_b \approx 15 \sqrt{A}$ or 150 mm, whichever is the greater

Key

- | | |
|----|---|
| 1 | main reference conductor |
| 2 | branch reference conductor |
| 3 | equalizer (for stranded conductors) |
| a | branch connector |
| c | current control |
| Sw | switch (for branch resistance measurement) a distance of $d/2$ between switch and connectors should be used |


Figure 3 – Typical electrical test loop for branch connectors

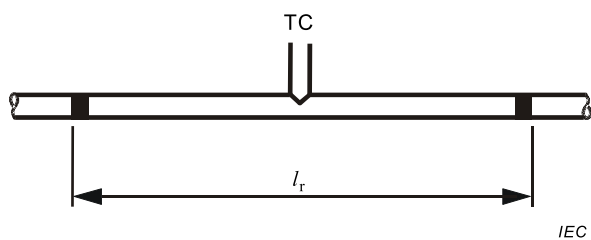

a) Reference conductor

Formula:

$$R_r = \frac{U_r}{I_r} \times \frac{1}{1 + \alpha(\theta_r - 20)}$$

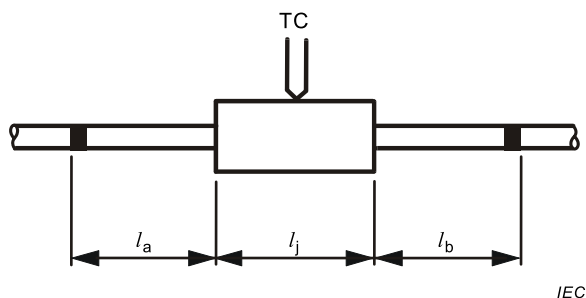


b) Through connector

Formulas:

$$R_j = R - R_r \times \frac{(l_a + l_b)}{l_r}$$

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j}$$

Reference: same conductor on both sides

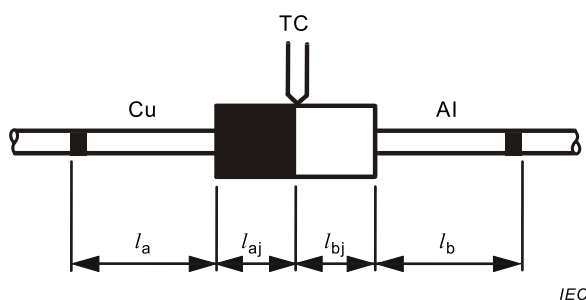


c) Bimetallic through connector

Formulas:

$$R_j = R - \left(\frac{R_r \text{Cu}}{l_r \text{Cu}} \times l_a + \frac{R_r \text{Al}}{l_r \text{Al}} \times l_b \right)$$

$$k = \frac{R_j}{\frac{R_r \text{Cu}}{l_r \text{Cu}} \times l_{aj} + \frac{R_r \text{Al}}{l_r \text{Al}} \times l_{bj}}$$

Reference: copper and aluminium conductors

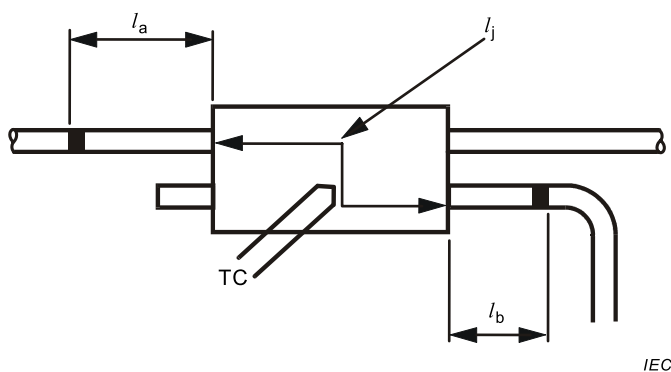


d) Branch connector

Formulas:

$$R_j = R - \left(\frac{R_r \text{main}}{l_r \text{main}} \times l_a + \frac{R_r \text{branch}}{l_r \text{branch}} \times l_b \right)$$

$$k = \frac{R_j}{R_r \text{branch}} \times \frac{l_r \text{branch}}{l_j}$$

Reference: main and branch conductors

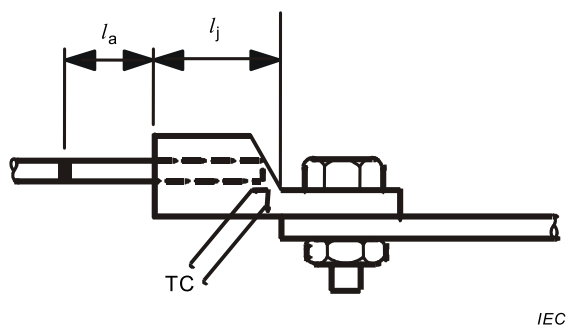


Formulas:

$$R_j = R - R_r \times \frac{l_a}{l_r}$$

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j}$$

Reference: conductor

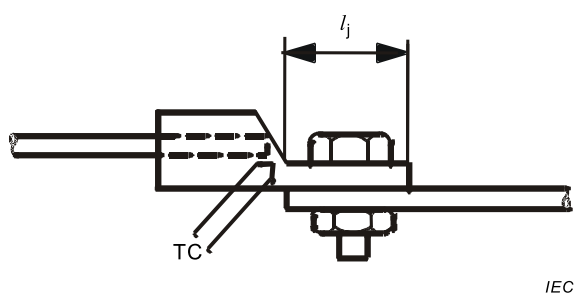
e) Barrel of terminal lug

Formulas:

$$R_j = R$$

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j}$$

Reference: conductor

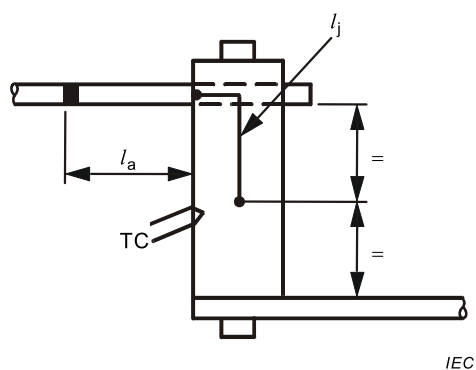f) Palm of terminal lug


Formulas:

$$R_j = R - R_r \times \frac{l_a}{l_r}$$

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j}$$

Reference: conductor

g) Connection to the conductor for a mechanical connector

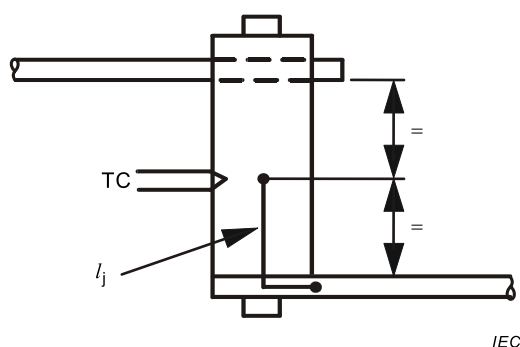

Formulas:

$$R_j = R$$

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j}$$

Reference: conductor

h) Connection to a terminal bar for a mechanical connector

Key

TC = Temperature measurement positions

Figure 4 – Typical cases of resistance measurements

7 Mechanical test

7.1 General

The purpose of this test is to ensure an acceptable mechanical strength for the connections to the conductors of power cables.

NOTE The mechanical test does not give any indication that the connector will be able to fulfill the electrical test requirements.

7.2 Method

The test shall be made on three additional connectors having the same combination of conductors and installation procedure as used for the electrical test. The recommended conductor length, between connectors or between the connector and the tensile test machine jaws, is ≥ 500 mm. The rate of application of the load shall not exceed 10 N per square millimeter of nominal cross-sectional area and per second up to 25 % of the value in Table 4 in order to mark the conductor relatively to the connector, then up to the value in Table 4, which is then maintained for 1 min.

The applicable tolerance for applying the mechanical load shall be within ± 5 %.

When the axes of two conductors are not aligned, the connector shall be fixed and the force applied in the axis of the clamping channel on each conductor core. One sample of connector shall be used per tensile test.

For example for a branch connector as shown in Figure 4 d), six connectors are needed: three samples are required for testing the main conductor and three samples for the branch conductor.

If the connector is tested electrically for conductors of different nominal cross-sectional area, three connectors shall be tested individually with the same conductor as used in the electrical test, in accordance with Table 4.

Table 4 – Selection of tensile force withstand values for the mechanical test

Class	Conductor material	Nominal cross-sectional area A (mm ²)	Tensile force (N)
Class 1	Aluminium	≤ 500 ≥ 630	$40 \times A$ 20 000
	Copper	≤ 300 ≥ 400	$60 \times A$ 20 000
Class 2	Aluminium	≥ 630	$40 \times A$
	Copper	≥ 400	$60 \times A$

7.3 Requirements

Not more than 3 mm slippage shall occur during the last minute of the test.

8 Test report

8.1 General

The type test results according to this document may be presented in separate test reports.

8.2 Electrical tests

The test report shall include the following information:

- connector class (see 5.1);
- conductor used (see 5.2);
- connector and installation procedure (see 5.3);
- installation for example in the case of terminations, where bolted connections are not supplied and not described by the manufacturer, for example palms of cable lugs, additional information shall be given about material, surface and lubrication of used bolts, nuts, washers and applied torques;
- temperature measurement method (see 6.2.3);
- current I_N at equilibrium temperature (see 6.3.2);
- the short-circuit test parameters (see 6.4);
- test loop configuration;
- values and graph of the connector resistance factor k versus the cycle number (see 6.5);
- values and graph of the maximum temperatures versus the cycle number (see 6.3.4);
- results of the electrical test (see Table 3).

It is advisable to show a graph of the temperature profile of the second cycle (see 6.3.3).

8.3 Mechanical test

The test report shall include the following information:

- connector class (see 5.1);
- conductor used (see 5.2);
- connector and installation procedure (see 5.3);
- results of the mechanical test.

Annex A (normative)

Equalizers and their preparation

A.1 Requirements for equalizers

For stranded and flexible conductors, the potential difference between the strands at measuring positions may cause errors in measuring electrical resistance.

Therefore equalizers are needed, the requirements for which are:

- achieve the electrical connection of all the strands to ensure accurate electrical resistance measurements;
- achieve thermomechanical strength throughout the electrical test including the short-circuit test (e.g. by avoiding excessive annealing or constricting of strands during preparation of equalizers and providing adequate current carrying volume);
- avoid thermal effect on the connector or the reference conductor temperature readings during current heating (e.g. by using bulky equalizers).

Welded, soldered or crimped equalizers may be used to overcome this problem and to ensure uniform current distribution during resistance measurement. Welding equalizers is the recommended method for stranded conductors to ensure reliable measurements.

Other methods may be used provided they give comparable results and do not affect the temperature of the connectors or the reference conductor.

A.2 Recommendations for welding equalizers


The welding material should be similar to the conductor material.

Cut the conductors square, clean the ends, and melt them with the welding torch ensuring all strands are welded together. Build up the weld until the chamfer dimensions are achieved. The length of the chamfer is referenced as a , and the separation between the conductors for final welding is referenced as b .


With the conductors supported and spaced by dimensions b , build weld metal up at the centre and turn the conductors so as to obtain a uniform circular weld profile.

Ensure that the conductor remote from the ends is kept sufficiently cool in order not to change the mechanical properties of the conductor in the region where the contact will be made.

The dimensions of the equalizer shall be as indicated in Figure A.1.

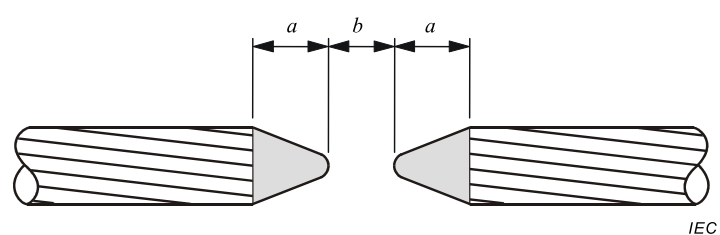

a) Ends prepared

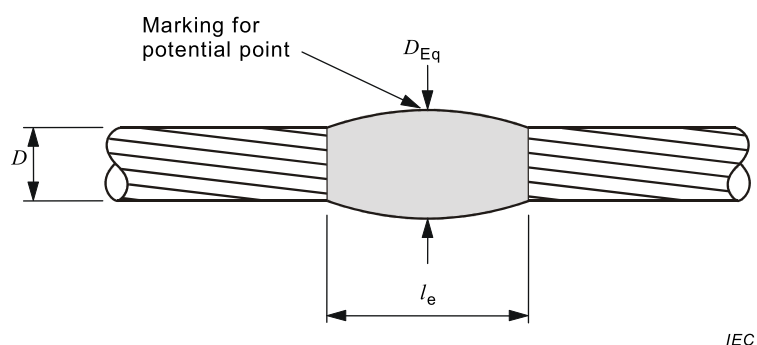

b) Welded/soldered equalizer

where:

For circular shape

$$D \leq D_{Eq} \leq 1,4 \times D$$

$$l_e \leq 1,5 \times D + 10 \text{ mm}$$

For sectoral shape

$$H \leq H_{Eq} \leq 1,4 \times H \text{ and } W \leq W_{Eq} \leq 1,4 \times W$$

$$l_e \leq 1,5 \times H + 10 \text{ mm}$$

Key

a :	chamfer length
b :	conductor separation
D :	conductor diameter
D_{Eq} :	equalizer diameter
l_e :	equalizer length
H :	sector height
W :	sector width




Figure A.1 – Preparation of equalizers

Annex B (normative)

Measurements

B.1 Potential measuring positions for typical connectors

Potential measuring positions for the purpose of resistance measurement are shown in Figure 4. Potential measuring positions on solid conductors shall be adjacent to, but not touching, the connector. For stranded conductors, the potential measuring positions are the mid-point of the equalizers, which shall be $15\sqrt{A}$ mm or 150 mm, whichever is the longer, away from the connector. The actual lengths of l_a and l_b can vary in a real test set-up at each connector. It is therefore necessary to take into account these individual readings for the calculation of the resistance for every individual connector.

B.2 Temperature measurement

A good thermal contact between the thermocouple junction and the measuring object shall be established.

In the case of the reference conductor (Figure 4 a)), the thermocouple shall be positioned at the mid-point and secured either in a small hole drilled in a solid conductor, or by sliding it under the strands of the outer layer of a stranded conductor.

In the case of connectors (Figure 4 b) to Figure 4 h)), the thermocouple may either be inserted in a small hole drilled into the main body of the connector, or be secured to the outside surface using a thermally conductive adhesive or self-adhesive thermal tape. In the latter case, the amount of glue or tape used to install the thermocouple should not affect the heat dissipation in the connector.

B.3 Equivalent conductor resistance

It is necessary to measure the resistance of a known length of the reference conductor and its temperature (Figure 4 a)), so that the actual connector resistance R_j may be calculated, by subtracting the resistance due to the conductor lengths l_a and l_b . The various lengths, which need to be recorded, are shown in Figure 4.

It should be noted that in the case of branch connectors, resistances of both the main and the branch reference conductors are used when calculating the actual connector resistance (see Figure 4 d)).

It is necessary to measure the resistance of the reference conductor on each occasion that the connector resistance measurement is made. All measured resistance values of the reference conductor (corrected by temperature) shall be stable throughout the complete test to show that the equalizers are stable in principle. For the determination of the parameter k (see Annex E) it is essential that during resistance measurement, the reference conductor and all connectors are in the range of ambient temperature such as defined in 6.2.2.

Annex C

(informative)

Recommendations to decrease uncertainties of measurement

C.1 Handling the test loop

Bending or vibrations during transport and handling may give rise to mechanical forces, which affect the contact resistance of the test objects and should be avoided.

The same potential measuring positions should be used throughout the test, they should be clearly marked since calculation always refers to the initial situation. Verification of measuring positions, especially after the short-circuit test, is advised.

C.2 Measurements, instruments and readings

For stranded conductors, the distances between any equalizer in the test set-up where no connectors are installed may be used for verification of resistance measurements.

All recorded values should show that the equalizers have acceptable stability throughout the test.

Check the validity of calibration or make a calibration of each instrument prior to the test. If possible, calibrate the whole measuring chain.

For measuring the current, a calibrated shunt may be introduced into the test loop.

If possible, use the same instrument for voltage (ΔU_{DC}), current (ΔU_{DC} of a shunt) and temperature (ΔU_{DC} of thermocouple-voltage output) measurement.

A calibrated resistance with a value in the same order as the readings may be used for the calibration of the voltage measurement or a direct measurement of the resistance. A check should be made before, during and after the test.

It is recommended:

- to use the same instruments throughout the whole test;
- to avoid, whenever possible, the replacement of any instrument, since the change in the systematic uncertainty may influence the assessment of the measuring results;
- to use automatic storage of the measured values to avoid copy errors;
- to use a validated computer programme for the calculation to avoid errors by accident.

When calculating the k value, it is possible to use the measured resistance values of the reference conductor and the connectors without any temperature correction, provided that the resistance of the reference conductor does not change during the test and the temperatures of all parts of the test loop are the same and in stable conditions when resistance measurements are made.

Every effort should be made to avoid spurious readings.

Annex D (normative)

Calculation of adiabatic short-circuit current

The general form of the adiabatic temperature rise formula which is applicable to any initial temperature is:

$$I_{AD}^2 t = K^2 S^2 \ln \left(\frac{\theta_f + \beta}{\theta_i + \beta} \right)$$

where:

- I_{AD} is the short-circuit current (RMS over duration) calculated on an adiabatic basis (A)
- t is the duration of short-circuit (s)
- K is the constant depending on the conductor material ($\text{As}^{1/2}/\text{mm}^2$) see Table D.1 below for normative values of K
- S is the actual cross-sectional area of the conductor (mm^2) see below
- θ_f is the final temperature ($^{\circ}\text{C}$)
- θ_i is the initial temperature ($^{\circ}\text{C}$)
- β is the reciprocal of temperature coefficient of resistance of the conductor at 0°C (K) see Table D.1 below for normative values of β
- $\ln$ is $\log_e$

Table D.1 – Material properties

Material	K ($\text{As}^{1/2}/\text{mm}^2$)	β (K)
Copper	226	234,5
Aluminium	148	228


Although it is not required to measure the final temperature of a conductor during the short-circuit test, experience has shown that the actual final temperature for some conductor sizes is significantly higher when applying this calculation by using the nominal cross-sectional area. Therefore it is recommended to determine the actual cross-sectional area (S) to prevent over-heating. In this case, the preferred method is to weigh a fixed length of conductor and calculate the actual cross-sectional area (S) using the material density. The fixed length of conductor should not be lower than the reference length (l_r) used in the electrical ageing test or 1 000 mm, whichever is the greater.

Annex D is based on Clause 3 and Table I of IEC 60949:1988 and IEC 60949:1988/AMD1:2008 wherein the complete calculation method can be found. This method shall be used for alloys.

Annex E (informative)

Determination of the value of the short-circuit current

In the case where there is no constant symmetrical RMS value during the short-time current, the equivalent RMS value can be determined from an oscillogram, using the method described below (see Figure F.1).

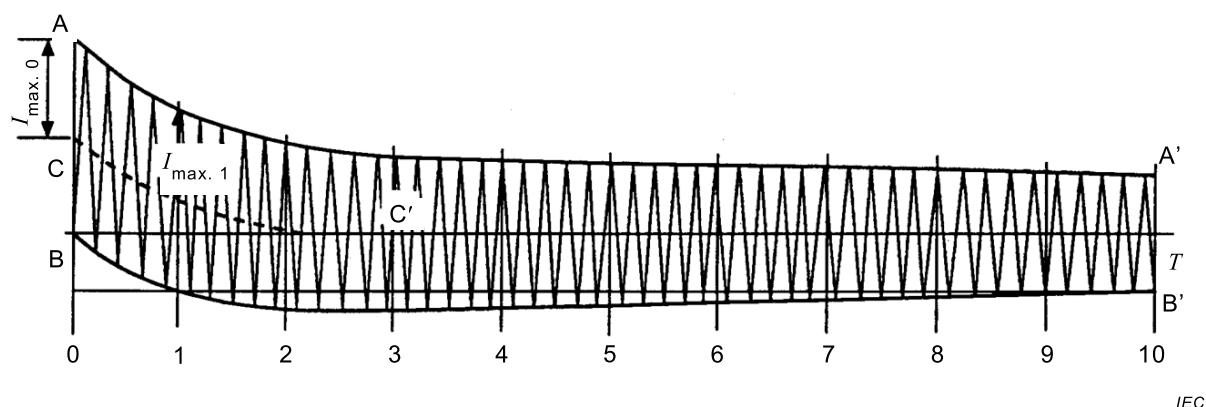

Key

AA' and BB'	Envelopes of current waves
CC'	Displacement of current-wave zero line from normal zero line at any instant
$I_0 \dots I_i$	RMS value of the AC component of current at any instant calculated from normal zero: DC component (CC') is neglected
$I_{\max 0}$	Peak value of the AC component of current at the instant of initiating short circuit
BT	Duration of short circuit

**Figure E.1 – Determination of equivalent RMS value
of current during the short-circuit test**

The total time BT of the test is divided into 10 equal parts by verticals 0 to 1...10 and the peak value of the AC component of the current is measured at these verticals.

These values are designated: $I_{\max 0}, I_{\max 1}, I_{\max 2}, \dots, I_{\max 10}$.

The effective values are then: $I_i = I_{\max i} / \sqrt{2}$

The equivalent RMS current during the time BT is given by:

$$I_{\text{RMS}} = \sqrt{\frac{1}{30} \left[I_0^2 + 4(I_1^2 + I_3^2 + I_5^2 + I_7^2 + I_9^2) + 2(I_2^2 + I_4^2 + I_6^2 + I_8^2) + I_{10}^2 \right]}$$

NOTE Annex E is consistent with Annex G of IEC 62475:2010.

Annex F (normative)

Calculation method

F.1 General

This statistical evaluation shall follow IEC 60493-1.

F.2 Measurements made

To the cycles listed in Table 2, the following measurements with the test loop at ambient temperature shall be taken (see 6.2 and Annex B):

U potential difference between measurement positions spanning each connector;

I direct current at the moment of measuring U ;

θ temperature of each connector at the moment of measuring U ;

U_r potential difference between measurement positions on the reference conductor;

I_r direct current at the moment of measuring U_r ;

θ_R temperature of the reference conductor at the moment of measuring U_r .

The above is the recommended method. Direct measurements of resistance R and R_r may, alternatively, be used for any of the above U/I values.

In addition, temperature measurements θ on each connector and θ_R on the reference conductor during heat cycling on the cycle prior to, or following the resistance measurements shall be recorded.

Distances l_a , l_b , l_j , l_r defined in Figure 4, are measured and are applicable for the whole test. The distances shall be measured with a tolerance of ± 2 mm for lengths ≥ 40 mm, or ± 5 % for lengths < 40 mm.

F.3 Connector resistance factor k

The resistance, referred to 20 °C, between measuring positions spanning a connector is as follows:

$$R = \frac{U}{I} \times \frac{1}{1 + \alpha(\theta - 20)}$$

where the temperature coefficient of resistance α , for the purposes of this document, is regarded as equal for copper and aluminium:

$$\alpha = 0,004 \text{ K}^{-1}$$

The resistance of the reference conductor, referred to 20 °C, is as follows:

$$R_r = \frac{U_r}{I_r} \times \frac{1}{1 + \alpha(\theta_r - 20)}$$

The connector resistance R_j is then:

$$R_j = R - R_r \times \frac{(l_a + l_b)}{l_r}$$

and the connector resistance factor k :

$$k = \frac{R_j}{R_r} \times \frac{l_r}{l_j} \quad (\text{F.1})$$

F.4 Initial scatter δ

The scatter between the six values of k_0 (one value for each connector) at cycle no. zero is calculated as follows:

Calculate the mean value:

$$\bar{K}_0 = \frac{1}{6} \sum_1^6 k_0$$

then the standard deviation:

$$s_0 = \sqrt{\frac{1}{5} \sum_1^6 (k_0 - \bar{K}_0)^2}$$

and finally the scatter:

$$\delta = \frac{1}{\sqrt{6}} \frac{s_0}{\bar{K}_0} t_s$$

where

t_s is the Student coefficient;


$t_s = t_{5;0,995} = 4,032$ for 99 % two-sided confidence level and five degrees of freedom;

hence:

$$\delta = 1,65 \frac{s_0}{\bar{K}_0} \quad (\text{F.2})$$

F.5 Mean scatter β

This scatter shall be determined using the last 11 measurement readings of resistance. These 11 readings start at the 250th cycle point, and then every 75 cycles up to 1000 cycles. A tolerance of ± 10 cycles is permitted on the timing of any reading, and in this case, the statistical formulae listed in this document are applicable. Outside this tolerance, a detailed statistical treatment is necessary. For convenience of calculation, the origin is transferred to the mid-point of the 11 readings and the statistical variable x is introduced (see Figure F.1). The symbol x has the values $0, \pm 1, \pm 2, \dots, \pm 5$.

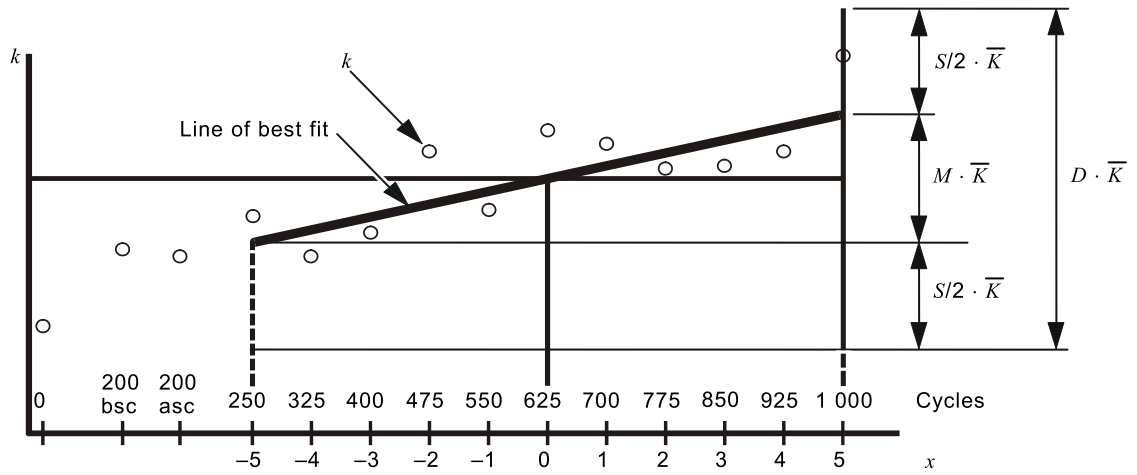

IEC

Key

bsc = before short-circuit test

asc = after short-circuit test

Figure F.1 – Graphic example of assessment of a Class A individual connector

For each connector, its mean value over the interval $x = -5$ to $+5$ shall be calculated.

$$\bar{k} = \frac{1}{11} \sum_{-5}^{+5} k \quad (\text{F.3})$$

Hence six values are obtained. The mean of these six values is then:

$$\bar{K} = \frac{1}{6} \sum_1^6 \bar{k}$$

The standard deviation:

$$s = \sqrt{\frac{1}{5} \sum_1^6 (\bar{k} - \bar{K})^2}$$

and the scatter:

$$\beta = \frac{1}{\sqrt{6}} \frac{s}{\bar{K}} t_s$$

where $t_s = 4,032$ as before.

Hence:

$$\beta = 1,65 \frac{s}{\bar{K}} \quad (\text{F.4})$$

F.6 Change in resistance factor of each connector

F.6.1 General

To calculate the possible variation in the resistance factor of a connector over the last 11 measurement readings, the method of least squares shall be used to determine the line of best fit. To the change in resistance factor of this line is added a quantity, the magnitude of which depends upon the confidence interval of scatter of resistance factor values about the line of best fit.

F.6.2 Line of best fit

The slope of the line of best fit over the range $x = -5$ to $+5$ is given by:

$$b = \frac{\sum_{-5}^{+5} x k}{\sum_{-5}^{+5} x^2}$$

Hence, the per-unit change in resistance factor is:

$$M = 10 \frac{b}{k} \quad (\text{F.5})$$

where $\bar{k}$ has the value given by Equation (F.3).

The parameter M is evaluated for each of the six connectors.

F.6.3 Confidence interval δ_i

The confidence interval δ_i for the change in resistance factor is:

$$\delta_i = t_s \sigma$$

where

t_s is the Student coefficient;

$t_s = t_{9;0,95} = 1,833$ for a 90 % two-sided confidence level and $(11 - 2) = 9$ degrees of freedom;

σ is the standard error estimated from the line of best fit at $x = +5$ or $x = -5$.

It can be shown that σ , for 11 measurements, is:

$$\sigma = 0,564 \times \sqrt{\sum_{-5}^{+5} \frac{(k - \bar{k} - b \cdot x)^2}{9}}$$

$$\sigma = 0,564 \times s_j$$

The expression under the root sign is the standard deviation of the connector from the line of best fit. We define this value s_j since it relates to an individual connector and it should not therefore be confused with the standard deviation of the six connectors, s , calculated at the mean measurement position $x = 0$ and used for determining the scatter β .

It should be noted that the above expression for s_j can also be determined by simplifying to:

$$s_j = \frac{1}{3} \sqrt{11 \left[(\bar{k}^2) - (\bar{k})^2 \right] - 110 b^2}$$

where $\bar{k}$ has the value given in Equation (F.3)

and

$$(\bar{k}^2) = \frac{1}{11} \sum_{-5}^{+5} k^2$$

The total per-unit deviation from the line of best fit is then:

$$S = \frac{2 \cdot t_s \cdot \sigma}{\bar{k}} = \frac{2 \cdot 1,833 \cdot 0,564 \cdot s_j}{\bar{k}} = \frac{2,07 \cdot s_j}{\bar{k}}$$

The parameter S is evaluated for each of the six connectors.

F.6.4 Change in resistance factor D

From F.5.1 and F.5.2, the estimated change in the value of k for each connector over the last 11 measurements is

$$D = |M| + S = \frac{|10b|}{\bar{k}} + \frac{2,07 s_j}{\bar{k}} \quad (\text{F.6})$$

F.7 Resistance factor ratio λ

$$\lambda = \frac{k}{k_0}$$

where:

k is the connector resistance factor for each connector found at any stage of the measurement series;

k_0 is the connector resistance factor of the same connector measured at cycle no. zero.

F.8 Maximum temperatures $\theta_{\max}$

For each connector, the value of $\theta_{\max}$ shall be recorded. This is the maximum value of the connector temperature reached during any stage of the heat cycling test. Simultaneously, the value of θ_{ref} shall also be recorded.

Annex G

(informative)

Explanation on assessment of results of electrical tests on connectors

G.1 History

The wide divergence between different national test methods for electrical connectors made it difficult for the user to compare, evaluate and accept results from tests according to different standards. When introducing new products, it was sometimes necessary for the manufacturers to present test reports according to all relevant standards. To overcome these problems, a decision was made to establish a working group to develop an internationally accepted standard with a well defined testing procedure and an assessment that was reproducible. The result of this work, IEC 61238-1, was presented in 1993.

The various testing standards considered during the preparation of IEC 61238-1 were based on temperature cycles and most of them included the application of short-circuit currents. The requirements and acceptance criteria were for the resistances to be stable. Different methods were used to define the stability during the short period of testing.

The statistical method of assessing test results described in this document is mainly based on a compromise between the Italian standard CEI 20-28 and the British standard BS 4579-3. Early in the discussions it was agreed to adopt a statistical method of evaluating the trend of electrical resistances instead of the more traditional deterministic methods. Several tests were carried out to find the similarities and differences between the two standards. The aim was to find a method of statistical assessment that would be relevant for a test with 1 000 heat cycles. The Italian standard requires 1 500 cycles with resistance measurements every 60 cycles during the last 600 cycles and six short-circuit current tests after 500 cycles, while the British standard requires 2 000 cycles with resistance measurements every 100 cycles and three short-circuit current tests prior to heat cycling.

G.2 Short examination of the assessment methods of IEC 61238-1 compared with the Italian standard CEI 20-28 and the British standard BS 4579-3

The different statistical evaluations should be viewed as a part of the complete assessment procedure. All three standards require six identical specimens to be installed in a test loop and 11 resistance measurements constitute the basis for the statistical assessment. It should be noted that the formula symbols in each standard may have different meanings. Table G.1 lists the various connector characteristics examined for IEC 61238-1.

The main difference between the Italian and the British regression analysis is that the former, except for temperature requirements, assesses the six specimens as a group whereas in the British standard each specimen is assessed individually.

The individual regression analysis, which is incorporated in BS 4579-3 and also adopted in IEC 61238-1, is essential to provide adequate sensitivity to the change of resistance for a single sample. The analysis looks at the scatter of measurements about the line of best fit. However, the method is sensitive to anomalous readings, which may be a merit of the test as it can detect the onset of deterioration. The possibility that incorrect readings may affect the analysis should also be considered.

Group regression analysis as specified in the Italian standard CEI 20-28 is a sensitive indicator of scatter and has the advantage of taking into account all 66 measurements. The method responds to differences between samples and to the change of resistance for particular samples. However, the method is less sensitive to the instability of a single specimen.

This formula in IEC 61238-1 for mean scatter is a group regression analysis based on the standard deviation between the mean of the six groups of specimen values averaged over 11 measurements. The Italian regression method is based on the calculation of mean values of the six specimens obtained for each of the 11 measurements.

The group regression analysis is a verification of whether or not the tested connectors belong to the same family.

G.3 The IEC 61238-1 method of assessing test results

It was considered advantageous to introduce the “relative resistance” k so that the analysis would be independent of the absolute value of connector resistance. k is the relationship between the resistance of a connector and an equivalent length of the conductor. The adoption of k is also expected to give improved measurement reproducibility.

Other parameters that shall be calculated include:

- the initial scatter δ between the initial six values of k_0 before heat cycling;
- the mean scatter β between the six values of k averaged over the last 11 measurements. The assessment verifies that the connectors behave in the same way and that they belong to the same “family”;
- the change in resistance factor D , which shows the change of the resistance factor k for each connector over the last 11 measurements. Statistical methods are used to assess the probability that the change of resistance will not exceed the specified value;
- the resistance factor ratio λ , which shows the relationship between the resistance at any stage of the measurements and the initial resistance;
- the maximum temperature $\theta_{\max}$ of the test objects.

The selection of assessment criteria and values was made after evaluating test results and experience from different laboratories and countries.

At an early stage during the development of IEC 61238-1, k itself was included as one of the acceptance criteria together with the change in k due to the short-circuit test. To reduce the number of acceptance criteria, a decision was taken to exclude these parameters.

Table G.1 – Summary of assessed behaviour of a tested connector

General requirements Type tested connector shall show the same behaviour regarding the following aspects:	Assessment in IEC 61238-1 Related test parameter and limit values covering the general requirement:
1 All tested connectors of a specific design shall be similar in resistance after installation.	The initial scatter δ between the six values of k_0 before heat cycling shall not exceed the value 0,30 as given in Table 3.
2 The resistances of each tested connector shall remain stable during the entire electrical test, including the short circuit test.	The resistance factor ratio λ of each tested connector shall not exceed 2,0 as given in Table 3.
3 The resistance of each tested connector shall not rise excessively during the last 750 heat cycles and all connectors shall show similar behaviour.	The mean scatter β shall not exceed the value 0,30 and the change in resistance factor D shall not exceed 0,15 as given in Table 3.
4 The connectors shall never overheat during any phase of the electrical test.	For each specimen the temperature of the connector during current-heating shall not exceed that of the reference conductor when measured as given in Table 3.
5 If applicable, the connector shall withstand a specified pull-out force related to conductor size and conductor material to guarantee the required basic mechanical tensile strengths occurring in service.	Mechanical tensile strength for all connectors except of Class 0: no slipping shall occur at the entrance of installed connectors after applying the related mechanical tensile force given in Table 4.

NOTE Electrical and mechanical tests of connectors are performed with separate samples in this type test which is sufficient to cover cable applications described in Clause 1. Other combined mechanical and electrical tests performed on the same samples are under consideration for special applications for example to verify the aptitude of a connector design to handle possible displacements in cable installations.

Annex H (informative)

Electrical tests on cable terminal lugs for application in separable connectors

H.1 Principle

The aim of this test proposal is to test the interface between palm of terminal lugs and pin contacts which are parts in separable connectors.

Separable connectors are fully insulated terminations permitting the connection and the disconnection of MV-cables to other equipment.

Plug-in type separable connectors use sliding contacts, however they are outside the scope of this document.

The cable terminal lug and contact pin together with its installation procedure, using specified fastening means and method, are integral parts of the electrical contact design of the separable connector.

To eliminate the effects of the sliding contact, it is removed and replaced by a linking pin (see Figure H.1).

The linking pin is:

- manufactured in the same way using the same material, shape and surface treatment as the pin at the interface to the palm, assembled with the same tool and nominal torque value as given in the instruction manual,
- bolted on a linking copper bar having an electrical cross-sectional area equivalent to the conductor cross-sectional area. Bolts and torque values may be mentioned in the test report.

H.2 Lengths

According to this test proposal, the lengths between two tested samples are similar to d as in Figure 2 c) valid for terminal lugs.

As per Figure H.1 this length is divided up as follows:

- $d/2$ for the linking bar,
- $d/4$ for each linking pin and ≥ 300 mm.

H.3 Temperature measurement

The temperature measurement positions should be:

- in the middle of the barrel,
- in the middle of the largest part (shoulder) of the pin,
- in the middle of the linking pin,
- in the middle of the linking bar.

Concerning the linking bars, the last two sentences in 6.3.2 a) should be used.

H.4 Median connector

The median connector is selected according to 6.3.2 due to the measured temperatures of each terminal lug barrel.


H.5 Electrical test parameters

The pin contact lugs should be tested and assessed similarly to terminal lugs with six barrels and six palms.

The barrel of the lugs is tested according to Figure 4 e).

The contact between palm and pin is tested:

- according to Figure 4 f), with l_j (l_{jb} on Figure H.1) = length of palm + length of pin contact shoulder (if any) + length of pin contact. Lengths should be measured following the median line of the current,
- with the linking pin as reference conductor.

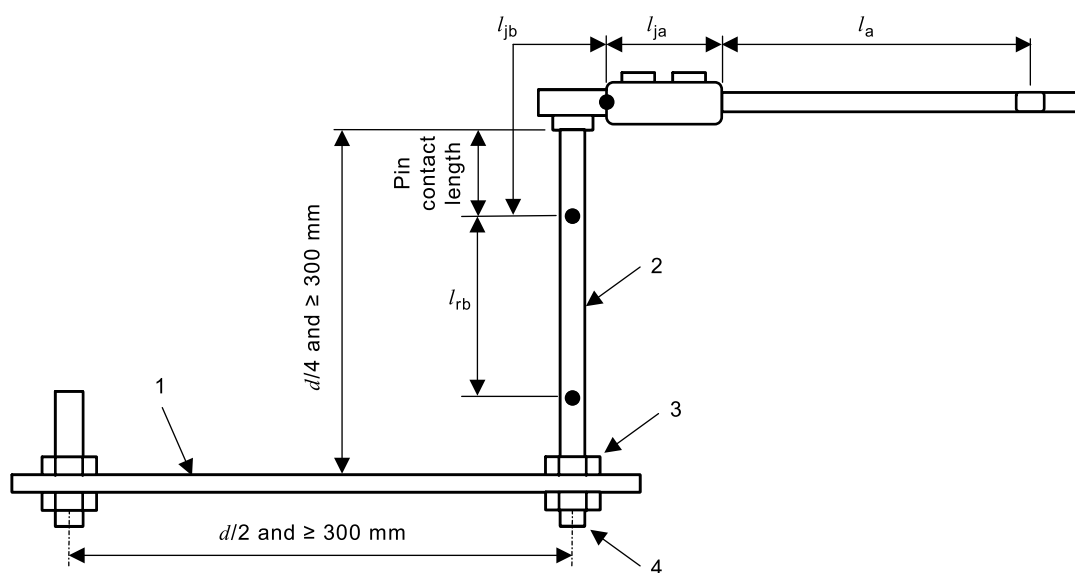

IEC

where:

$d \geq 80 \sqrt{A}$ or 500 mm, whichever is the greater

A is the conductor cross-sectional area, in mm²

$l_{rb} = 15 \sqrt{A}$ or 150 mm, whichever is the greater

For stranded conductors:

$l_a \approx 15 \sqrt{A}$ or 150 mm, whichever is the greater

Key

- | | |
|---|--|
| 1 | linking copper bar |
| 2 | linking pin |
| 3 | bolted assembly, designed to avoid thermal effect on connection |
| 4 | end of the linking pin, manufactured to bolt the pin at the required installation torque |

Figure H.1 – Test arrangement

Bibliography

IEC 61238-1, *Compression and mechanical connectors for power cables for rated voltages up to 30 kV ($U_m = 36$ kV) – Part 1: Test methods and requirements*

IEC 61238-1-1, *Compression and mechanical connectors for power cables – Part 1-1: Test methods and requirements for compression and mechanical connectors for power cables for rated voltages up to 1 kV ($U_m = 1,2$ kV) tested on non-insulated conductors*¹

IEC 61238-1-2, *Compression and mechanical connectors for power cables – Part 1-2: Test methods and requirements for insulation piercing connectors for power cables for rated voltages up to 1 kV ($U_m = 1,2$ kV) tested on insulated conductors*²

IEC 62475:2010, *High-current test techniques – Definitions and requirements for test currents and measuring systems*

CEI 20-28:1998, *Connettori per cavi d'energia*³

BS 4579-3:1976, *Specification for the performance of mechanical and compression joints in electric cable and wire connectors. Mechanical and compression joints in aluminium conductors*⁴

¹ Under preparation. Stage at the time of publication IEC RFDIS 61238-1-1:2018.

² Under preparation. Stage at the time of publication IEC RFDIS 61238-1-2:2018.

³ Withdrawn.

⁴ Withdrawn.

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

3, rue de Varembé
PO Box 131
CH-1211 Geneva 20
Switzerland

Tel: + 41 22 919 02 11
Fax: + 41 22 919 03 00
info@iec.ch
www.iec.ch