




Voltage regulator

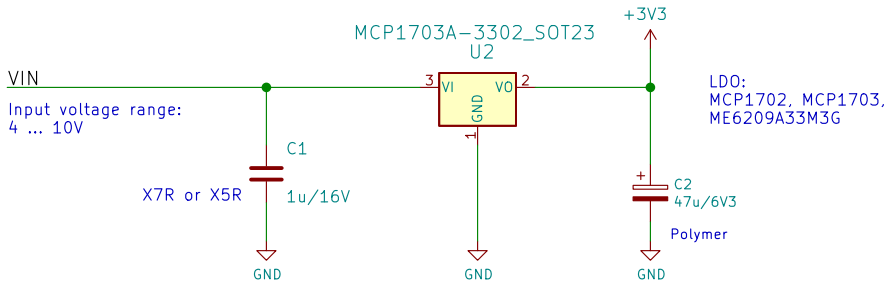

Servo/Pre-processor in/out

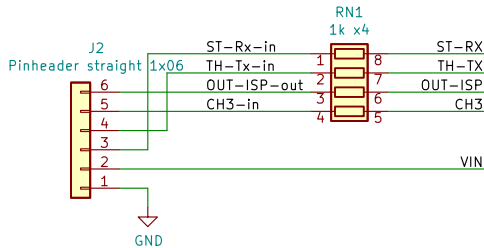


Output connector

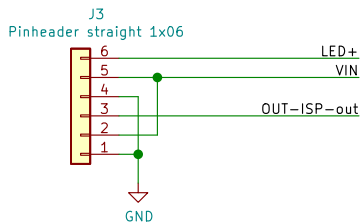

VIN1 is physically close to LED+.
This allows two modes of operation:
1) when VIN1 is connected to LED+
via a solder bridge, then the LEDs are
powered from the receiver.
2) A separate power supply can be
connected to LED+ (and the nearby GND),
e.g. for higher voltages

Microcontroller

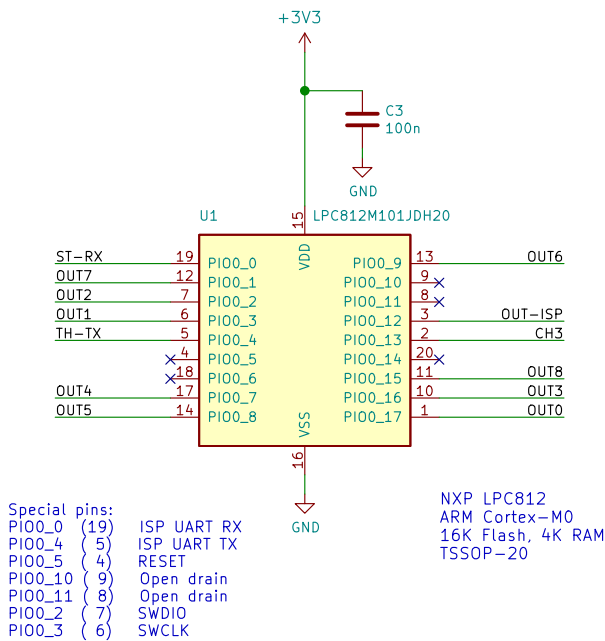

LED driver and outputs

