


Young lock board test software is designed by ourself. It is suitable for the debugging of non-customized version of the lock control board, and can be used for the functional test of the 485 interface lock control board, the network port lock control board, and the 2G/4G lock control board and assist user development.

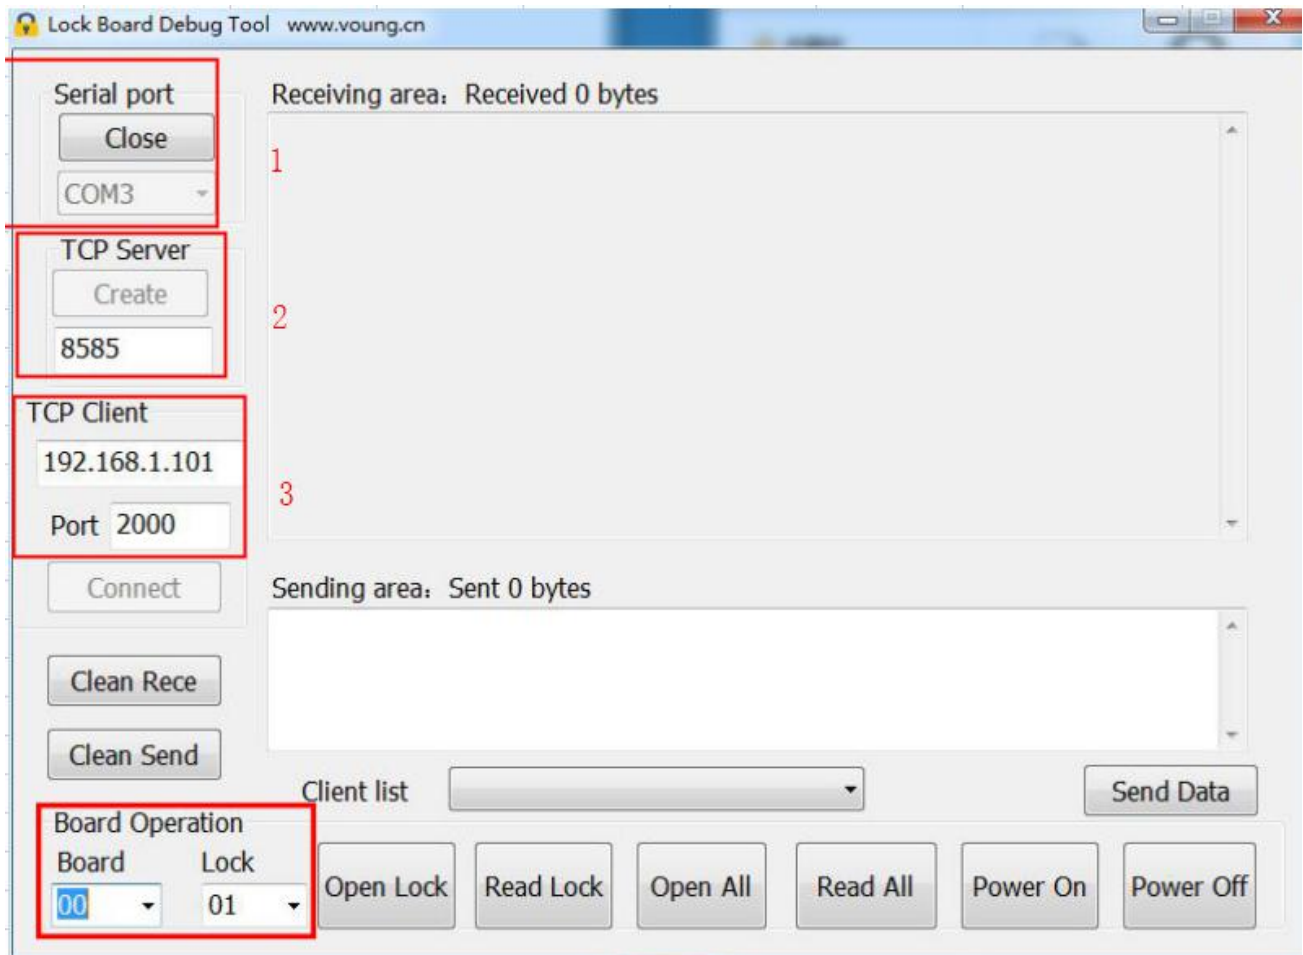


There are three communication methods of this software, namely serial port, TCP server and TCP client. Only one of them can be selected during debugging. The serial port is suitable for the company's 485 lock control board, and the TCP server is suitable for 2G/ 4G lock control board and network port lock control board, TCP client is suitable for network port lock control board.


Connection and operation instructions

for Rs485 Board - USB convertor Board -PC

Step 1. Connect electromagnetic lock and board to Computer

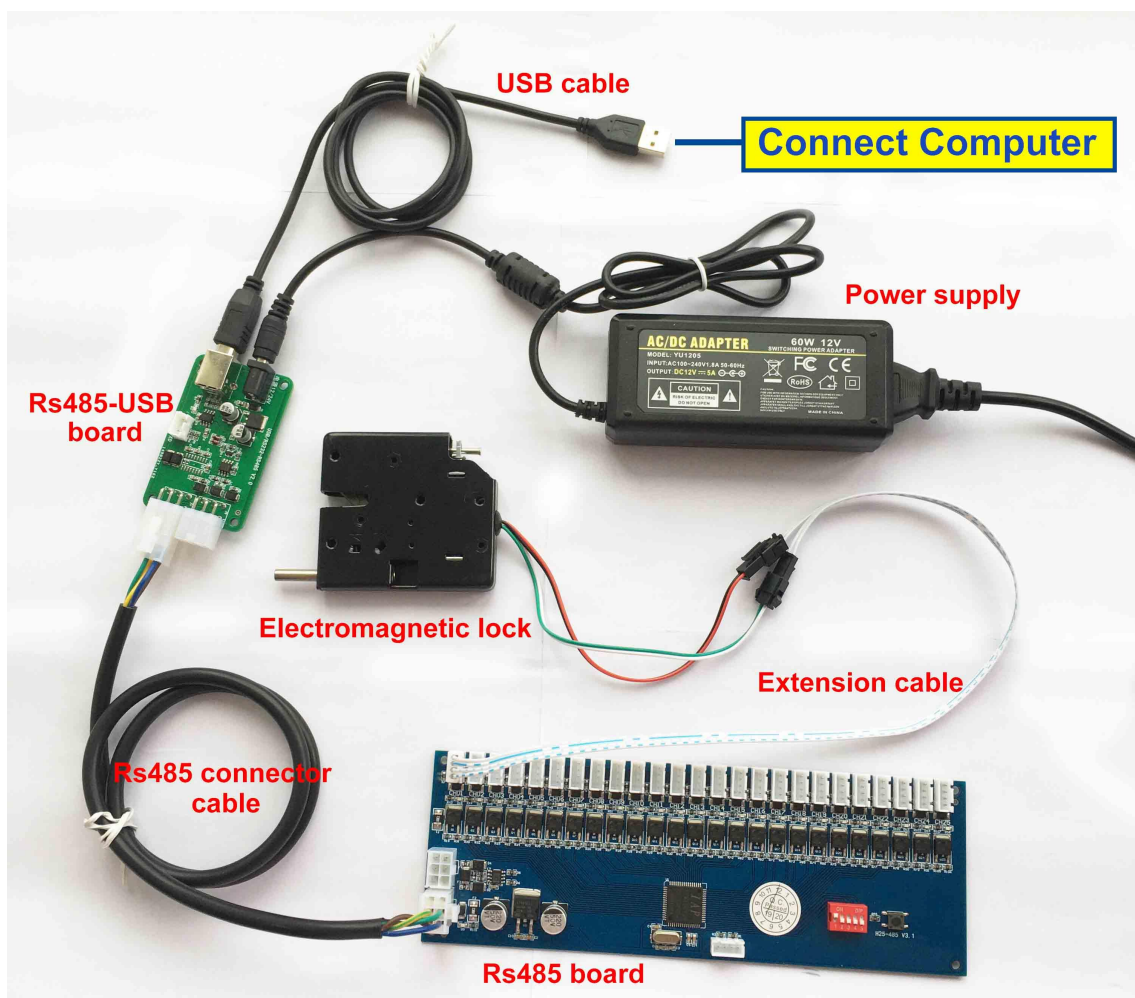



Step 2. Open the Lock board test software " Lock Board Debug Tool"



If do not have USB driver , please install this USB driver





Step 3. After Open ,click "Open" , it will be " Close"
if can not connect , please check the Step 1 connection

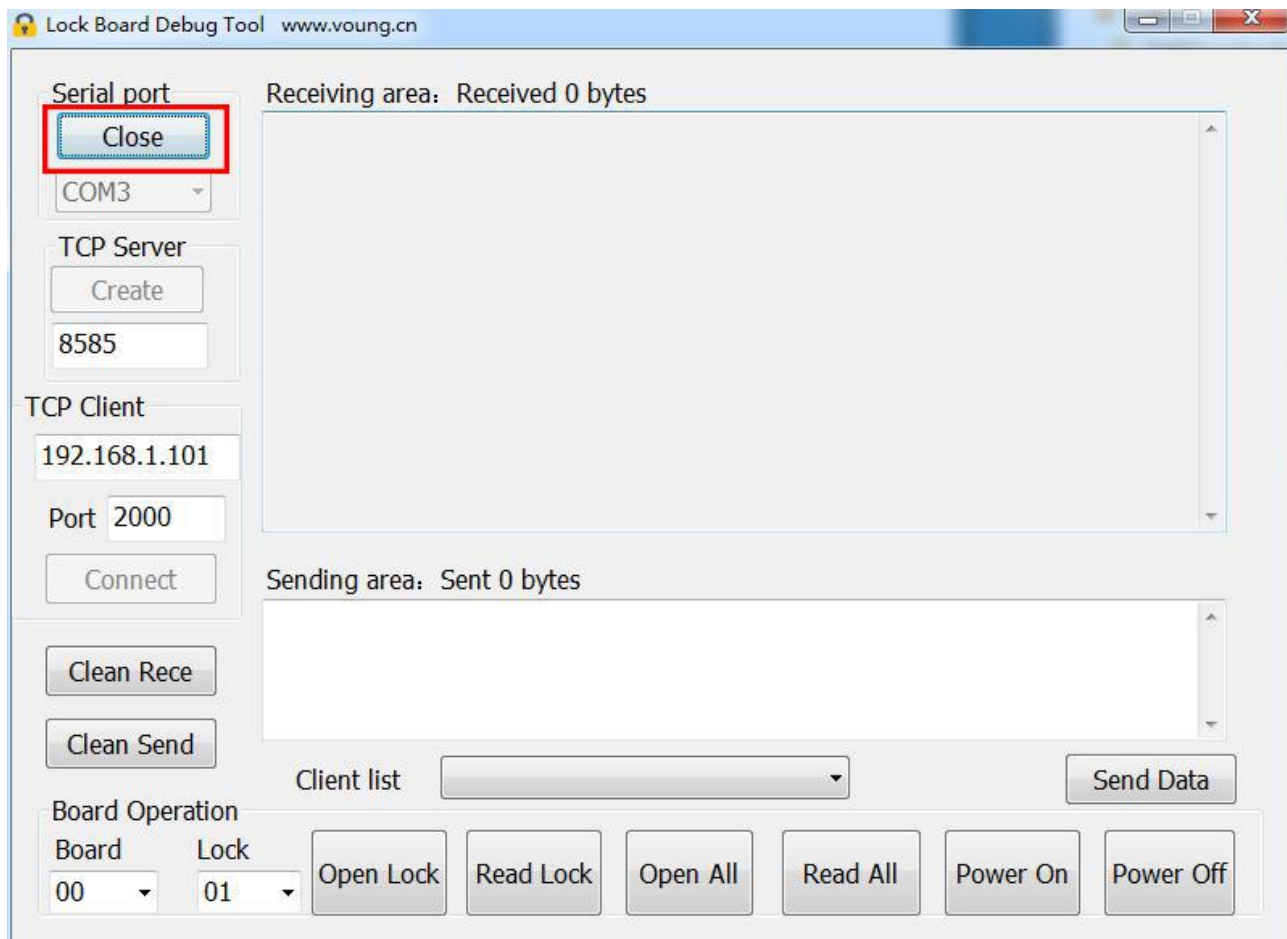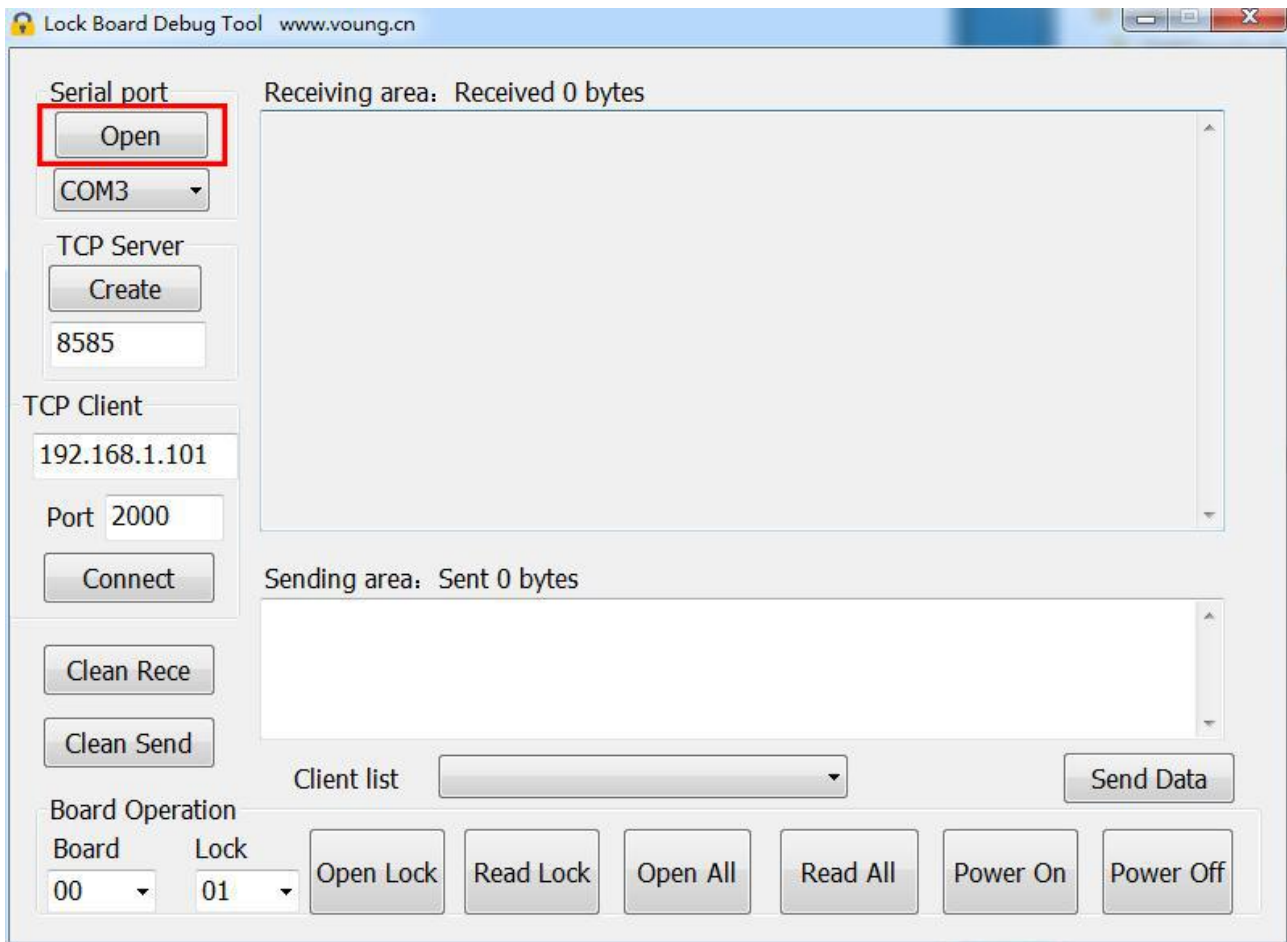


Step 4. Choose board and lock to control .

For example : choose 01 board and 01 lock , you can control the first lock on the first board

Max 32 pcs board can connect in series

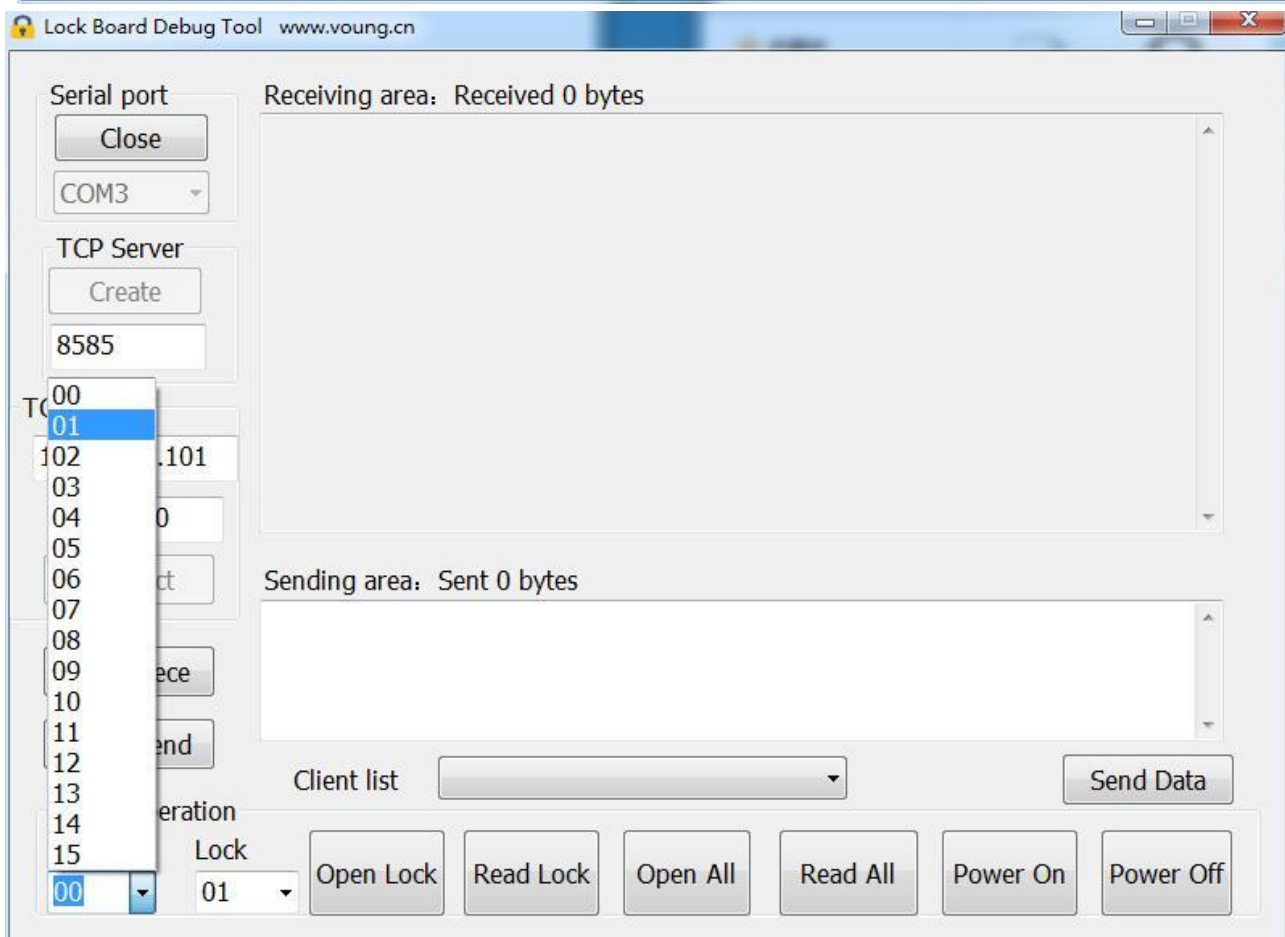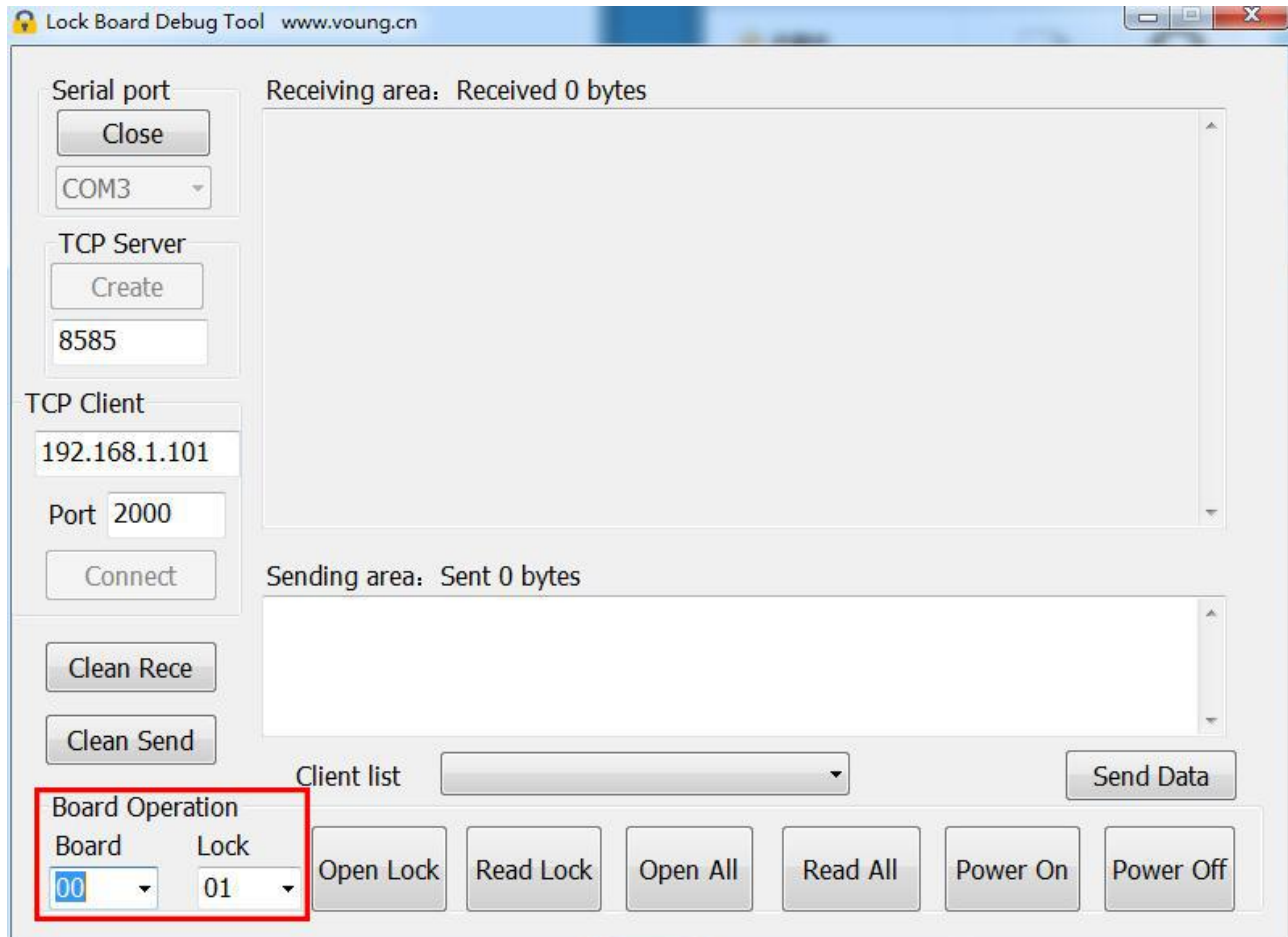

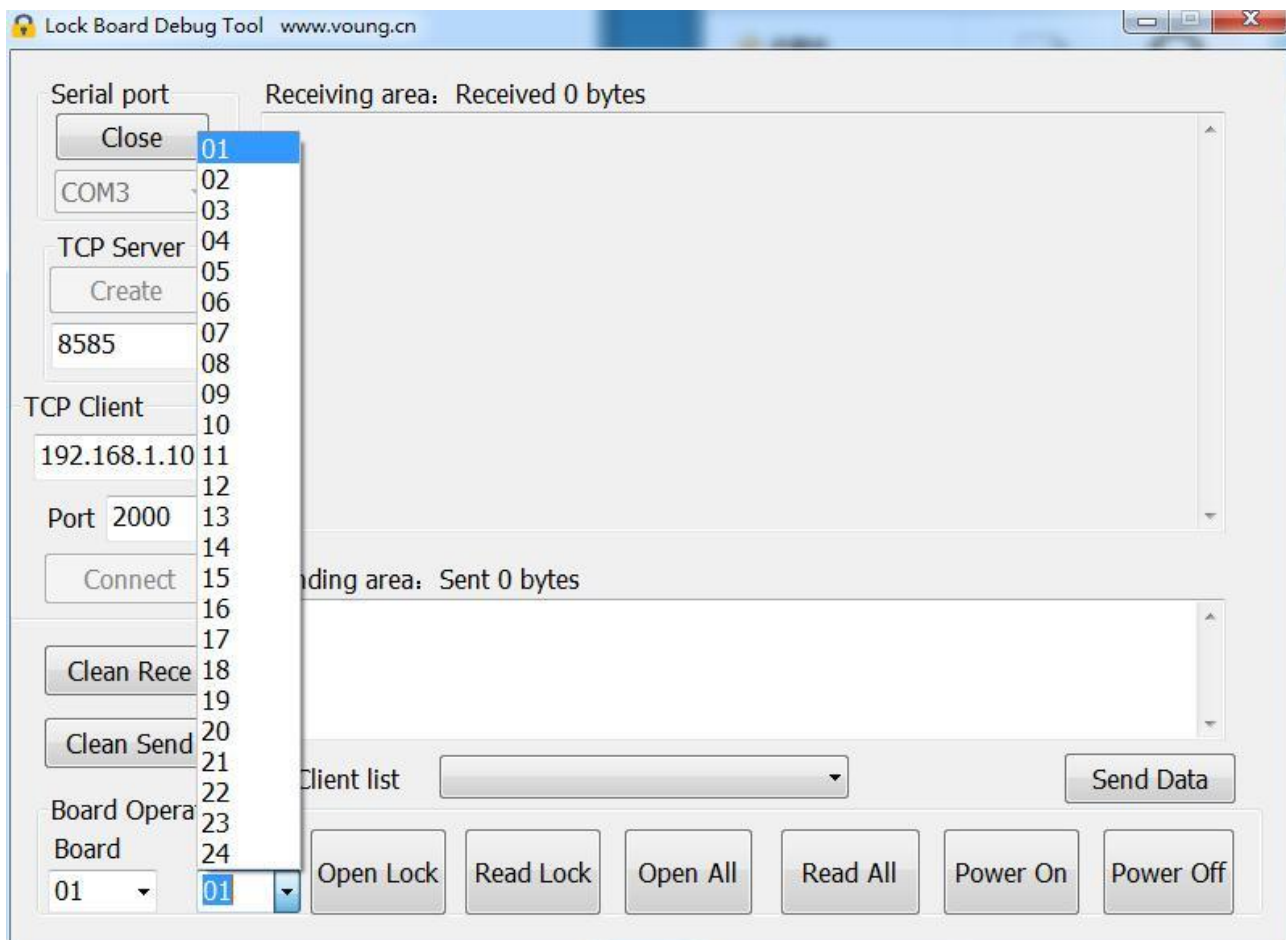

Please notice the address dial switch


If you dial 1 on , the board Add is the 01

If you dial 2 on , the board Add is the 02

If you dial 1and 2 on , the board Add is the 03

.....

for more details , please check the datasheet

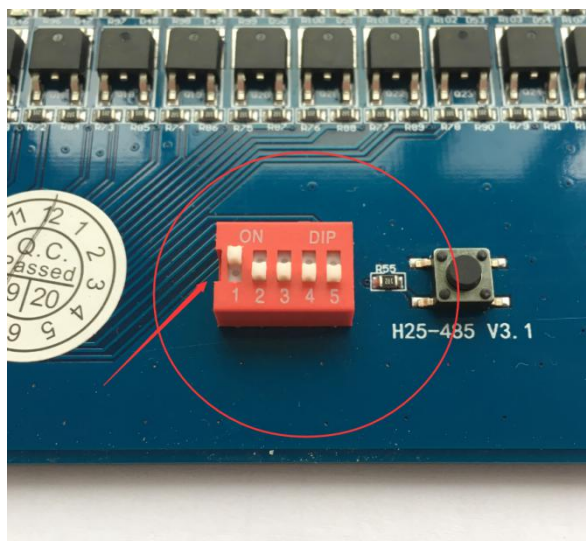

Add 1 add 2 add 3 add 4 add 5 add 6 add 7 add 8



Step 5. Control locks

Open Lock : Open the lock

Lock Board Debug Tool www.voung.cn

Serial port
Close
COM3

TCP Server
Create
8585

TCP Client
192.168.1.101
Port 2000
Connect

Clean Rece
Clean Send

Board Operation
Board 01 Lock 01

Client list

Receiving area: Received 11 bytes
Serial port received: 57 4B 4C 59 0B 01 82 00 01 00 80

Sending area: Sent 9 bytes
57 4B 4C 59 09 01 82 01 82

Send Data

Open Lock Read Lock Open All Read All Power On Power Off

Read Lock: Read the Lock status

Lock Board Debug Tool www.voung.cn

Serial port
Close
COM3

TCP Server
Create
8585

TCP Client
192.168.1.101
Port 2000
Connect

Clean Rece
Clean Send

Board Operation
Board 01 Lock 01

Client list


Receiving area: Received 22 bytes
Serial port received: 57 4B 4C 59 0B 01 82 00 01 00 80
Serial port received: 57 4B 4C 59 0B 01 83 00 01 00 81

Sending area: Sent 18 bytes
57 4B 4C 59 09 01 83 01 83


Send Data

Open Lock Read Lock Open All Read All Power On Power Off


Open All : Open all one board Locks

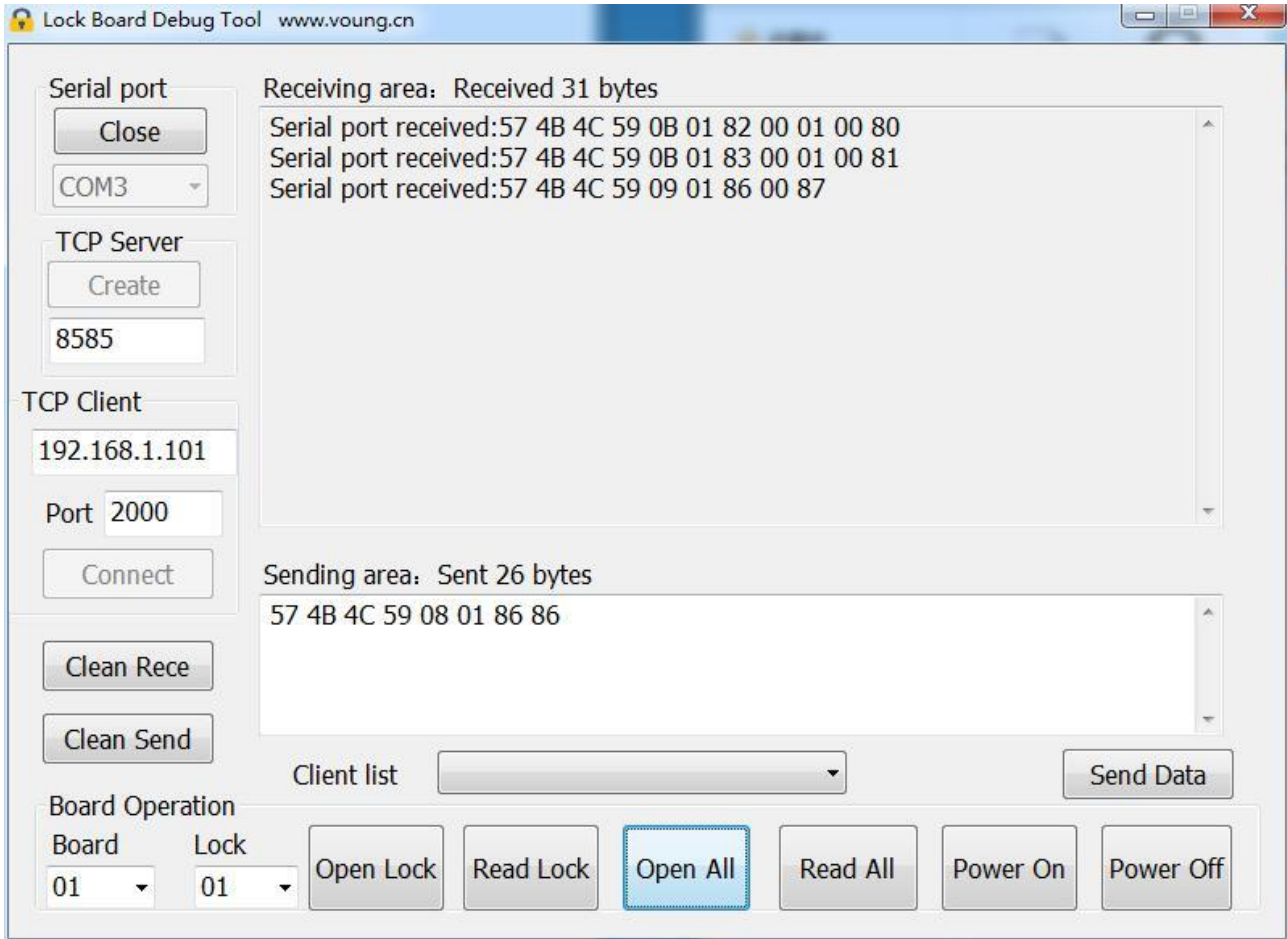

Read All : Read all one board Locks status

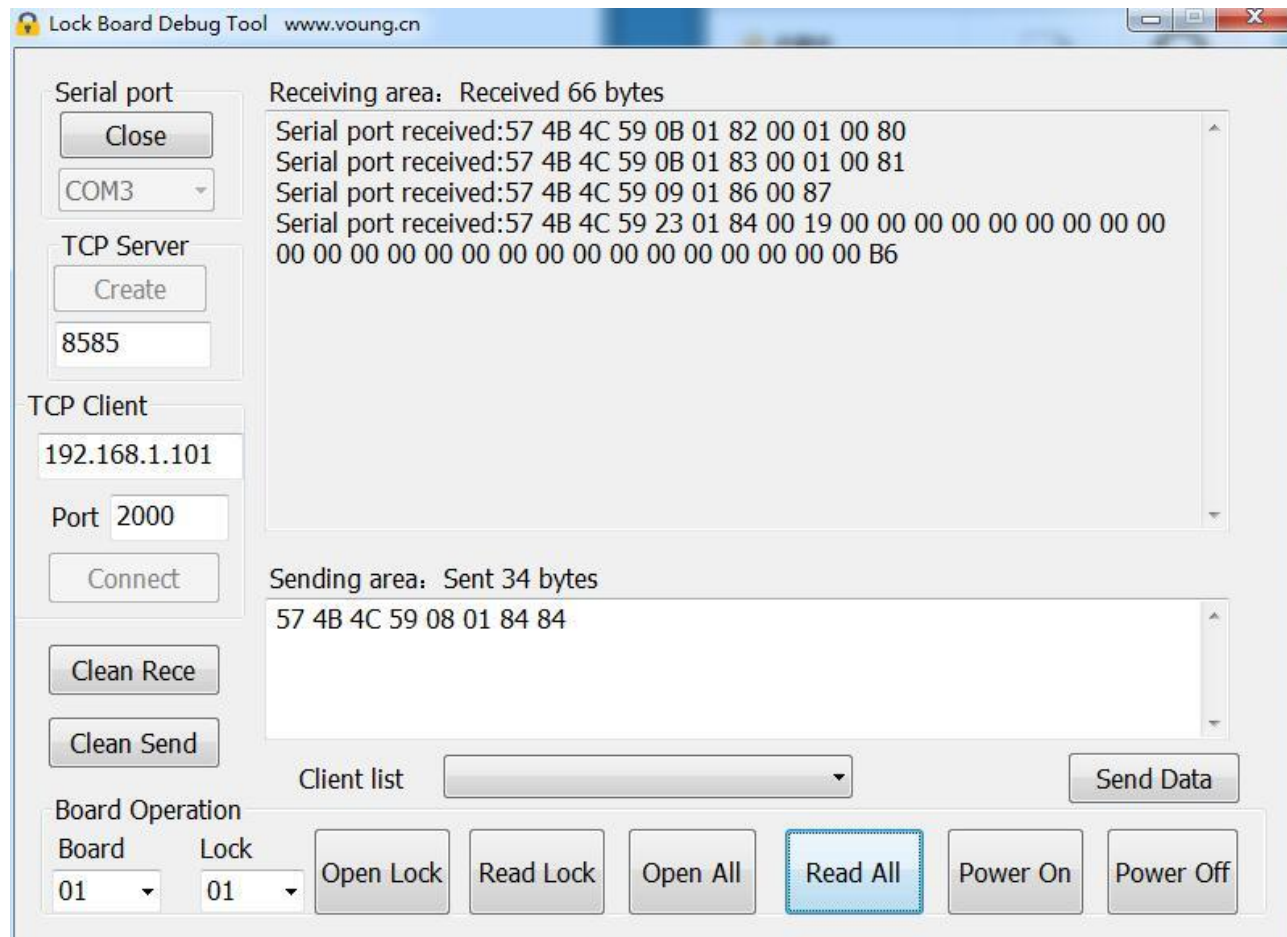

Power On : Keep power on

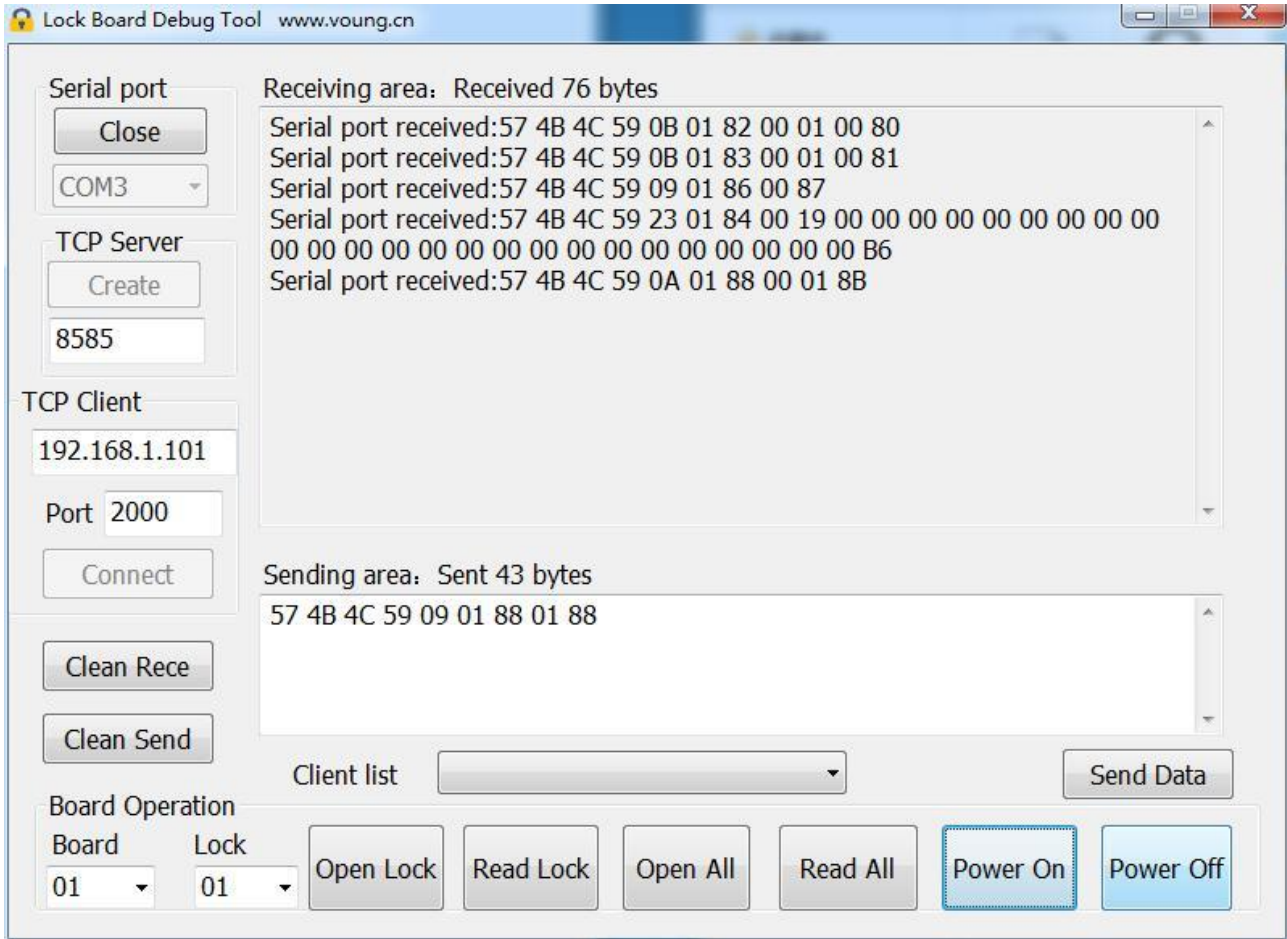

Power Off: Turn off the power

