


型号: RDF-TS6

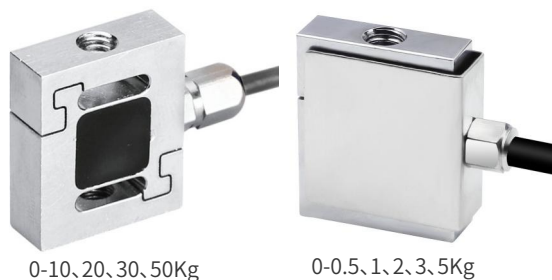


温度、防水、量程、外形可特殊定制

Temperature, waterproof, range and appearance can be specially customized

特点与应用/ Characteristics

- 传感器采用不锈钢材料梁式结构感应精度高,频响快、体积小、稳定可靠。
- 广泛应用与自动化非标设备、机器人、治具等工业自动化力控测量系统中。
- The sensor adopts a stainless steel beam structure with high sensing accuracy, fast frequency response, small size, and stable reliability.
- Widely used in industrial automation force control measurement systems such as non-standard equipment, robots, and fixtures.

安装&尺寸/Mounting dimensions

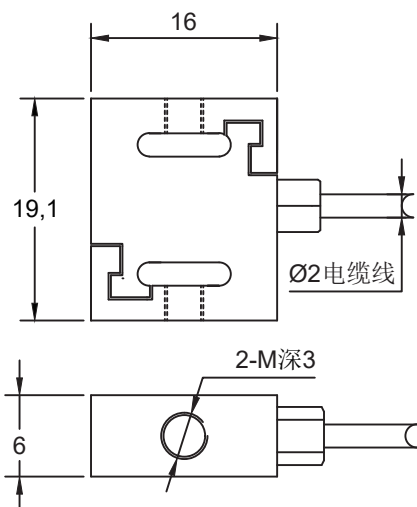


量程(Kg)	M
0-0.5、1、2、3	M3
0-5、10、20、30、50	M4


● 受力方式/Force mode

两个M或端面为受力位置,轴向拉压测量

Two M or end faces are the stress positions, and axial tension and compression measurements are taken



● 接线方式/Wiring method

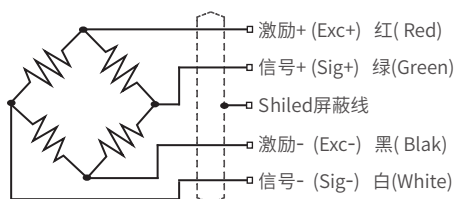

● 选型说明/Measurement method

如测量的范围是0-10kg, 型号为: RDF-TS6-10kg

技术参数/ Technical parameter

量程 Capacity	0.5/1/2/5/10/20/50Kg	激励电压 Recommended excitation	5-12V
信号输出 output	mV	最大激励电压 Maximum excitation	12V
非线性 Non-linearity	±0.05%F.S	工作温度范围 Operation temp range	-20~80°C
滞后 Hysteresis	±0.05%F.S	安全超载 Safe overload	150%F.S
重复性 Repeatability	±0.05%F.S	极限超载 Ultimate overload	200%F.S
蠕变(30min) Creep(30min)	±0.05%F.S	材料 Material	17-4PH
温度灵敏度漂移 Temp.effect on output	0.05%F.S./10°C	防护等级 IP Class	IP65
零点温度漂移 Temp.effect on zero	0.05%F.S./10°C	电缆尺寸 Cable size	Φ2×2000mm
绝缘电阻 Insulation	≥5000MΩ/100VDC		