



165° Panoramic Camera

ASK-165B-IR



Overview

This 8MP panoramic camera offers a wide-angle view with a single lens, built-in mic, and 20 FPS video. Ideal for expansive coverage, it features PoE, edge storage, and IP66 weatherproof protection for all-day surveillance.

Key Features

- 8 MP Resolution
- Single Panoramic lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Wall Mount and Ceiling Mount Options
- 20 FPS at Full Resolution
- Edge Storage Support
- Built-in Mic
- PoE Support
- IP66 Weatherproof Rating
- IR Distance up to 30 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK-165B-IR



CAMERA

Image Sensor	Sony 1/2.8" Progressive Scan CMOS Sensor Sony Starvis™ Technology
Maximum Resolution	8.0MP (3840(H)*2160(V)
Compression	H.264/H.265
Electronic Shutter Time	Auto , Manual 1/25-1/10000Sec
Minimum Illumination	0.1 – 0.2 lux @ F 1.6 (Color), 0.005 – 0.01lux @ F1.6 (B/W), 0 lux with IR On
S/N Ratio	≥52dB
WDR	≥120dB
Focus Length	1.7 mm
FOV	H:117.2°; V: 83.6°;D: 165°
Lens Type	Fixed Focal
Iris type	Fixed
DORI Distance In Meters	91.0m(Detect), 36.4m(Observe), 18.2m(Recognize), 9.1m(Identify)
Day/Night	Auto,Manual,Smart
Infrared LED	18 IRED ARRAY
Infrared Distance	30M
IR Status	Under 10 Lux By Sensor
IR Power On	Sensor Auto Control



VIDEO

Compression	H264 ,H265
FRAME RATE	
Main Stream	3840X2160@20fps , 3072X2048@25fps , 2592X1944 , 2560X1440 , 2304X1296 @30fps ,1080P , 720P @60fps
Sub Stream	1080P , 720P @25fps , 720X480 ,VGA , 640X360 , 480X360 ,CIF @ 30fps
Third Stream	352*288@30fps
BIT RATE	CBR, VBR, (16kbps-8000 kbps)
OTHER SETTINGS	BLC,HLC,White Balance, AGC,3D NR, Motion Detection,ROI,Privacy Mask,Defog



AUDIO

Input/Output	Built In
Compression	G.711 U



NETWORK

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
ONVIF	Profile S
POE	802.3af/at 48V
SD Card Slot	Yes





GENERAL

Housing	Metal ,IP66
Anti-cut Bracket	YES
Operation Temperature	-30°C ~ +65°C RH95% Max
Storage Temperature	-30°C ~ +65°C RH95% Max
Power Source	DC12V±10%, 450mA / POE
Dimension	70(W)mm×70(H)mm×192mm (L)
Weight	450g
Language	English,Russian,Arabic and Spanish
Certification	IEC-62368-1 ,CE-EMC , FCC:47 CFR FCC Part 15; Subpart B; SASO



DIMENSION

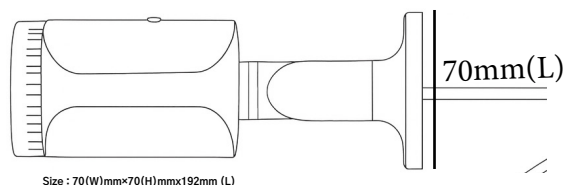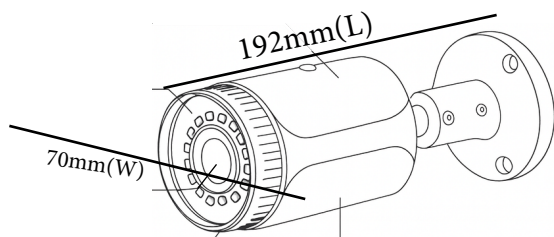

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

***Product specifications and availability are subject to change without notice.**