



Pan Tilt Zoom Camera ASK-5036SD-IR



Overview

This 5MP PTZ camera features a powerful 36X optical zoom for detailed long-range monitoring, with 30 FPS recording and edge storage. Designed for demanding environments, it includes PoE, 150m IR range, and IP66 weatherproofing.

Key Features

- 5 MP Resolution
- 36X Optical Zoom Lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Wall Mount and Ceiling Mount Options
- 30 FPS at Full Resolution
- Edge Storage Support
- PoE Support
- IP66 Weatherproof Rating
- IR Distance up to 150 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK-5036SD-IR



CAMERA

Sensor	1/2.8." 3.0 Megapixel , Progressive scan , CMOS				
Lens	4.5mm-162mm, AF automatic focusing and motorized zoom lens				
Optical Zoom	36 X				
DIGITAL ZOOM	16				
DORI Distance	LENS (mm)	DETECT (mtrs)	OBSERVE (mtrs)	RECOGNIZE (m)	IDENTIFY (m)
	4.5mm	631	25.2	12.6	6.3
	162mm	2081.8	832.7	416.4	208.2
Angle of View (H)	58.7° ~ 2.9°				
Angle of View (V)	57.4° ~ 1.9°				
Angle of View (O)	72.2° ~ 3.4°				
Shutter	Auto/Manual; shutter time: 1 ~ 1/100000s				
Minimum Illumination	Colour:0.03lux (F1.6, AGC ON) 0 lux with IR				
Iris	Auto/Manual; F1.6 ~ F5.3				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>55dB				
IR Range	UP to 150 Mtrs				
Defog	Digital Defog				
WDR	120dB				



VIDEO

Video Compression	Metal ,IP66
H.264 code profile	YES
HLC/BLC/EIS	Supported
OSD	Up to 8 OSDs
Privacy Mask	Up to 24 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication



NETWORK

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Network	1 RJ45 . 10M/100M base – TX Ethernet



PAN & TILT

Pan Speed	0~80°/s ,
Pan Range	360° (endless)
Tilt Speed	0~40°/s
Tilt Range	-15° ~ 90° (auto reverse)
Number of Presets	220pcs presets (dwell time 01-60s interval available)
Patrol	Preset patrol, route patrol, recorded patrol
Home Position	Supported



STORAGE

Edge Storage	Micro SD, up to 256 GB
--------------	------------------------




Power

POE	POE+
Power	AC 24V (Default)±25%, DC 24V±25% Power consumption: ≤25W



DIMENSION

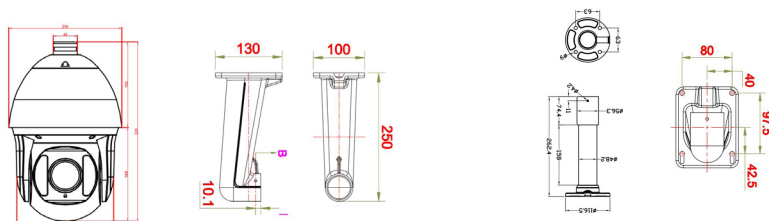

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

*Product specifications and availability are subject to change without notice.