



5 MP Bullet Camera

ASK – 5B–IR



Overview

This 5MP camera delivers smooth 30 FPS video with a 2.8mm fixed lens and built-in audio. With PoE, IP66 weatherproofing, and flexible mounting options, it's perfect for reliable day/night surveillance.

Key Features

- 5MP Resolution
- 2.8 mm Fixed Lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Wall Mount & Ceiling Mount Options
- 30 FPS at Full Resolution
- Built-in Audio
- PoE Support
- IP66 Weatherproof Rating
- IR Distance up to 30 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK - 5B-IR



CAMERA

Image Sensor	Sony 1/2.7" Progressive Scan CMOS Sensor Sony Starvis™ Technology
Maximum Resolution	5.0MP , 2592(H) X 1944(V)
Compression	H.264/H.265
Electronic Shutter Time	Auto , Manual 1/25-1/10000Sec
Minimum Illumination	0.1 – 0.2 lux @ F 1.6 (Color), 0.005 – 0.01lux @ F1.6 (B/W), 0 lux with IR On
S/N Ratio	≥52dB
WDR	≥120dB
Focus Length	2.8mm
FOV	H:106°; V: 55°;D: 125°
Lens Type	Fixed Focal
Iris type	Fixed
DORI Distance In Meters	91.0m(Detect), 36.4m(Observe), 18.2m(Recognize), 9.1m(Identify)
Day/Night	Auto,Manual,Smart
Infrared LED	2 IRED ARRAY
Infrared Distance	30M
IR Status	Under 10 Lux By Sensor
IR Power On	Sensor Auto Control



VIDEO

Compression	H264 ,H265
FRAME RATE	
Main Stream	2592X1944 , 2560X1440 ,2304X1296 , 1920X1920 , 1200X1200 @ 30 fps / 1080P , 1920X1920 , 720P , @60 fps
Sub Stream	D1 ,VGA ,640X360 ,480X360 ,480X480 ,CIF @ 30fps
BIT RATE	CBR, VBR, (16kbps-8000 kbps)
OTHER SETTINGS	BLC,HLC,White Balance, AGC,3D NR, Motion Detection,ROI,Privacy Mask,Defog



AUDIO

Input/Output	Built In Mic & Speaker
Compression	G.711 U



NETWORK

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
ONVIF	Profile S
POE	802.3af/at 48V




GENERAL

Housing	Metal ,IP66
Anti-cut Bracket	YES
Operation Temperature	-30°C ~ +65°C RH95% Max
Storage Temperature	-30°C ~ +65°C RH95% Max
Power Source	DC12V±10%, 600mA / POE
Dimension	75mm (H) , 70 mm (W) 190 mm (L)
Weight	470g
Language	English,Russian,Arabic and Spanish
Certification	IEC-62368-1 ,CE-EMC , FCC:47 CFR FCC Part 15; Subpart B; SASO



DIMENSION

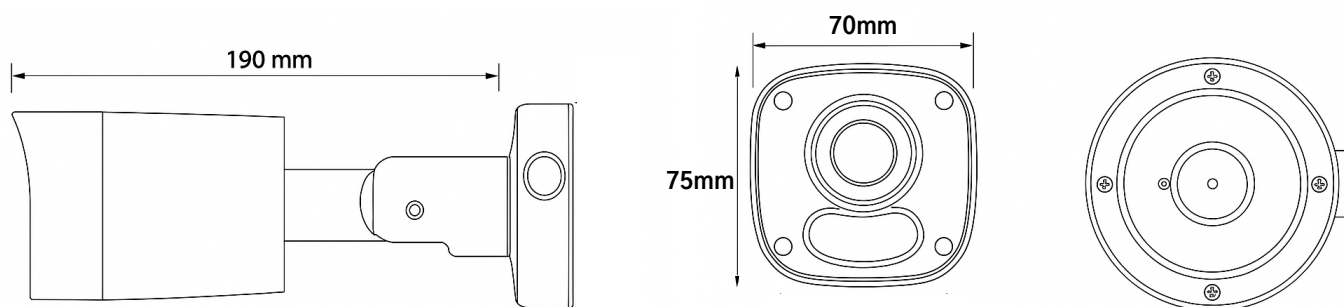

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

***Product specifications and availability are subject to change without notice.**