



6 MP Dome Camera

ASK - 6DVF-IR



Overview

This 6MP camera features a motorised 2.8–13mm varifocal lens, built-in mic, and 30 FPS recording for flexible, high-quality surveillance. With PoE, edge storage, IK10 vandal resistance, and IP66 weather-proofing, it's built for demanding environments.

Key Features

- 6 MP Resolution
- 2.8–13mm Motorised varifocal Lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Ceiling Mount and Wall Mount Options
- 30 FPS at Full Resolution
- Edge Storage Support
- Built-in Mic
- PoE Support
- IP66 Weatherproof Rating
- IK 10 Rating
- IR Distance up to 30 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK - 6DVF-IR



CAMERA

Image Sensor	Sony 1/2.8" Progressive Scan CMOS Sensor Sony Starvis™ Technology
Maximum Resolution	6.0MP 3072 (H)*2048 (V)
Compression	H.264/H.265
Electronic Shutter Time	Auto , Manual 1/10 s-1/10,000 s
Minimum Illumination	0.1 – 0.2 lux @ F 1.6 (Color), 0.005 – 0.01lux @ F1.6 (B/W), 0 lux with IR On
S/N Ratio	≥52dB
WDR	≥120dB
Focus Length	2.8mm – 12mm ,
FOV	H:106°; V: 55°;D: 125°
Lens Type	Motorized Varifocal Lens
Iris type	Auto
DORI Distance In Meters	2.8 mm , 91.0m(Detect) , 36.4m(Observe) , 18.2m(Recognize) , 9.1m(Identify) 12.0 mm , 200 m(Detect) , 80m(Observe) , 40 m(Recognize) , 20 m(Identify)
Day/Night	Auto,Manual,Smart
Infrared LED	18 IRED IR Array
Infrared Distance	30M
IR Status	Under 10 Lux By Sensor
IR Power On	Sensor Auto Control



VIDEO

Compression	H264 ,H265
FRAME RATE	
Main Stream	3072x2048 @25fps , 2592x1944@25 fps 4MP/3MP/1080P/720P@30FPS
Sub Stream	D1/VGA/360P/CIF @ 30 FPS
BIT RATE	CBR, VBR, (512kbps-8000 kbps)
OTHER SETTINGS	BLC,HLC,White Balance, AGC,3D NR, Motion Detection,ROI,Privacy Mask,Defog



AUDIO

Input/Output	Built In mic
Compression	G.711 U



NETWORK

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
ONVIF	Profile S
POE	802.3af/at 48V
SD Card Slot	Yes




GENERAL

Housing	Metal ,IP66 , IK10 BUBBLE DOME
Anti-cut Bracket	YES
Operation Temperature	-30°C ~ +65°C RH95% Max
Storage Temperature	-30°C ~ +65°C RH95% Max
Power Source	DC12V±10%, 450mA / POE
Dimension	111 (D)mm×90.5(H)mm
Weight	720g
Language	English,Russian,Arabic & Spanish
Certification	IEC-62368-1 , CE-EMC , FCC:47 CFR FCC Part 15; Subpart B; SASO



DIMENSION

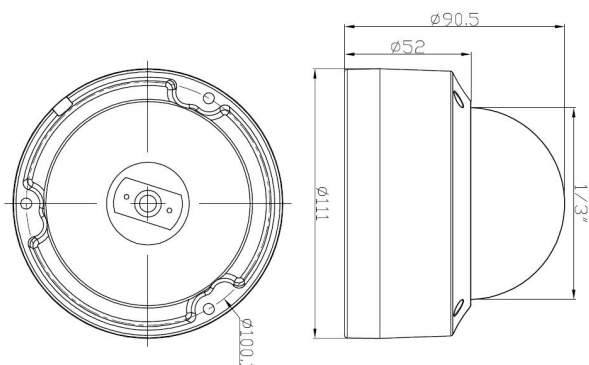

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

***Product specifications and availability are subject to change without notice.**