



8 MP Dome Camera

ASK - 8DVF-IR



Overview

This 8MP camera offers sharp imaging with a motorised 2.8–13mm varifocal lens and built-in mic. Featuring PoE, edge storage, IP66 weatherproofing, and IK10 vandal resistance, it ensures durable and flexible surveillance at 20 FPS.

Key Features

- 8 MP Resolution
- 2.8–13mm Motorised varifocal Lens
- Day/Night Functionality
- H.264 / H.265 Compression
- Supports Multiple Video Streams
- ONVIF Support
- Ceiling Mount and Wall Mount Options
- 20 FPS at Full Resolution
- Edge Storage Support
- Built-in Mic
- PoE Support
- IP66 Weatherproof Rating
- IK 10 Rating
- IR Distance up to 30 Meters
- 5-Year Replacement Warranty
- No Written Hardware Warranty

SPECIFICATIONS | ASK - 8DVF-IR



CAMERA

Image Sensor	Sony 1/2.8" Progressive Scan CMOS Sensor Sony Starvis™ Technology
Maximum Resolution	8.0MP 3840 (H)* 2160 (V)
Compression	H.264/H.265
Electronic Shutter Time	Auto , Manual 1/10 s-1/10,000 s
Minimum Illumination	0.1 – 0.2 lux @ F 1.6 (Color), 0.005 – 0.01lux @ F1.6 (B/W), 0 lux with IR On
S/N Ratio	≥52dB
WDR	≥120dB
Focus Length	2.8mm – 12mm ,
FOV	2.8 mm H:106°; V: 55°;D: 125° 12.0 mm H:24°; V: 13.5°;D: 27.5°
Lens Type	Motorized Varifocal Lens
Iris type	Auto
DORI Distance In Meters	2.8 mm , 91.0m (Detect) , 36.4m (Observe) , 18.2m (Recognize) , 9.1m (Identify) 12.0 mm , 200 m (Detect) , 80m (Observe) , 40 m (Recognize) , 20 m (Identify)
Day/Night	Auto, Manual, Smart
Infrared LED	4 IRED IR Array
Infrared Distance	30M
IR Status	Under 10 Lux By Sensor
IR Power On	Sensor Auto Control



VIDEO

Compression	H264 ,H265
FRAME RATE	
Main Stream	3840X2160@20fps , 3072X2048@25fps , 2592X1944 , 2560X1440 , 2304X1296 @30fps , 1080P , 720P @60fps
Sub Stream	1080P , 720P @25fps , 720X480 , VGA , 640X360 , 480X360 , CIF @ 30fps
Third Stream	352*288@30fps
BIT RATE	CBR, VBR, (512kbps-12000 kbps)
OTHER SETTINGS	BLC,HLC,White Balance, AGC,3D NR, Motion Detection,ROI,Privacy Mask,Defog



AUDIO

Input/Output	Built In mic
Compression	G.711 U



NETWORK

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
ONVIF	Profile S
POE	802.3af/at 48V
SD Card Slot	Yes




GENERAL

Housing	Metal ,IP66, IK10 BUBBLE DOME
Anti-cut Bracket	YES
Operation Temperature	-30°C ~ +65°C RH95% Max
Storage Temperature	-30°C ~ +65°C RH95% Max
Power Source	DC12V±10%, 450mA / POE
Dimension	111 (D)mm×103.9(H)mm
Weight	720g
Language	English,Russian,Arabic & Spanish
Certification	IEC-62368-1 ,CE-EMC , FCC:47 CFR FCC Part 15; Subpart B; SASO



DIMENSION

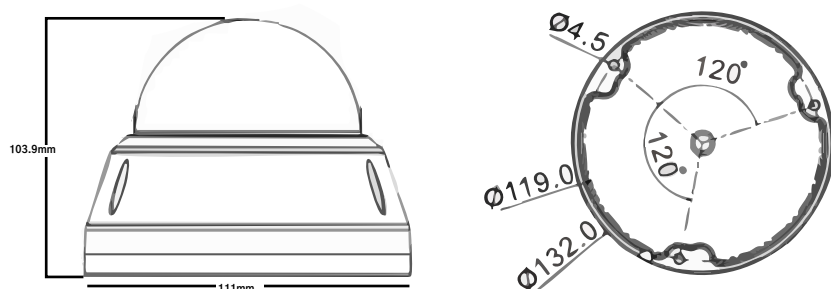

AEROSKOP W.L.L

✉ info@aeroskop.com

🌐 www.aeroskop.com

MIDDLE EAST & AFRICA

📍 Umm Al Hassam, Bahrain

☎ +973 77992203

EUROPE

📍 ul. Hoża 86 lok. 410, 00-682 Warszawa

☎ +48 732 082 387

*Product specifications and availability are subject to change without notice.