

HAN Master Major Project

Major Project

Using FANUC R-2000iC/210F (6-axis robot) for improved efficiency in FRC parts formation

Student Number: 617931

Name: Karl Wallkum

Track: Master Control Systems Engineering

Company: HAN Smart Production Cell (IPKW)

Supervisors: Nguyen Trung(Company Supervisor)
Wesselingh Ellen(HAN Supervisor)

Date: 06/02/2020

Nguyen Trung

Wesselingh Ellen



Figure 0.1: FANUC R-2000iC/210F 6-axis industrial robot arm

Contents

1 Abstract	1
2 Preface	1
3 Summary	2
4 Acronyms	2
5 Problem Definition	2
6 Literature survey	3
6.1 Field of study	3
6.2 In depth literature	4
7 Forward Kinematics	5
7.1 Approach	5
7.2 Numbering the joints and links	6
7.3 local coordinate reference frames	6
8 Denavit-Hartenberg-Convention	10
8.1 Robot configurations	10
Appendices	14
A Appendix 1	15
B Appendix 2	15
C Robot Quick start guide	15
3.0.1 Parts of the robot	15
3.0.2 iPendant Navigation Manual:	16

1. Abstract

This work aims to integrate a FANUC 210F 6 axis industrial robot arm into an experimental production line. As this production line is set in a research environment, gaining a deeper understanding of all involved systems is desired.

The dynamic behaviour of a physical system is best expressed with an analytical model. In order to control a robot arm, a kinematic model needs to be created. With this model, a control algorithm can be derived.

The objective of this thesis is to derive the complete inverse kinematic model of a 6 degrees of freedom ([DOF](#)) robotic arm analytically. For an exact numerical simulation of the device most steps are laid out theoretically and difficulties in the practical implementation are described. Additionally for follow up projects this work also contains a quick start guide and a safety manual for the robot in this setting . Finally to contribute to current research, twinning specifications will be defined.

2. Preface

Robots can be defined as programmable movement automations that can perform tasks without human supervision and can be taught at least repetitive tasks. Increasingly, also ways to sense their surroundings are added and improve their movements according to their surroundings. These additionally to the sensors like pulse encoders at their axes to feedback control their endpoint position accuracy.

I have started working with robots and robotic systems in my bachelor studies. As a starting engineer, I was exploring the possibilities of automated manufacturing with CNC mills and 3D printers. These were very simplistic robotic systems based on a feedforward control with stepper motors for position accuracy. For starting a production process, these devices had to be half automatically calibrated and the position and orientation

needed to be taught automatically by pointing the drill/printing head to the markerpoints.

3. Summary

4. Acronyms

HAN Hogeschool van Arnhem en Nijmegen

SPC Smart Production Cell

DOF degrees of freedom

FRC Fibre Reinforced Composites

DH Denavit-Hartenberg

IOT Internet Of Things

FHEM Freundliche Hausautomation und Energie-Messung [6]

NFC Near-field communication

IPKW Industrial Park Kleevse Waard

NFC Near Field Communication

ROS Robot Operating System

GUI Graphical User Interface

EOAT End Of Arm Tooling

5. Problem Definition

For Fibre Reinforced Composites (**FRC**) part production, a robot arm can be used to load the press with raw material, as it allows for more flexibility in the production line. As the robot arm has many degrees of freedom, there are different strategies for a control cycle. Main constraint is to achieve this movement of materials as fast as possible to minimize the cool-down of the molten **FRC**. Additionally, the accelerations and forces on the

material should be minimized while transferring, to make sure no material is lost in the process. This makes it hard to find an ideal, fast control strategy to place the raw material into the press.

6. Literature survey

In my project plan I stated that "I will demonstrate my master level by understanding and simulating the dynamics of a 6 axis Robot arm."[\[29\]](#) This should be done by creating a model of the robot arm. To create the model of the robot arm, a literature review is necessary to lay out the best approach.

6.1 Field of study

To start the literature review, a set of first keywords was needed. Through an expert interview with my company supervisor Trung Nguyen [\[16\]](#), who had already supervised other thesis projects in the domain of robotics, a list of keywords to start with was found in a quick discussion. Not all of these keywords were immediately clear, so it was necessary to find definitions for these. With the help of scientific databases and search engines, sources for these definitions could be found.

6 axis robot serial 6 degree of freedom robots ([\[28\]](#) with HANQuest)

industrial robot arm some form of jointed structure achieved by the linking of a number of rotary and/or linear motions or joints([\[32\]](#) with Science Direct)

inverse kinematics mathematical process of recovering the movements of an object with kinematic equations to determine the joint parameters that provide a desired position for each of the robot's end effectors ([\[7\]](#) with Wikipedia)

Peter Corke robotics toolbox Matlab toolbox for the study and simulation of classical arm-type robotics, for example such things as kinematics, dynamics, and trajectory generation ([\[22\]](#) with Google search)

motion planning find a sequence of valid configurations that moves the robot from the source to destination ([\[13\]](#) with Google search)

robot dynamics relationship between the forces acting on a robot mechanism and the accelerations they produce ([\[5\]](#), with Scholarpedia)

ROS Robot Operating System - framework for writing robot software. It is a collection of tools, libraries, and conventions that aim to simplify the task of creating complex and robust robot behaviour across a wide variety of robotic platforms. ([\[20\]](#) with Google search)

As seen in "Implementation of Robot Systems" [\[32\]](#), the FANUC 210F is an articulated robot arm, also called a jointed arm. It is a 6 axis robot that has six rotational joints, each mounted on the previous joint. This type of robot has the ability to reach a point within the working envelope in more than one configuration or position. As there are multiple configurations possible to reach the same position, path planning would become an important topic. This means through inverse kinematics the motion of the joints needs to be determined without considering the local forces that cause them to move. The robotics toolbox by Peter Corke was seen as a good tool for simulating these kinematics in MATLAB. When attaching the dynamics to this model, further simulations could be made to simulate the dynamic behaviour of the robot arm and create a controller. ROS, while being an advanced tool for robot control would not fall in the scope of this thesis, as it would rather be a tool for later in the process of integrating the robot into the production line.

6.2 In depth literature

As stated in the online manual of MathWorks, "Kinematics is the study of motion without considering the cause of the motion, such as forces and torques." [17] Inverse Kinematics, also called backward kinematics is the logical opposite to forward kinematics also called direct kinematics (See figure 6.1).

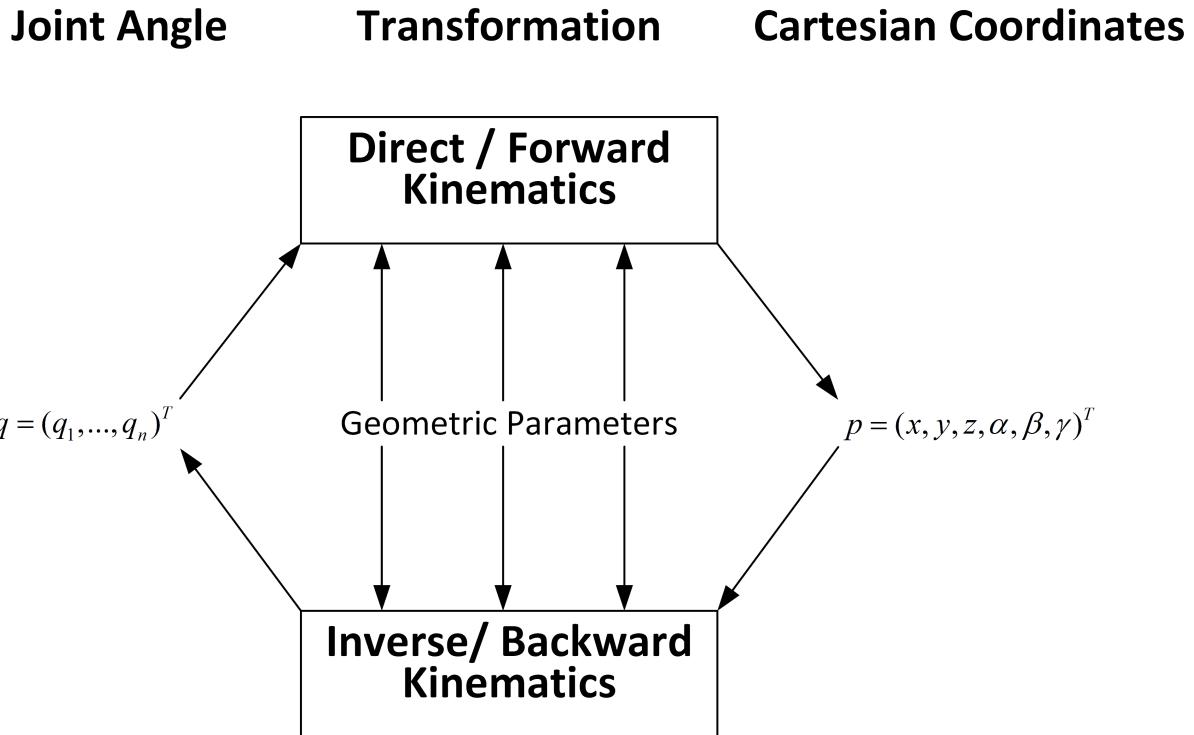


Figure 6.1: Relation between inverse and forward kinematics translated from German Wikipedia site on inverse kinematics [19]

In the german wikipedia article on inverse kinematics [8], the thesis "Verallgemeinerte inverse Kinematik für Anwendungen in der Robotersimulation und der virtuellen Realität" [23] is given as one of the main sources. This thesis work gives a good overview on the topic of inverse kinematics. As stated in this thesis work, the Denavit-Hartenberg notation is a robotic convention to map the local coordinate systems within a kinematic chain as found in robot arms.

As seen in "A Mathematical Introduction to Robotic Manipulation" [18] (obtained through Semantic Scholar, search phrase: robotic convention), there are several other conventions besides the "Denavit-Hartenberg notation" used in the robotics research field like the the "product of exponentials formulation". As most literature prefers a Denavit-Hartenberg fomulation of the kinematics (see [18]), this convention will be chosen in this work as well.

Solutions for forward kinematics are simple to obtain but solving inverse kinematics has been one of the main concerns in robot kinematics research. With more DOF, solutions get more complex as non-linear equations with transcendental functions need to be solved. For this set of equations, no general algorithms are available. Often algebraic, geometric and iterative methods for complex manipulators are used to find a solution to the inverse kinematic problem as stated by Tarun Pratap Singh et al. [25].

To find a suitable method for solving the inverse kinematic problem, a definition for the solution is needed:

"A manipulator will be considered solvable if the joint variables can be determined by an algorithm that allows one to determine all sets of joint variables associated with a given position and orientation. [...] The algorithm should find all possible solutions" -Dr.-Ing. John Nassou[15]

With this definition of solvability, all systems with revolute and prismatic joints with 6 DOF in a single series chain are solvable with the current available research. [15] As a quick search on HAN Quest with the search term "7 DOF inverse kinematics" suggests, there is currently ongoing research for the inverse kinematics problem in higher DOF manipulators with fuzzy logic as multiple articles following this approach can be found.

As the goal is to find a suitable solution strategy for the inverse kinematic problem, it helps to map out the different types of methods. Solution strategies can be split into two classes as stated by Dr.-Ing. John Nassou [15]:

Closed-form solutions	Numerical solutions
faster because analytical method	slower because of iterative nature
will find all solutions	not always find all solutions
Two approaches:	
algebraic approach	geometric approach

As numerical methods solve within an unknown number of operations, cannot always deliver all solutions and depend on the users decision for accuracy, [15] a closed-form solution will be preferred.

On HAN Quest, with the keywords "6DOF inverse kinematics" the article "Inverse Kinematics Solution and Optimization of 6DOF Handling Robot" [30] can be found. This offers an algebraic method to solve the inverse kinematic problem for 6 axis robots. A similar approach is shown in "Forward and Inverse Kinematic Analysis of Robotic Manipulators" [25]

As an alternative, a geometric modeling can be done as seen in "Workspace analysis and geometric modeling of 6 DOF Fanuc 200IC " [2]. A completely different approach is given in "A inverse kinematic solution of a 6-DOF industrial robot using ANN" by using artificial neural networks [1].

With one of these methods, a solution can be found for the inverse kinematic problem. This solution can then be verified with the robotics toolbox (Corke)

With this solution, a dynamic model of the robot can be created by attaching dynamics to the model as seen in "Control and Safety Mechanisms for a 3 DOF Manipulator with Human Interaction" [31] and "A mathematical introduction to Robotic Manipulation" [18]. A complete example of a dynamic simulation of a 6 DOF robot arm can be found in "Dynamic Multibody Simulation of a 6-DOF Robotic Arm" [12]

A controller for trajectory tracking can then be created with the model as seen in "Experimental Evaluation of Nonlinear Feedback and Feedforward Control Schemes for Manipulators" [10]

This controller could then be plugged into the real robot as stated in the "Control of a FANUC Robotic arm using MATLAB manual" [26] An example of this can be found in "Modeling and analysis of a 6 DOF robotic arm manipulator" [9]

7. Forward Kinematics

To model the movements of the end effector of a kinematic chain, a forward kinematic analysis is needed. This means, that the position of the endpoint in the operational space needs to be described by the kinematic equations with the joint space as input. The non-linear kinematic equations map the joint parameters to the configuration of the robot system. This results in a pure geometrical description of motion by means of position, orientation, and their time derivatives.

7.1 Approach

A serial-link manipulator consists of links in a chain connected by joints. A link is a rigid body, defining the spatial relationship between two following axes. For describing the serial-link mechanism geometry the Denavit Hartenberg notation is one possible approach. It gives a description of a manipulator for kinematic solutions, Jacobians, dynamics, motion planning and simulation. This description can be obtained through a five step algorithm:[3]

7.2 Numbering the joints and links

A serial link robot with n joints has $n + 1$ links.

numbering of links The numbering scheme for links starts at (0) with the fixed grounded base and then increases sequentially up to (n) for the end effector.

numbering of joints The numbering scheme for joints starts at (1) with the joint connecting the first movable link to the base and then increases sequentially up to n .

relation between links and joints Link (i) is connected to its

- lower link ($i - 1$) at its proximal [14] end by joint (i)
- upper link ($i + 1$) at its distal [14] end by joint ($i + 1$)

Joint and link numbering in Fanuc 210F This numbering scheme can be applied to the Fanuc 210F (see 7.1)



Figure 7.1: Links (turquoise) and joints (orange) in the FANUC 210F

7.3 local coordinate reference frames

With the Denavit-Hartenberg convention, local coordinate frames can be attached to the far end of the links (i) and their accompanying joints ($i + 1$). Each link (i) is described relative to the pose of the preceding link.

Assignment of z_i axes With the DH-notation, the z_i axes are assigned to link (i). Two cases need to be considered:

revolute: z_i is the axis of revolution of joint ($i + 1$)

prismatic: z_i is the axis of translation of joint ($i + 1$)

This means, that joint z_i turns around axis z_i .

Direction of rotation With the direction of the z_i -axis, the direction of positive rotation around joint ($i + 1$) is also given by the right hand rule (see [21] at 10:35). This means, the direction of positive rotation is counter-clockwise around the z_i -axis.

z_i axes in Fanuc 210F As described above, the z_i axes can be attached to the Fanuc 210F (see figure 7.2).



Figure 7.2: z_i axes on the Fanuc 210F with the direction of positive rotation (orange)

Base frame The base frame (0) can be chosen nearly arbitrarily. The origin of the base frame can be any point on z_0 . For simplicity, the origin of frame(0) can be put into joint(1). Usually, the x-axis of the base frame is chosen, so that it points in the direction of the End Of Arm Tooling (**EOAT**) in default position according to its base, [33] but can be chosen in any convenient manner [24].

Assignation of frames (i) Starting from frame (0) in an iterative process, frame (i) can be set up using frame ($i - 1$).

Three cases regarding the relationship of axes z_{i-1} and z_i need to be considered when setting up frames:

Non coplanar: Axes don't intersect and are not parallel. Line containing the common normal z_{i-1} to z_i defines x_i -axis and the point of intersection with z_i is the origin of frame (i)

- a) find common normal of the joint axes
- b) put origin in intersection of normal with joint axis
- c) put z_i axis in the joint axis
- d) x_i points in direction of the common normal, facing away from frame (0)
- e) add y_i according to right hand rule

Parallel: Axes are parallel. Line containing the normal through origin of frame ($i + 1$) and the z_i -axis defines the x_i -axis which is directed from origin of frame (i) toward the distal joint. The point of intersection of common normal with z_i -axis gives the origin of frame (i).

- a) look for normal originating from distal joint
- b) put origin in the intersection of the normal with the joint axis
- c) put the z_i axis in the joint axis of the link ($i + 1$)
- d) x_i points follows the common normal with the distal joint, pointing towards the distal joint
- e) add y_i according to right hand rule

Intersecting: Axes are intersecting. Line containing the normal to the plane formed by axes z_{i-1} and z_i gives the x_i -axis with positive direction chosen arbitrarily. Point of intersection of axes z_{i-1} and z_i is the origin of frame (i).

- a) put origin in intersection point of the axes

b) put the z_i axis in the joint axis of the link ($i + 1$)

c) x_i is perpendicular to both joint axes

d) add y_i according to right hand rule

Assignation of EOAT frame As there is no distal joint for the EOAT frame, the steps for this frame are different:

a) put origin on axis of proximal joint

b) axis z_i follows direction of z_{i-1}

c) x_i can be chosen arbitrarily, but is usually determined by screw holes

d) add y_i according to right hand rule

local coordinate reference frames on the Fanuc 210F As described above, the local coordinate reference frames can also be attached to the Fanuc 210F as seen in 7.3.

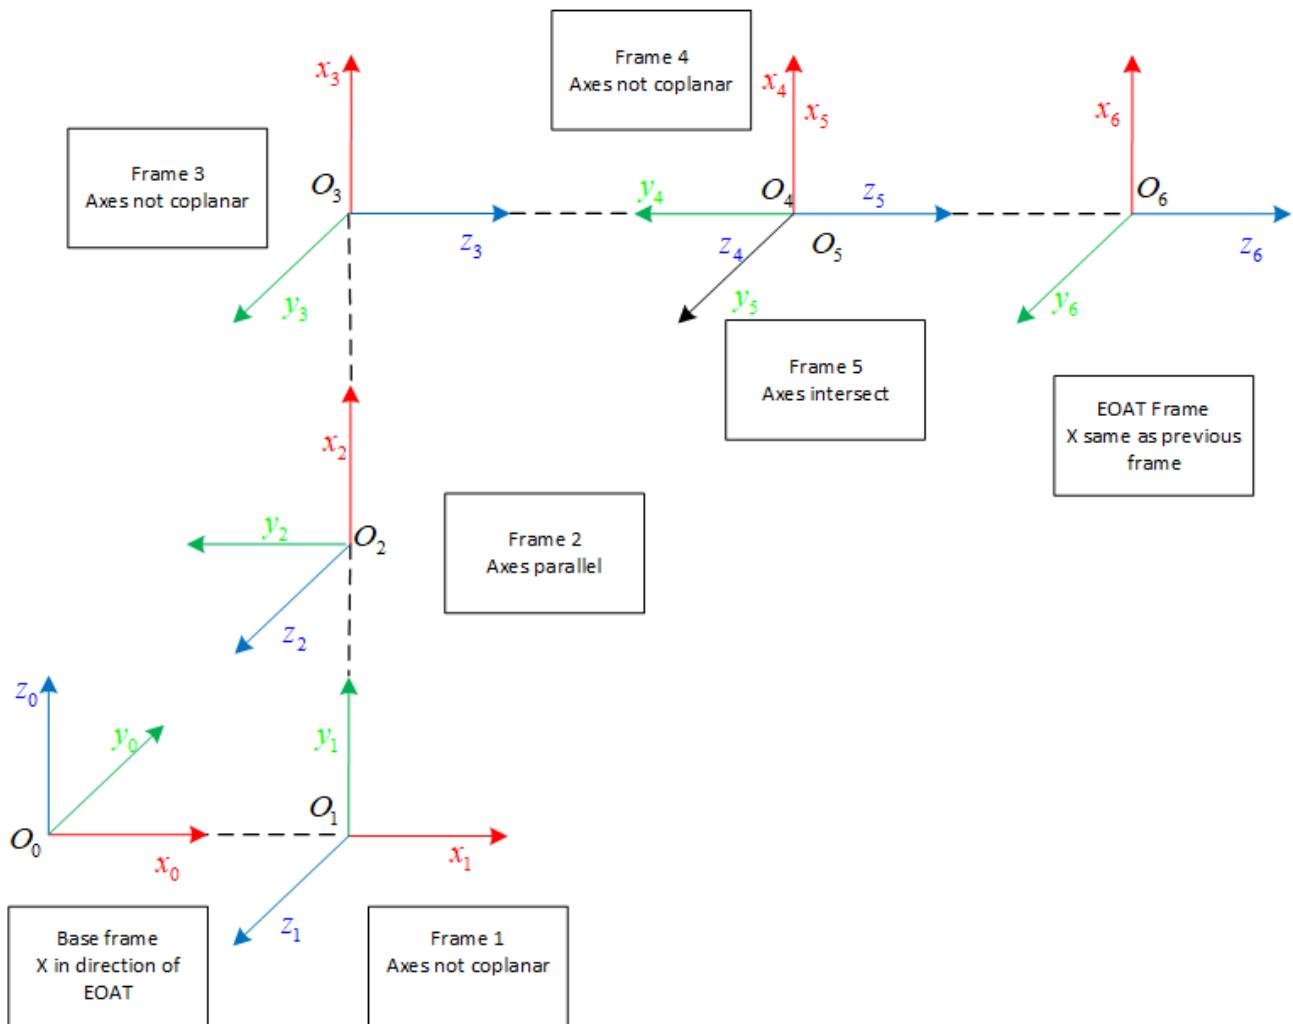


Figure 7.3: Coordinate reference frames for Fanuc 210F

frame 0 (Base) The frame mapping starts with the base frame. For the base frame the z -axis is given through joint j_1 . Origin of frame 0 is put into joint 1. The x -axis is chosen to point in direction of the EOAT in standard pose. For standard pose see 7.4. This pose will also be chosen for alignment of all distal frames.

frame 1 For frame 1, the z -axes are not coplanar. Because of that, the z_0 -axis is extended until a common normal can be found that intersects with z_i to define the origin O_1 . x_1 departs from O_1 along the common normal. y_1 is added according to the right hand rule.

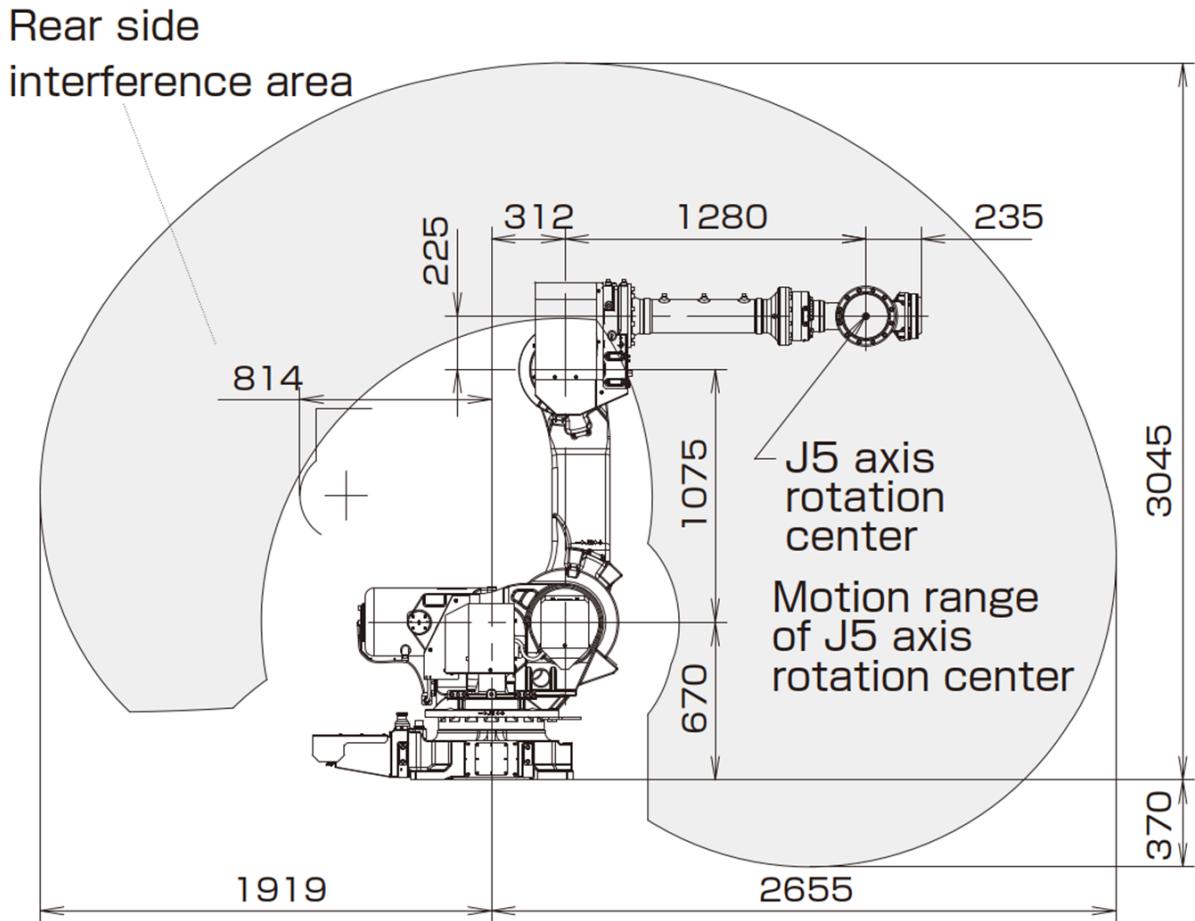


Figure 7.4: Standard pose of the robot

frame 2 As seen, in image 7.2, axes z_2 and z_1 are parallel. O_2 can be found at the intersection of the normal through O_1 with z_2 . x_2 follows the common normal with joint 4. y_2 is added according to the right hand rule.

frame 3 Joint 3 and joint 4 are not exactly aligned (see image 7.4), which prevents the z-axes to intersect. That's why axes z_3 and z_2 are not coplanar. z_3 runs parallel through the link 3, due to the orientation of the rotational axis. As the common normal between z_3 and z_2 defines x_3 , which in turn gives O_3 , the origin can be found far away from the physical position of the joint. y_3 is added according to the right hand rule.

frame 4 Joint 5 lies in line with joint 4. As z_3 follows this line, the axes z_4 and z_3 intersect in the center of joint 5, which gives O_4 . x_4 leaves the plane spanned by z_4 and z_3 perpendicular. The positive direction of x_4 is chosen to be similar as in frame 3 for simplicity. y_4 is added according to the right hand rule and points in direction of frame 3.

frame 5 As z_5 lies in line with O_4 , the axes z_5 and z_4 intersect in O_4 which puts O_5 at the same position as O_4 . x_5 leaves the plane spanned by z_5 and z_4 perpendicular. The positive direction of x_5 is chosen to be similar as in frame 4 for simplicity, which puts x_5 and x_4 on top of each other. y_5 is added according to the right hand rule and as z_5 is turned 90 degrees relative to z_4 around $x_{4,5}$, y_5 is turned 90 degrees relative to z_4 around $x_{4,5}$ as well.

frame 6 (EOAT) z_6 lies in line with z_5 and is consequently parallel. As there are no distal joints, to reference x_6 , it can be chosen arbitrarily. For simplicity, it is chosen to be similar as in frame 5. y_6 is added according to

the right hand rule.

8. Denavit-Hartenberg-Convention

The Denavit-Hartenberg ([DH](#))-Convention is a commonly used and simplifies the forward and backward transformation. It was named after Jaques Denavit and Richard Hartenberg who developed a general theory to describe a serial link mechanism. [11]

It consists of following parts:

- [DH](#)-Convention for establishing the coordinate systems
- [DH](#)-Transformation for generation of the coordinate systems
- [DH](#)-Parameters as a result form the transformations

Determining the coordinate systems is done according to set rules. Nevertheless, the choices of coordinate frames are also not unique, so different people will derive different, but correct frame assignments. This freedom of choice should be used to bring as many [DH](#)-Parameters as possible to zero. This simplifies subsequent equations and calculations. [33]

Each joint of the robot is described by four parameters.

8.1 Robot configurations

As mentioned before, a 6 [DOF](#) manipulator can reach the same position in multiple configurations. The different configurations in the solutions can be seen in the example of the FANUC robot arms (see figure 8.1)

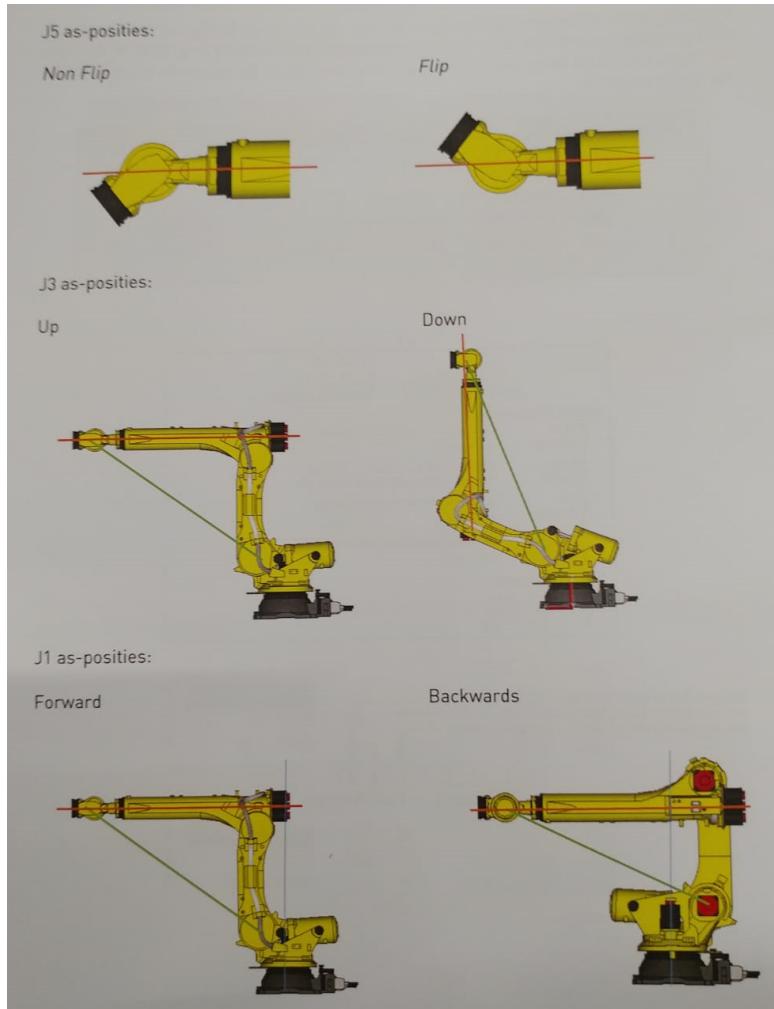


Figure 8.1: 6 axis robot configurations on the example of a FANUC Robot [4]

References

- [1] Ahmed R. J. Almusawi, Lale Dülger, and Sadettin Kapucu. "A New Artificial Neural Network Approach in Solving Inverse Kinematics of Robotic Arm (Denso VP6242)". In: *Computational Intelligence and Neuroscience* 2016 (Aug. 2016), p. 10. DOI: [10.1155/2016/572016](https://doi.org/10.1155/2016/572016).
- [2] Kamel Bouzgou and Zoubir Ahmed-Foith. "Workspace Analysis and Geometric Modeling of 6 DOF Fanuc 200IC Robot". In: vol. 182. 4th WORLD CONFERENCE on EDUCATIONAL TECHNOLOGY RESEARCHES (WCETR-2014). 2015, pp. 703–709. DOI: <https://doi.org/10.1016/j.sbspro.2015.04.817>. URL: <http://www.sciencedirect.com/science/article/pii/S187704281503092X>.
- [3] Daniel Constantin et al. "Forward Kinematic Analysis of an Industrial Robot". In:
- [4] *Fanuc Academy Manual*. Dutch. Robot hands on manual. FANUC.
- [5] Roy Featherstone. *Robot dynamics*. Version revision Nr. 91723. Brain Corporation. Oct. 21, 2011. DOI: [doi:10.4249/scholarpedia.3829](https://doi.org/10.4249/scholarpedia.3829). URL: http://www.scholarpedia.org/article/Robot_dynamics (visited on 01/25/2020).
- [6] *FHEM Homepage*. URL: <https://fhem.de/> (visited on 01/20/2020).
- [7] *Inverse kinematics*. EN. Wikipedia. URL: https://en.wikipedia.org/wiki/Inverse_kinematics (visited on 01/16/2020).

- [8] *Inverse Kinematik*. DE. note. Wikipedia. URL: https://de.wikipedia.org/wiki/Inverse_Kinematik (visited on 01/16/2020).
- [9] Jamshed Iqbal, Muhammad Ul Islam, and Hamza Khan. “Modeling and analysis of a 6 DOF robotic arm manipulator”. In: *Canadian Journal on Electrical and Electronics Engineering* 3.6 (Jan. 2012), pp. 300–306. URL: <https://www.researchgate.net/publication/280643085>.
- [10] Pradeep K. Khosla and Takeo Kanade. “Experimental Evaluation of Nonlinear Feedback and Feedforward Control Schemes for Manipulators”. In: *The international Journal of Robotics Research* (Feb. 1988). DOI: [10.1177/027836498800700102](https://doi.org/10.1177/027836498800700102).
- [11] LESSON Denavit-Hartenberg notation. EN. Format: Video lecture. Queseland University of Technology. Apr. 9, 2017. URL: <https://robotacademy.net/lesson/denavit-hartenberg-notation/> (visited on 01/14/2020).
- [12] Bin LI et al. “Dynamic Multibody Simulation of a 6-DOF Robotic Arm”. In: *Advanced Materials Research* 139-141 (2010), pp. 1001–1004. DOI: [10.4028/www.scientific.net/AMR.139-141.1001](https://doi.org/10.4028/www.scientific.net/AMR.139-141.1001).
- [13] Motion planning. Wikipedia. URL: https://en.wikipedia.org/wiki/Motion_planning (visited on 01/22/2020).
- [14] Stephen Mraz. *The Difference between Medial and Lateral, Proximal and Distal, and Superior and Inferior (Biomechanics)*. June 22, 2016. URL: <https://www.machinedesign.com/markets/medical/article/21834827/the-difference-between-medial-and-lateral-proximal-and-distal-and-superior-and-inferior-biomechanics> (visited on 02/03/2020).
- [15] Dr.-Ing. John Nassou. *Inverse Kinematics Serial link manipulators*. Humanoide Roboter (ehem. Robotik). presentation slides. Technische Universität Chemnitz - Fakultät für Informatik. Nov. 22, 2016. URL: <https://www.tu-chemnitz.de/informatik/KI/edu/robotik/ws2016/lecture-ik%201.pdf> (visited on 01/18/2020).
- [16] Trung Nguyen. Company Supervisor for project.
- [17] Program inverse kinematics algorithms with MATLAB. Mathworks online tutorial.
- [18] Li Ze-xiang Richard M. Murray S. Shankar Sastry. *A Mathematical Introduction to Robotic Manipulation*. CRC Press, 1994.
- [19] Roboterkinematik. DE. Version 1. Wikipedia. May 28, 2005. URL: <https://upload.wikimedia.org/wikipedia/de/a/ae/Roboterkinematik.png> (visited on 01/15/2020).
- [20] Open Robotics. Website of ROS project.
- [21] Robotics 1 U1 (Kinematics) S2 (Kinematic Diagrams) P1 (Denavit-Hartenberg Frames). URL: https://www.youtube.com/watch?v=ut4uZ6Yzv6o&list=PLT_0lwItn0sDBE98BsbaZezflB96ws12b&index=7.
- [22] Robotics Toolbox. Introduction. EN. Homepage of Peter Corke. URL: <https://petercorke.com/wordpress/toolboxes/robotics-toolbox> (visited on 01/18/2020).
- [23] Wolfgang Smidt. “Verallgemeinerte inverse Kinematik für Anwendungen in der Robotersimulation und der virtuellen Realität”. MA thesis. Institut für Roboterforschung Universität Dortmund, 1998.
- [24] Mark W. Spong. *Robot Dynamics and Control*. 1st. USA: John Wiley and Sons, Inc., 1989. ISBN: 047161243X.
- [25] Dr. Swet Chandan Tarun Pratap Singh Dr. P. Suresh. “Forward and Inverse Kinematic Analysis of Robotic Manipulators”. In: *International Research Journal of Engineering and Technology (IRJET)* 4.2 (Feb. 2017).
- [26] Ashwin Kumar Venkatesan Keyvan Noury Tiezheng Zhao Fady Tourdas. *CONTROL OF A FANUC ROBOTIC ARM USING MATLAB MANUAL*. USC Viterbi / Aerospace and Mechnaical Engineering department.
- [27] Ashwin Kumar Venkatesan Keyvan Noury Tiezheng Zhao Fady Tourdas. *CONTROL OF A FANUC ROBOTIC ARM USING MATLAB MANUAL*. USCViterbi School of Engineering - Aerospace and Mechanical Engineering department.
- [28] R. J. Urbanic. “Methods for Evaluating the Functional Work Space for Machine Tools and 6 Axis Serial Robots.” In: *SAE International Journal of Materials & Manufacturing*. 9.2 (May 2016), pp. 465–473.
- [29] Karl Wallkum. “Using FANUC R-2000iC/210F (6-axis robot) for improved efficiency in FRC parts formation”. Major Project Plan. Nov. 2019.
- [30] Yan Wu1 Lihui Cheng Guofeng Fan Caidong Wang. “Inverse Kinematics Solution and Optimization of 6DOF Handling Robot”. In: *Applied Mechanics and Materials* 635-637 (2014). DOI: [10.4028/www.scientific.net/AMM.635-637.1355](https://doi.org/10.4028/www.scientific.net/AMM.635-637.1355).
- [31] Kong Wei. “Control and Safety Mechanisms for a 3 DOF Manipulator with Human Interaction”. Supervisor: Prof.dr.ir. Aart-Jan de Graaf. MA thesis. HAN, Oct. 2014.

- [32] Mike Wilson. *Implementation of Robot Systems*. An Introduction to Robotics, Automation, and Successful Systems Integration in Manufacturing. Butterworth-Heinemann, 2015. doi: <https://doi.org/10.1016/C2012-0-00795-8>.
- [33] Prof. Dr. Klaus Wuest. *Denavit-Hartenberg-Konventionen*. Technische Hochschule Mittelhessen. Wiesenstrasse 14, 35390 Giessen, Deutschland, June 2018. URL: <https://homepages.thm.de/~hg6458/Robotik/Denavit-Hartenberg.pdf>.

Appendices

A. Appendix 1

B. Appendix 2

C. Robot Quick start guide

A big part of this was derived from [27].

3.0.1 Parts of the robot

A quick overview over the visible parts.

FANUC R-2000iC/210F 6 axis robotic arm

The robot has 6 movable joints with a possible payload attached to the end. Its features include a wide reach (2655 mm), sturdy but flexible arm design, a spring loaded counterbalance, relatively high payload capacity (210Kg) and fast moving axes. The joints also have hashes to indicate the zero positions which help with the calibration of the robot.

R30iA Robot Controller

The Robot is controlled using an original equipment manufacturer controller called the FANUC R30iA controller. Its features include faster sustained speed and superior position accuracies. It also has the I/O ports that are used to connect grippers and other payloads. (It also houses the camera circuits which are required to access the data from the SONY camera provided with the robot. - Delta only) The controller is also provided with a data card slot in which the special SD cards manufactured can be inserted and used as external memory. On the outside of the controller (side of iPendant at Delta) a USB port can be found. With these, programs, firmware files and other files can easily be transferred. Additionally, there is extended connectivity via its Ethernet port e.g. for FTP available.

iPendant

The teaching pendant is the primary user interface to the robot. It is used to move the joints of the robot manually, to program specific trajectories, to control the gripper, and various other actions. It also is an interface that can be used for input and output of the robot controller parameters. The user can access the system variables and position variables. (It is provided with a USB port that can be used to connect to a USB

drive for external storage. - Delta only) It can also be used to setup an FTP server and client in order to communicate with the PC.

Gripper

The robot as handed over does not have an active gripper system. It has been tested though with a pneumatic gripper controlled via the DO ports and pneumatic valves. A 2-way pneumatic valve, some piping and a pressure regulator are still available. (Delta Equipment varies here a lot).

3.0.2 iPendant Navigation Manual:

The teaching pendant is the primary user interface to the robot. This section deals with the important buttons on the TP.

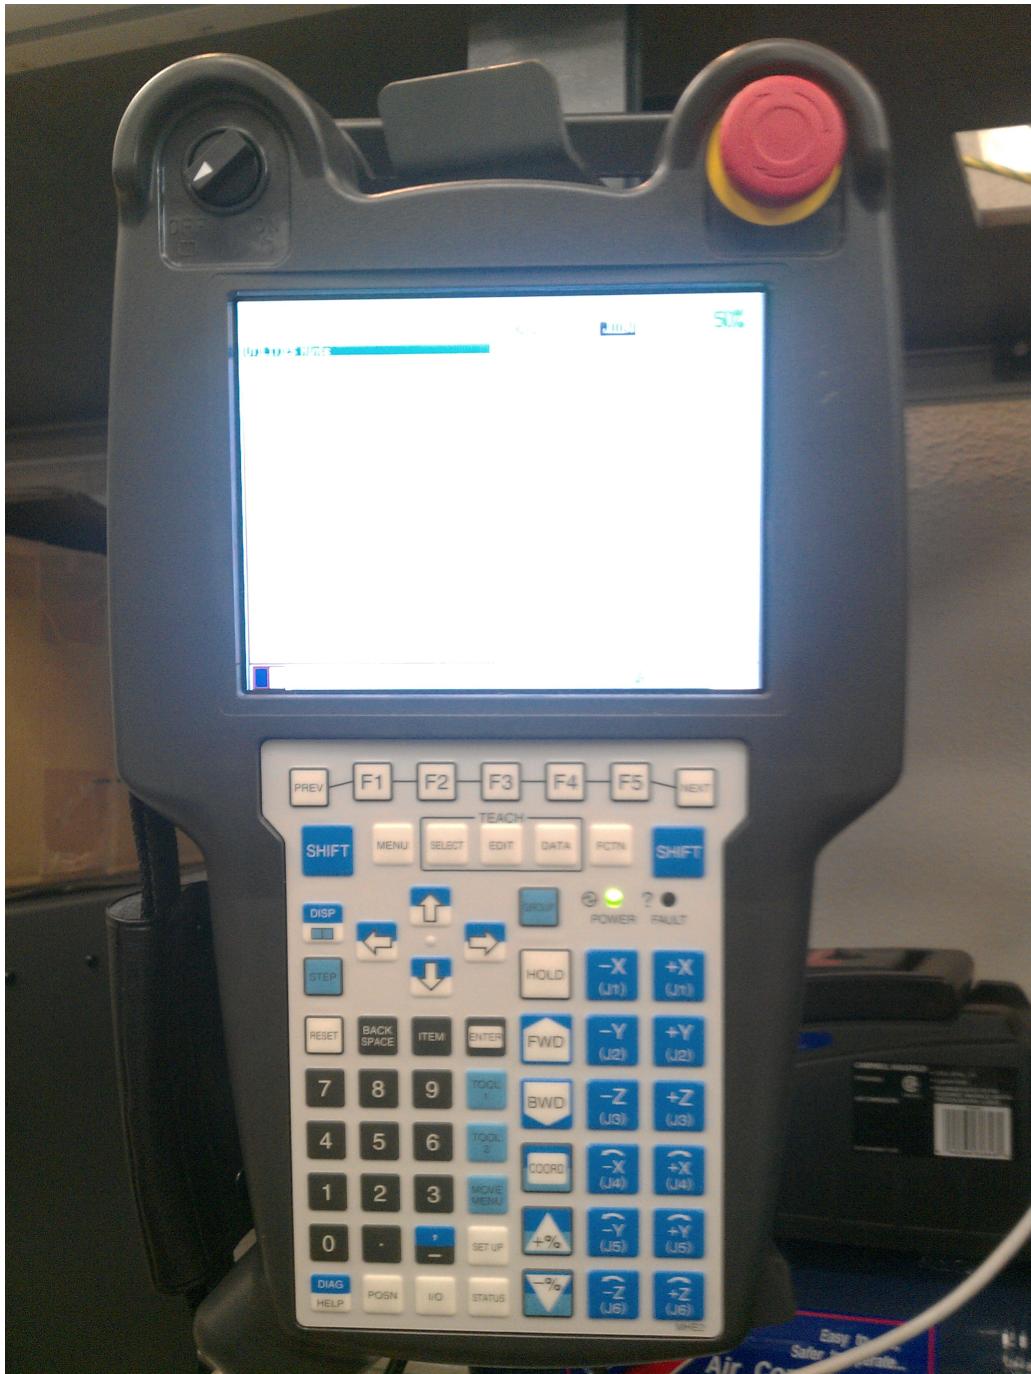


Figure 3.1: Most important iPendant buttons numbered: This image from another iPendant than the ones available was chosen because of its labelling of buttons. Some buttons of the available iPendants are not labelled, so this picture can be used as a reference. Source: [27]

Emergency stop:

Makes the robot stop immediately by applying brakes. Use it only when necessary as the brakes wear down. There is also an E-stop on the controller. Press down on the button to activate it. Twist it to the right to release. If a slow and gradual halt is required, press HOLD on the iPendant. TP on/off Below the E-stop button. It should be ON to access any function in the Teach Pendant (Set-ups, calibration, programs etc) and OFF when running in AUTO mode. Deadman switch The 2 yellow bars behind the iPendant. 3 modes are available: Fully released, halfway pressed, fully pressed. Only the middle mode activates control.