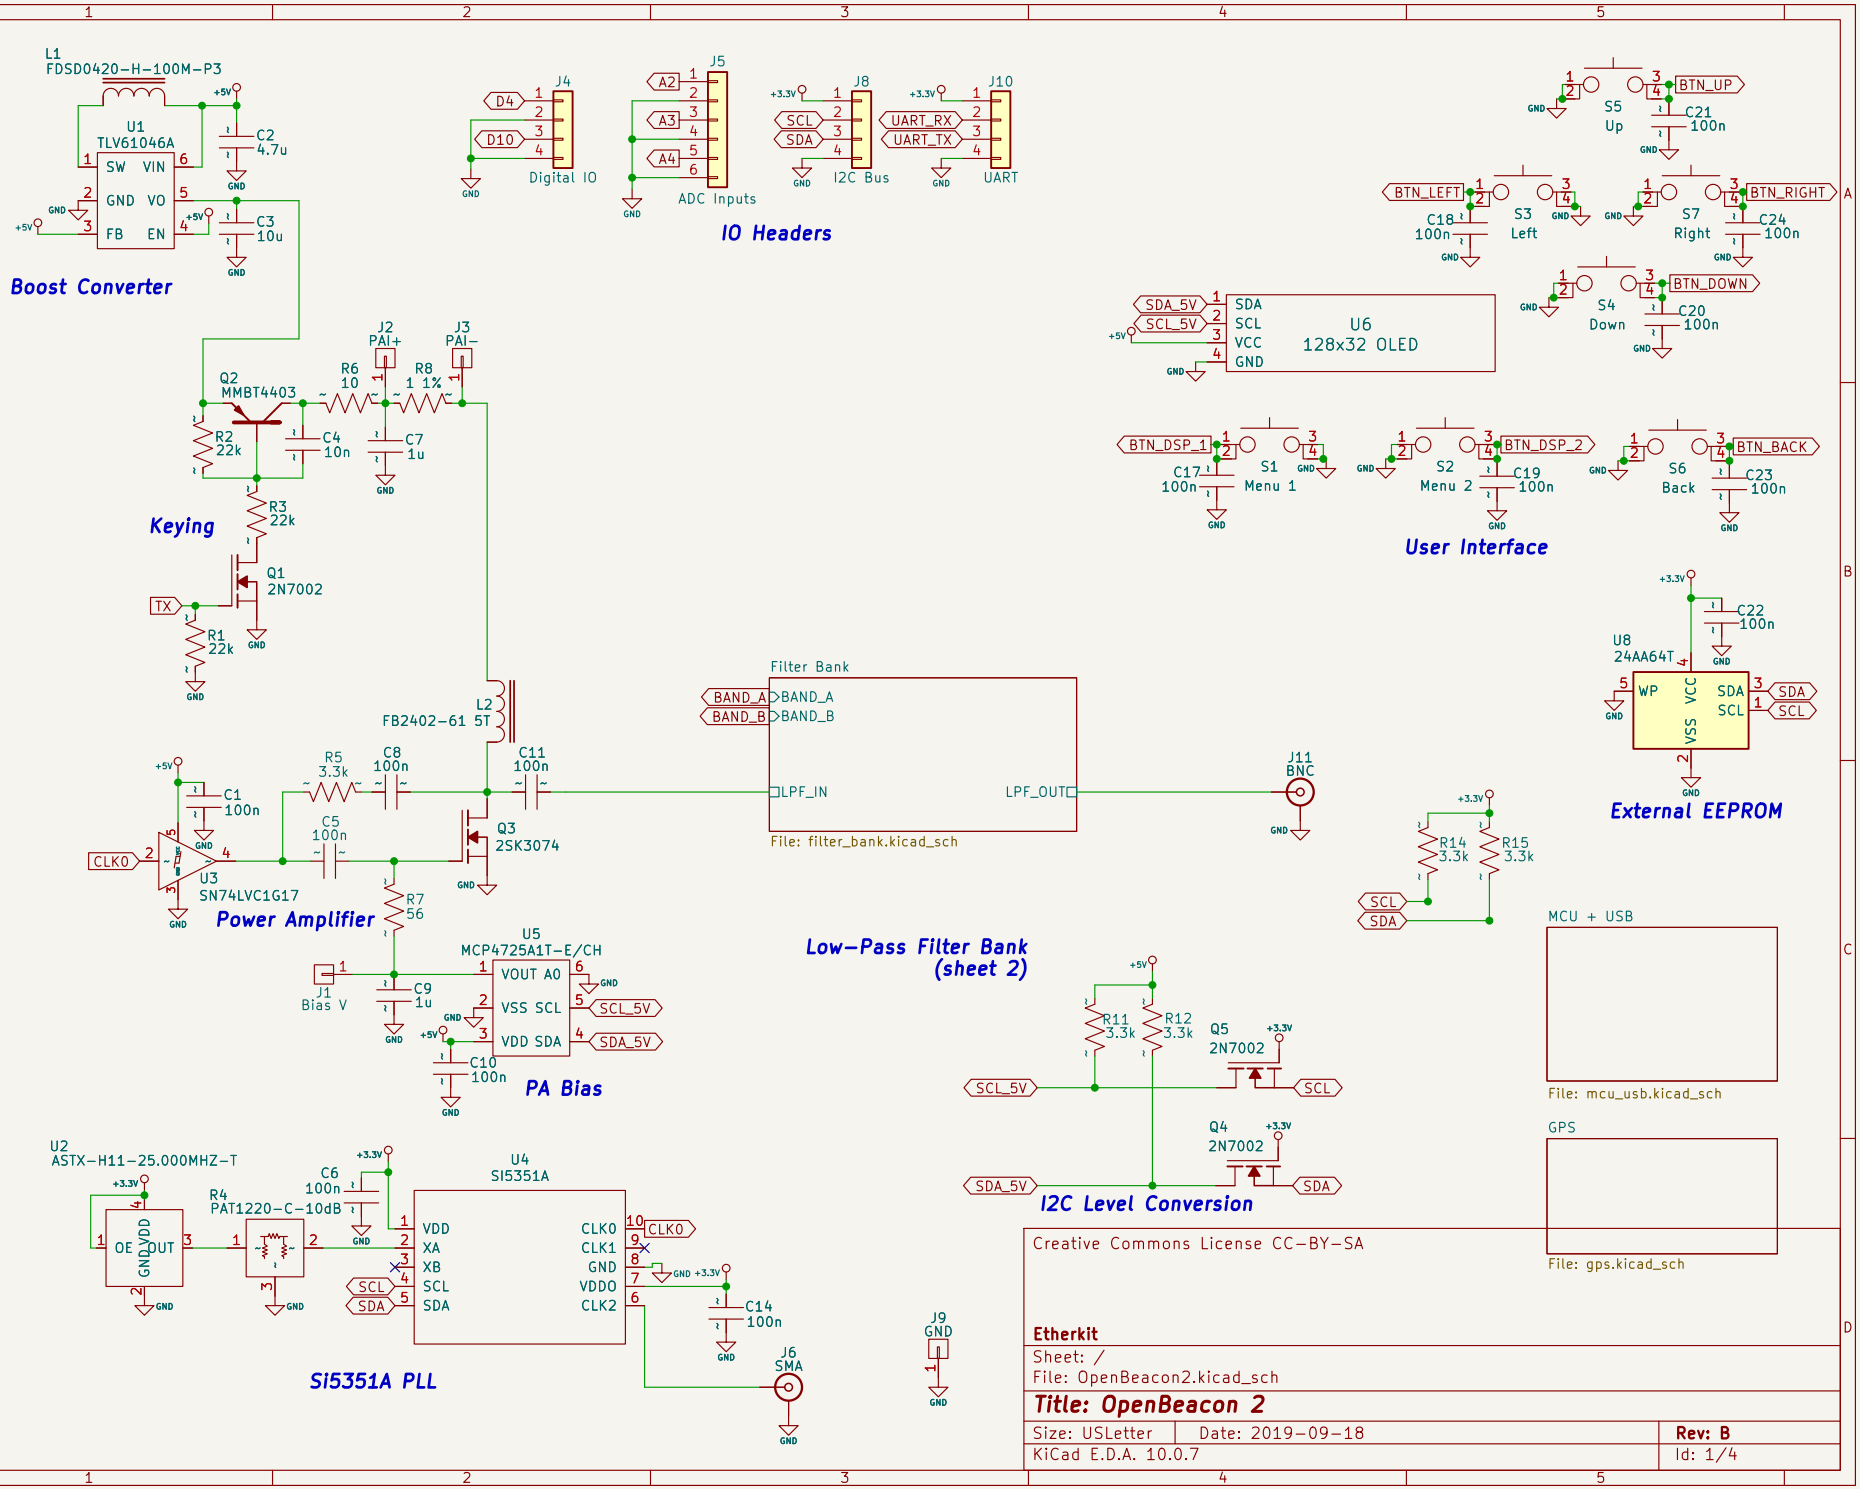
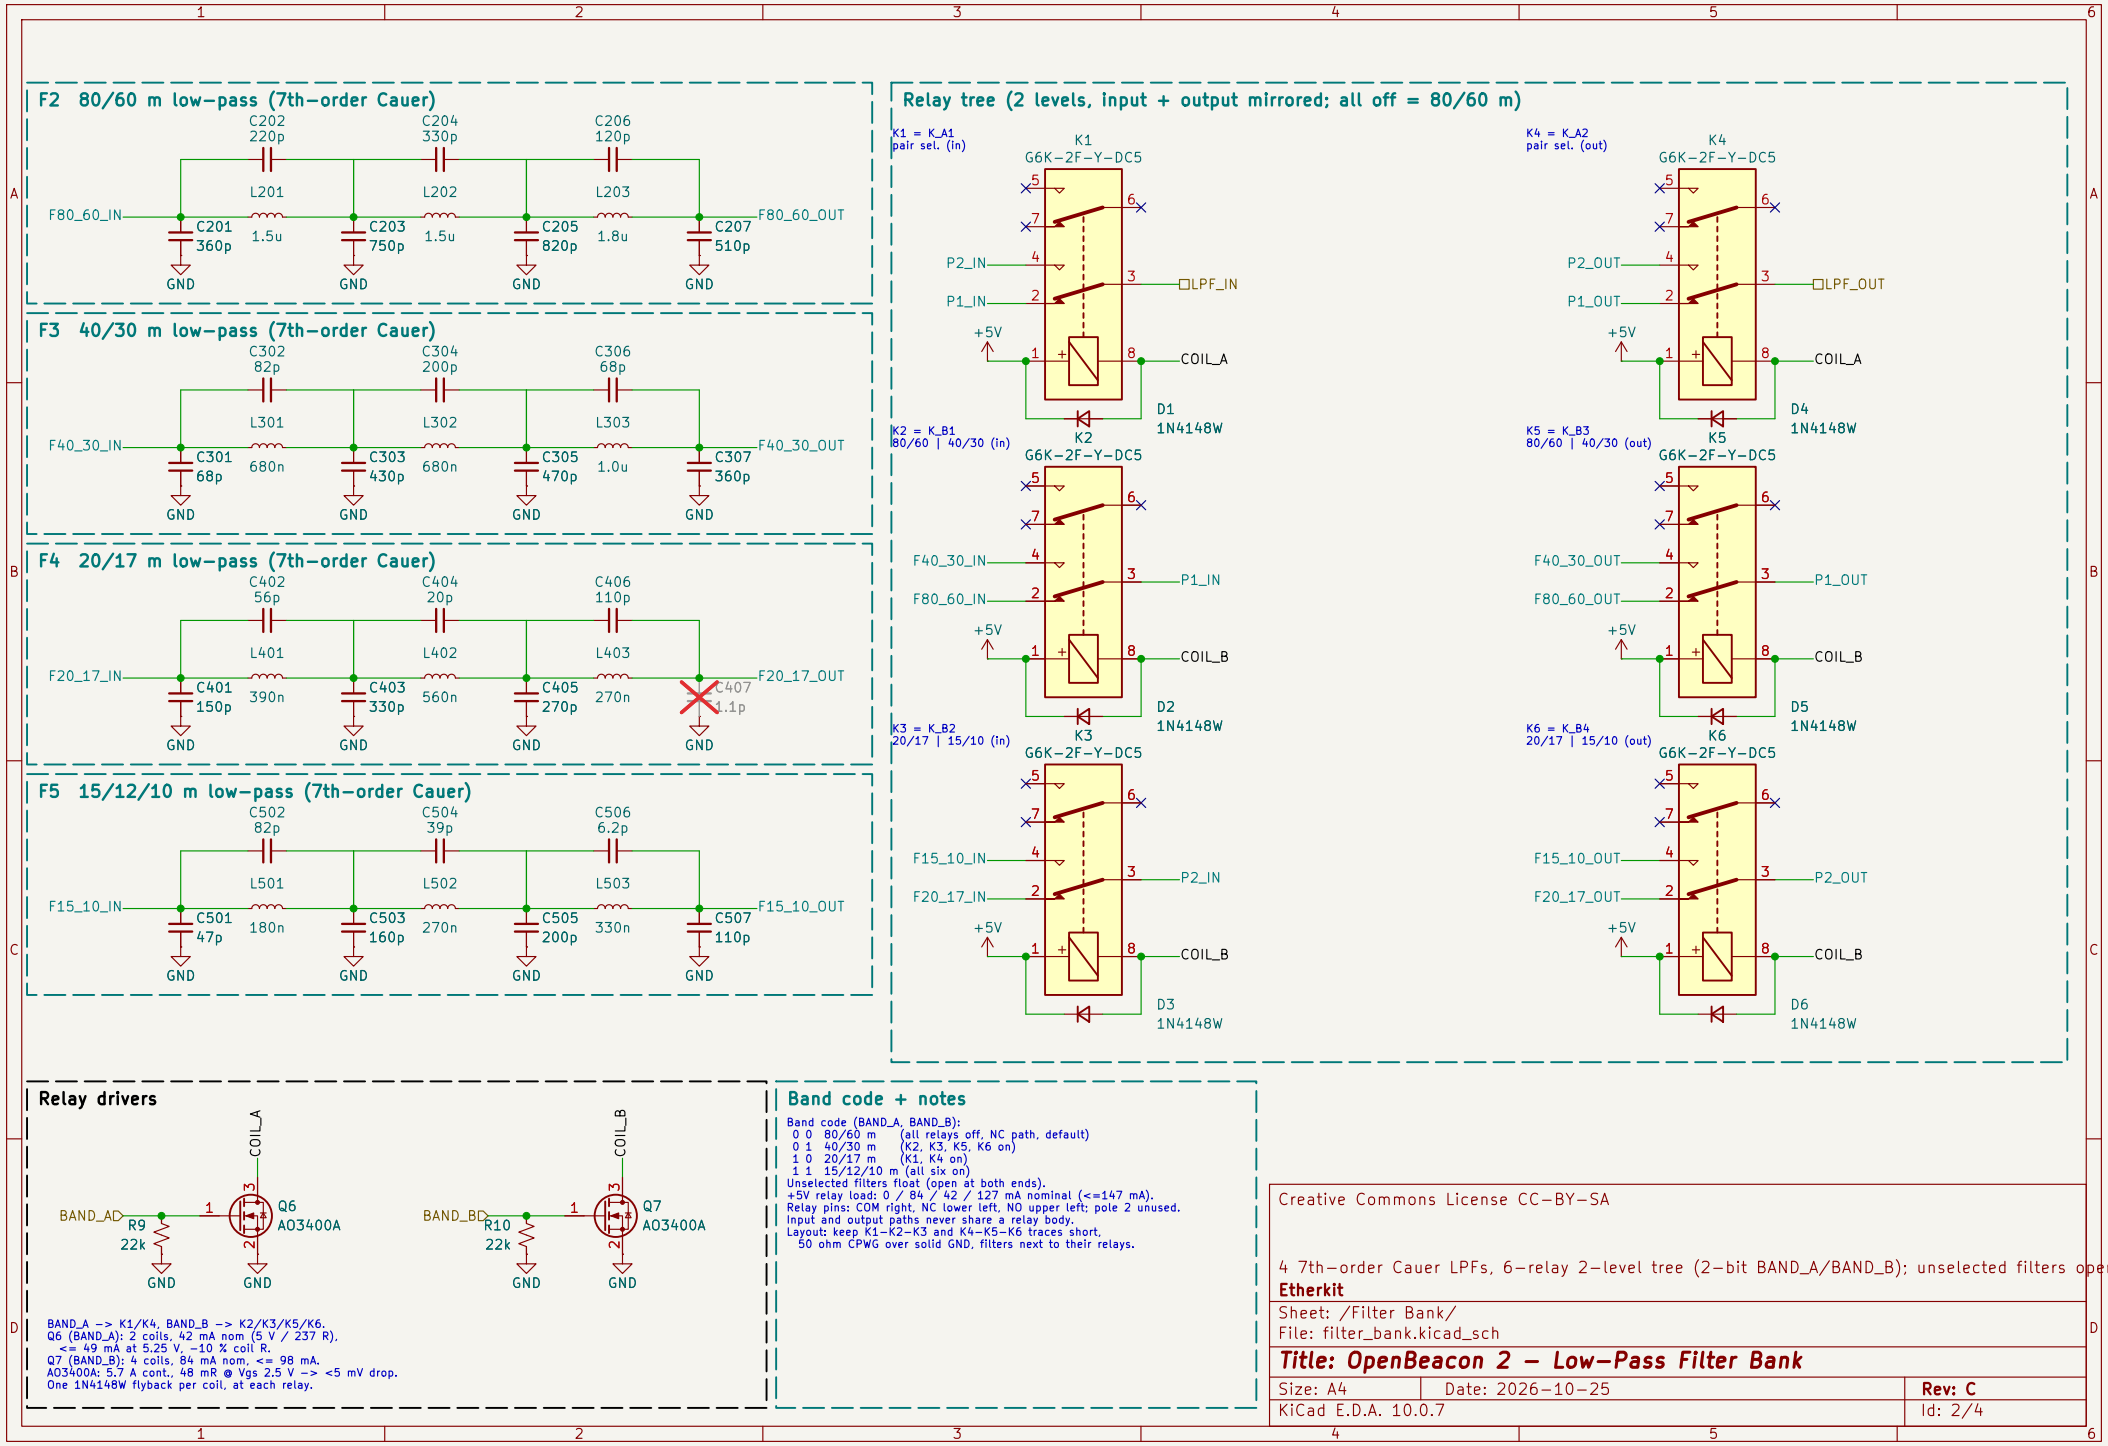
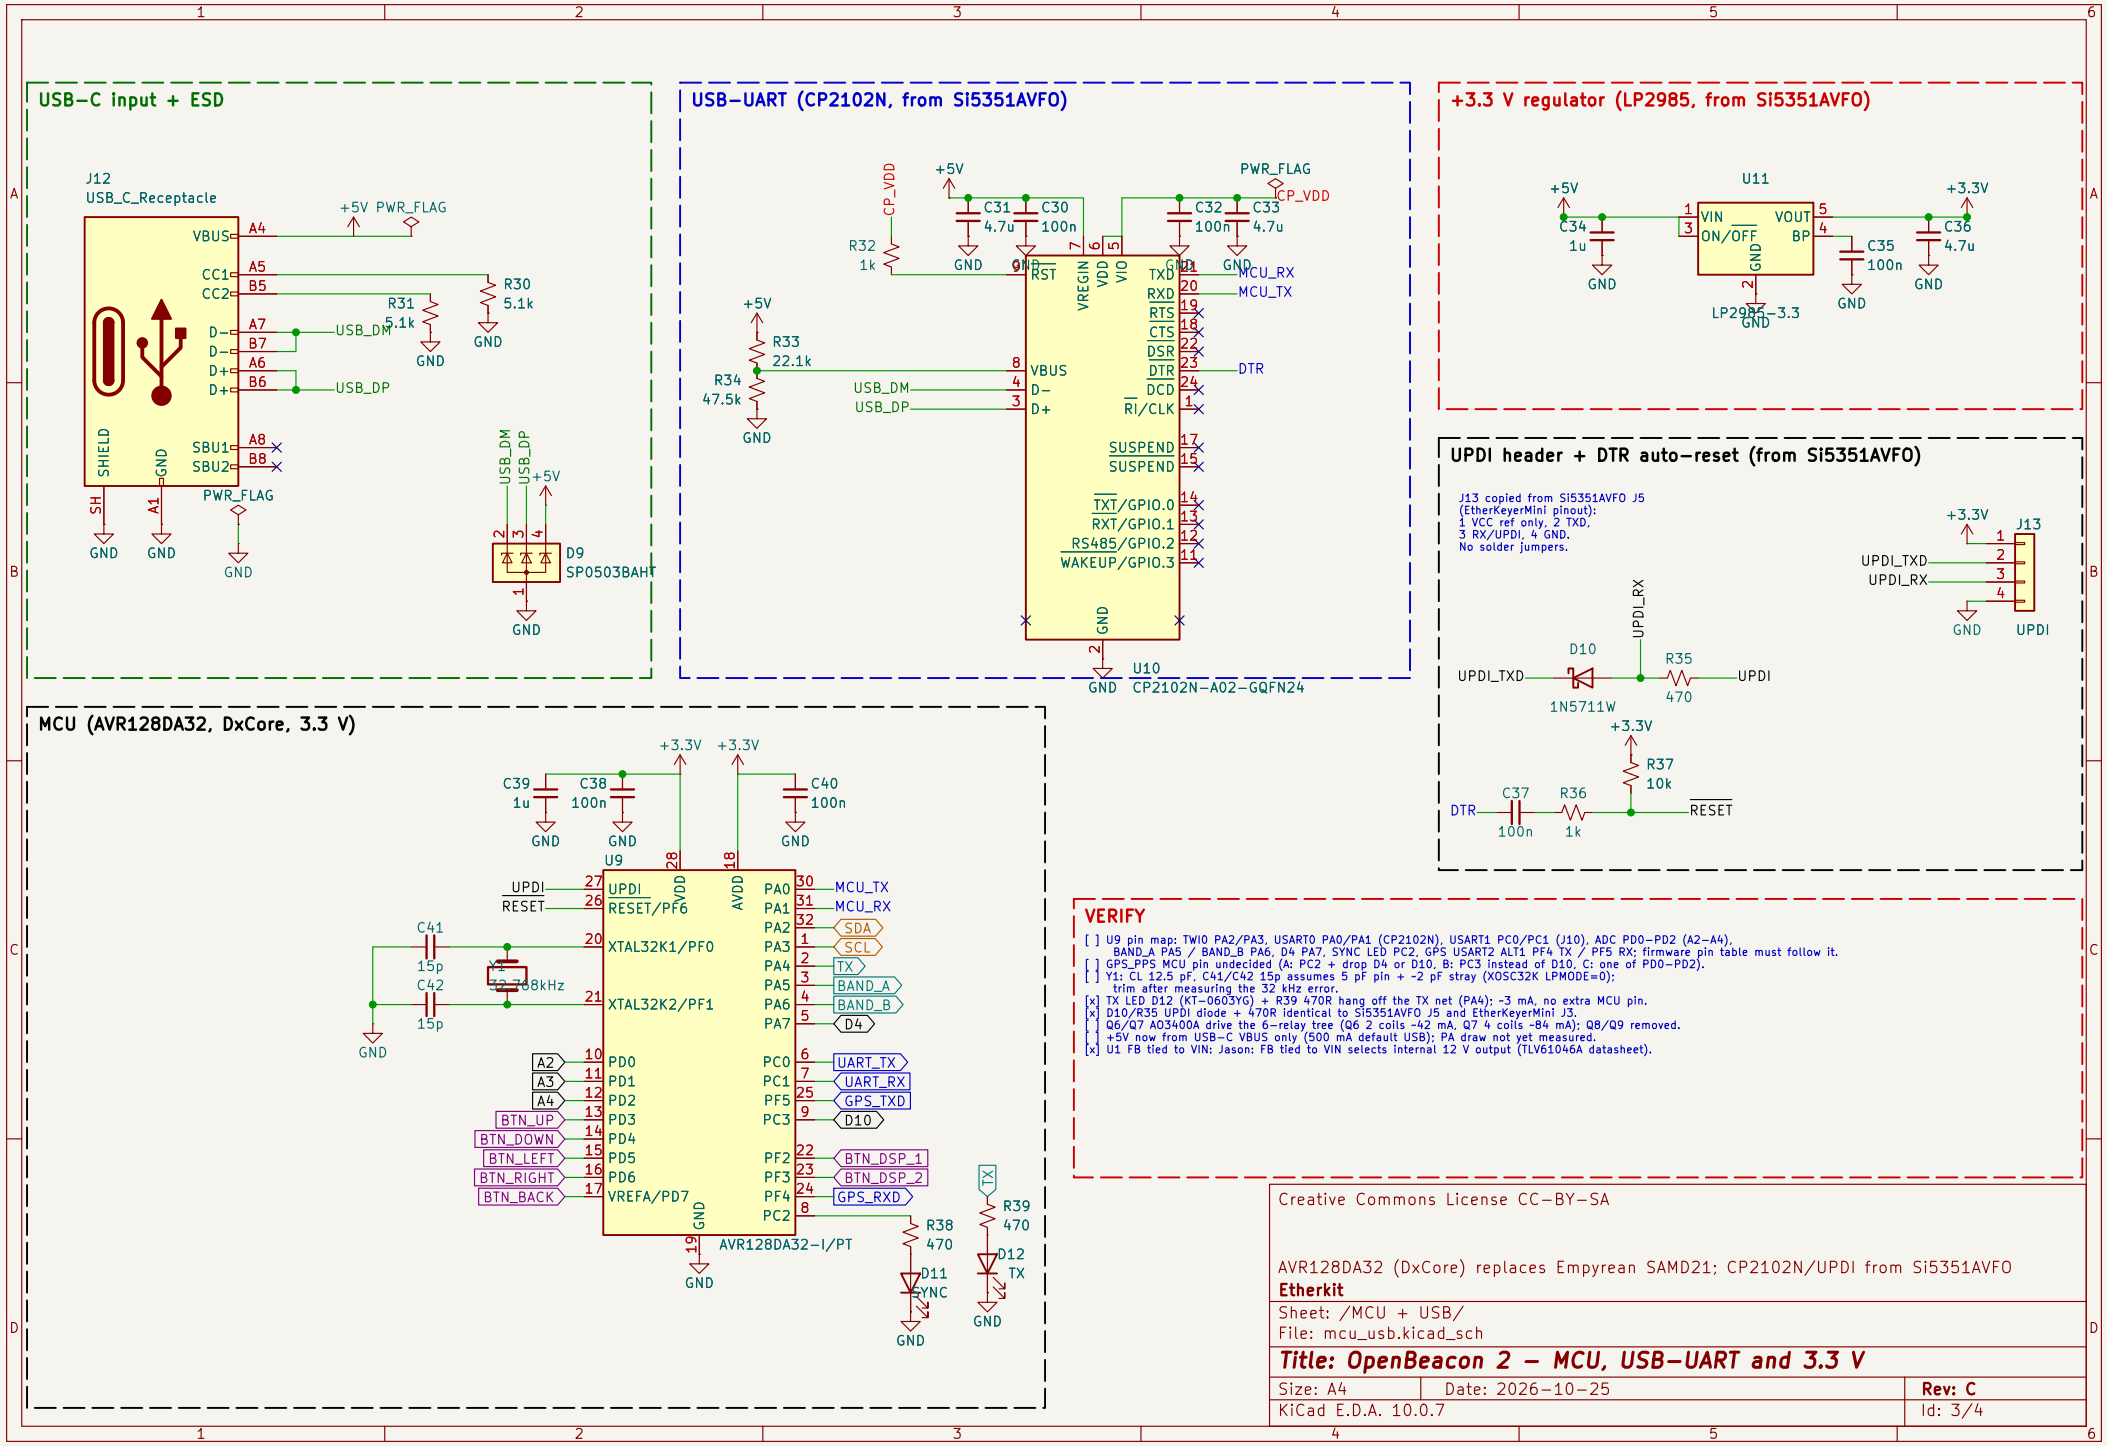
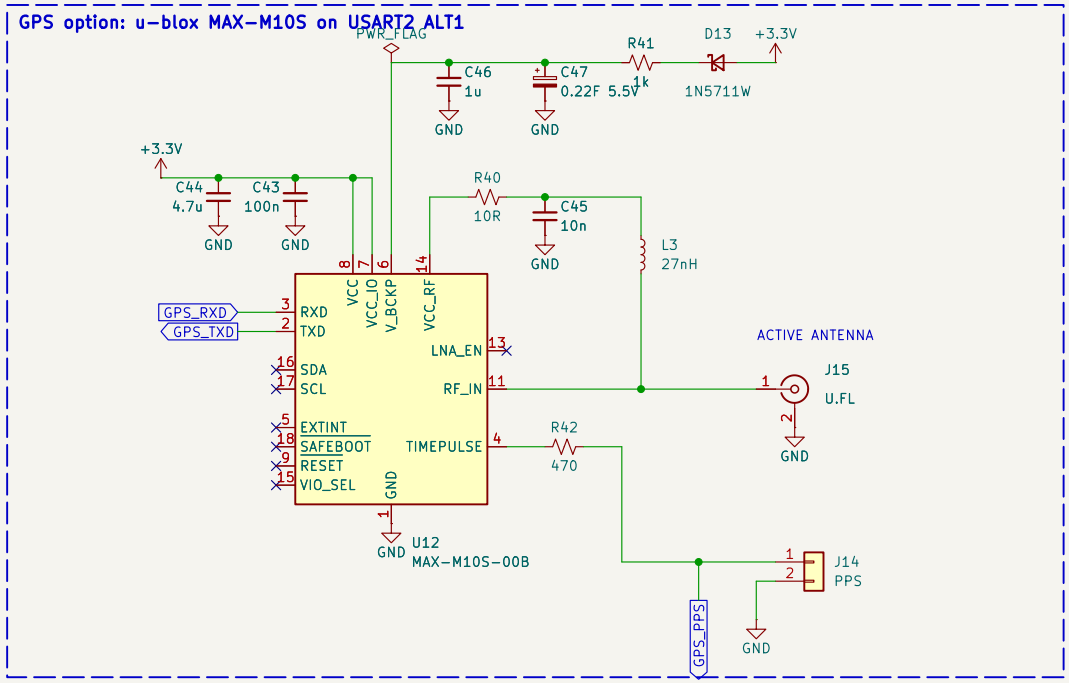

Boost Converter
IO Headers
Digital IO
ADC Inputs
I2C Bus
UART
User Interface
External EEPROM
Keying
Power Amplifier
PA Bias
Low-Pass Filter Bank
(sheet 2)
I2C Level Conversion
SI5351A PLL
MCU + USB
GPS
Filter Bank
File: filter_bank.kicad_sch
File: mcu_usb.kicad_sch
File: gps.kicad_sch
Creative Commons License CC-BY-SA
Etherkit
Sheet: /
File: OpenBeacon2.kicad_sch
Title: OpenBeacon 2
Size: USLetter
Date: 2019-09-18
Rev: B
KiCad E.D.A. 10.0.7
Id: 1/4


F2 80/60 m low-pass (7th-order Cauer)
C202 220p
C204 330p
C206 120p
L201
L202
L203
F80_60_IN
F80_60_OUT
C201 360p
1.5u
C203 750p
1.5u
C205 820p
1.8u
C207 510p
GND
F3 40/30 m low-pass (7th-order Cauer)
C302 82p
C304 200p
C306 68p
L301
L302
L303
F40_30_IN
F40_30_OUT
C301 68p
680n
C303 430p
680n
C305 470p
1.0u
C307 360p
F4 20/17 m low-pass (7th-order Cauer)
C402 56p
C404 20p
C406 110p
L401
L402
L403
F20_17_IN
F20_17_OUT
C401 150p
390n
C403 330p
560n
C405 270p
270n
C407 1.1p
F5 15/12/10 m low-pass (7th-order Cauer)
C502 82p
C504 39p
C506 6.2p
L501
L502
L503
F15_10_IN
F15_10_OUT
C501 47p
180n
C503 160p
270n
C505 200p
330n
C507 110p
Relay tree (2 levels, input + output mirrored; all off = 80/60 m)
K1 = K_A1
pair sel. (in)
K1
G6K-2F-Y-DC5
P2_IN
P1_IN
LPF_IN
+5V
COIL_A
D1
1N4148W
K2 = K_B1
80/60 | 40/30 (in)
K2
G6K-2F-Y-DC5
F40_30_IN
F80_60_IN
P1_IN
COIL_B
D2
1N4148W
K3 = K_B2
20/17 | 15/10 (in)
K3
G6K-2F-Y-DC5
F15_10_IN
F20_17_IN
P2_IN
COIL_B
D3
1N4148W
K4 = K_A2
pair sel. (out)
K4
G6K-2F-Y-DC5
P2_OUT
P1_OUT
LPF_OUT
COIL_A
D4
1N4148W
K5 = K_B3
80/60 | 40/30 (out)
K5
G6K-2F-Y-DC5
F40_30_OUT
F80_60_OUT
P1_OUT
COIL_B
D5
1N4148W
K6 = K_B4
20/17 | 15/10 (out)
K6
G6K-2F-Y-DC5
F15_10_OUT
F20_17_OUT
P2_OUT
COIL_B
D6
1N4148W
Relay drivers
BAND_A
BAND_B
R9 22k
R10 22k
Q6 AO3400A
Q7 AO3400A
COIL_A
COIL_B
GND
BAND_A -> K1/K4, BAND_B -> K2/K3/K5/K6.
Q6 (BAND_A): 2 coils, 42 mA nom (5 V / 237 R),
<= 49 mA at 5.25 V, -10 % coil R.
Q7 (BAND_B): 4 coils, 84 mA nom, <= 98 mA.
AO3400A: 5.7 A cont., 48 mR @ Vgs 2.5 V -> <5 mV drop.
One 1N4148W flyback per coil, at each relay.
Band code + notes
Band code (BAND_A, BAND_B):
0 0 80/60 m (all relays off, NC path, default)
0 1 40/30 m (K2, K3, K5, K6 on)
1 0 20/17 m (K1, K4 on)
1 1 15/12/10 m (all six on)
Unselected filters float (open at both ends).
+5V relay load: 0 / 84 / 42 / 127 mA nominal (<=147 mA).
Relay pins: COM right, NC lower left, NO upper left; pole 2 unused.
Input and output paths never share a relay body.
Layout: keep K1-K2-K3 and K4-K5-K6 traces short,
50 ohm CPWG over solid GND, filters next to their relays.
Creative Commons License CC-BY-SA
4 7th-order Cauer LPFs, 6-relay 2-level tree (2-bit BAND_A/BAND_B); unselected filters open
Etherkit
Sheet: /Filter Bank/
File: filter_bank.kicad_sch
Title: OpenBeacon 2 – Low-Pass Filter Bank
Size: A4
Date: 2026-10-25
Rev: C
KiCad E.D.A. 10.0.7
Id: 2/4


USB-C input + ESD
J12
USB_C_Receptacle
+5V PWR_FLAG
VBUS
CC1
CC2
D-
D-
D+
D+
SHIELD
GND
SBU1
SBU2
A4
A5
B5
A7
B7
A6
B6
A8
B8
R30
5.1k
R31
5.1k
USB_DM
USB_DP
SH
A1
PWR_FLAG
GND
USB_DM
USB_DP
+5V
D9
SP0503BAHT
USB-UART (CP2102N, from Si5351AVFO)
CP_VDD
+5V
PWR_FLAG
C31
4.7u
C30
100n
C32
100n
C33
4.7u
R32
1k
GND
RST
VREGIN
VDD
VIO
TXD
RXD
RTS
CTS
DSR
DTR
DCD
RI/CLK
SUSPEND
SUSPEND
TXT/GPIO.0
RXT/GPIO.1
RS485/GPIO.2
WAKEUP/GPIO.3
MCU_RX
MCU_TX
DTR
R33
22.1k
R34
47.5k
VBUS
D-
D+
U10
CP2102N-A02-GQFN24
+3.3 V regulator (LP2985, from Si5351AVFO)
U11
+5V
+3.3V
C34
1u
VIN
ON/OFF
GND
VOUT
BP
C35
100n
C36
4.7u
LP2985-3.3
UPDI header + DTR auto-reset (from Si5351AVFO)
J13 copied from Si5351AVFO J5
(EtherKeyerMini pinout):
1 VCC ref only, 2 TXD,
3 RX/UPDI, 4 GND.
No solder jumpers.
J13
UPDI_TXD
UPDI_RX
UPDI
UPDI_RX
D10
1N5711W
R35
470
R37
10k
C37
100n
R36
1k
DTR
RESET
MCU (AVR128DA32, DxCore, 3.3 V)
C39
1u
C38
100n
C40
100n
U9
UPDI
RESET/PF6
XTAL32K1/PF0
XTAL32K2/PF1
PD0
PD1
PD2
PD3
PD4
PD5
PD6
VREFA/PD7
VDD
AVDD
GND
PA0
PA1
PA2
PA3
PA4
PA5
PA6
PA7
PC0
PC1
PF5
PC3
PF2
PF3
PF4
PC2
AVR128DA32-I/PT
C41
15p
C42
15p
32.768kHz
A2
A3
A4
BTN_UP
BTN_DOWN
BTN_LEFT
BTN_RIGHT
BTN_BACK
MCU_TX
MCU_RX
SDA
SCL
TX
BAND_A
BAND_B
D4
UART_TX
UART_RX
GPS_TXD
D10
BTN_DSP_1
BTN_DSP_2
GPS_RXD
R38
470
D11
SYNC
R39
470
D12
TX
VERIFY
[ ] U9 pin map: TWI0 PA2/PA3, USART0 PA0/PA1 (CP2102N), USART1 PC0/PC1 (J10), ADC PD0–PD2 (A2–A4), BAND_A PA5 / BAND_B PA6, D4 PA7, SYNC LED PC2, GPS USART2 ALT1 PF4 TX / PF5 RX; firmware pin table must follow it.
[ ] GPS_PPS MCU pin undecided (A: PC2 + drop D4 or D10, B: PC3 instead of D10, C: one of PD0–PD2).
[ ] Y1: CL 12.5 pF, C41/C42 15p assumes 5 pF pin + ~2 pF stray (XOSC32K LPMODE=0); trim after measuring the 32 kHz error.
[x] TX LED D12 (KT-0603YG) + R39 470R hang off the TX net (PA4); ~3 mA, no extra MCU pin.
[x] D10/R35 UPDI diode + 470R identical to Si5351AVFO J5 and EtherKeyerMini J3.
[ ] Q6/Q7 AO3400A drive the 6-relay tree (Q6 2 coils ~42 mA, Q7 4 coils ~84 mA); Q8/Q9 removed.
[ ] +5V now from USB-C VBUS only (500 mA default USB); PA draw not yet measured.
[x] U1 FB tied to VIN: Jason: FB tied to VIN selects internal 12 V output (TLV61046A datasheet).
Creative Commons License CC-BY-SA
AVR128DA32 (DxCore) replaces Empyrean SAMD21; CP2102N/UPDI from Si5351AVFO
Etherkit
Sheet: /MCU + USB/
File: mcu_usb.kicad_sch
Title: OpenBeacon 2 – MCU, USB-UART and 3.3 V
Size: A4
Date: 2026-10-25
Rev: C
KiCad E.D.A. 10.0.7
Id: 3/4



VERIFY

- [ ] C47: no stocked supercap at JLC/LCSC; EECS0HD224H is THT, hand-solder, no footprint.
- [ ] Antenna short: 3.2 V / 10R = 320 mA, above VCC_RF 250 mA abs max; no supervisor.
- [ ] V_IO ramp 25–35000 us/V (DS 4.1): measure LP2985 start-up.
- [ ] +3.3V budget: GPS inrush 100 mA, LP2985 peak ~145 of 150 mA.
- [ ] GPS_PPS MCU pin: A PC2 (move LED), B PC3 (drop D10), C PD0–PD2.

RECEIVER: VCC + V_IO tied to +3.3V; VIO_SEL open = 3.3 V I/O (IM 4.1.2).
C43/C44 beside pins 7/8, short GND vias; no series R > 0.2 ohm in VCC (IM 4.1.1).
RESET_N, EXTINT, SDA, SCL, SAFEBOOT_N, LNA_EN left open (DS Table 10).
PPS: TIMEPULSE = SAFEBOOT_N via 1k inside (DS fn 15); nothing may hold it low at power-up, so no pull-down. R42 limits a shorted J14 to ~7 mA (I_PIO 10 mA).

ANTENNA: RF_IN is DC-blocked inside the module (IM Table 1), no external DC block.
Bias-T VCC_RF -> R40 10R -> C45 10n -> L3 27 nH onto RF line (IM 4.3.4, Tables 52–54).
Layout: 50 ohm CPWG pin 11 -> J15, L3 pad on the line, >= 5 mm from digital.
BACKUP: D13 + R41 charge C47 to ~2.9 V, D13 blocks back-feed; C46 1u at pin 6 for the switch-over peak (IM 4.1.3). ~2.7 h hold at 28 uA (DS Table 17).

Creative Commons License CC-BY-SA

MAX-M10S on USART2 ALT1, PPS to J14, active-antenna bias-T, supercap V_BCKP

Etherkit

Sheet: /GPS/
File: gps.kicad_sch

Title: OpenBeacon 2 – GPS (u-blox MAX-M10S)

Size: A4	Date: 2026-10-25	**Rev: C**
KiCad E.D.A. 10.0.7		Id: 4/4