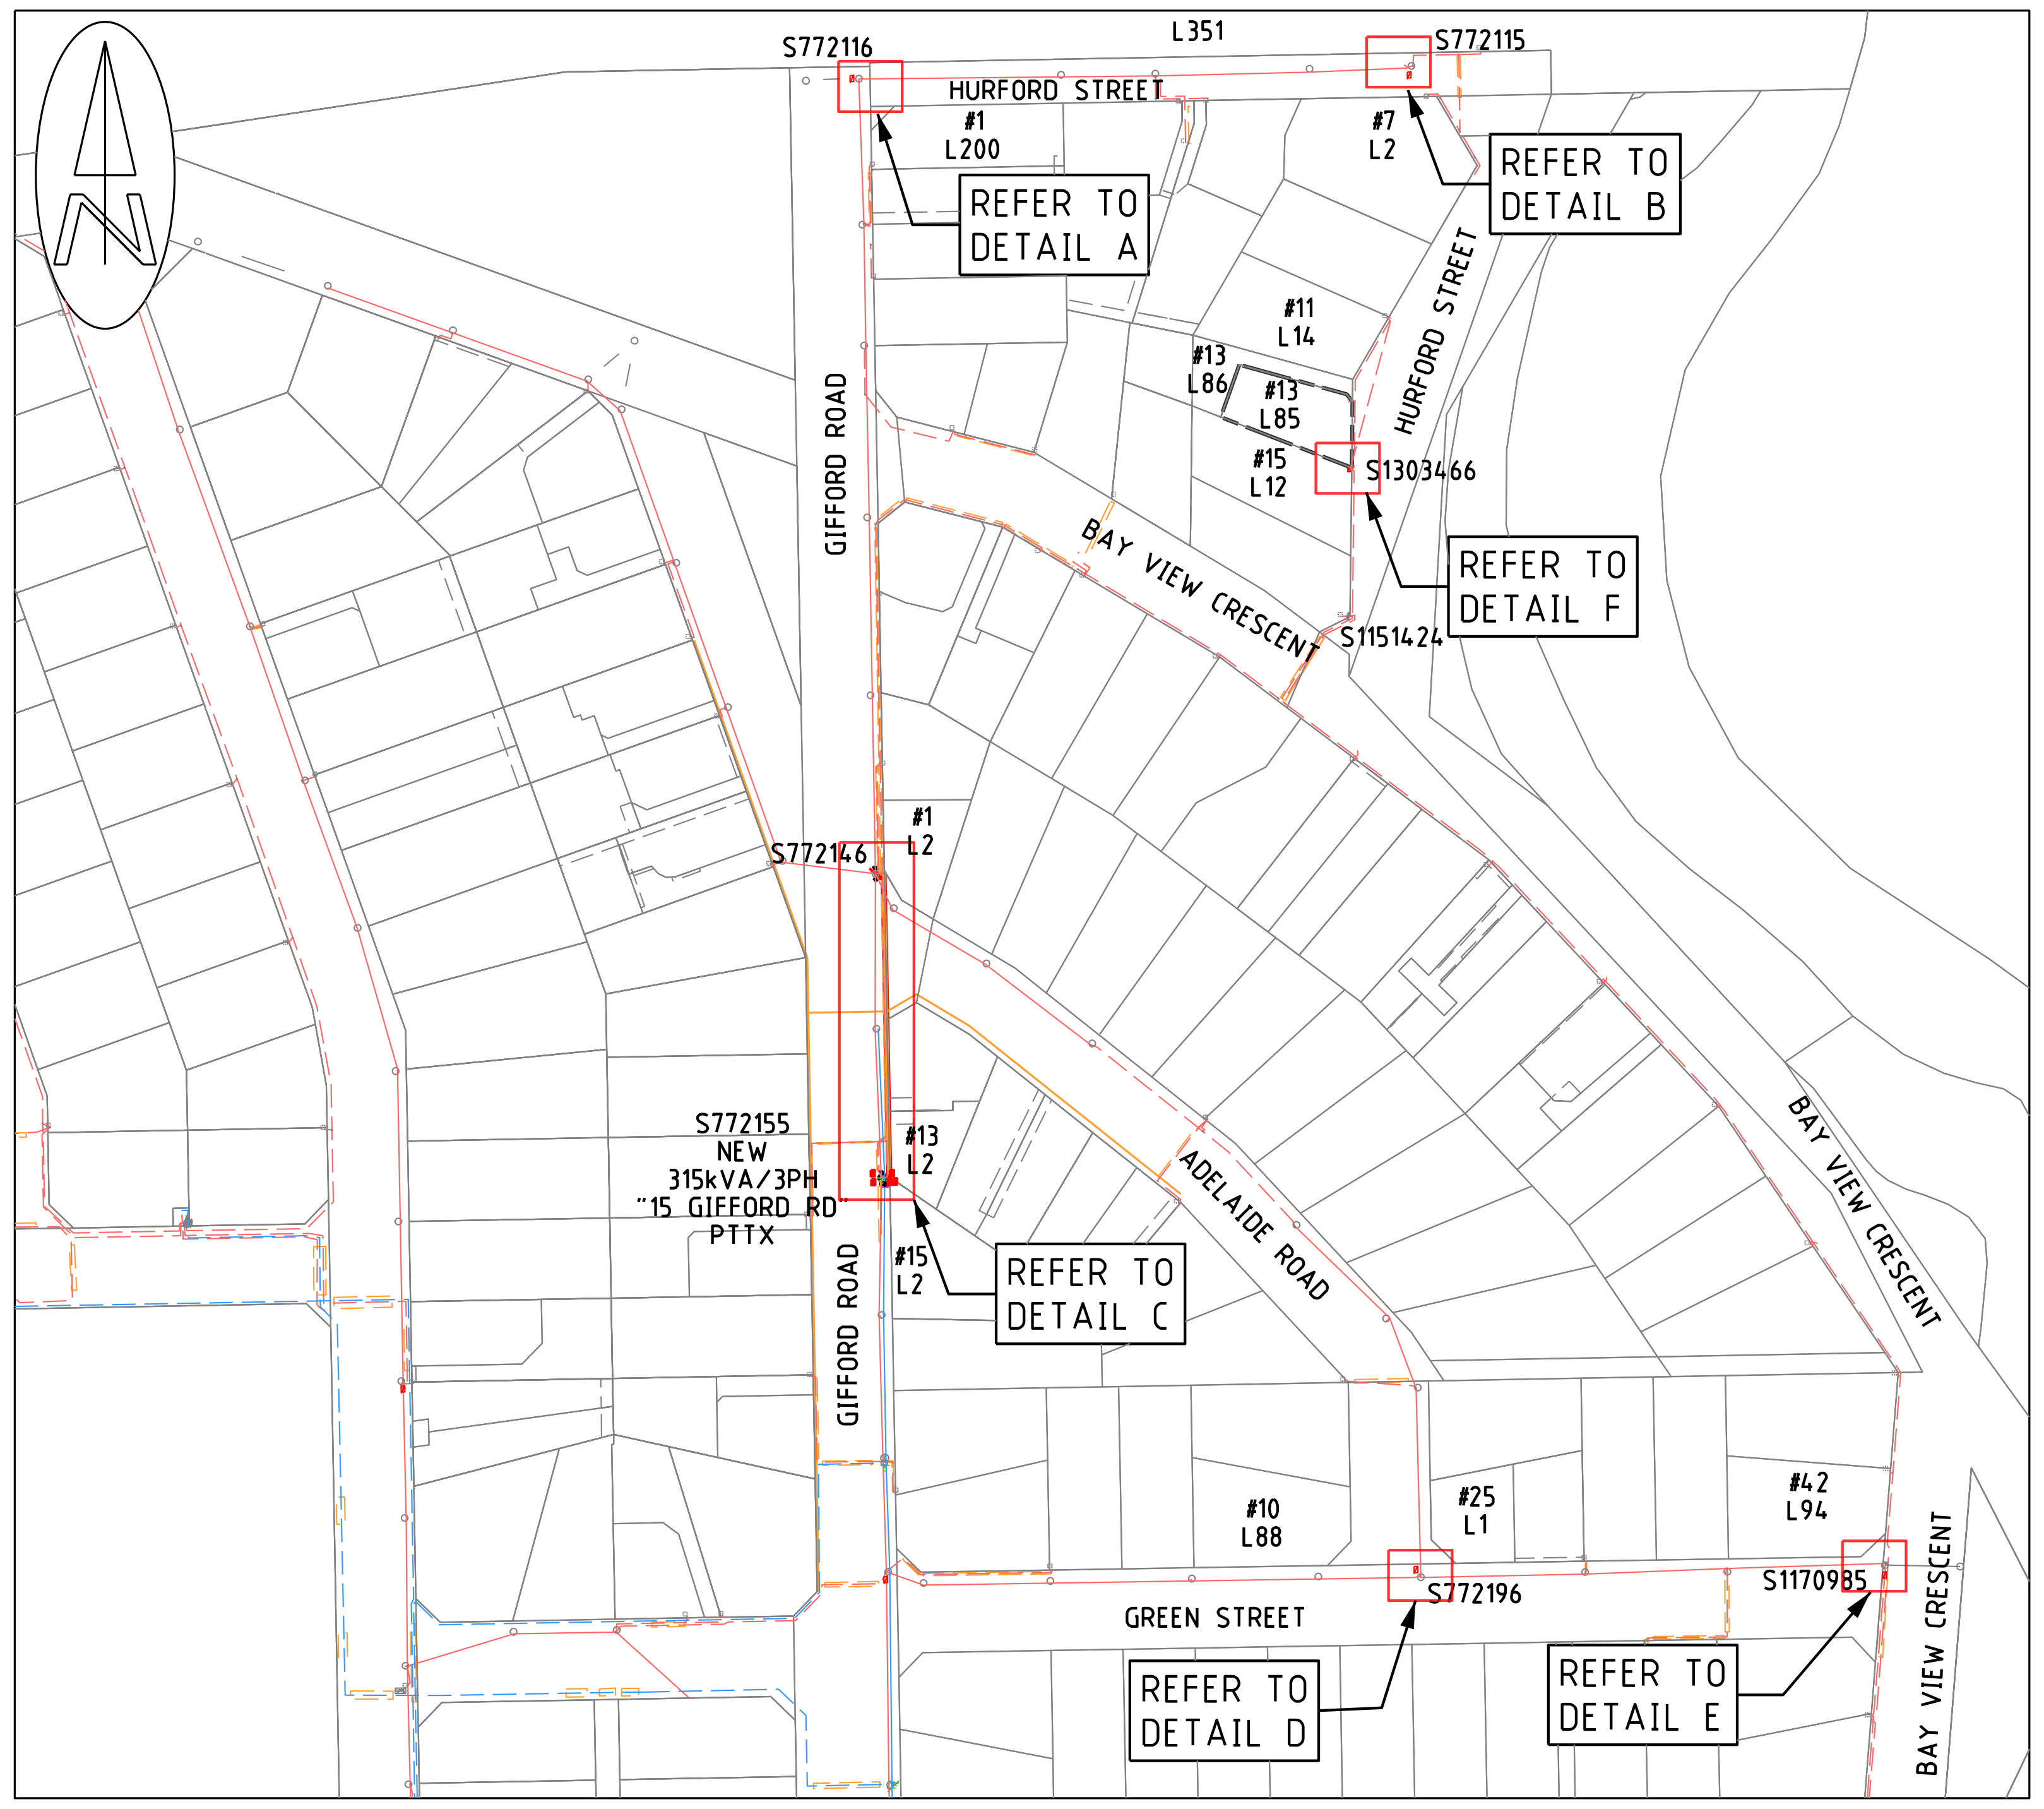

LOCATION PLAN

1:2000

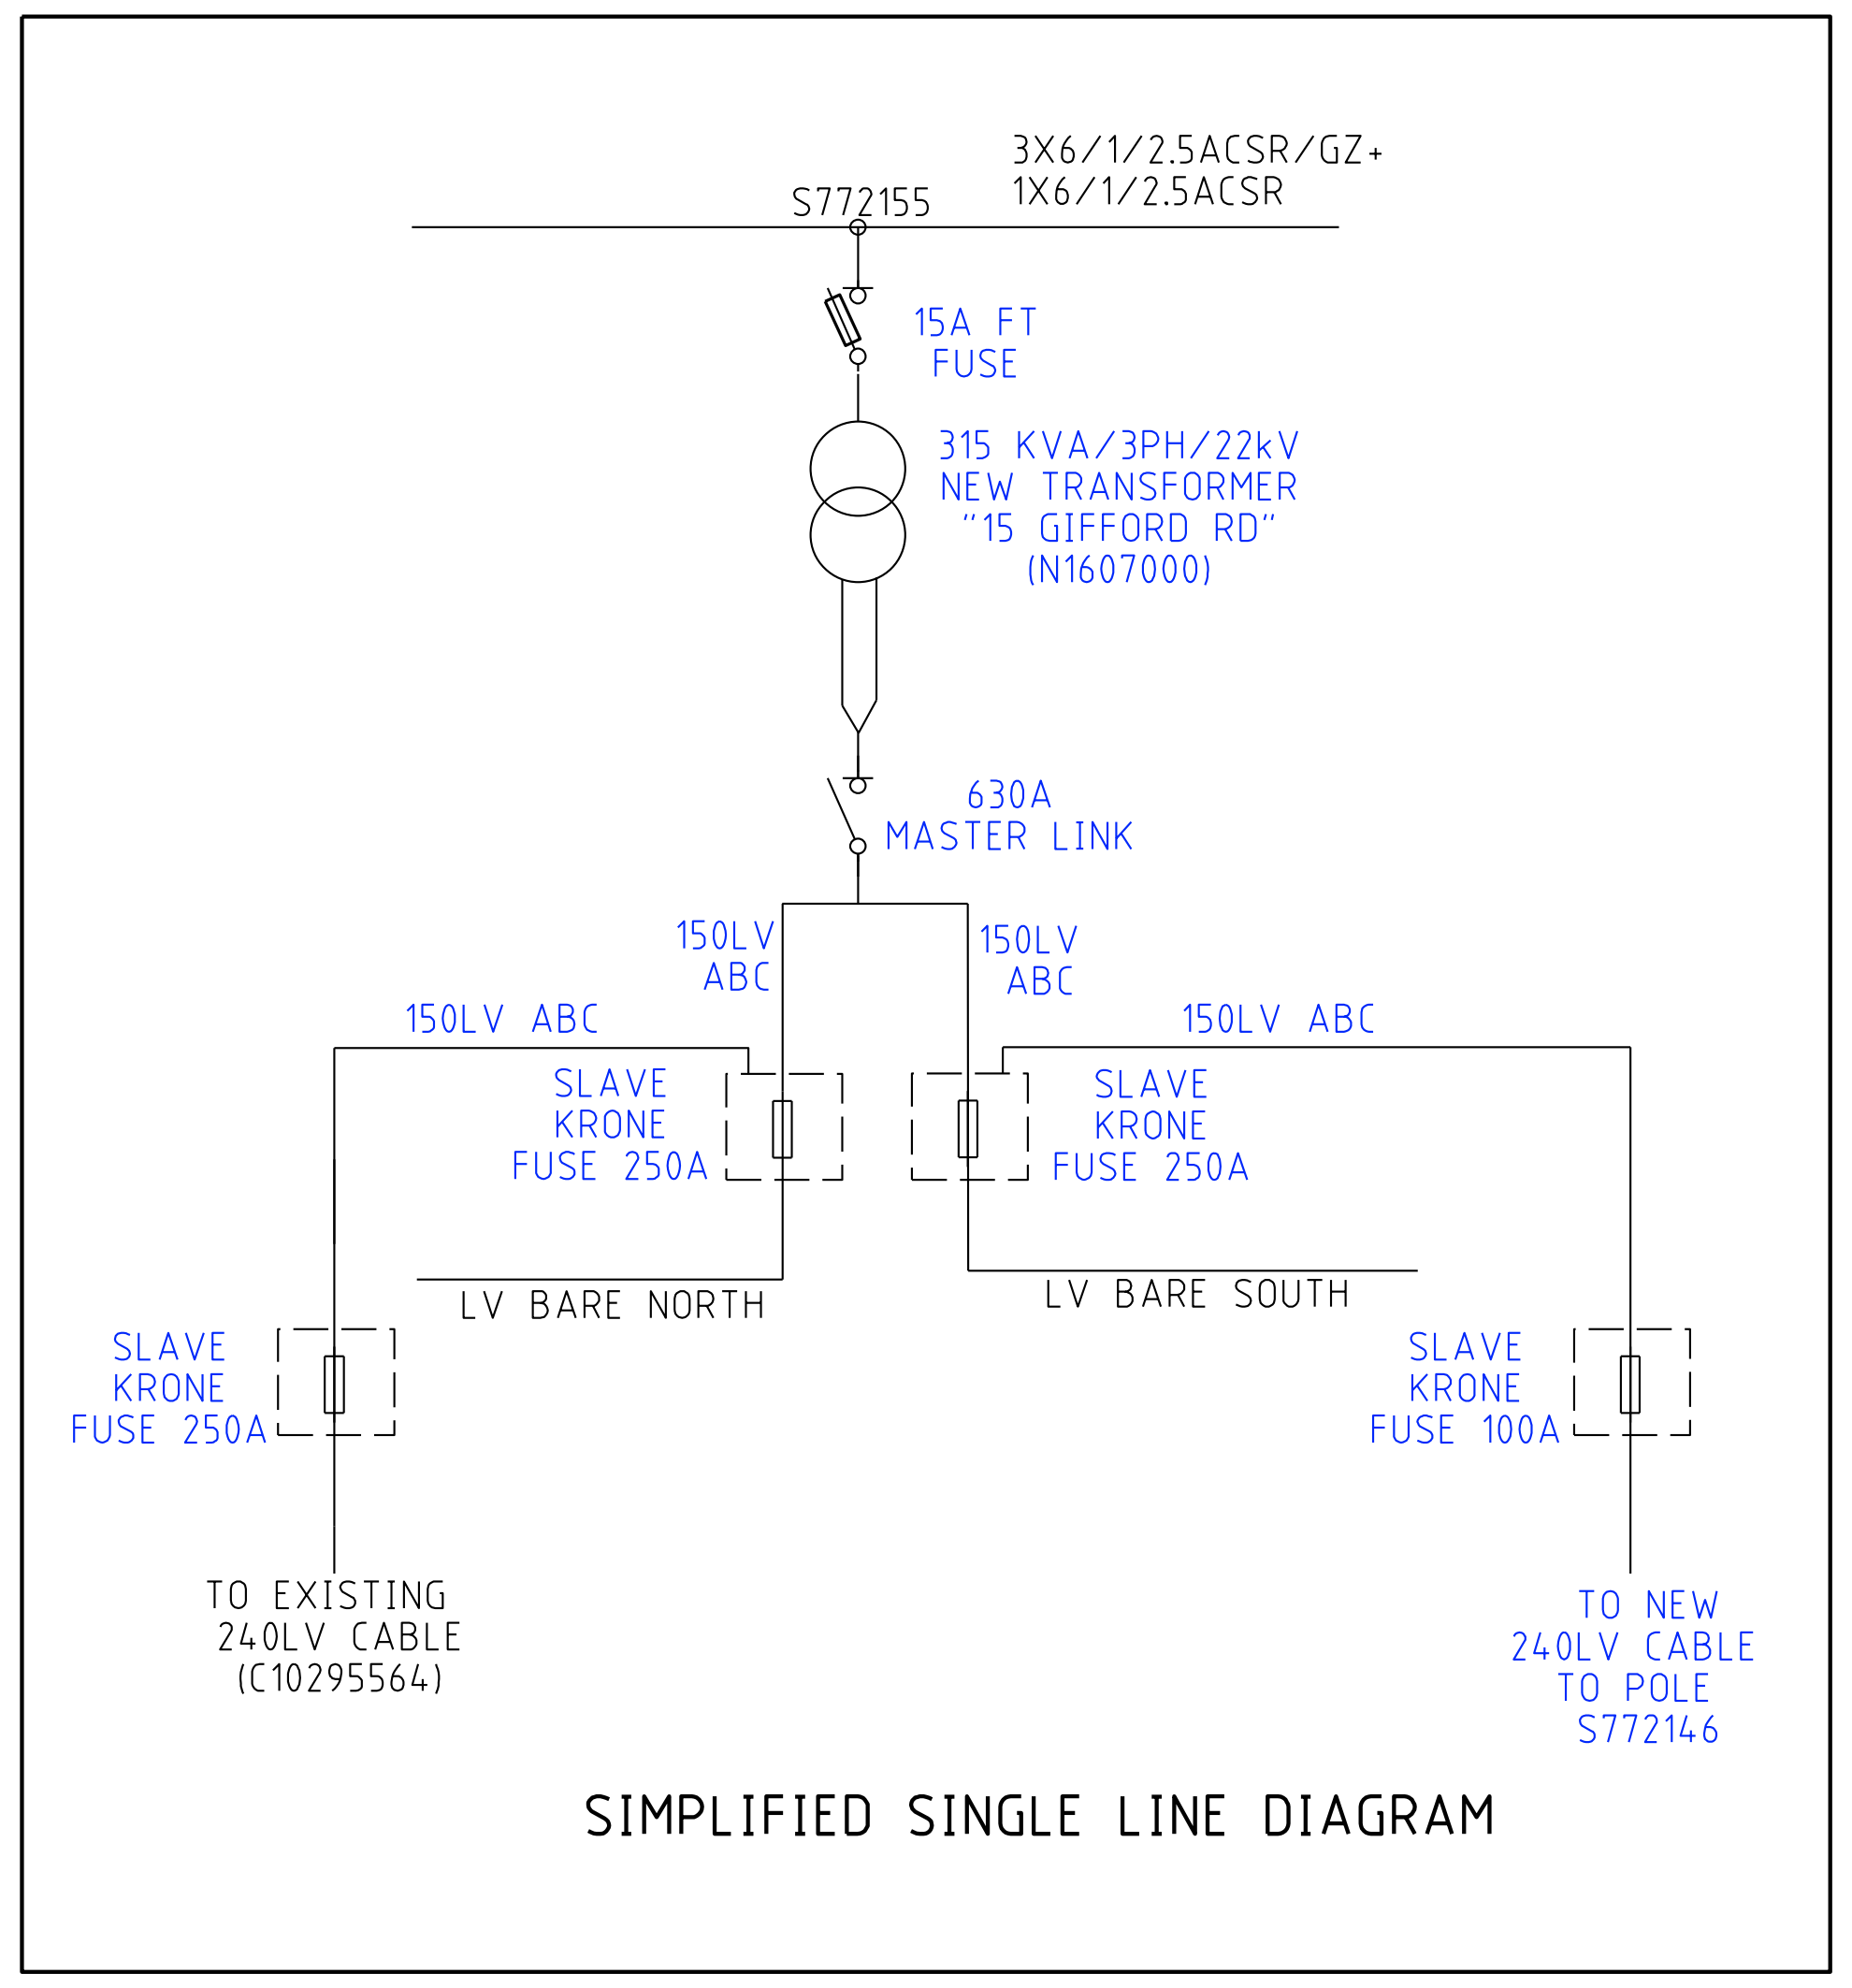

SIMPLIFIED SINGLE LINE DIAGRAM

EXISTING UNI-PILLAR S1151424 LOACTED
AT L11/#15 BAY VIEW CR
HAS LINKS INBETWEEN TOP BAR AND BOTTOM BAR
AS PER LKG SQ019786

CRITICAL RISK MANAGEMENT

▣ ▣ ▣ ▣ ▣ ▣ ☐ ▣ ☐

NO DESIGN CHANGES
WITHOUT MANAGER APPROVAL

ISSUED FOR CONSTRUCTION

DESIGNED TO BE CONSTRUCTED DE-ENERGISED

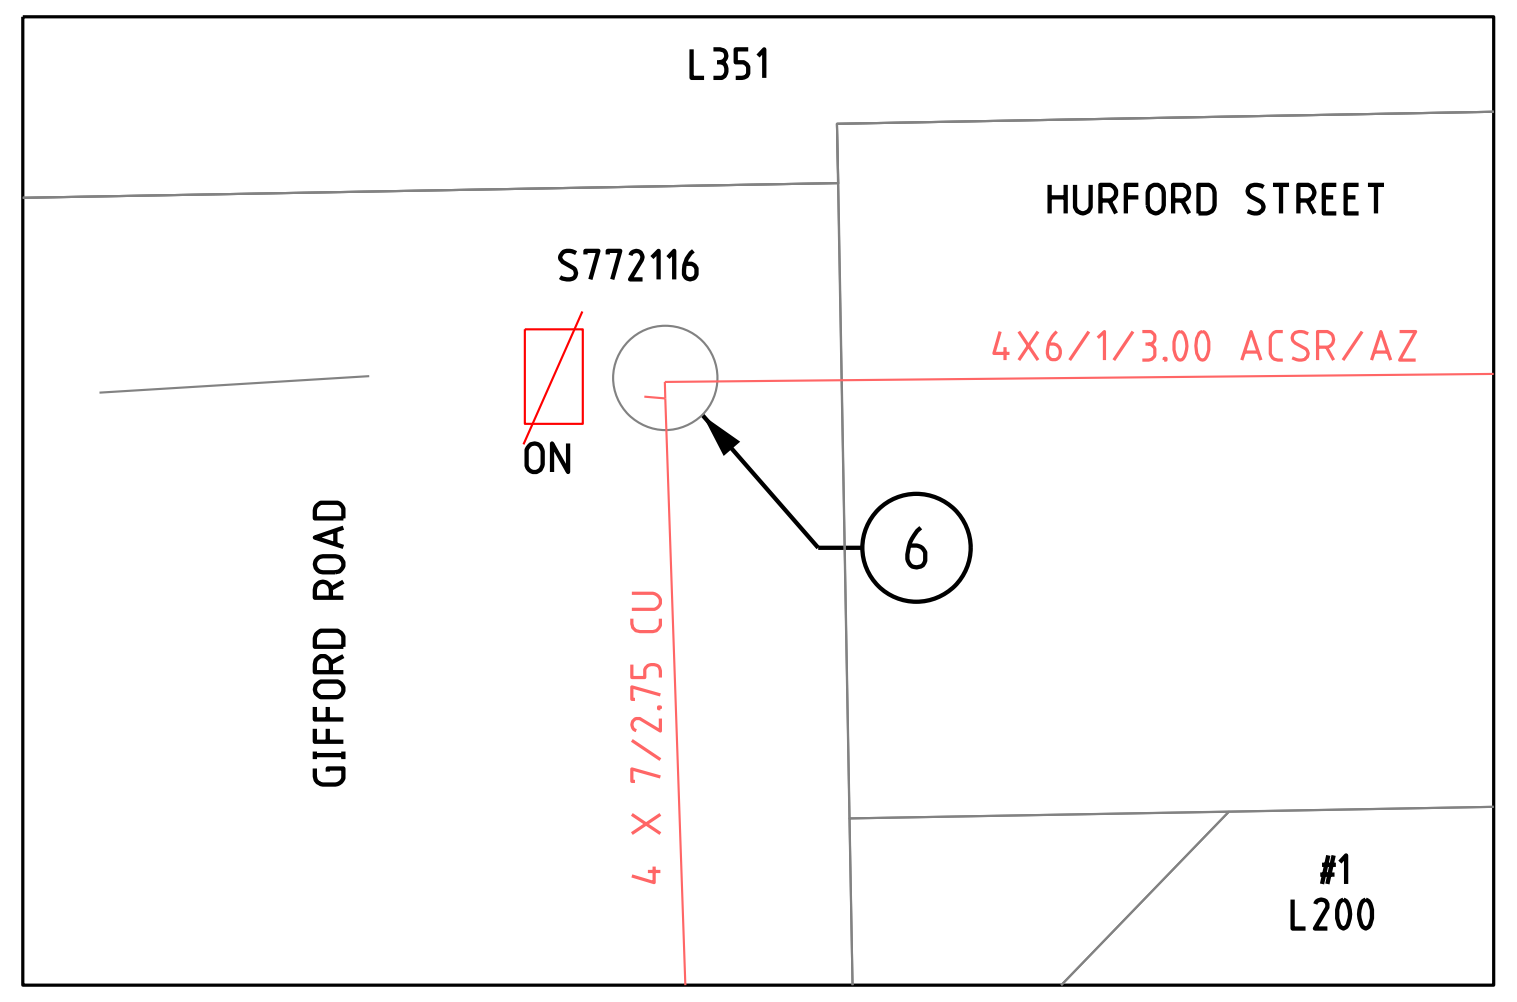

DETAIL A

1:200

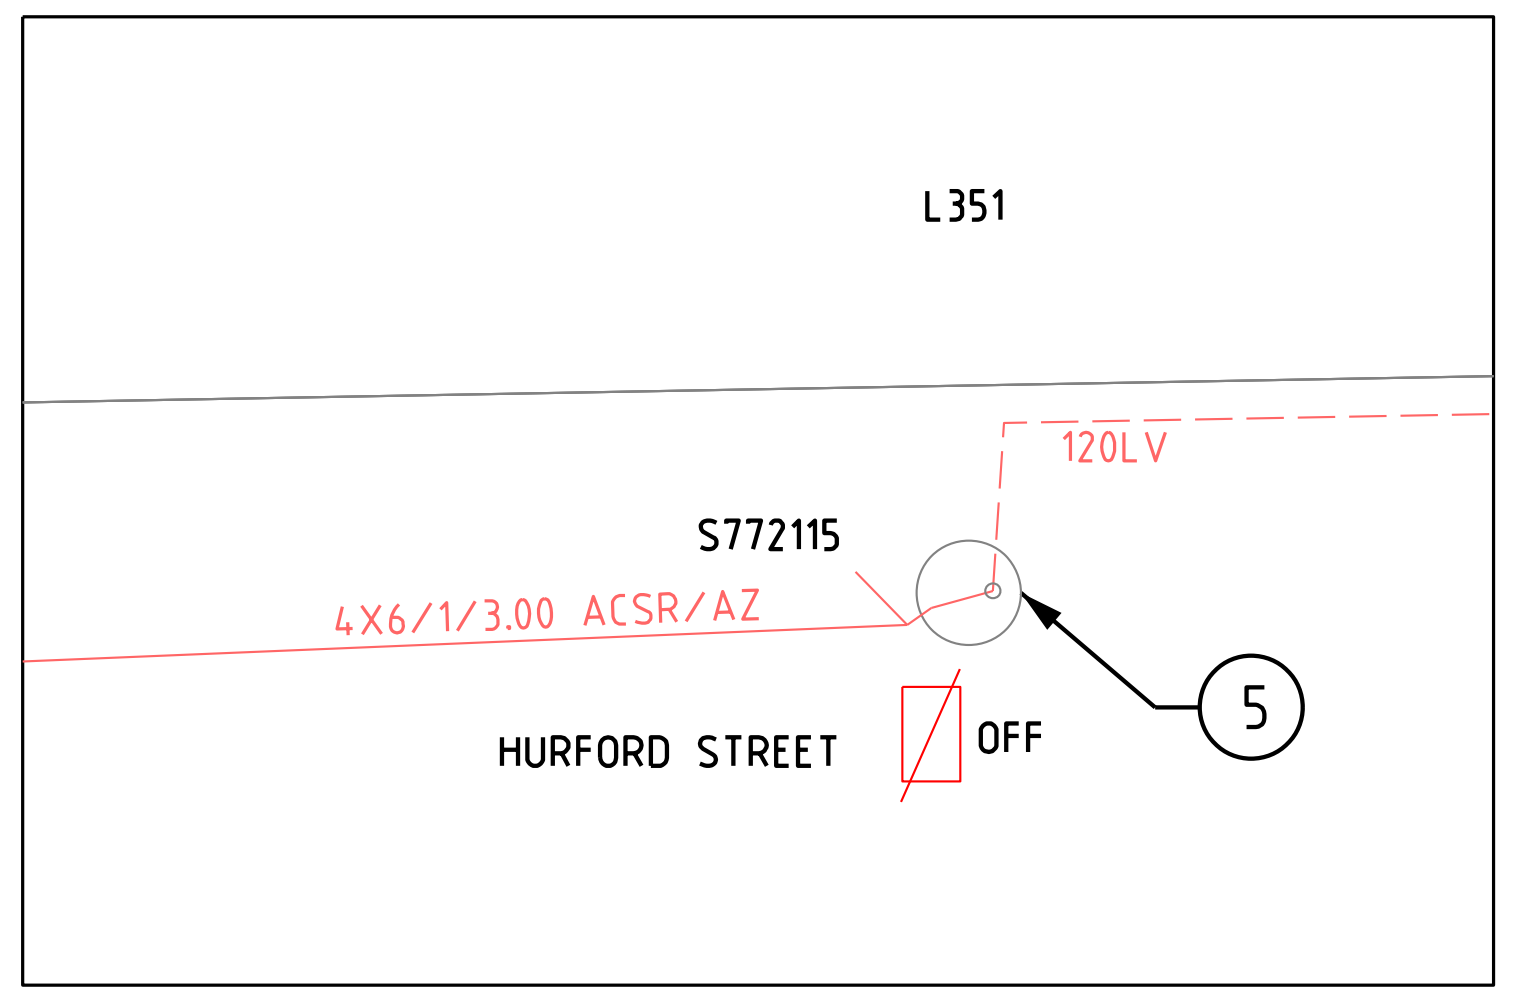

DETAIL B

1:200

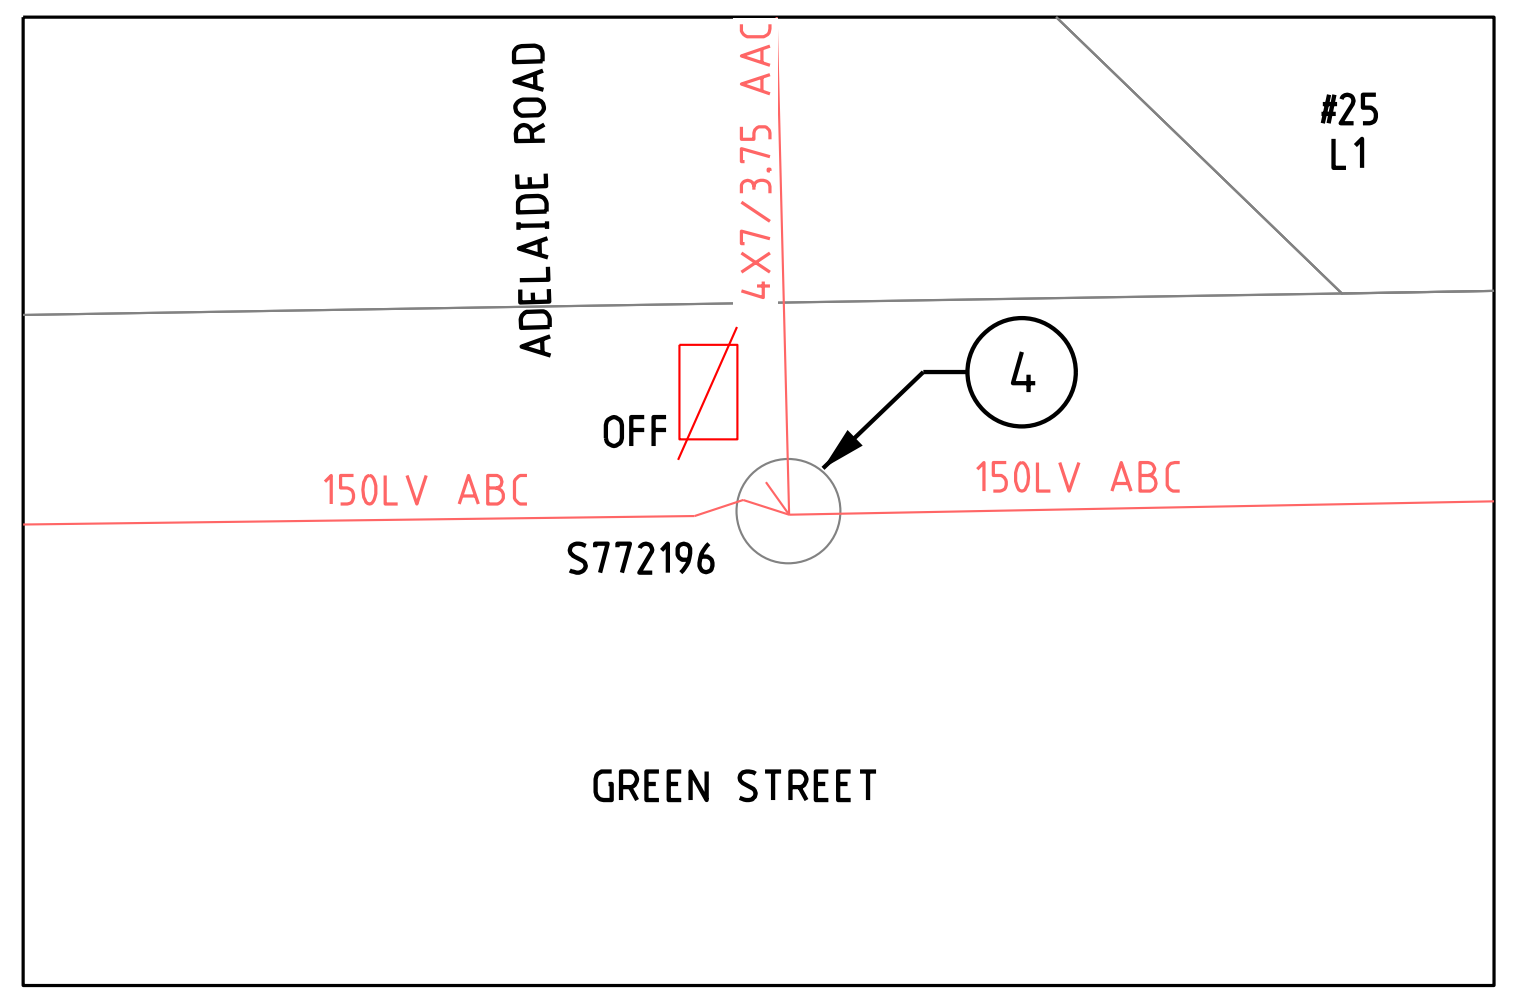

DETAIL D

1:200

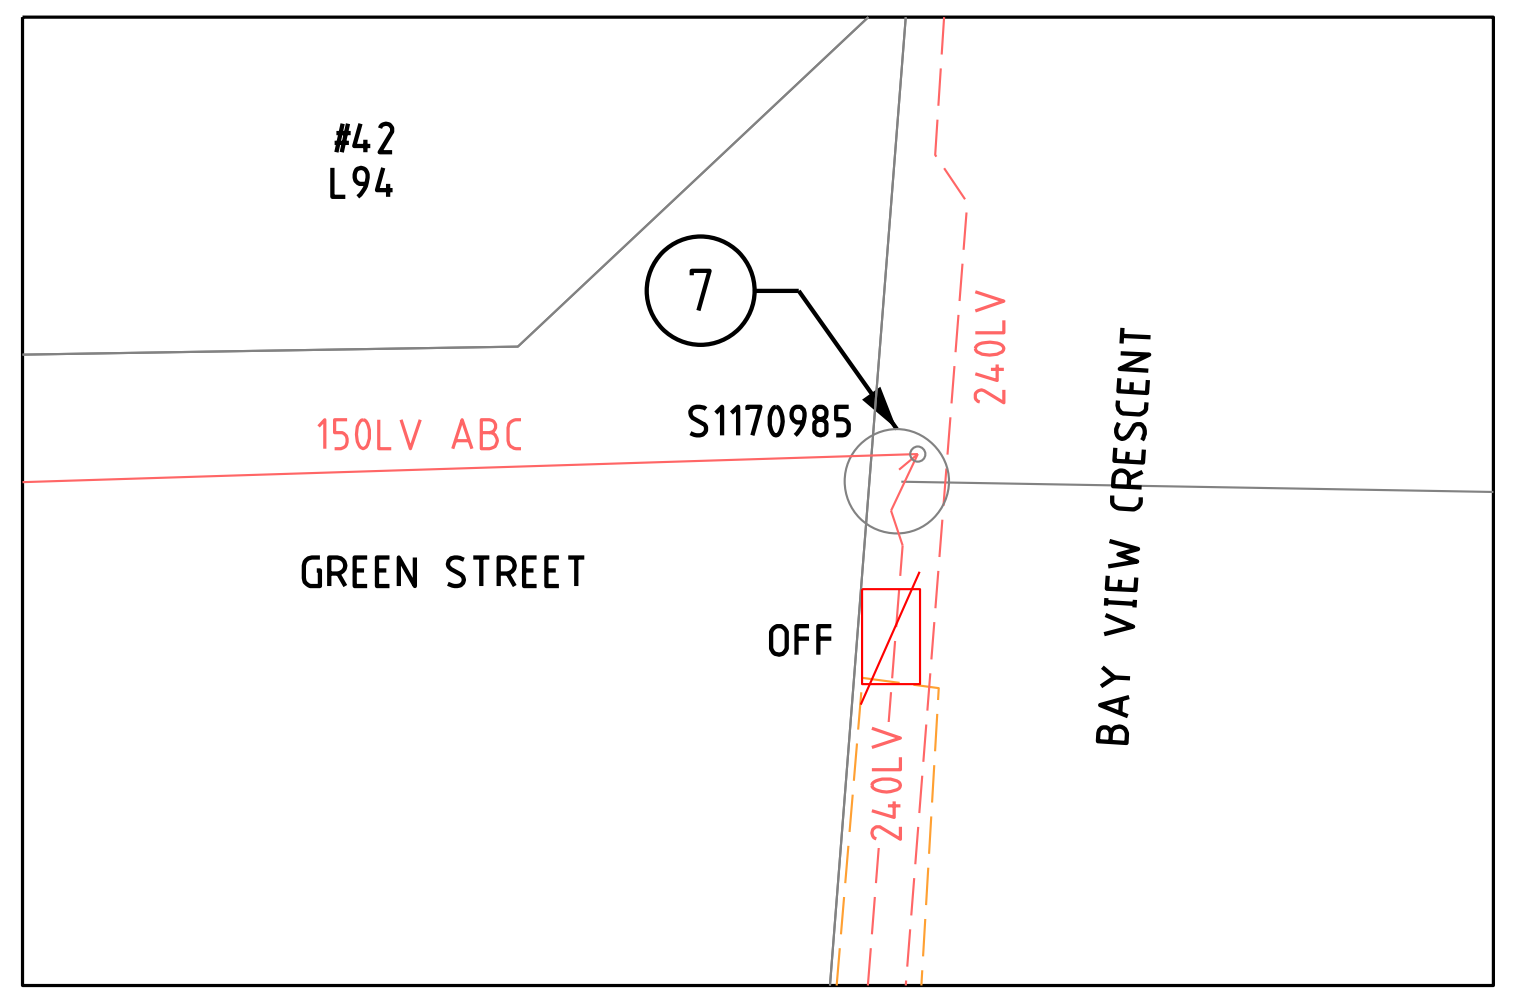

DETAIL E

1:200

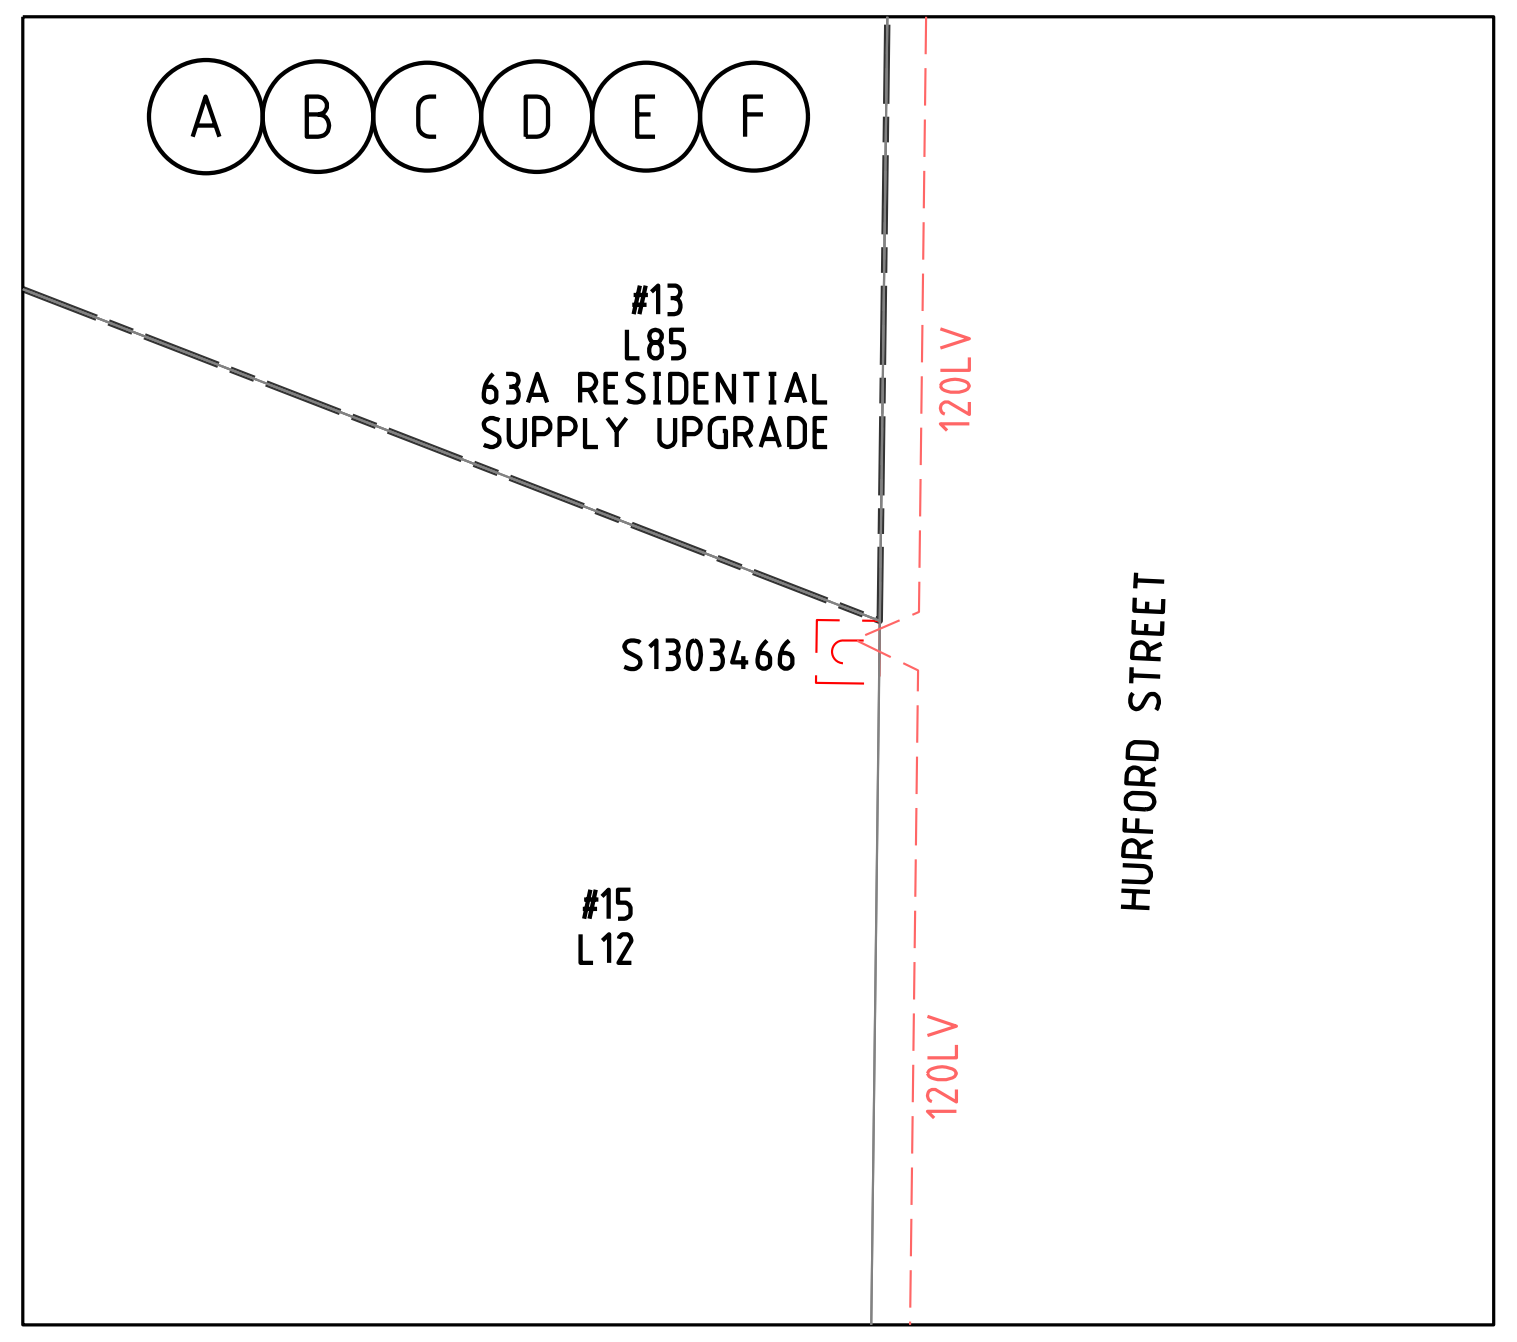

DETAIL F

1:200

CUSTOMER SCOPE OF WORK

Ⓐ THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE WESTERN AUSTRALIAN SERVICE AND INSTALLATION REQUIREMENTS.

Ⓑ CUSTOMER MUST COMPLY WITH POWER QUALITY LIMITS AS PER AS/NZS TS IEC 61000.3.5 AND WESTERN POWER TECHNICAL REQUIREMENTS.

Ⓒ CUSTOMER TO SUPPLY AND INSTALL A SMSB PRIOR TO ENERGISATION WITHIN 30m OF THE POINT OF SUPPLY (MINI-PILLAR).

Ⓓ CUSTOMER IS RESPONSIBLE TO ARRANGE FOR WESTERN POWER, OR AN APPROPRIATELY ACCREDITED ELECTRICAL CONTRACTOR TO INSTALL DIRECT METERING IN THE SWITCHBOARD PRIOR TO SUPPLY BEING ENERGIZED.

Ⓔ SHOULD ANY VEGETATION CLEARING BE REQUIRED TO COMPLETE THE SCOPE OF WORKS, CUSTOMER SHALL CLEAR AS REQUIRED AND OBTAIN RELEVANT APPROVALS.

Ⓕ CUSTOMER IS RESPONSIBLE TO ARRANGE FOR WESTERN POWER ELECTRICAL SERVICE REQUEST, OR AN APPROPRIATELY ACCREDITED ELECTRICAL CONTRACTOR TO TERMINATE ALL CONSUMER MAINS TO THE PILLAR BACK BLOCKS. MAX SIZE CONSUMER MAINS THAT CAN BE TERMINATED IS 35MM2/PHASE CABLE

WESTERN POWER SCOPE OF WORK

① INSTALL 240LV MAIN CABLE FROM POLE S772155 TO POLE S772146 VIA 110MM POLYPIPE
CU: CN45 x 100m , CN54 x 3, CN73_LVMAINS x 3

② AT EXISTING 12.5m/6kN WOOD POLE S772155
-DISCONNECT AND REMOVE EXISTING HV CROSSARM, PTTX AND ASSOCIATED EQUIPMENT.
-REPLACE POLE WITH 12.5m/8kN WOOD POLE.
-INSTALL HV INTERMEDIATE CROSSARM.
-INSTALL 15A FAULT TAMER DOF CROSS ARM ASSEMBLY.
-INSTALL LV INLINE STRAIN CROSSARM.
-INSTALL NEW 22kV/315kVA PTTX.
-INSTALL NEW 630A MASTER LINK AND 2x250A KRONE FUSE AS PER DCSH R12-3.
-TAP EXISTING LV BARE TO NEW TX VIA KRONE FUSE AS PER SLD.
-TERMINATE NEW 240LV CABLE VIA ADDITIONAL KRONE BOX (SLAVE) WITH 100A FUSES AS SHOWN ON SLD.
-CONNECT EXISTING 240LV CABLE VIA ADDITIONAL KRONE BOX (SLAVE) WITH 250A FUSES AS SHOWN ON SLD.
-REPLACE/REATTACH 3xOH SERVICES SUPPLY.
-RETERMINATE EXISTING 25LV CABLE TO EXISTING LV OH BARE.
CU: P09_M x 1, HV1_3HS x 1, HV52_15FT x 3,
HV20_3H x 1, TX8_1_315/22 x 1, CN9_T6/1/25 x 4 ,
CN70_95 x 4, LV3_W3 x 1, CN9_CU x 8, CN69_95 x 8,
HV34_PT x 1, HV34_PT12 x 1, HV34_PT16 x 1
CN27_3/275 x 3, LU37_2400 x 2, LU37_240U x 2,
LV8_3PX 2, LV8_1P x 1, LU51_25ALO x 1, LU51_25ALU x 1
NON CU: GF2130 x 3, GF2129 x 3, FC0110 X 10, CB0204 x 3
DCSH: R12-3, R13-3-1, H11-3, R10-1, L03, U17,
R-3-3, R6-1-4. R11-1

③ AT EXISTING POLE S772146
- REPLACE TOP INTERMEDIATE XARM WITH INLINE STRAIN XARM
- INSTALL NEW LV ISOLATORS (OPEN)
-TAP EXISTING LV BARE NORTH TO LV BARE SOUTH VIA NEW LV ISOLATORS. (OPEN)
- TERMINATE NEW 240LV CABLE TO CONDUCTORS HEADING NORTH
- RE-TAP EXISTING EAST- WEST LV CONDUCTORS TO CONDUCTORS HEADING SOUTH REFER TO DETAIL G
CU: LV3_W3 x 1, CN9_CU X 8, CN11_150 X 6,
CN13_19/275CU x 8, CN39_150/4M x 1, CN69_150 x 8,
LV6_600Ax1, LU6_2400x1, LU6_240Ux1
DCSH: U16-1

④ AT EXISTING POLE S772196
-SWITCH EXISTING KRONE FUSE TO "OFF" POSTION

⑤ AT EXISTING POLE S772115
-SWITCH EXISTING KRONE FUSE TO "OFF" POSTION

⑥ AT EXISTING POLE S772116
-SWITCH EXISTING KRONE FUSE TO "ON" POSTION

⑦ AT EXISTING POLE S1170985
-CONFIRM IN "OFF" POSTION

⑧ ENVIRONMENTAL FILTER CHECKED
NO ENVIRONMENTAL ISSUES IDENTIFIED GIVEN THE NATURE OF THE PROPOSED WORKS. THE FOLLOWING POTENTIAL ENVIRONMENTAL RISK LAYERS ARE PRESENT WITHIN THE AREA OF WORKS.
1. DECLARED RARE FLORA
2. WEST RINGTAIL HABITAT SUITABILITY
3. SOILS
4. VEGETATION
5. LANDBASE
6. ACID SULFATE SOIL
7. SURFACE WATER

NO NATIVE VEGETATION MAY BE DISTURBED WITHOUT A PERMIT OR OUTSIDE OF THE PERMIT AREA. IF IN DOUBT, PLEASE CONTACT THE RELEVANT MANAGER WHO WILL CONTACT WESTERN POWER ENVIRONMENTAL TEAM.

PLEASE NOTE: HEAVY PENALTIES MAY APPLY TO INDIVIDUALS AND BUSINESSES FOR DAMAGE TO NATIVE VEGETATION WITHOUT A PERMIT.

CRITICAL WATER PIPES
IN VICINITY OF WORKS

COMMS CABLES
IN VICINITY OF WORKS

HIGH FIRE RISK AREA

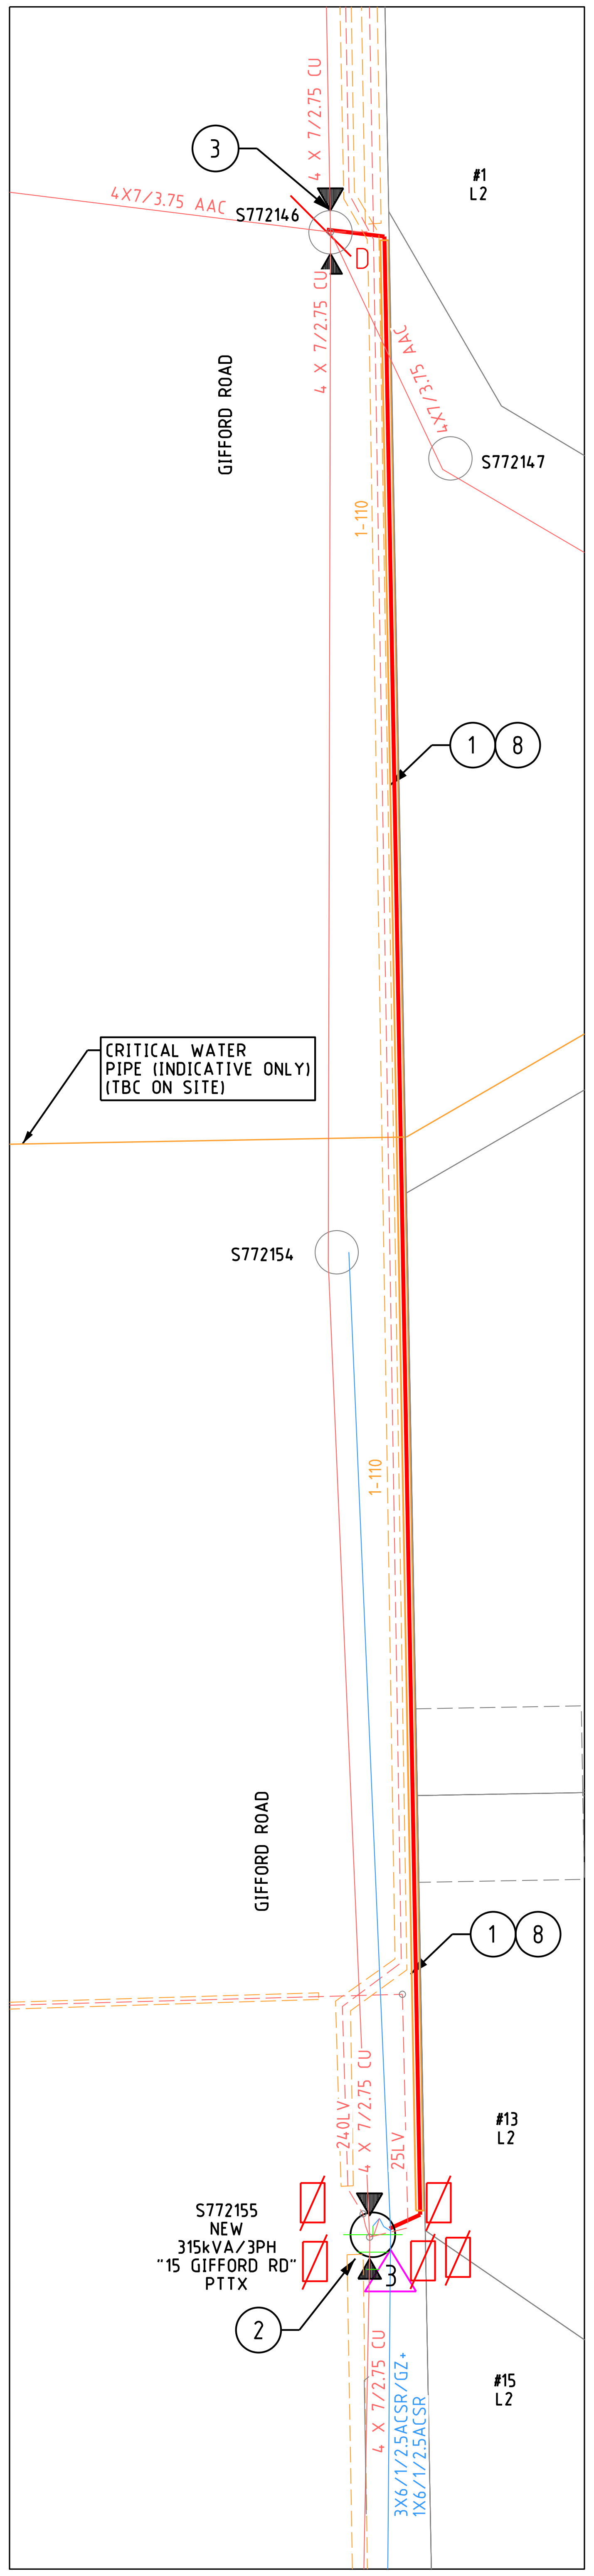

DETAIL C

1:200

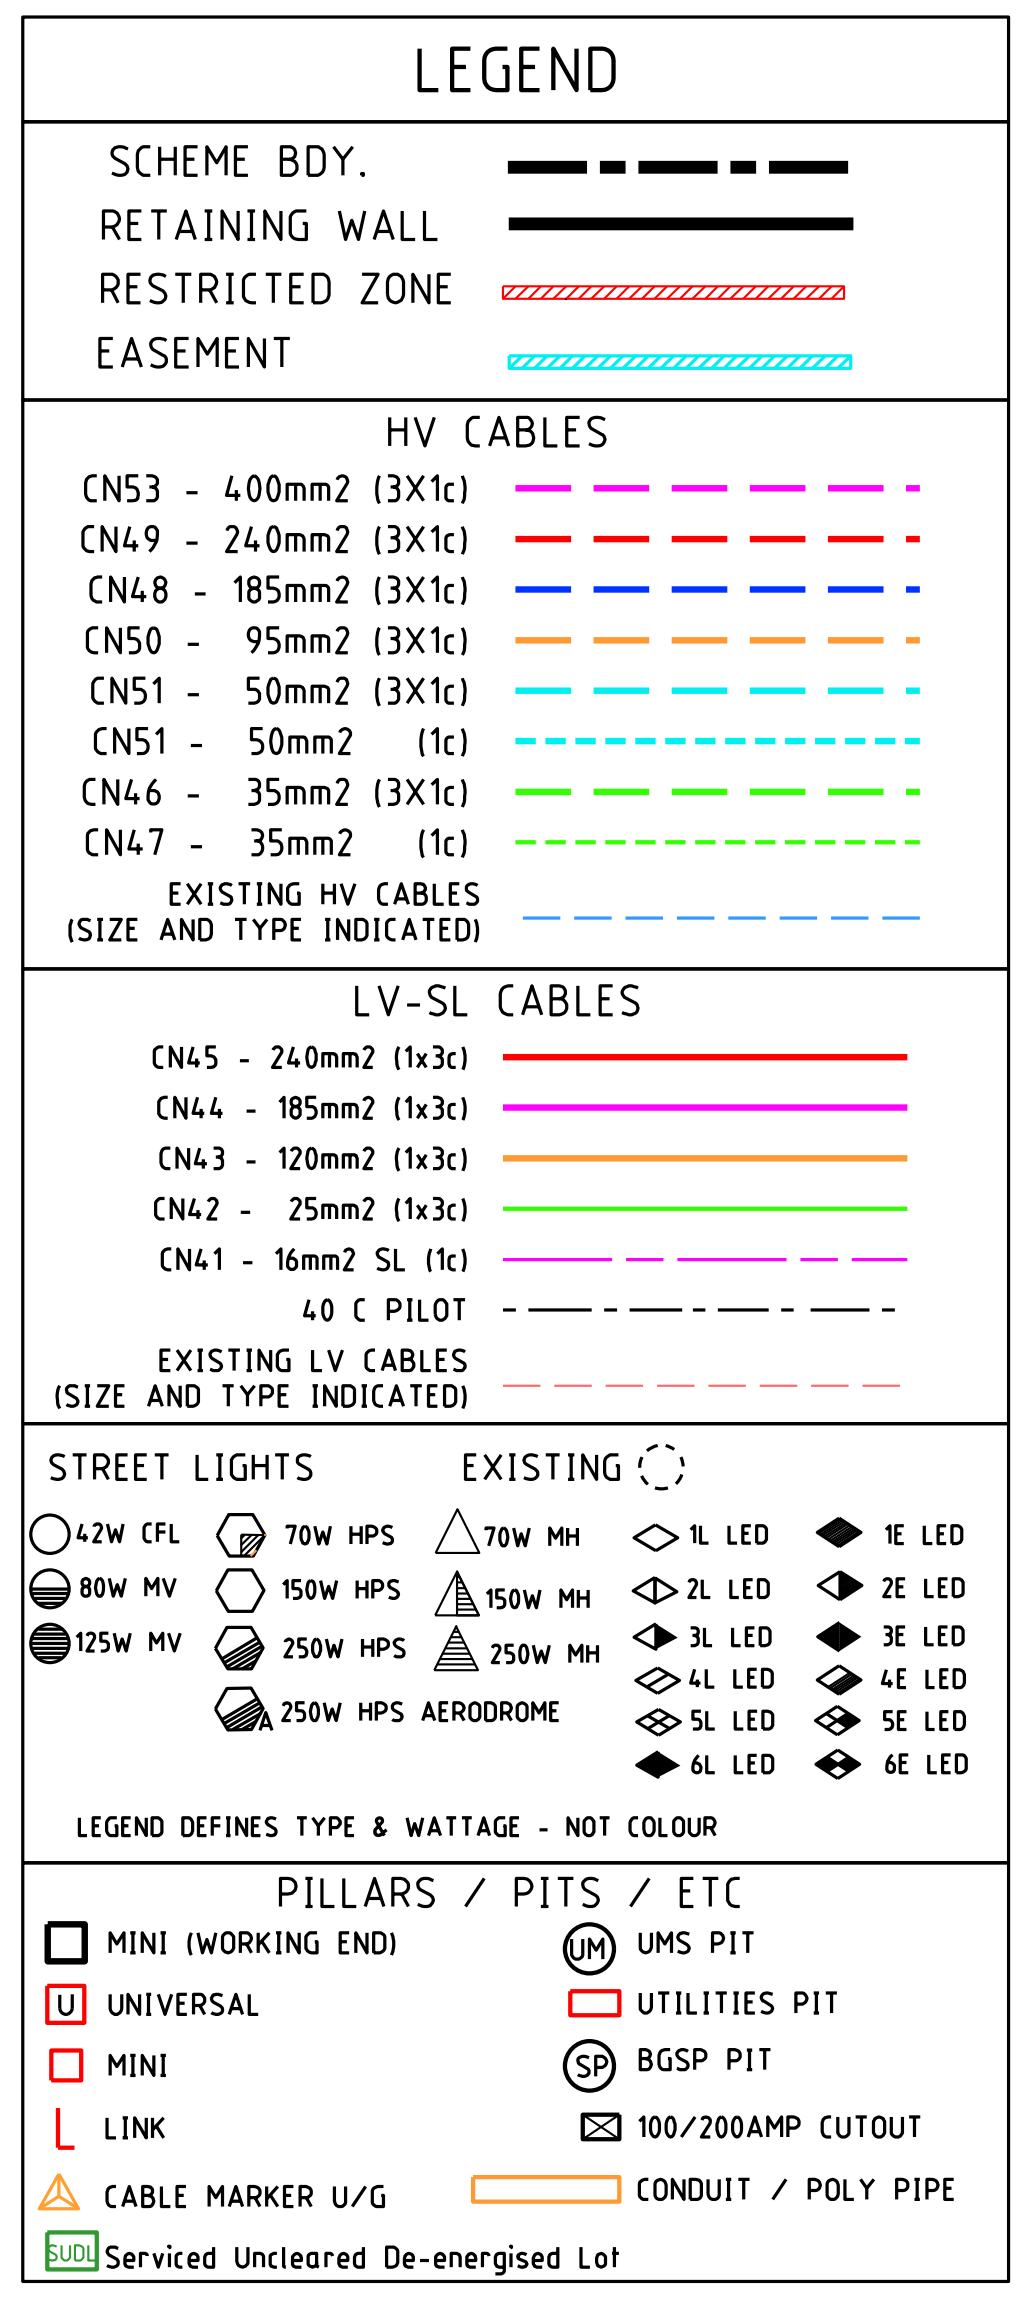

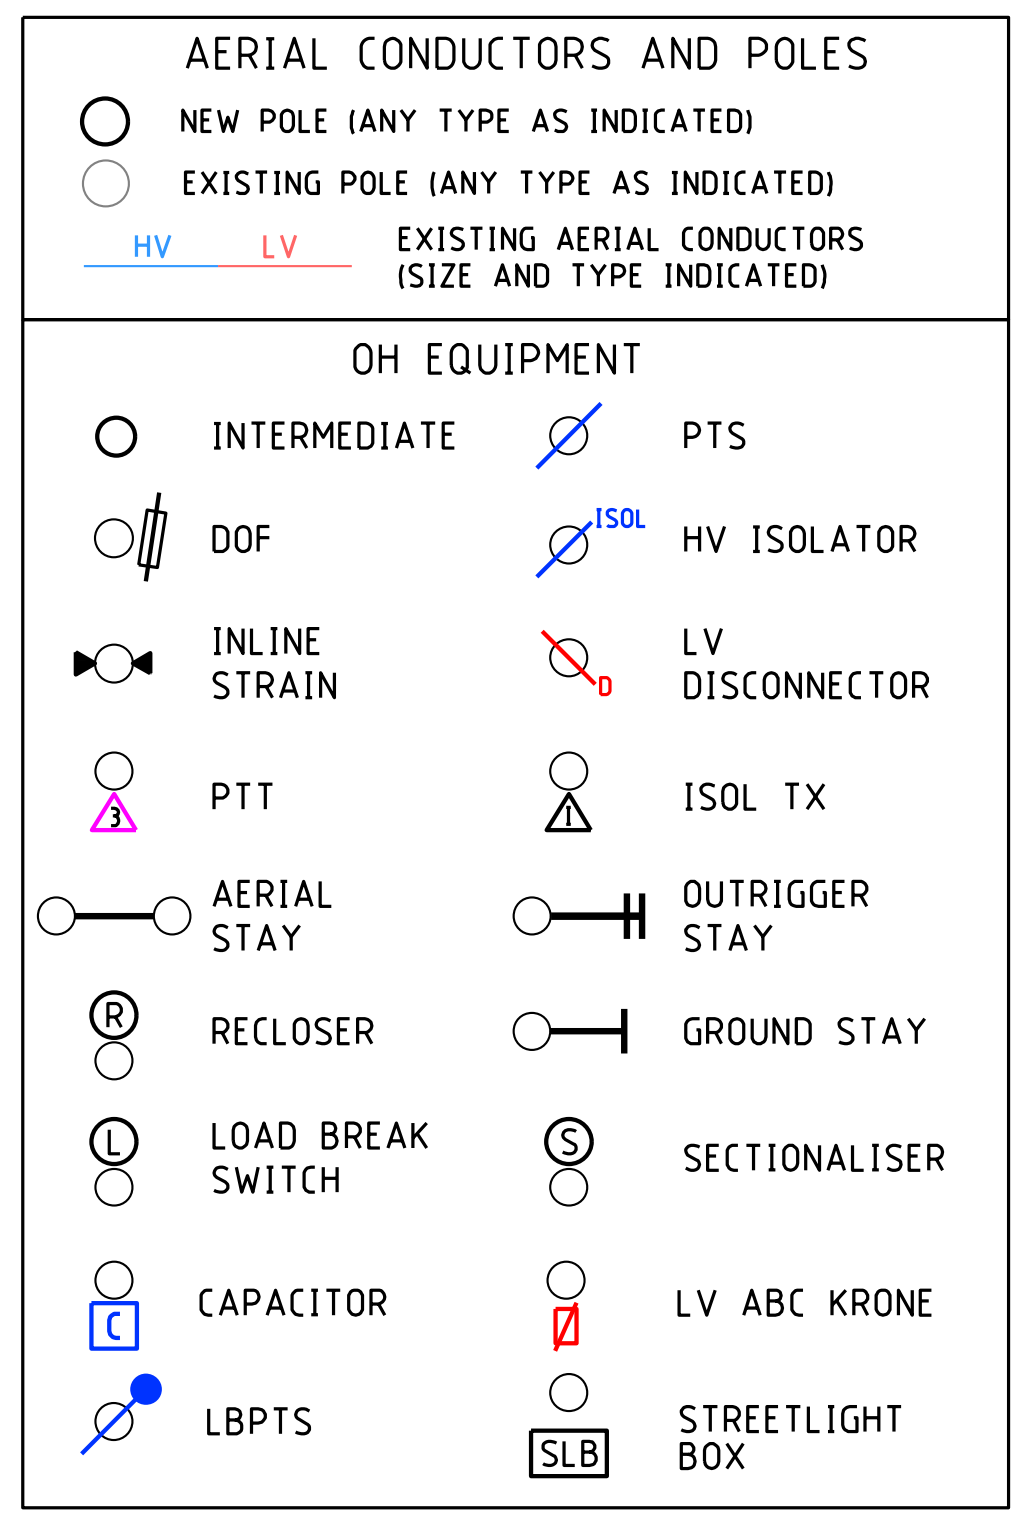

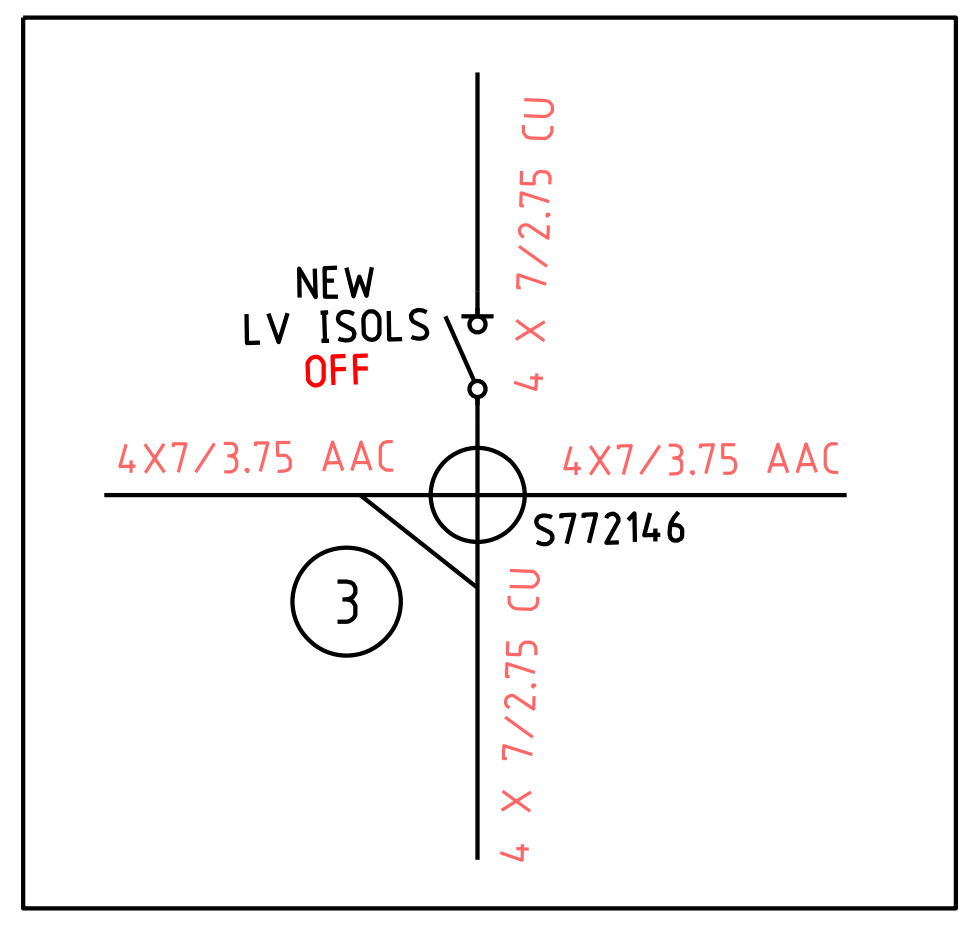

DETAIL G: SWITCHING DETAILS ON
POLES S772146
SCALE: NTS

CONSULTANT CONTACT DETAILS
COMPANY NAME: BIG ROCK ELECTRICAL PTY LTD
CONTACT: BEN GERRANS TEL: 0407 475 698

CUSTOMER CONTACT DETAILS
COMPANY NAME: N/A
CONTACT: MICHAEL CHANEY TEL: 0418 915 375

Rev.	REVISIONS	DRN	DATE
A	ISSUED FOR CONSTRUCTION	S.Y	10/26

REFERENCE FILE DETAILS
SHE ASSESSMENT REPORT
HAZARD MANAGEMENT REGISTER

63A RESIDENTIAL SUPPLY UPGRADE

#13/L85 HURFORD STREET

DUNSBOROUGH, WA 6281

NETWORK VOLTAGE: 22kV / 415V

DESIGNER: SUBAGAR YOGANANTHAN
DESIGN TEAM: CCS RESI SOL - RASP
EMAIL: ccs.design.resi.solution@westernpower.com.au
TEL: 13 10 87
DATE: 10/26
SCALE: AS NOTED @ A1
GEO REF: Lat. - 33°35'52" S
Long. - 115°06'13" E

westernpower

DRAWING NUMBER
SP053242
SHEET 01 OF 01
REV: A
ORIGINAL SIZE - A1