INTERNAL · PRODUCTION REFERENCE

Material Element Brochure

Every material we cut, coat, print and rig in-house — what it is, and what we use it for.

61 MATERIALS · 8 SECTIONS

CONTENTS

What's inside

I	Carpentry	11 MATERIALS	3
II	Paint	4 MATERIALS	6
III	Acrylics	4 MATERIALS	7
IV	Metals	8 MATERIALS	8
V	Graphics	10 MATERIALS	10
VI	Electricals	12 MATERIALS	13
VII	AV	5 MATERIALS	17
VIII	Truss, Rigging and Support Systems	7 MATERIALS	19

HOW TO READ A CARD

- what it is — the material, in one line
- purpose — where and why we use it on a stand

Photography is studio reference, not a supplier specification; finishes and fixings vary by batch. This document carries no cost tiers; material rates are quoted from current supply pricing.

I Carpentry

MDF

A dense engineered wood-fibre board with smooth, uniform faces and a consistent core.

Used for painted stand walls, counters, fascias, shelves, routed shapes and custom joinery where a seamless finish is required.

THICKNESS · MM

6mm Walls · **9mm** Structures · **12mm** Structures · **15mm** Counters · **18mm** Counter doors & heavy structure

Plywood

A cross-laminated panel made from bonded wood veneers, giving greater strength and screw-holding than standard fibreboard.

Used for structural panels, platforms, load-bearing joinery, transport crates and areas that require added durability.

THICKNESS · MM

6mm Lightweight structures · **15mm** Wall & fascia

Bendable Ply

A thin, flexible plywood engineered to bend across one direction without splitting.

Used to form curved walls, arches, rounded counters and organic stand features before applying paint, laminate or veneer.

THICKNESS · MM

5mm Curved structure · **8mm** Thick curved structure

Timber

- Natural solid-wood sections supplied as battens, planks or shaped profiles.
- Used for internal framing, reinforcement, slatted features, trims, supports and visible decorative joinery.

Wood Veneer

- A thin layer of real wood bonded to a stable board substrate while retaining the natural grain.
- Used to give counters, wall panels, furniture and feature surfaces a premium natural-wood appearance with less weight than solid timber.

Laminate

- A factory-finished decorative sheet bonded to a board, available in solid colours and wood, stone, metal or textured effects.
- Used on counters, cabinets, wall panels and high-contact surfaces where a durable, consistent and easy-to-clean finish is required.

Melamine Board

- A particleboard or MDF panel pre-finished with a resin-impregnated decorative surface.
- Used for economical shelving, storage interiors, cabinets and back-of-house joinery without additional painting or laminating. Mainly used for flooring in ehibitions.

THICKNESS · MM

18mm Flooring

OSB Board

An engineered board made from oriented wood strands bonded under heat and pressure.

Used for industrial or rustic visual treatments, temporary fabrication, protective backing and crate construction.

THICKNESS · MM

8mm Light structure · **12mm** Heavy structure / ceiling

Cabinet Locks

Mechanical or electronic hardware used to secure doors, drawers and storage compartments.

Used to protect stock, electronics, documents and personal belongings within counters, stores and service areas.

Hinges

Jointed hardware that connects a door or panel to its frame while allowing controlled movement.

Used for storage doors, access panels, cabinet fronts and service hatches; selected as concealed, soft-close or heavy-duty to suit the load.

Door Knobs

A knob, lever or pull fitting used to grip and operate a door or cabinet front.

Used to provide safe, convenient access while coordinating the hardware with the stand's finish and design language.

II Paint

Primer

- A preparatory coating applied before the final paint system to seal, stabilise and prepare the substrate.
- Used to improve adhesion, control MDF or wood porosity, protect metal and produce a more uniform, durable final finish.

Thinner

- A compatible liquid solvent or reducer used to adjust paint viscosity and clean application equipment.
- Used to support the required spray or brush consistency and to clean tools, subject to the specific paint manufacturer's instructions.

Putty

- A paste or powder-based filler, including stucco or gypsum filler, used to level joints, holes and surface imperfections.
- Used to create smooth, seamless walls and joinery before sanding, priming and applying the final paint finish.

Turpentine / Tarpin Oil

- A petroleum or mineral solvent commonly used with compatible oil-based and alkyd coatings.
- Used for controlled thinning, residue removal and cleaning of brushes or tools where approved for the selected paint system.

III Acrylics

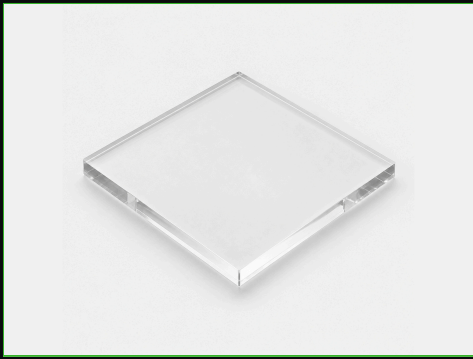

Clear Acrylic

A rigid transparent PMMA sheet with glass-like clarity and lower weight than glass.

Used for glazing, showcases, protective covers, shelves, display fabrication, logos and transparent architectural details.

THICKNESS · MM

2.8mm See-through logo / structure

ALSO STOCKED · 4 · 8 · 10 · 12 · 15 · 18MM

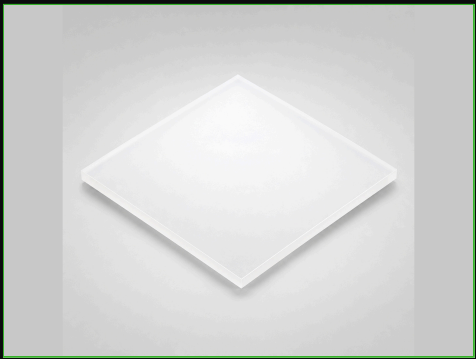

Milky Acrylic

An opal or translucent acrylic sheet designed to diffuse light and reduce direct visibility through the panel.

Used for illuminated logos, lightboxes, glowing counters, privacy screens and evenly lit decorative surfaces.

THICKNESS · MM

2.8mm Lit logos / structure

ALSO STOCKED · 4 · 8 · 10 · 12 · 15 · 18MM

Coloured Acrylic

Acrylic manufactured with solid, translucent or transparent colour throughout the sheet.

Used for branded accents, display panels, letters, shelves and decorative features requiring a clean, saturated colour finish.

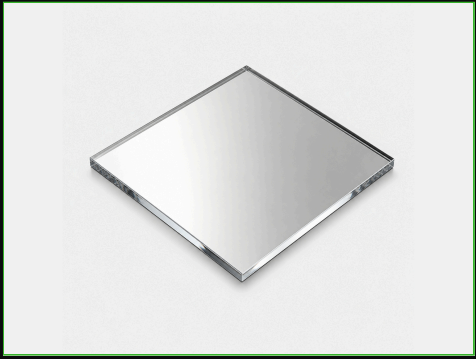

Mirror Acrylic

An acrylic sheet with a reflective backing that creates a mirror effect at a lower weight than glass.

Used for decorative cladding, display features and visual-space enhancement where reduced weight and breakage risk are advantageous.

IV Metals

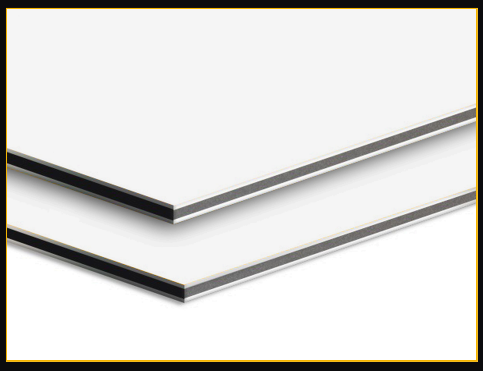

Aluminium Composite Panel (ACP)

- A lightweight sandwich panel made with aluminium skins bonded to a rigid core.
- Used for smooth cladding, fascias, counters, ceilings and metallic feature surfaces that can be routed, folded and installed efficiently.

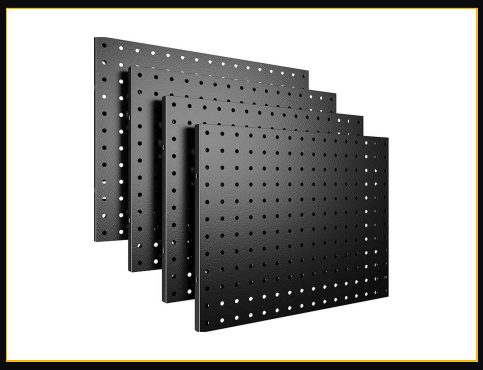

Perforated Metal / Mesh / Pegboard

- Metal sheet or mesh formed with repeated holes, openings or a grid pattern.
- Used for ventilated panels, product hanging, screening, industrial textures, decorative partitions and equipment enclosures.

Stainless Steel Pipe

- A corrosion-resistant hollow metal tube available in polished, brushed or satin finishes.
- Used for rails, frames, supports, trims and visible structural details requiring strength and a premium metallic appearance.

Powder-Coated Metal

- Steel or aluminium coated electrostatically with coloured powder and cured to form a hard surface.
- Used for frames, legs, rails, brackets and feature structures requiring a durable, consistent colour and improved corrosion resistance.

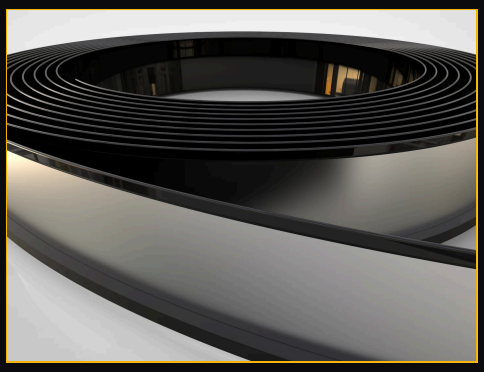

Channelume

A pre-finished aluminium channel-letter coil or profile used to form the side returns of dimensional letters and logos.

Used to fabricate lightweight 3D and illuminated signage with controlled depth, clean edges and a consistent branded finish.

WIDTH · MM

30mm · 50mm · 70mm Moulding letters

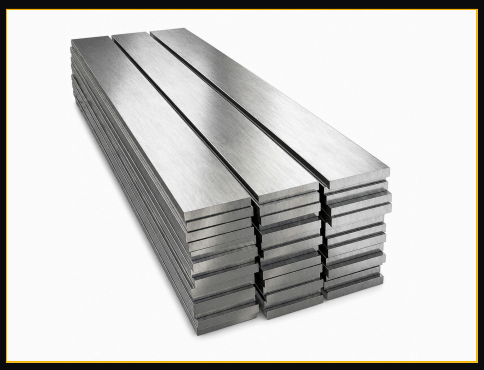

Flat Bars

Flat rectangular strips of steel, stainless steel or aluminium supplied in different widths and thicknesses.

Used as brackets, stiffeners, trims, frames, joining plates and concealed reinforcement within fabricated stand elements.

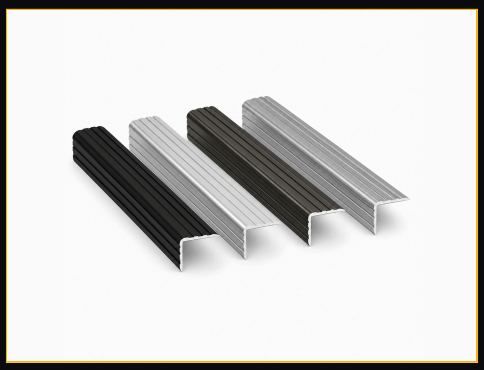

Metal Skirting

A formed metal skirting or edge trim, usually aluminium or stainless steel, fitted around the exposed perimeter of raised exhibition stand flooring.

Used to cover and protect the visible edge of raised flooring, create a clean finished perimeter, conceal the subfloor build-up and reduce wear or damage on the platform edge.

Corner Profile

An L-, U- or angle-shaped metal or aluminium extrusion designed to finish and protect a corner.

Used in raised platforms to align joints, reinforce corners, cover exposed board edges and create crisp, durable transitions between materials.

V Graphics

Lightpass Fabric

- A translucent printable polyester fabric engineered for backlit tension-frame and SEG systems.
- Used in illuminated lightboxes and fascias to produce bright, evenly diffused graphics with a clean, frameless appearance.

Blackout Fabric

- An opaque printable or coloured fabric with a light-blocking backing or dense weave.
- Used for front-lit graphics, divider walls, drapes and concealed areas where light bleed or visibility through the material must be prevented.

Flex Material

- A reinforced flexible PVC banner sheet suitable for large-format solvent, latex or UV printing.
- Used for banners, temporary signage and large seamless graphics that can be tensioned, hemmed or eyeleted for installation.

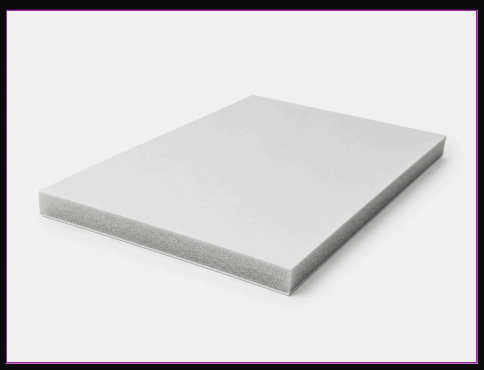

Foam Board

- A lightweight rigid panel with a foam core faced with paper or printable liners.
- Used for short-term indoor signs, presentation panels, lightweight cut-outs and graphics that do not require high impact resistance.

THICKNESS · MM

5mm Graphic backing · **10mm** Graphic backing

Forex

A rigid expanded PVC sheet with a smooth surface suitable for direct printing and fabrication.

Used for signs, cut letters, display panels, lightweight cladding and durable indoor graphic applications.

THICKNESS · MM

5mm Logo backing · **10mm** Logo backing

Vinyl

A self-adhesive PVC film supplied in printable, coloured, frosted or specialty finishes.

Used to wrap walls, counters and glazing; produce cut lettering; apply temporary colour changes; and create branded surface graphics.

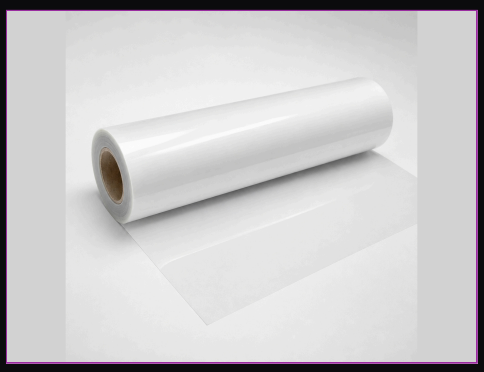

Lamination

A transparent protective film applied over a printed graphic in gloss, matte or specialist finishes.

Used to improve scratch, moisture and UV resistance, enhance cleanability and provide the required final surface appearance.

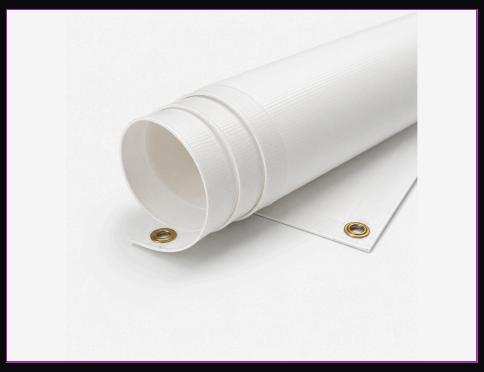

Banner

- A printed flexible graphic sheet, generally PVC or fabric, finished with hems, eyelets or pole pockets.
- Used for hanging signs, backdrops, temporary branding and large-format messages that must be lightweight and quick to install.

Linoleum / PVC Flooring

- A heavy-duty PVC sheet flooring supplied in wide rolls, available in wood, stone and solid-colour finishes.
- Used as the standard roll flooring laid over a stand platform; seams are taped or heat-welded and edge trim must be resolved at design stage.

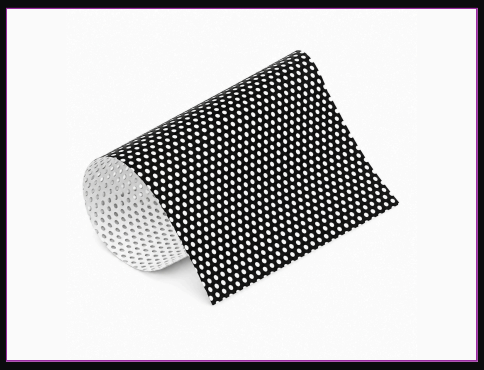

1-Way Vision

- A perforated printable window film that displays a graphic on one side while retaining partial visibility through the glazing from the other.
- Used for branding glass walls and windows while preserving light, outward sightlines and a degree of privacy.

VI Electricals

LED Strip Lights

A flexible circuit tape fitted with closely spaced LEDs, available in white, tunable or RGB formats.

Used for concealed linear lighting, cove details, shelves, counters, illuminated letters, lightboxes and decorative edge effects.

COLOUR TEMP · K

3000K Warm · **4000K** Neutral · **6500K** White

Tubelights

A linear LED or fluorescent-style light fitting designed to provide broad, even illumination.

Used for functional lighting in stores, pantry areas, but mainly used for lightboxes the illumination comes from these tube lights..

Floodlights

High-output luminaires with a wide beam spread for covering larger areas or surfaces.

Used to wash walls, graphics, façades and open stand areas, particularly where fittings must be mounted at height or from a distance.

COLOUR TEMP · K

3000K Warm · **6500K** White

Downlight

A recessed or surface-mounted ceiling fitting that directs light downward in a controlled beam.

Used for clean general or accent lighting above counters, meeting spaces, product zones and circulation areas.

COLOUR TEMP · K

3000K Warm · **4000K** Neutral · **6500K** White

Armlight

An adjustable light fitting mounted on a projecting arm or bracket.

Used to illuminate fascias, signs, graphics and display shelves from an offset position where ceiling or track mounting is unsuitable.

COLOUR TEMP · K

3000K Warm · **4000K** Neutral · **6500K** White

Tracklight

An adjustable spotlight connected to an electrified track system.

Used for flexible accent lighting that can be repositioned to highlight products, graphics and focal areas as the display changes.

COLOUR TEMP · K

3000K Warm · **4000K** Neutral · **6500K** White

Transformers

Electrical drivers or power supplies that convert mains power to the voltage and current required by low-voltage equipment.

Used to operate LED strips, signage and other low-voltage systems safely and reliably, with access maintained for ventilation and servicing.

Silicon Profiling

A flexible silicone diffuser or channel designed to house or cover LED strip lighting.

Used to form continuous neon-like light lines, follow curved details, diffuse visible LED points and protect the strip from contact.

WIDTH · MM

10mm · 20mm · 30mm · 40mm · 50mm

Linear profile light (flexible & straight)

Aluminium Profiling

A rigid extruded aluminium channel, generally fitted with a diffuser, end caps and mounting accessories for LED strips.

Used to keep linear lighting straight and neat, dissipate heat, protect the LEDs and allow recessed or surface-mounted installation.

WIDTH · MM

10mm · 20mm · 30mm · 40mm · 50mm

Linear profile light (straight only)

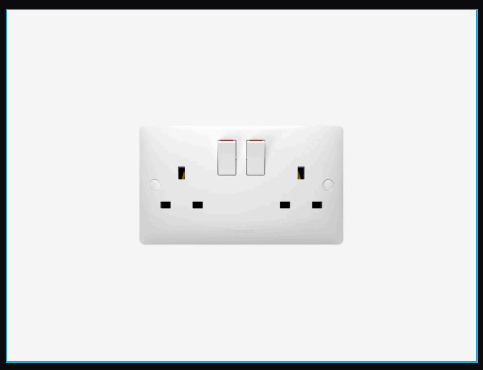

Sockets

- Fixed electrical outlets that provide accessible connection points for plug-in equipment.
- Used to power laptops, chargers, appliances, demonstrations and AV equipment at locations coordinated with counters, furniture and storage.

DB / Distribution Board

- A protected enclosure containing the main isolator, circuit breakers and residual-current protection for the stand's electrical circuits.
- Used to receive and safely distribute the organiser's incoming supply, isolate circuits and protect lighting, socket and equipment loads.

Cable Wires

- Insulated electrical conductors and multicore cables selected according to load, voltage and installation conditions.
- Used to connect the distribution board, lighting, sockets and AV systems through labelled, protected and concealed routes.

VII AV

Mode Controller / Console

- A compact media controller, video processor or AV control console used to route, scale and manage content for LED displays and other presentation devices.
- Used to configure screen output, switch or cue content and ensure reliable playback for exhibition stand presentations, demos and branded digital content.

LED Panel

- A modular LED display cabinet or tile containing pixels, control electronics and power components.
- Used to assemble seamless, high-brightness video walls for branded content, animation, presentations, live feeds and product storytelling.

Flexible LED Screen

- A lightweight bendable LED display system built from flexible modules or cabinets.
- Used to create curved columns, rings, waves and other unconventional digital surfaces that standard rigid LED panels cannot follow.

Speakers

A speaker mounted on the wall or ceiling for localised audio playback within a booth environment.

Used for stand videos, speech reinforcement, product demos and ambient sound in meeting or presentation areas without overscaling the AV setup.

Wireless Microphone System

A wireless microphone set comprising handheld or bodypack microphones with a receiver / frequency control unit.

Used for small booth presentations, product demonstrations and guided sessions where presenters need mobility and a clean cable-free setup.

VIII Truss, Rigging and Support Systems

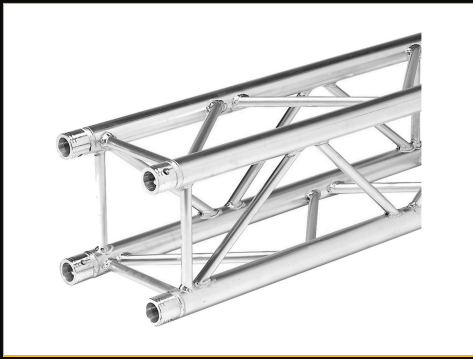

Aluminium Truss

- A lightweight modular lattice structure manufactured from aluminium chords and bracing.
- Used to span and support lighting, signs, screens and suspended stand features within approved engineering and venue load limits.

Circular Truss

- Curved aluminium truss sections assembled into a ring or arc.
- Used for suspended halos, circular branding, curved lighting layouts and overhead features that require a defined radius.

Rigging Point

- An organiser-approved ceiling or structural attachment location with a stated working load limit.
- Used to transfer suspended stand loads to the venue structure through authorised rigging hardware and procedures.

Steel Wire Suspension

- Rated steel wire rope or suspension cable fitted with suitable terminations and safety components.
- Used to suspend or stabilise signs, lights and lightweight features, and to provide secondary safety retention where required.

Chain Hoist

- A manual or motorised lifting device that raises or lowers a load using a load chain and hook system.
- Used to lift truss and suspended elements during installation and position them at the approved working height under qualified rigging control.

Ballast

- A dense counterweight system sized to resist overturning, movement or uplift.
- Used to stabilise freestanding structures when floor fixing is unavailable or prohibited, based on the engineered load requirement.

Base Plate

- A flat steel plate or weighted base designed to support a vertical pole, frame or truss tower.
- Used to spread the load, provide a stable footprint and allow bolting, anchoring or ballasting of freestanding elements.