



V93000 Specifications

PMUX01 Power MUX Card

Version 7.10.9

Published on 2024-04-02

Notices

Legal Notices

All rights reserved. All text and figures included in this publication are the exclusive property of Advantest Corporation. Reproduction of this publication in any manner without the written permission of Advantest Corporation is prohibited. Information in this document is subject to change without notice.

Trademarks and Registered Trademarks

- ADVANTEST is a trademark of Advantest Corporation.
- All other marks referenced herein are trademarks or registered trademarks of their respective owners.

Warranty

The material contained in this document is provided "as is," and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, Advantest disclaims all warranties, either express or implied, with regard to this material and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Advantest shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this material or of any information contained herein. Should Advantest and the user have a separate written agreement with warranty terms covering the material in this document that conflict with these terms, the warranty terms in the separate agreement shall control.

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Restricted Rights Legend

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Advantest's standard commercial license terms for 93000 systems and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Safety Notices

⚠ Warning **Warning of a hazard or hazardous situation**

A warning calls attention to a procedure, practice or similar process, which, if not correctly performed or adhered to, could result in death, injury or harm to personnel.

➡ Do not proceed beyond a warning unless the indicated conditions are fully understood and met.

▲ CAUTION Caution of a hazard or hazardous situation

A caution calls attention to a procedure, practice or similar process, which, if not correctly performed or adhered to, could result in damage to or destruction of part or all of the test system equipment.


➡ Do not proceed beyond a caution unless the indicated conditions are fully understood and met.

PMUX01 Power MUX card

The specification covers the PMUX01 Power MUX (Part Number E8021PM)

Configuration and topology

Total force switches	48
Total sense switches	48
Force switch topology	12 x 1:4 (1 IN, 4 OUT)
Sense switch topology	12 x 1:4 (1 IN, 4 OUT)
Maximum card count per system	16 (max. 12 for a Direct-Probe™ configuration)

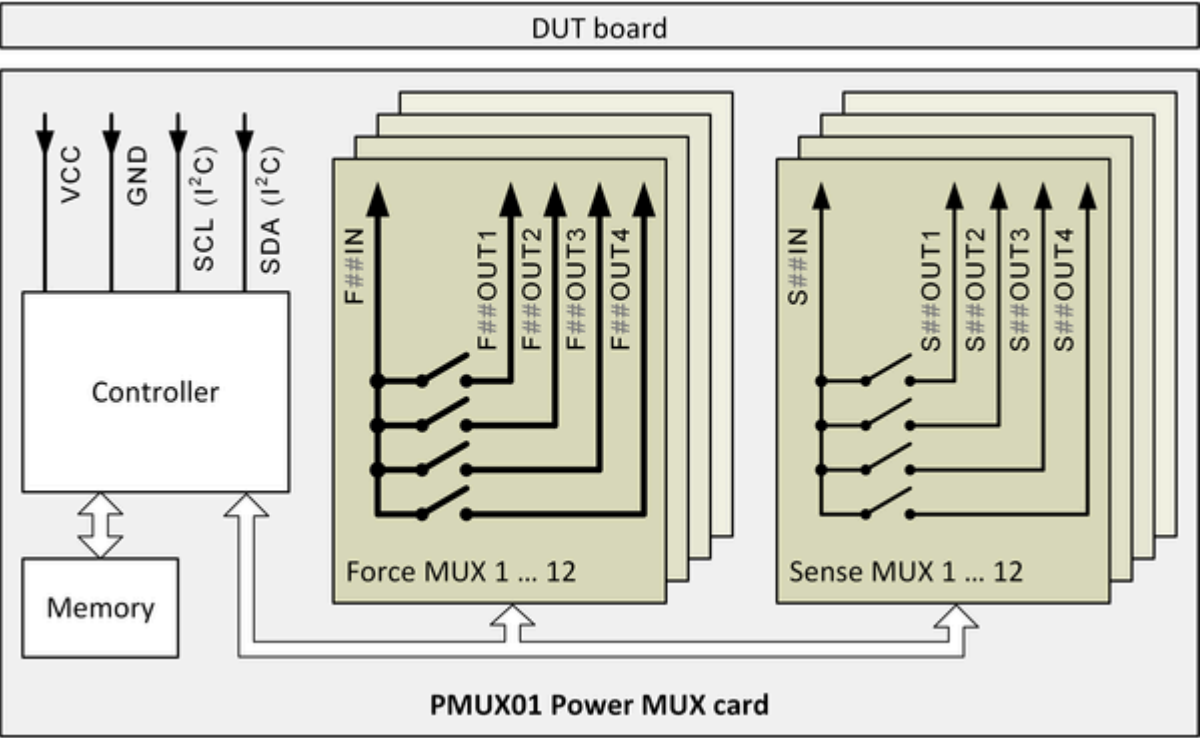

Power supply

Card supply	External power supply option via DUT board
Card supply voltage	+5 V ± 0.25 V
Maximum current consumption (idle)	100 mA
Maximum current consumption per force switch ON	8 mA
Maximum current consumption per sense switch ON	5 mA
Maximum total current consumption (ALL switches ON)	700 mA

Force switch specifications

Typical path resistance (IN to OUT)	100 mΩ
Maximum path resistance (IN to OUT)	250 mΩ
Maximum voltage across open switch (IN to OUT)	±120 V

Maximum voltage between adjacent pogo pins	±160 V
Maximum voltage to DUT board ground	±120 V
Maximum continuous current (IN, OUT)	1 A
Maximum pulse current (IN, OUT)	5 A, maximum 10 ms, 10 % duty cycle
Typical OUT to IN leakage current @ 40V ^[1]	10 nA
Typical OUT to IN leakage current @ 80V ^[1]	20 nA
Maximum OUT to IN leakage current ^[1]	11 nA + 1 nA / V ^[2]
Maximum IN to OUTx leakage current ^[3]	46 nA + 4 nA / V ^[4]
Switch on time	0.2 ms typical, 0.5 ms maximum
Switch off time	0.2 ms typical, 0.5 ms maximum
Coupling capacity (IN-OUT)	1000 pF

Sense switch specifications

Typical path resistance (IN to OUT)	20 Ω
Maximum path resistance (IN to OUT)	40 Ω
Maximum voltage across open switch (IN to OUT)	±120 V
Maximum voltage between adjacent channels	±160 V
Maximum voltage to DUT board ground	±120 V
Maximum continuous current	0.1 A
Typical OUT to IN leakage current @ 40V ^[1]	4 nA
Typical OUT to IN leakage current @ 80V ^[1]	8 nA
Maximum OUT to IN leakage current ^[1]	6 nA + 0.2 nA / V ^[5]
Maximum IN to OUTx leakage current ^[3]	18 nA + 0.8 nA / V ^[6]
Switch on time	0.2 ms typical, 1 ms maximum
Switch off time	0.2 ms typical, 1 ms maximum
Coupling capacity (IN-OUT)	100 pF

Control specifications

- On-board controller handles the data transfer via the I²C interface, interprets the received commands and applies the settings.
- The I²C interface complies with the I2C-bus Specification, Rev. 5. The Fast-mode Plus (Fm+) with a bit rate up to 1 Mbit/s is supported.
- Four addressing bits on pogo pins ID0 to ID3 select one of the maximum 16 cards.
- On-board volatile memory stores complete setups to minimize the programming time. The memory stores up to 8192 complete setups.

^[1] Leakage current at one OUT pin with the IN pin connected to ground and other OUT pins open.

^[2] Tested with test limits of 25 nA + 1 nA / V. The test limits include a measurement deviation of 14 nA.

^[3] Leakage current at the IN pin with all OUT pins connected to ground.

^[4] Tested with test limits of 60 nA + 4 nA / V. The test limits include a measurement deviation of 14 nA.

^[5] Tested with test limits of 20 nA + 0.2 nA / V. The test limits include a measurement deviation of 14 nA.

^[6] Tested with test limits of 32 nA + 0.8 nA / V. The test limits include a measurement deviation of 14 nA.

Other configuration data

- The DUT board stiffener MUXSTIF01 is required for applications that connect to the PMUX01 Power MUX card. For more information, refer to topic 146875 - "MUX card stiffeners overview".
- The interposer MUXIP01 is required for applications that connect to the card. The interposer covers two PMUX01 Power MUX cards and is mounted on the bottom side of the DUT board. For more information, refer to topic 146845 - "MUX Cards Interposer (MUXIP01)".
- Diagnostics requires the MUXDIAG (E7010MUX) Diagnostics Interconnect Board.
- The Enhanced DUT Scale Interface is required.