

SPEAR3 RF System

RF Physics, Control Theory and Physical Plant

Faya Wang

RF Department, SSRL / Accelerator Directorate
SLAC National Accelerator Laboratory

March 2026

Document	Doc P — RF Physics, Control Theory and Physical Plant
Version	3.3
Status	Draft
Tier	1 — Physics and Plant Reference (implementation-independent)
Source	Designs/tex/docP-rf-physics/P_rf_physics_and_plant.tex
Companion	Doc L (legacy architecture), Doc I (interlocks), Doc T (tuner control)

Galil status — corrected September 2026. The Galil DMC-4143 has **not** been installed and is **not** in operation; it was in development. Test moves were performed on the existing cavity motors and worked fine, but it goes online only *when the current LLRF upgrade project is finished*. The **AB 1746-HSTP1 remains the in-service tuner controller**. Any statement below that this work is “already done”, or that the Galil “replaced” the AB hardware, is incorrect and has been amended.

This document is implementation-independent. It states the physics of the SPEAR3 RF plant and the control problem that follows from it: what disturbs the cavity field, over what frequency range, and which loop is responsible for each band. Hardware-specific detail belongs in Doc L (legacy) and Doc 0 (upgrade).

Contents

Document Scope and Provenance	5
0.1 Purpose	5
0.2 Provenance Statement	5
1 System Overview and Field Stability Requirements	5
1.1 The Control Problem in One Sentence	5
1.2 Storage Ring Parameters	5
1.3 RF System Configuration	6
1.4 Field Stability Requirements	6
2 Plant Physics Model	7
2.1 High-Level System Block Diagram	7
2.2 RF Cavity as a Narrowband Resonator	7
2.3 Klystron as the Actuator	10
2.4 Loop Delay Budget — The Fundamental Bandwidth Ceiling	10
2.5 Complete Open-Loop Plant Transfer Function	11
3 I/Q Signal Processing Framework	11
3.1 Baseband I/Q Representation	11
3.2 Baseband I/Q Modulator	11
3.3 I/Q Demodulation	12
3.4 Cavity Probe Vector Sum	12
3.5 Error Signal Generation	12
4 Disturbance Analysis and Control Problem Statement	12
4.1 Disturbance Taxonomy	12
4.2 D1/D2: Beam Loading — The Dominant Disturbance	13
4.3 D3: Robinson Instability	13
4.4 D4: Coupled-Bunch Modes	14
4.5 D5: HVPS Ripple	15
4.6 D6: Klystron Gain Variation	16
4.7 D7/D8: Microphonics and Thermal Detuning	16
4.8 D9: Ring Circumference Thermal Drift — Long-Term RF Frequency Migration	16
4.9 Frequency-Domain Summary: The Disturbance Spectrum	17
5 Control Architecture: From Disturbances to Loops	18
5.1 The Design Logic: Bandwidth Matching	18
5.2 Direct Feedback Loop — Compensating Beam Loading (D1–D4)	18
5.3 Comb Loop — Narrowband Enhancement at Revolution Harmonics (D4)	19
5.4 Slow Loops — Maintaining Operating Point (D6, D7, D8, D9)	19
5.5 Ripple Loop — HVPS Harmonic Rejection (D5)	19
5.6 Multi-Loop Stability: The Bandwidth Separation Principle	19

6	Loop-by-Loop Transfer Functions and Design	20
6.1	Loop Overview and Implementation Summary	20
6.2	Direct Loop — Wideband RF Field Regulation	21
6.3	Comb Loop — Narrowband Enhancement at Revolution Harmonics	22
6.4	LFB Woofer — Longitudinal Feedback via RF Modulation	23
6.5	Ripple Loop — HVPS Harmonic Rejection	24
6.6	Gap Feedforward Loop	25
6.7	HVPS Loop — Klystron Operating Point Regulation	25
6.8	Tuner Loop — Cavity Resonant Frequency Tracking	26
6.9	DAC Loop — Outermost Amplitude Regulation	27
6.10	Gain Tracking Function	28
7	HVPS Plant Model and Dynamics	28
7.1	Power Supply Architecture	28
7.2	HVPS Electrical Parameters	28
7.3	SCR Phase Control Dynamics	29
7.4	PLC Voltage Regulation Loop	29
7.5	Klystron Arc Protection	29
7.6	HVPS Dynamic Response Summary	29
8	Tuner Mechanics and Resonant Frequency Control	29
8.1	Cavity Tuner Physical Description	29
8.2	Tuning Physics	30
8.3	Tuner Control Loop	30
9	Performance Requirements and Verification	30
9.1	Disturbance Rejection Summary	30
9.2	LLRF9 Commissioning Results	30
9.3	Performance Margins	30
9.4	Calibration Data	31
A	SPEAR3 RF System Parameter Table	33
A.1	A.1 Storage Ring Parameters	33
A.2	A.2 Cavity Parameters (Per Cavity)	33
A.3	A.3 Klystron Parameters	34
A.4	A.4 Feedback Loop Parameters	34
B	Source Document Reference Index	34
B.1	B.1 Published Papers	34
B.2	B.2 Textbooks	35
B.3	B.3 Repository Documents	35
B.4	B.4 External Web References	36
C	Symbol and Notation Conventions	36
C.1	C.1 Cavity and Beam Parameters	36
C.2	C.2 Klystron and Drive Parameters	37
C.3	C.3 Loop Transfer Functions and Compensator Parameters	38
C.4	C.4 Comb Filter and Group Delay Equalization Parameters	38
C.5	C.4a LFB Woofer Parameters	39

C.6	C.5 Ripple Loop Parameters	39
C.7	C.6 Slow Loop Parameters	39
C.8	C.7 Calibration Parameters	40
C.9	C.8 I/Q Signal Processing	40
C.10	C.9 Conventions	40

Document Scope and Provenance

0.1 Purpose

This document is the **Tier 1 physics and plant reference** for the SPEAR3 RF system. It describes the RF physics, control theory, and physical plant parameters that are **independent of the specific control hardware implementation**. The content does not change when VXI hardware is replaced with the LLRF9 controller — it describes the *why* behind the control system design.

The SPEAR3 LLRF control architecture is uniquely determined by the disturbance landscape of the RF plant. Each feedback loop exists because a specific class of disturbance threatens RF field stability, and the loop's bandwidth and gain are set by the magnitude and frequency content of that disturbance.

0.2 Provenance Statement

All technical content is derived from **original source documents** per the Documentation Architecture Proposal (v5.1, §2.1). AI-generated technical notes are cited as "*preliminary analysis (AI-generated, see [filename], unreviewed)*" per §2.4.

1 System Overview and Field Stability Requirements

1.1 The Control Problem in One Sentence

The SPEAR3 RF system must deliver a 476.3 MHz accelerating voltage of ~ 2.85 MV across four cavities with amplitude stability $< 0.1\%$ RMS and phase stability $< 0.1^\circ$ RMS, in the presence of beam loading forces that — without feedback — would drive the system unstable within microseconds.

1.2 Storage Ring Parameters

Parameter	Symbol	Value	Unit
Beam energy	E_0	3.0	GeV
Beam current (top-off)	I_b	500	mA
Circumference	C	234.14	m
Revolution frequency	f_{rev}	1.2804	MHz
Revolution period	T_{rev}	0.781	μs
Harmonic number	h	372	—
RF frequency	f_{RF}	476.3	MHz
Momentum compaction	α_c	1.18×10^{-3}	—
Energy loss per turn	U_0	1.02	MeV
Total accelerating voltage (design)	V_{RF}	3.2	MV
Total accelerating voltage (operational)	V_{RF}	~ 2.85	MV
Synchrotron frequency	f_s	~ 10.1	kHz

Parameter	Symbol	Value	Unit
Synchrotron tune	ν_s	~ 0.008	—
Longitudinal radiation damping time	τ_s	~ 2.9	ms
Transverse radiation damping time	$\tau_{x,y}$	$\sim 4.2, 5.1$	ms

Note on f_{RF} : The nominal RF frequency is 476.3 MHz. The precise frequency (e.g. 476.3051755 MHz as measured) varies slightly as the ring circumference changes with temperature. For consistency, 476.3 MHz is used throughout this document.

Note on U_0 : The current operational energy loss per turn is $U_0 = 1.02$ MeV. This is validated by the measured generator power of ~ 200 kW/cavity (§2.1.3). The value 0.91 MeV appearing in some earlier references [R1] corresponds to a different set of insertion-device contributions; the current ID complement increases U_0 .

Note on V_{RF} : The **design** value of 3.2 MV (800 kV/cavity) is from the original SPEAR3 RF system specification [R1]. The **operational** value of ~ 2.85 MV (712 kV/cavity) is from LLRF9 commissioning measurements [R4] (also the current operation nominal at 500 mA) and is used throughout the beam loading calculations in this document.

Note on α_c : Published values range from 0.0011 (SSRL parameter page [R3]) to 0.00118 (used in this document) depending on the specific lattice optics. Differences of $\sim 7\%$ in α_c produce $\sim 3\%$ differences in f_s .

Sources: [R1] McIntosh et al., SLAC-PUB-10983, EPAC 2004 (Table 1: $Q_s = 0.008$, $\alpha = 0.00113$). [R2] Hettel et al., PAC 1999. [R3] SSRL SPEAR Storage Ring Parameters ($\nu_s = 0.007$, $\alpha_c = 0.0011$, $V_{\text{RF}} = 3.2$ MV). [R5] Designs/tex/doc0-system-design/0_system_design_report.pdf.

1.3 RF System Configuration

The RF station consists of: a single 1.2 MW CW klystron (Marconi/CPI K3512S) $\rightarrow$ waveguide circulator $\rightarrow 3 \times$ Magic-Tee power splitter $\rightarrow$ four PEP-II-type single-cell HOM-damped copper cavities. A single I/Q modulator at the klystron input is the primary actuator for all fast feedback loops.

Sources: [R1]; [R6] Schwarz, PS-340-330-51-R0, 1999.

1.4 Field Stability Requirements

Parameter	Requirement	Typical Achieved	Rationale
Amplitude stability	$< 0.1\%$ RMS	$< 0.05\%$ RMS	Photon beam position, energy spread
Phase stability	$< 0.1^\circ$ RMS	$< 0.05^\circ$ RMS	Bunch timing, longitudinal emittance
HVPS voltage regulation	$< \pm 0.5\%$	$< \pm 0.3\%$	Klystron gain/phase stability
HVPS ripple	$< 1\%$ P-P	$< 0.5\%$ P-P	RF phase modulation budget

Sources: [R5]; [R4] LLRF9 Commissioning Tests.

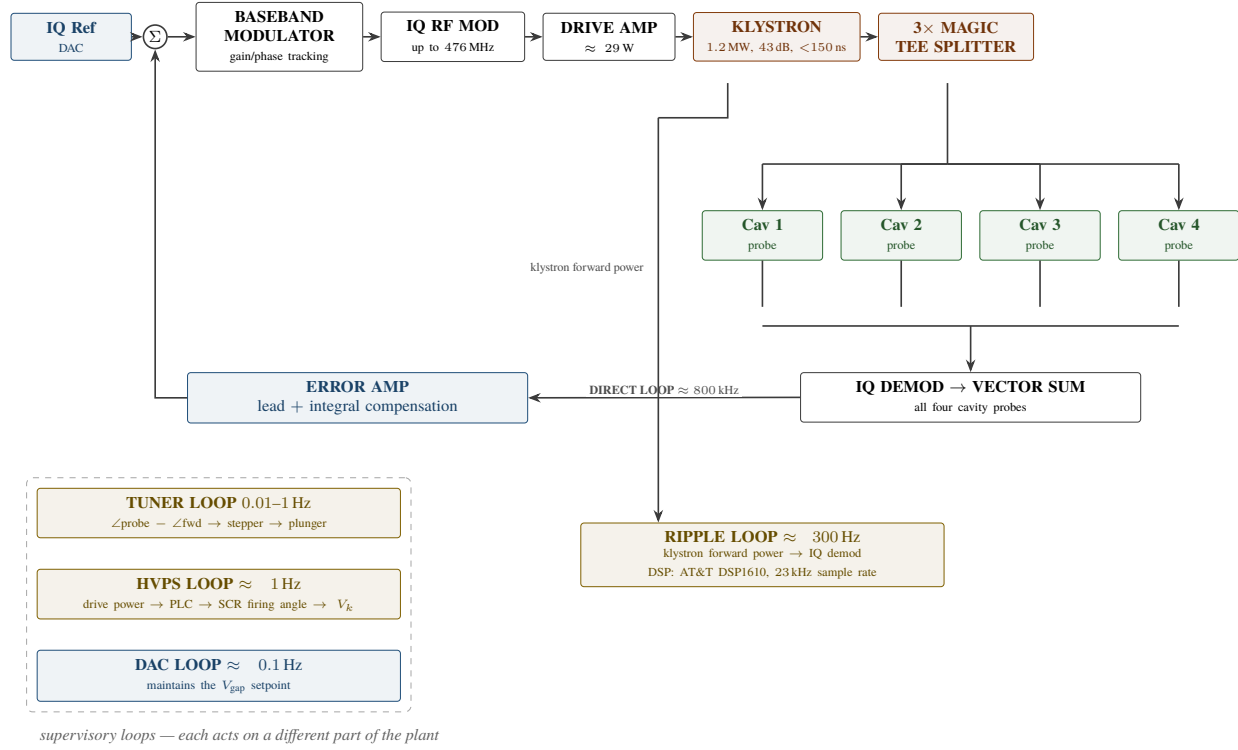


Figure 1: The SPEAR3 RF plant as a control system: the klystron and cavity chain is the plant, the LLRF processor is the controller, and the beam is the principal disturbance.

2 Plant Physics Model

This section derives the mathematical models of the three physical subsystems that the LLRF controller must regulate: the RF cavity, the klystron amplifier, and the HVPS.

2.1 High-Level System Block Diagram

The following diagram shows the full RF control architecture — four cavities driven by one klystron, with multiple feedback loops spanning seven decades of frequency:

Key architectural features:

- **Single klystron, four cavities:** One I/Q modulator drives all four cavities simultaneously. Field regulation uses the vector sum of all four cavity probes.
- **Bandwidth hierarchy:** Direct (800 kHz) $\gg$ Ripple (300 Hz) $\gg$ HVPS/Tuner (~ 1 Hz) $\gg$ DAC (0.1 Hz) — natural frequency-domain decoupling.
- **Analog fast path:** The direct loop operates entirely in analog baseband for minimum delay (~ 270 – 500 ns total loop delay).

2.2 RF Cavity as a Narrowband Resonator

2.2.1 Equivalent Circuit

Near its fundamental mode at $\omega_0 = 2\pi \times 476.3$ MHz, each cavity is modeled as a parallel RLC circuit. The cavity parameters (per cavity, linac convention $R_s = V^2/2P$):

Parameter	Symbol	Value	Unit
Resonant frequency	f_0	≈ 476.3	MHz
Shunt impedance	R_s	3.73	M Ω
Unloaded Q	Q_0	32,000	—
Loaded Q	Q_L	6,700	—
Coupling coefficient	$\beta = Q_0/Q_{\text{ext}}$	3.78	—

Traceability note: $R_s = 3.73 \text{ M}\Omega$ and $Q_0 = 32,000$ are directly from [R6] Schwarz. Schwarz reports $\beta_{\text{actual}} = 3.72$ and $\beta_{\text{optimum}} = 3.84$ for PEP-II HER, giving $Q_L = 6,780$. The value $\beta = 3.78$ used here is a derived operating point (intermediate between actual and optimum) consistent with $Q_L \approx 6,700$ via $Q_L = Q_0/(1 + \beta) = 32,000/4.78 = 6,695$. McIntosh [R1] reports $R_s = 3.8 \text{ M}\Omega$ in accelerator convention ($= 2 \times R_s^{\text{linac}} = 7.6 \text{ M}\Omega$, consistent with Schwarz $R_a = 7.5 \text{ M}\Omega$ [R6]).

Sources: [R6] Schwarz parameter table (PS-340-330-51-R0); [R7] Rimmer et al., LBL-33360.

2.2.2 Cavity Transfer Function

The cavity voltage response to a driving current near resonance:

$$H_{\text{cav}}(s) = \frac{R_s \omega_{1/2}}{s + \omega_{1/2} + j\Delta\omega} \quad (\text{Eq. 2.1a})$$

where $\omega_{1/2} = \omega_0/(2Q_L)$ is the cavity half-bandwidth. The **impedance seen by the beam** at frequency offset $\Delta\omega$ from ω_{RF} :

$$Z_{\text{cav}}(\Delta\omega) = \frac{R_s}{1 + j 2Q_L \Delta\omega/\omega_0} \quad (\text{Eq. 2.1})$$

Cavity half-bandwidth:

$$\Delta f_{1/2} = \frac{f_0}{2Q_L} = \frac{476.3 \text{ MHz}}{2 \times 6700} = 35.5 \text{ kHz} \quad (\text{Eq. 2.1b})$$

This determines the cavity natural response time $\tau_{\text{cav}} = 1/(2\pi\Delta f_{1/2}) \approx 4.5 \mu\text{s}$.

2.2.3 Beam Loading — Steady-State Phasor Analysis

The beam-induced voltage at resonance:

$$V_{b,\text{res}} = I_b \cdot R_s = 0.5 \text{ A} \times 3.73 \text{ M}\Omega = 1.865 \text{ MV} \quad (\text{Eq. 2.2})$$

This exceeds the desired gap voltage ($V_{\text{gap}} = 712 \text{ kV}$) by a factor of 2.6, demonstrating that **beam loading is the dominant effect**.

Synchronous phase — In the convention where ϕ_s is measured from the voltage crest (SLAC convention, used throughout this document):

$$V_{\text{RF}} \cos \phi_s = U_0 \quad (\text{Eq. 2.4})$$

$$\cos \phi_s = \frac{U_0}{V_{\text{RF}}} = \frac{1.02 \text{ MeV}}{2.85 \text{ MV}} = 0.358 \implies \phi_s \approx 69.0^\circ \quad (\text{Eq. 2.4a})$$

Note: $\sin \phi_s = \sin(69.0^\circ) = 0.934$, which appears in the beam loading compensation formulas below.

Synchrotron frequency :

$$\nu_s = \sqrt{\frac{h \alpha_c V_{\text{RF}} \sin \phi_s}{2\pi E_0}} \quad (\text{Eq. 2.4b})$$

With $V_{\text{RF}} = 2.85 \text{ MV}$, $\sin \phi_s = 0.934$: $\nu_s = \sqrt{372 \times 0.00118 \times 2.85 \times 0.934 / (2\pi \times 3000)} \approx 0.0079$, giving $f_s = \nu_s f_{\text{rev}} \approx 10.1 \text{ kHz}$. Published values: $Q_s = 0.008$ [R1], $\nu_s = 0.007$ [R3] — the range reflects differences in operational V_{RF} and α_c across lattice configurations. For control design, the key constraint is that the direct loop bandwidth ($\sim 800 \text{ kHz}$) $\gg f_s$.

Optimum detuning — minimizes reflected power at the input coupler:

$$\tan \psi_{\text{opt}} = -\frac{I_b R_s \sin \phi_s}{V_{\text{gap}}} = -\frac{0.5 \times 3.73 \times 10^6 \times 0.934}{712 \times 10^3} = -2.45 \quad (\text{Eq. 2.5})$$

$$\psi_{\text{opt}} \approx -67.8^\circ \quad (\text{Eq. 2.5a})$$

Derivation note: Equation 2.5 follows from the condition that optimum detuning makes the reactive component of the required generator current zero, minimizing reflected power at the input coupler. The cavity admittance at the drive frequency is $Y = G(1 + j \tan \psi)$ with $G = 1/(2R_s)$. The reactive generator current is $\text{Im}(I_{\text{gen}}) = V_{\text{gap}} \cdot G \cdot \tan \psi + I_b \sin \phi_s$. Setting this to zero gives $\tan \psi_{\text{opt}} = -I_b \sin \phi_s / (V_{\text{gap}} \cdot G) = -I_b \cdot R_s \cdot \sin \phi_s / V_{\text{gap}}$, which is Eq. 2.5. The formula is self-consistent: both $V_{b,\text{res}} = I_b R_s$ (Eq. 2.2) and $P_{\text{wall}} = V^2 / (2R_s)$ (Eq. 2.7a) use the same $R_s = 3.73 \text{ M}\Omega$, confirming that $\tan \psi_{\text{opt}} = -V_{b,\text{res}} \sin \phi_s / V_{\text{gap}}$ is the correct form.

Optimum frequency detuning — using $\sin \phi_s$ explicitly in the formula:

$$\Delta f_{\text{opt}} = \frac{f_0 \tan \psi_{\text{opt}}}{2Q_L} = -\frac{f_0 I_b R_s \sin \phi_s}{2Q_L V_{\text{gap}}} = -\frac{476.3 \text{ MHz} \times 0.5 \times 3.73 \times 10^6 \times 0.934}{2 \times 6700 \times 712 \times 10^3} \approx -87 \text{ kHz} \quad (\text{Eq. 2.6})$$

The cavity must be tuned $\sim 87 \text{ kHz}$ **below** f_{RF} at 500 mA.

Required generator power per cavity — At optimum coupling (β_{opt}) and optimum detuning (ψ_{opt}), the minimum generator power per cavity is the sum of cavity wall losses and beam power:

$$P_{\text{gen/cav}} = P_{\text{wall}} + \frac{P_{\text{beam}}}{n_{\text{cav}}} = \frac{V_{\text{gap}}^2}{2R_s} + \frac{I_b U_0}{n_{\text{cav}}} \quad (\text{Eq. 2.7})$$

Evaluation:

$$P_{\text{wall}} = \frac{V_{\text{gap}}^2}{2R_s} = \frac{(712 \text{ kV})^2}{2 \times 3.73 \text{ M}\Omega} = 68 \text{ kW/cavity} \quad (\text{Eq. 2.7a})$$

$$\frac{P_{\text{beam}}}{n_{\text{cav}}} = \frac{I_b U_0}{n_{\text{cav}}} = \frac{0.5 \text{ A} \times 1.02 \text{ MeV}}{4} = 127.5 \text{ kW/cavity} \quad (\text{Eq. 2.7b})$$

$$P_{\text{gen/cav}} = 68 + 127.5 \approx 196 \text{ kW/cavity} \quad (\text{Eq. 2.7c})$$

Total RF power: $4 \times 196 = 782 \text{ kW}$ — within the 1.2 MW klystron capacity ($\sim 35\%$ margin). The measured forward power at 500 mA is $\sim 200 \text{ kW/cavity}$, consistent with this calculation (the small excess accounts for reflected power at non-ideal coupling).

Note: Eq. 2.7 is the minimum-power condition at optimum coupling. In the general case with arbitrary coupling β and detuning ψ , the generator power includes reflected power terms. The important identity is that beam power per cavity $= I_b V_{\text{gap}} \cos \phi_s = I_b U_0 / n_{\text{cav}}$.

Sources: [R11] Gamp, CAS 2011; [R12] Wilson, SLAC-PUB-6062; [R13] Boussard, PAC 1985.

2.3 Klystron as the Actuator

For control analysis, the klystron is modeled as:

$$G_{\text{kly}}(s) = K_{\text{kly}} \cdot e^{-s\tau_{\text{kly}}} \quad (\text{Eq. 2.8})$$

where K_{kly} is the small-signal gain and $\tau_{\text{kly}} < 150 \text{ ns}$.

Parameter	Value	Unit
Maximum output power	1.2 MW	CW
Gain	43 dB (min)	—
Bandwidth	5 MHz	−3 dB
Group delay	< 150 ns	—
Perveance	$\sim 2.0 \times 10^{-6}$	$\text{A/V}^{3/2}$

Saturation model:

$$P_{\text{out}} = P_{\text{sat}} \cdot \frac{P_{\text{in}}/P_{\text{in,sat}}}{1 + P_{\text{in}}/P_{\text{in,sat}}} \quad (\text{Eq. 2.9})$$

AM-PM conversion — klystron output phase sensitivity to cathode voltage:

$$\Delta\phi_{\text{kly}} \propto \frac{\Delta V_k}{V_k} \quad (\text{Eq. 2.10})$$

Sources: [R1]; [R15] Corredoura, PAC 1999; [R5].

2.4 Loop Delay Budget — The Fundamental Bandwidth Ceiling

The maximum stable crossover frequency (with $\sim 45^\circ$ phase margin):

$$f_{c,\text{max}} \approx \frac{1}{4\tau_d} \quad (\text{Eq. 2.11})$$

This is the single most important constraint in the entire control design (a practical rule-of-thumb, $2\times$ phase margin of $\frac{\pi}{4}$).

Component	Legacy (analog)	LLRF9 (digital)
Klystron group delay	< 150 ns	< 150 ns
I/Q modulator	< 5 ns	< 5 ns
Cable propagation	~ 50 ns	~ 50 ns
Electronics/computation	~ 300 ns	~ 65 ns
Total τ_d	~ 500 ns	~ 270 ns
$f_{c,\max}$	~ 500 kHz	~ 926 kHz

Note: Direct loop delay is 270 ns from LLRF9 manual, which is assumed the total delay of the loop as listed here [To be confirmed].

2.5 Complete Open-Loop Plant Transfer Function

$$G_{\text{plant}}(s) = G_0 \cdot H_{\text{cav}}(s) \cdot e^{-s\tau_d} = \frac{G_0 \omega_{1/2}}{s + \omega_{1/2} + j\Delta\omega} e^{-s\tau_d} \quad (\text{Eq. 2.12})$$

The cavity bandwidth (35.5 kHz) and the loop delay together define the limits of what feedback can achieve.

3 I/Q Signal Processing Framework

3.1 Baseband I/Q Representation

All RF feedback loops use baseband In-phase and Quadrature (I/Q) techniques:

$$V_{\text{RF}}(t) = A(t) \cos[\omega_{\text{RF}}t + \phi(t)] = I(t) \cos(\omega_{\text{RF}}t) - Q(t) \sin(\omega_{\text{RF}}t) \quad (\text{Eq. 3.0})$$

where $I(t) = A(t) \cos \phi(t)$ and $Q(t) = A(t) \sin \phi(t)$, with inverse relations:

$$A(t) = \sqrt{I^2 + Q^2}, \quad \phi(t) = \text{atan2}(Q, I) \quad (\text{Eq. 3.0a})$$

3.2 Baseband I/Q Modulator

The I/Q modulator performs a scaled rotation:

$$\begin{pmatrix} I_{\text{out}} \\ Q_{\text{out}} \end{pmatrix} = G \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix} \begin{pmatrix} I_{\text{in}} \\ Q_{\text{in}} \end{pmatrix} \quad (\text{Eq. 3.1})$$

Implementation: Each baseband I/Q modulator uses four AD834 four-quadrant multipliers (DC to 500 MHz) + two EL2073 summing amplifiers to implement the 2×2 matrix. Group delay < 5 ns, full-power BW > 40 MHz, dynamic range > 50 dB.

SPEAR3 modulator count: 4 cavity combining modulators (one per probe) + 1 drive modulator (direct loop gain/phase) = **5 baseband I/Q modulators**, with associated Octal DAC channels on the RFP module for the 2×2 matrix coefficients.

PEP-II comparison: The PEP-II HER system used 7 baseband I/Q modulators (4 cavity combining + 1 direct loop + 1 comb filter adjust + 1 ripple) with 56 DAC channels [R15]. SPEAR3 requires fewer because: (a) the comb loop is not used, (b) the ripple correction is applied via DSP rather than a dedicated modulator. The AD834 multipliers and EL2073 op-amps are the same components.

Sources: [R15] Corredoura, Eq. 2 (PEP-II configuration); [R14] Schwarz, PS-340-330-52-R0; Doc B §13.2 (SPEAR3 RFP module description).

3.3 I/Q Demodulation

RF signals are converted to baseband I/Q using +13 dBm demodulators. Outputs: AC-coupled into 50 Ω , low-pass filtered ($F_c = 225$ MHz), video amplified (17 dB) to ± 1 V.

3.4 Cavity Probe Vector Sum

Each of the 4 cavity probe signals is demodulated to I/Q and combined through a programmable combining network (4 I/Q baseband modulators + 2 summing amplifiers on the RFP module) to form the **total accelerating RF vector**. The DAC weights for each modulator set the complex gain for each cavity's contribution to the vector sum.

3.5 Error Signal Generation

$$\vec{E} = \vec{V}_{\text{ref}} - \vec{V}_{\text{probe}} \quad (\text{Eq. 3.2})$$

$$\vec{V}_{\text{drive}} = G_{\text{loop}} \cdot \vec{E} = G_{\text{loop}} (\vec{V}_{\text{ref}} - \vec{V}_{\text{probe}}) \quad (\text{Eq. 3.3})$$

Sources: [R15]; [R14].

The error signals ΔI , ΔQ are then used with the reference I , Q to calculate the rotation angle or multipliers in Eq.(3.1) for cavity field regulation. The I/Q baseband representation developed in this section is used throughout §4–§9 to express all loop transfer functions in the complex baseband domain.

4 Disturbance Analysis and Control Problem Statement

The control architecture follows inevitably from the disturbance landscape.

4.1 Disturbance Taxonomy

# Disturbance	Frequency	Magnitude	Impact
D1Beam loading (steady-state)	DC	$V_b = 1.865$ MV/cavity	Dominates voltage budget
D2Beam loading (transient)	DC–100 kHz	Growth rates $< T_{\text{rev}}$	Longitudinal instability
D3Robinson instability	$f_s \sim 10$ kHz (Eq. 2.4b)	Exponential growth	Beam loss

#	Disturbance	Frequency	Magnitude	Impact
D4	Coupled-bunch modes	$n \cdot f_{\text{rev}}$	$1/\tau_{cb}$	Beam oscillation
D5	HVPS ripple	360, 720, 1080... Hz	< 1% P-P voltage	Phase modulation
D6	Klystron gain drift	0.01–1 Hz	up to 7 dB	Loop gain variation
D7	Microphonics	1–300 Hz	$\Delta f \sim 1\text{--}10$ Hz	Cavity detuning
D8	Thermal detuning (cavity)	< 0.01 Hz	$\Delta f \sim 1\text{--}100$ Hz	Slow frequency drift
D9	Ring circumference thermal drift	Seasonal ($\ll 0.001$ Hz)	$\Delta f_{RF} \sim 4$ kHz/year	Secular tuner setpoint migration

4.2 D1/D2: Beam Loading — The Dominant Disturbance

D1 — Steady-state beam loading: Each bunch extracts energy from the cavity field. The beam-induced voltage $V_{b,\text{res}} = I_b R_s = 1.865$ MV per cavity (Eq. 2.2) exceeds the gap voltage by a factor of ~ 2.6 . Without active compensation, the generator must supply this reactive power in addition to the real power delivered to the beam. Detuning the cavity (§2.1.3) brings the reactive component to zero at the operating current, but any current deviation creates a mismatch.

D2 — Transient beam loading: Current transients (injection, ion-clearing gap, bunch-by-bunch variations) cause rapid changes in the beam-induced voltage. These transients drive cavity field oscillations at frequencies up to $\sim f_{\text{rev}}$.

How feedback suppresses D1/D2: The direct feedback loop reduces the effective impedance seen by the beam:

$$Z_{\text{eff}}(\omega) = \frac{Z_{\text{cav}}(\omega)}{1 + G_{\text{OL}}(\omega)} \quad (\text{Eq. 4.1a, same as Eq. 5.3})$$

At DC and low frequencies where $|G_{\text{OL}}| \gg 1$ (proportional gain ~ 15 dB + integrator), the impedance reduction is ~ 40 dB ($\times 100$). This has two physical effects:

1. **Voltage regulation:** The beam-induced voltage perturbation $\Delta V_b = \Delta I_b \cdot Z_{\text{eff}}$ is reduced by the loop gain. A 1% current transient that would cause ~ 19 kV field perturbation without feedback produces only ~ 190 V with 40 dB impedance reduction.
2. **Stability:** The beam-cavity interaction becomes stable because the reduced impedance eliminates the conditions for exponential growth. The **growth rate** for coupled-bunch instability from the fundamental mode [R15]:

$$\frac{1}{\tau} = \frac{I_b \alpha_c f_{\text{RF}}}{2 \nu_s \beta^2 (E/e)} R_{cb} \quad (\text{Eq. 4.1})$$

where $R_{cb} = \sum_n \text{Re} [Z_{\text{eff}}(\omega_{\text{RF}} + n\omega_{\text{rev}} + \omega_s) - Z_{\text{eff}}(\omega_{\text{RF}} + n\omega_{\text{rev}} - \omega_s)]$.

With feedback, Z_{eff} replaces Z_{cav} in the sum, reducing growth rates by the same factor as the impedance reduction. **Without feedback**, the peak cavity impedance of ~ 750 k Ω produces growth rates faster than $T_{\text{rev}} \approx 0.78$ μs . This single fact drove the PEP-II system design to include multiple feedback loops [R15].

Sources: [R15] Corredoura, PAC 1999, Eq. 1; [R11] Gamp, CAS 2011.

4.3 D3: Robinson Instability

Robinson stability criterion (above transition):

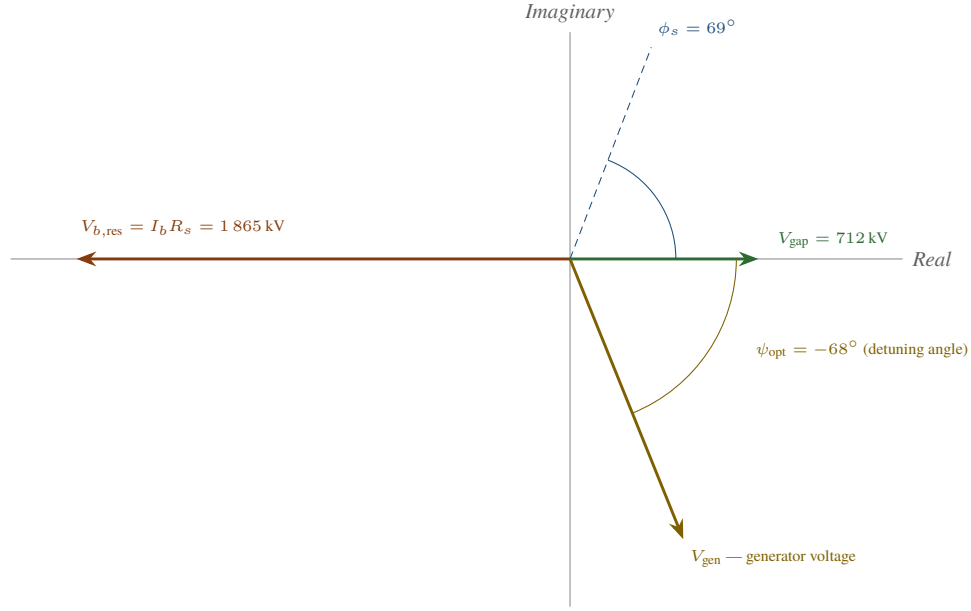


Figure 2: Beam loading phasor diagram in steady state at 500 mA. The cavity is detuned so that the generator sees a real load: the reactive part of the beam-induced voltage is cancelled by the detuning angle ψ .

$$\text{Re}\{Z_{\text{eff}}(\omega_{\text{RF}} + \omega_s)\} < \text{Re}\{Z_{\text{eff}}(\omega_{\text{RF}} - \omega_s)\} \quad (\text{Eq. 4.2})$$

Robinson growth rate:

$$\frac{1}{\tau_{\text{Rob}}} = \frac{\alpha_c \omega_{\text{rev}} I_b}{4 \omega_s (E/e)} [\text{Re}\{Z(\omega_{\text{RF}} + \omega_s)\} - \text{Re}\{Z(\omega_{\text{RF}} - \omega_s)\}] \quad (\text{Eq. 4.3})$$

Direct feedback reduces $Z_{\text{eff}} = Z_{\text{cav}}/(1 + G_{\text{OL}})$, reducing the growth rate by the same factor.

Sources: [R16] Robinson, CEAL-1010; [R11] Gamp; [R13] Boussard.

4.4 D4: Coupled-Bunch Modes

For $h = 372$ modes, each mode m is driven by the impedance sampled at revolution harmonics:

$$\frac{1}{\tau_m} = \frac{\alpha_c \omega_{\text{rev}} I_b}{4 \omega_s (E/e)} \sum_p [\text{Re}\{Z((ph + m)\omega_{\text{rev}} + \omega_s)\} - \text{Re}\{Z((ph + m)\omega_{\text{rev}} - \omega_s)\}] \quad (\text{Eq. 4.4})$$

Physics of the comb filter: The comb filter is designed to provide additional impedance reduction at revolution frequency harmonics — precisely where beam-driven modes exist — without increasing gain (and noise) at frequencies between harmonics. Its transfer function (Eq. 5.4) has gain peaks at integer multiples of f_{rev} , creating a frequency response that looks like the teeth of a comb:

Why SPEAR3 does not need the comb filter: The key ratio is $f_{\text{rev}}/\Delta f_{1/2}$:

- **SPEAR3:** $f_{\text{rev}} = 1.28 \text{ MHz} \gg \Delta f_{1/2} = 35.5 \text{ kHz} \rightarrow \text{ratio} \approx 36$. In this regime, only the central RF harmonic lies within the cavity bandwidth, while all revolution sidebands are many cavity linewidths away and therefore do not significantly couple through the cavity impedance. The cavity effectively behaves as a narrowband filter, responding primarily to the carrier component of the beam current.

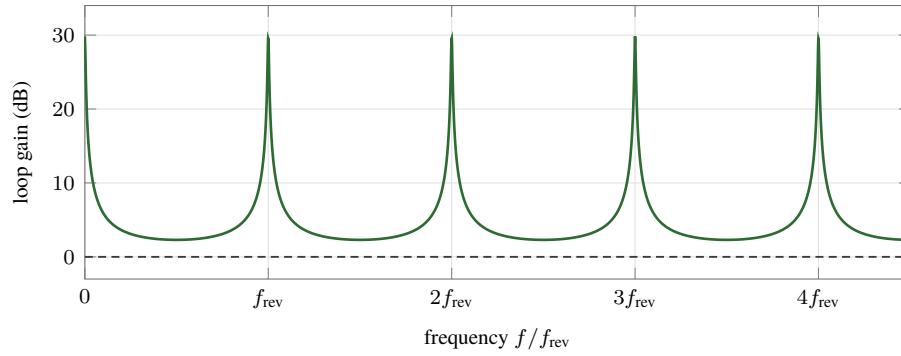


Figure 3: Comb filter response. The peaks sit at multiples of the revolution frequency, one per coupled-bunch mode; between them the gain returns towards unity, so the filter adds no broadband noise. Drawn from the digital comb magnitude with pole radius $K = 0.98$ and comb gain 30 to show the characteristic shape — these are not fitted SPEAR3 values.

- As a result, beam-induced disturbances at revolution harmonics are not directly amplified by the cavity, and the interaction is dominated by the fundamental RF component. Meanwhile, the beam current is much lower than PEP-II, comb filtering is not necessary for fine control and disturbance rejection, as the overall system is less sensitive to revolution harmonic coupling compared to PEP-II, relaxing the requirements on harmonic-by-harmonic suppression.
- **PEP-II:** $f_{\text{rev}} \approx 136$ kHz, comparable to $\Delta f_{1/2} \rightarrow$ ratio ≈ 4 . Although only the central RF harmonic lies strictly within the cavity bandwidth, the nearby revolution harmonics are only a few cavity linewidths away and therefore couple significantly through the cavity impedance.
- As a result, multiple revolution sidebands contribute to beam–cavity interaction and must be actively controlled for PEP-II. This operating regime necessitates the use of a comb filter, which provides selective suppression at revolution harmonics. This approach effectively mitigates beam-induced disturbances while avoiding the excessive noise amplification that would arise from a purely wideband feedback loop.

4.5 D5: HVPS Ripple

The 12-pulse SCR rectifier produces two families of harmonics:

12-pulse fundamental harmonics (ideal 12-pulse cancellation):

$$f_{12p} = 12n \times f_{\text{line}} = 720, 1440, 2160, \dots \text{ Hz} \quad (\text{Eq. 4.5a})$$

Residual 6-pulse harmonics (from imperfect phase balance between the two 6-pulse bridges):

$$f_{6p} = 6n \times f_{\text{line}} = 360, 720, 1080, \dots \text{ Hz} \quad (\text{Eq. 4.5b})$$

The 360 Hz component (first 6-pulse harmonic absent in ideal 12-pulse operation) is the **dominant residual** and the primary target of the ripple loop. Additional low-order harmonics at 60, 120, 180, 240 Hz may appear at reduced levels (~ 20 – 40 dB below 360 Hz) depending on SCR firing symmetry. Coupling to RF field via AM-PM conversion:

$$\Delta\phi_{\text{RF}} \sim \frac{\partial P_{\text{kly}} / \partial V_k}{P_{\text{kly}}} \cdot \Delta V_{\text{ripple}} \quad (\text{Eq. 4.6})$$

Sources: [R21]; [R22]; 11rf/documentation/legacyArchitecture/feedbackLoopDescriptionps3403305200.pdf.

4.6 D6: Klystron Gain Variation

Source of gain variation: As beam current changes from 0 to 500 mA, the HVPS loop adjusts cathode voltage V_k to maintain the klystron $\sim 10\%$ below saturation. As V_k changes, the small-signal gain (slope of the P_{out} vs P_{in} curve) varies by up to ~ 7 dB. This shifts the open-loop gain of the direct feedback loop, potentially affecting stability margins.

Gain tracking implementation (§6.9): The baseband modulator on the RFP module (4 Gilbert-cell multipliers in a 2×2 matrix) has its matrix coefficients controlled by 12-bit Octal DACs. A slow EPICS loop (~ 1 Hz) reads the klystron forward power and drive power monitors, computes the current gain, and adjusts the modulator matrix to maintain constant overall loop gain:

$$G_{\text{modulator}} = \frac{G_{\text{loop,target}}}{G_{\text{klystron}}(V_k)} \quad (\text{Eq. 4.6a})$$

The MATLAB calibration routine `ConfDirect` (initiated from the EPICS feedback panel) performs the initial gain tracking setup by measuring klystron gain at the current operating point and writing the appropriate 2×2 matrix coefficients to the quad DAC.

Note: In PEP-II, the ripple loop also applied gain/phase correction via a dedicated I/Q modulator. At SPEAR3, the ripple loop phase correction is handled by the DSP (AT&T DSP1610), and the slow gain tracking is handled by the baseband modulator coefficients on the RFP module.

Sources: [R14] Schwarz, PS-340-330-52-R0; [R15] Corredoura; Doc B §7.6.

4.7 D7/D8: Microphonics and Thermal Detuning

For normal-conducting copper cavities: microphonic excursions < 10 Hz (negligible vs. $\Delta f_{1/2} = 35.5$ kHz).

Thermal detuning estimation: The resonant frequency of a copper cavity scales inversely with its linear dimensions: $\Delta f/f = -\alpha_{\text{Cu}} \cdot \Delta T$, where $\alpha_{\text{Cu}} \approx 16.5 \times 10^{-6} / ^\circ\text{C}$ is the linear thermal expansion coefficient of copper. For a simple cavity at 476.3 MHz, this gives:

$$\frac{\partial f_0}{\partial T} \approx -f_0 \cdot \alpha_{\text{Cu}} = -476.3 \text{ MHz} \times 16.5 \times 10^{-6} \approx -7.9 \text{ kHz}/^\circ\text{C} \quad (\text{Eq. 4.7})$$

Note: This first-principles estimate ($-7.9 \text{ kHz}/^\circ\text{C}$) applies to the uncooled cavity body. In practice, the PEP-II-type cavities at SPEAR3 are water-cooled with a regulated cooling circuit that maintains body temperature to within $\sim \pm 0.1^\circ\text{C}$.

The tuner loop (§8) tracks both microphonics and thermal drift, maintaining the cavity at the optimum detuning angle ψ_{opt} (Eq. 2.5a).

4.8 D9: Ring Circumference Thermal Drift — Long-Term RF Frequency Migration

Physical origin: The RF harmonic condition requires the RF operating frequency to equal an integer multiple of the revolution frequency:

$$f_{\text{RF}} = h \cdot f_{\text{rev}} = \frac{h \cdot c}{C} \quad (\text{Eq. 4.8})$$

The ring circumference $C = 234.14$ m is set by the physical path of the beam through the tunnel. As the building structure thermally expands and contracts with seasonal temperature changes, C varies slowly

on a monthly-to-annual timescale. By the harmonic condition, the correct RF operating frequency must shift accordingly. A nominally fixed RF master oscillator becomes progressively detuned from the correct harmonic as the circumference drifts.

Measured magnitude at SPEAR3: The RF operating frequency drifts by approximately $\Delta f_{\text{RF}} \approx 4$ kHz over one year. From the harmonic condition:

$$\frac{\Delta C}{C} = -\frac{\Delta f_{\text{RF}}}{f_{\text{RF}}} = -\frac{4 \text{ kHz}}{476.3 \text{ MHz}} = 8.4 \times 10^{-6} \quad (\text{Eq. 4.8a})$$

$$\Delta C = 8.4 \times 10^{-6} \times 234.14 \text{ m} \approx 2.0 \text{ mm} \quad (\text{Eq. 4.8b})$$

A 2 mm annual change in the 234 m circumference is consistent with a tunnel temperature variation of $\sim 0.8^\circ\text{C}$ (concrete/steel: $\alpha_{\text{struct}} \approx 10\text{--}12 \times 10^{-6}/^\circ\text{C}$), physically plausible for a building with seasonal HVAC cycling.

Contrast with D8 (cavity body thermal detuning):

	D8: Cavity thermal detuning	D9: Ring circumference drift
Physical origin	Cavity copper temperature $\rightarrow f_0$ shifts	Tunnel/building temperature $\rightarrow C$ changes $\rightarrow$ required f_{RF} shifts
Rate	$-7.9 \text{ kHz}/^\circ\text{C}$ (Eq. 4.7);	$\sim 4 \text{ kHz/year}$ (measured operational data)
Timescale	Short-term (hourly)	Long-term (seasonal/annual)
Control variable	Tuner re-tracks f_0 relative to f_{RF}	Tuner re-converges to new equilibrium as f_{RF} migrates; RF master oscillator updated periodically

Impact on the control system: The operating detuning $\Delta f = f_{\text{RF}} - f_0$ defines the tuner equilibrium. Both D8 and D9 shift Δf , but from opposite sides — D8 moves f_0 (cavity geometry changes), while D9 moves f_{RF} (ring geometry changes). The tuner loop (§6.7) is closed around the detuning angle $\psi = \arctan(2Q_L \Delta f / f_0)$, so it automatically re-converges to ψ_{opt} when f_{RF} changes, provided:

1. The tuner mechanical range and total step count are sufficient to reach the new equilibrium position.
2. The RF master oscillator frequency is updated periodically by feedback system to track the ring operating point.

4.9 Frequency-Domain Summary: The Disturbance Spectrum

This table is the Rosetta Stone of the control design. Each loop exists because one or more disturbances occupy a specific frequency band.

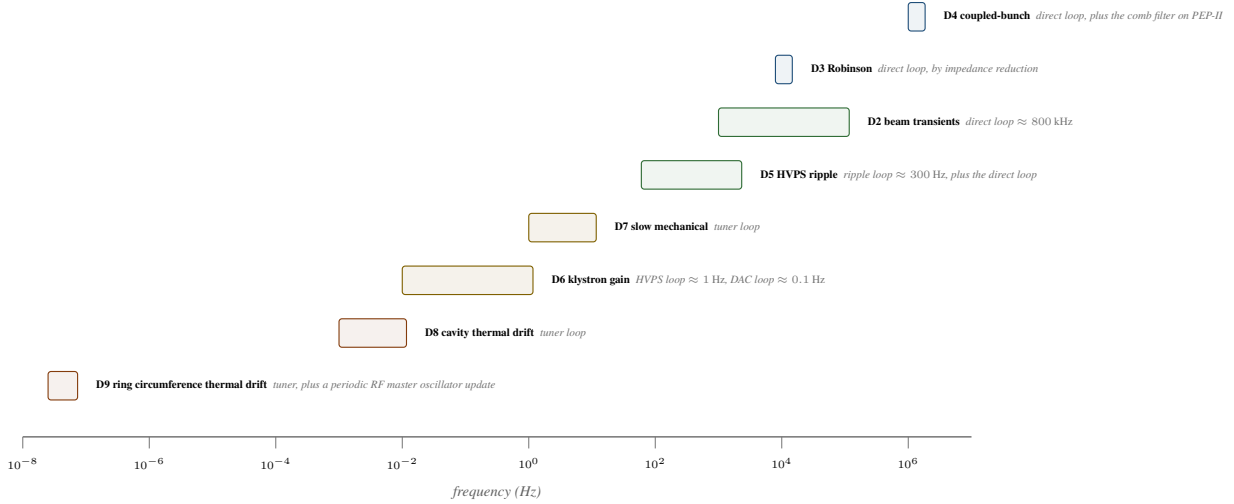


Figure 4: Disturbance spectrum and the loop assigned to each band. Loop bandwidths are separated by roughly a decade so that adjacent loops do not interact.

5 Control Architecture: From Disturbances to Loops

5.1 The Design Logic: Bandwidth Matching

The fundamental principle: **match the loop bandwidth to the disturbance frequency content.** For SPEAR3:

$$\text{DAC (0.1 Hz)} \ll \text{HVPS/Tuner } (\sim 1 \text{ Hz}) \ll \text{Ripple (300 Hz)} \ll \text{Direct } (\sim 800 \text{ kHz})$$

Bandwidth separations of $10\times$ – $1000\times$ provide natural frequency-domain decoupling.

5.2 Direct Feedback Loop — Compensating Beam Loading (D1–D4)

Open-loop transfer function:

$$G_{OL}(s) = G_{\text{prop}} \cdot G_{\text{lead}}(s) \cdot G_{\text{int}}(s) \cdot G_{\text{kly}}(s) \cdot H_{\text{cav}}(s) \cdot e^{-s\tau_d} \quad (\text{Eq. 5.1})$$

→ See §6.1 for block-by-block symbol definitions, explicit compensator forms (Eq. 6.1a), gain/phase budget at crossover, and stability analysis.

Closed-loop transfer function:

$$T(s) = \frac{G_{OL}(s)}{1 + G_{OL}(s)} \quad (\text{Eq. 5.2})$$

At frequencies well below f_c , $|G_{OL}| \gg 1$ and $T \approx 1$; above f_c , $T \rightarrow 0$.

Effective cavity impedance seen by the beam:

$$Z_{\text{eff}}(\omega) = \frac{Z_{\text{cav}}(\omega)}{1 + G_{OL}(\omega)} \quad (\text{Eq. 5.3})$$

This is the central result. The direct loop **transforms the cavity from a high-impedance resonator into a low-impedance broadband structure:**

- At DC: impedance reduction ~ 40 dB (integrator provides very high gain)

- At $f_s \approx 10$ kHz: ~ 30 dB (Robinson sidebands well suppressed)
- At $\Delta f_{1/2} = 35.5$ kHz: ~ 15 dB
- At $f > f_c$: no reduction ($Z_{\text{eff}} \approx Z_{\text{cav}}$)

Sources: [R15] Corredoura, Fig. 3; [R14]; [R11].

5.3 Comb Loop — Narrowband Enhancement at Revolution Harmonics (D4)

Z-domain transfer function [R15]:

$$H_{\text{comb}}(z) = G \frac{z^{-1} - z^{-n}}{1 - 2K \cos(2\pi\nu_s) z^{-n} + K^2 z^{-2n}} \quad (\text{Eq. 5.4})$$

The comb filter produces gain peaks at frequencies $f = m \cdot f_{\text{rev}} \pm f_s$ for integer m , precisely targeting the revolution-harmonic sidebands that drive coupled-bunch instabilities (Eq. 4.4).

5.4 Slow Loops — Maintaining Operating Point (D6, D7, D8, D9)

- **Tuner Loop** (~ 0.01 – 1 Hz): Adjusts cavity mechanical tuner to maintain ψ_{opt} (Eq. 2.6), compensating cavity thermal drift (D8) and microphonics (D7). Also re-converges to the new equilibrium after a ring-circumference-driven RF frequency update (D9).
- **HVPS Loop** (~ 1 Hz): Adjusts klystron cathode voltage to maintain $\sim 10\%$ below saturation.
- **DAC Loop** (~ 0.1 Hz): Adjusts I/Q modulator baseline to maintain V_{gap} setpoint.

5.5 Ripple Loop — HVPS Harmonic Rejection (D5)

Measures **klystron forward phase** (not cavity probe), avoiding the 35.5 kHz cavity BW limitation. DSP at ~ 23 kHz sample rate tracks harmonics of 60 Hz.

5.6 Multi-Loop Stability: The Bandwidth Separation Principle

Formal argument: Consider two feedback loops acting on the same plant. Let $L_1(s)$ be the loop transfer function (return ratio) of the fast loop and $L_2(s)$ be that of the slow loop, where:

- $L_1(s) = G_{\text{OL,fast}}(s)$: the open-loop transfer function of the fast loop (e.g., the direct loop, with bandwidth $f_1 \sim 800$ kHz)
- $L_2(s) = G_{\text{OL,slow}}(s)$: the open-loop transfer function of the slow loop (e.g., the ripple loop, with bandwidth $f_2 \sim 300$ Hz)

The combined loop transfer function for the two nested loops is:

$$L_{\text{total}}(s) = (1 + L_1(s))(1 + L_2(s)) - 1 = L_1(s) + L_2(s) + L_1(s) L_2(s) \quad (\text{Eq. 5.5})$$

The cross-term $L_1(s) \cdot L_2(s)$ represents the interaction between the two loops. At frequencies near f_1 , $|L_2(j\omega)| \ll 1$ (the slow loop has negligible gain), so $L_{\text{total}} \approx L_1$ — the fast loop sees the slow loop as transparent. Conversely, at frequencies near f_2 , $|L_1(j\omega)| \gg 1$ (the fast loop has high gain), but the cross-term simply augments the slow loop's authority without introducing new phase crossings, provided the bandwidth separation is sufficient.

The condition for safe decoupling — ensuring the cross-term does not introduce additional gain or phase crossings near either loop's crossover frequency:

$$\frac{f_i}{f_{i+1}} \geq 10 \quad \text{for all adjacent loop pairs} \quad (\text{Eq. 5.6})$$

This ensures that at each loop's crossover frequency, all other loops are either at very high gain (inner loops) or very low gain (outer loops), so the Nyquist criterion can be applied to each loop independently.

SPEAR3 satisfies this with large margins: DAC $\rightarrow$ HVPS ($10\times$), HVPS $\rightarrow$ Ripple ($300\times$), Ripple $\rightarrow$ Direct ($2700\times$). The smallest separation (DAC $\rightarrow$ HVPS, $10\times$) is adequate because both are slow integrating loops with well-separated crossover frequencies.

Sources: [R14]; [R15]; Åström & Murray, *Feedback Systems*, Ch. 12.

6 Loop-by-Loop Transfer Functions and Design

This section provides the transfer function, control law, and design rationale for each feedback loop. The subsections follow a consistent structure: **purpose** $\rightarrow$ **signal flow** $\rightarrow$ **transfer function** $\rightarrow$ **key parameters** $\rightarrow$ **design constraints**.

6.1 Loop Overview and Implementation Summary

The bandwidth requirement of each disturbance dictates the implementation technology. Microsecond-scale beam loading demands analog hardware with continuous processing. Millisecond-scale HVPS ripple is handled by a dedicated DSP. Second-scale drift is corrected by IOC software running in EPICS. This principle — **disturbance timescale** $\rightarrow$ **implementation tier** — makes the entire multi-loop architecture a natural consequence of the physics.

Loop	§Ref	Implementation	Update Rate	Controller Type	Bandwidth	SPEAR3 Status
Direct	6.1	Analog hardware (VXI RFP module)	Continuous	Lead-lag + PI	~800 kHz	Active
Comb	6.2	Digital hardware (VXI CFM, IIR + FIR)	~10 MHz	IIR comb + FIR equalizer	~2 MHz span	Not used
LFB Woofer	6.3	Digital hardware (GVF module, TAXI fiber)	~10 MHz	External injection	~1 MHz	Not used
Ripple	6.4	Digital hardware (AT&T DSP1610)	23 kHz	Adaptive harmonic estimator	~300 Hz	Active
Gap FF	6.5	Digital hardware (GVF module DSP)	~10 MHz	Feed-forward	~100 Hz	Not used
HVPS	6.6	Real-time software (EPICS SNL)	~1 Hz	Proportional + dead-band	~1 Hz	Active
Tuner	6.7	Real-time software (EPICS SNL)	~1 Hz	Bang-bang	~0.01–1 Hz	Active
DAC	6.8	Real-time software (EPICS SNL)	Event / 10 s	Proportional + dead-band	~0.1 Hz	Active
Gain Tracking	6.9	Supervisory software (EPICS CA)	~2 Hz	Ratio maintenance	~0.5 Hz	Active

The loops naturally partition into four implementation tiers:

1. **Analog hardware** (continuous): The direct loop — minimum latency path for the fastest disturbances (D1–D4).
2. **Digital hardware** (MHz-rate): Comb, woofer, gap feedforward, and ripple loops — dedicated DSP/FPGA processing for structured disturbances (D4, D5).
3. **Real-time software** (~1 Hz): HVPS, tuner, and DAC loops — EPICS programs managing slow plant dynamics (D6–D8).
4. **Supervisory software** (~0.1–2 Hz): Gain tracking — EPICS Channel Access for calibration maintenance.

6.2 Direct Loop — Wideband RF Field Regulation

Purpose: Reduces the effective cavity impedance seen by the beam by ~ 40 dB at low frequencies, suppressing Robinson instability (D3), coupled-bunch growth (D4), and regulating against beam loading transients (D1–D2). This is the primary stability loop.

Signal flow: Cavity probe I/Q (4 cavities, vector-summed) $\rightarrow$ error amplifier (compare to reference) $\rightarrow$ lead/integral compensator $\rightarrow$ baseband modulator (gain tracking) $\rightarrow$ I/Q RF modulator $\rightarrow$ drive amplifier $\rightarrow$ klystron $\rightarrow$ cavities.

Open-loop transfer function (restating Eq. 5.1 with component forms from §5.2):

$$G_{OL}(s) = K_p \cdot \frac{1 + s/\omega_z}{1 + s/\omega_p} \cdot \left(1 + \frac{\omega_i}{s}\right) \cdot K_{kly} \cdot \frac{R_s \omega_{1/2}}{s + \omega_{1/2}} \cdot e^{-s\tau_d} \quad (\text{Eq. 6.1a})$$

where the terms are (left to right): proportional gain, lead compensator, PI integrator, klystron gain, cavity response, and transport delay. All symbols are defined in the Eq. 5.1 table (§5.2).

Gain and phase budget at crossover ($f_c \approx 800$ kHz legacy, ≈ 930 kHz LLRF9):

Contributor	Gain at f_c	Phase at f_c
Proportional K_p	+15 dB	0°
Lead compensator	+3 to +6 dB	+30° to +50° (advance)
PI integrator	≈ 0 dB (above ω_i)	$\approx 0^\circ$
Cavity H_{cav}	$-20 \log_{10}(f_c/\Delta f_{1/2})$	$-90^\circ + \arctan(\Delta f_{1/2}/f_c)$
Transport delay	0 dB	$-360^\circ \cdot f_c \cdot \tau_d$
Net at crossover	0 dB (by definition)	$> -135^\circ$ (PM $> 45^\circ$)

Stability margins: Phase margin $\geq 45^\circ$ (required), gain margin ≥ 6 dB (required). The lead compensator zero and pole frequencies are chosen to provide sufficient phase advance at crossover to compensate the cavity pole (-90°) and delay lag ($-\omega_c \tau_d$).

Parameter	Value	Notes
Addresses	D1–D4	Primary stability loop
Measurement	Cavity probe vector sum (I/Q)	After combining network
Actuator	I/Q modulator on klystron drive	Direct analog path, minimum delay
Bandwidth f_c	~ 800 kHz (legacy) / ~ 930 kHz (LLRF9)	Limited by τ_d via Eq. 2.11
Proportional gain K_p	~ 15 dB (≈ 5.6)	Adjustable via EPICS PV
Integrator frequency ω_i	$\sim 2\pi \times 30$ kHz	Rejects DC errors

Parameter	Value	Notes
Phase margin	$\geq 45^\circ$	Maintained by lead compensation
DC impedance reduction	~ 40 dB	$\approx 100\times$ reduction in $ Z_{\text{eff}} $
SPEAR3 status	Active	—

Sources: [R15] Corredoura, Figs. 3, 5; [R14] Schwarz; [R11] Gamp.

6.3 Comb Loop — Narrowband Enhancement at Revolution Harmonics

Purpose: Provides an additional ~ 20 dB of impedance reduction at revolution frequency harmonics — precisely where coupled-bunch modes are driven (D4) — complementing the broadband reduction of the direct loop. Between revolution harmonics, the comb gain returns to unity, avoiding unnecessary noise amplification.

Signal flow: Cavity probe I/Q $\rightarrow$ ADC $\rightarrow$ IIR comb filter $\rightarrow$ FIR group delay equalizer $\rightarrow$ one-turn delay + vernier $\rightarrow$ DAC $\rightarrow$ summing node (added to direct loop output).

IIR comb transfer function (restating Eq. 5.4 with engineering context):

$$H_{\text{comb}}(z) = G \frac{z^{-1} - z^{-n}}{1 - 2K \cos(2\pi\nu_s) z^{-n} + K^2 z^{-2n}} \quad (\text{Eq. 5.4})$$

The peak gain at each comb tooth is $G_{\text{peak}} = G/(1 - K)$, and the -3 dB bandwidth per tooth is approximately $(1 - K) \cdot f_{\text{rev}}/\pi$. For typical PEP-II parameters ($K \approx 0.95$, $G \approx 0.05$), peak gain ≈ 1 (unity) and tooth bandwidth ≈ 2.2 kHz — narrow enough to target individual synchrotron sidebands without amplifying inter-harmonic noise.

Closed-loop impedance with Direct + Comb: The combined impedance reduction at a revolution harmonic $m \cdot f_{\text{rev}}$ is:

$$Z_{\text{eff,D+C}}(\omega) = \frac{Z_{\text{cav}}(\omega)}{1 + G_{\text{OL,direct}}(\omega) + G_{\text{OL,comb}}(\omega)} \quad (\text{Eq. 6.2a})$$

At revolution harmonics where both loops have authority, the impedance reduction is the product of the individual factors: the direct loop provides ~ 20 dB broadband, and the comb adds ~ 20 dB at targeted harmonics, for a combined ~ 40 dB at revolution sidebands.

Group delay equalization: A 32-tap FIR filter compensates for the frequency-dependent group delay of the cavity and transport path across the comb filter's operating range (~ 4 MHz centered on f_{RF}). The FIR coefficients are designed for the worst-case detuned cavity condition, maintaining phase linearity to $< 10^\circ$ over the full bandwidth. The one-turn delay is implemented as a FIFO and fine-adjusted with shift registers at 25 ns steps to match the revolution period to sub-ns precision.

$$H_{\text{eq}}(z) = \sum_{k=0}^{31} c_k z^{-k} \quad (\text{Eq. 6.2b})$$

The complete comb path transfer function including equalization:

$$G_{\text{OL,comb}}(z) = H_{\text{comb}}(z) \cdot H_{\text{eq}}(z) \cdot z^{-n_{\text{delay}}} \quad (\text{Eq. 6.2c})$$

where n_{delay} accounts for the hardware transport delay (ADC + DAC + cable propagation).

Sources: [R15] Corredoura, SLAC-PUB-8498, Figs. 4–6; [R14] Schwarz.

6.4 LFB Woofer — Longitudinal Feedback via RF Modulation

Purpose: Provides broadband damping of low-order coupled-bunch modes ($|n| < 10$) by using the RF station as a longitudinal ”sub-woofer” kicker (D2). In the multi-band longitudinal feedback architecture, the woofer handles the low-frequency content of the bunch oscillation spectrum (up to ~ 1 MHz), while a dedicated stripline kicker (the ”tweeter”) handles high-frequency content. This is the standard PEP-II/ALS/APS longitudinal damping architecture.

Signal flow: LFB BPM pickup $\rightarrow$ bunch-by-bunch DSP processing (external system) $\rightarrow$ 10-bit fiber-optic TAXI link at 10 MHz $\rightarrow$ GVF module DAC $\rightarrow$ FIR group delay equalizer $\rightarrow$ injection summing node $\rightarrow$ I/Q reference modulation.

Transfer function: The woofer acts as an additive correction to the static I/Q reference:

$$\vec{V}_{\text{ref,total}}(s) = \vec{V}_{\text{ref,static}} + K_{\text{woofer}} \cdot H_{\text{FIR}}(s) \cdot e^{-s\tau_{\text{woofer}}} \cdot \Delta\vec{V}_{\text{LFB}}(s) \quad (\text{Eq. 6.3a})$$

where:

- K_{woofer} is the woofer injection gain (adjustable), setting the strength of RF modulation per unit LFB correction signal
- $H_{\text{FIR}}(s)$ is the same 32-tap group delay equalizer used for the comb filter (Eq. 6.2b), compensating cavity and transport delay across the woofer bandwidth
- τ_{woofer} is the one-turn injection delay (matching the revolution period for proper bunch alignment)
- $\Delta\vec{V}_{\text{LFB}}(s)$ is the LFB correction signal received over the TAXI fiber link

Woofer/Tweeter complementarity: The longitudinal feedback system partitions the correction bandwidth between two actuators:

Actuator	Mechanism	Bandwidth	Modes Addressed
Woofer (RF station)	Modulates cavity voltage via I/Q reference injection	DC – ~ 1 MHz	Low-order
Tweeter (stripline kicker)	Direct longitudinal kick via broadband kicker	~ 1 – ~ 200 MHz	High-order

The RF station woofer is effective for low-order modes because these modes require large energy corrections at low frequency — naturally suited to the high-power RF cavity. Higher-order modes require fast, broadband corrections — suited to the stripline kicker's low latency.

Interaction with direct loop: The woofer injection enters upstream of the direct loop error point (at the reference input), so the direct loop sees the modified reference as its setpoint and tracks it. This means the woofer operates *through* the direct loop rather than in parallel, and the direct loop's bandwidth (~ 800 kHz) sets an upper limit on the effective woofer bandwidth.

Parameter	PEP-II Value	SPEAR3 Notes
Addresses	D2, D4 (low-order coupled-bunch)	—
External system	LFB bunch-by-bunch DSP	Not installed
Data link	TAXI fiber, 10-bit, 10 MHz	—
Injection hardware	GVF VXI module	Present but unused
FIR equalizer	32-tap (shared design with comb)	—
One-turn delay	$\approx 7.34 \mu\text{s}$ (PEP-II)	—

Parameter	PEP-II Value	SPEAR3 Notes
Effective bandwidth	DC – ~1 MHz	—
SPEAR3 status	—	Not used

Why not needed at SPEAR3: SPEAR3 does not have a longitudinal feedback system installed. At 500 mA beam current with $h = 372$, the coupled-bunch instability growth rates are manageable with the direct loop alone. PEP-II required the woofer to damp strong coupled-bunch oscillations driven by the high beam current (> 1 A) and large harmonic number ($h = 3,492$) where many more revolution harmonics drive unstable modes.

Sources: [R15] Corredoura, SLAC-PUB-8498; [R16] Fox et al., LFB system design; [R14] Schwarz.

6.5 Ripple Loop — HVPS Harmonic Rejection

Purpose: Cancels RF amplitude and phase modulation caused by HVPS switching ripple (D5). The ripple appears as harmonics of 60 Hz on the klystron cathode voltage, modulating klystron gain and phase via AM-PM conversion.

Signal flow: Klystron forward I/Q $\rightarrow$ I/Q demodulation $\rightarrow$ DSP phase/amplitude extraction $\rightarrow$ harmonic estimator $\rightarrow$ correction I/Q $\rightarrow$ DAC $\rightarrow$ summing node with direct loop.

Key design choice: Measures the **klystron forward signal** (not cavity probe), because the ripple frequencies (< 2 kHz) are well within the cavity bandwidth (35.5 kHz) and the correction must be applied upstream.

Harmonic estimator algorithm (from `ripple.s,v` [R36]): The DSP implements an adaptive harmonic tracker — for each harmonic k :

$$\hat{A}_k[n] = \hat{A}_k[n-1] + \mu_k \cdot e[n] \cdot \cos(2\pi k f_{\text{line}} n T_s) \quad (\text{Eq. 6.4a})$$

$$\hat{B}_k[n] = \hat{B}_k[n-1] + \mu_k \cdot e[n] \cdot \sin(2\pi k f_{\text{line}} n T_s) \quad (\text{Eq. 6.4b})$$

$$u[n] = \sum_k \left[\hat{A}_k \cos(2\pi k f_{\text{line}} n T_s) + \hat{B}_k \sin(2\pi k f_{\text{line}} n T_s) \right] \quad (\text{Eq. 6.4c})$$

where $e[n] = \phi_{\text{ref}} - \phi_{\text{kly}}$ is the phase error at sample n , $\hat{A}_k, \hat{B}_k$ are the estimated cosine/sine coefficients of the k -th harmonic, μ_k is the adaptation gain for harmonic k , $f_{\text{line}} = 60$ Hz, and $T_s = 1/23$ kHz is the sampling period. This is a **narrowband adaptive notch** algorithm that converges on the exact amplitude and phase of each harmonic.

Dual-rate processing: 6 fast harmonics (60–360 Hz, every cycle at 23 kHz) + 8 slow harmonics (420–840 Hz, round-robin at ~ 2.9 kHz effective rate). Fixed-point: q13 (phase), q11 (accumulators with $[-16, +16]$ headroom), q15 (gains).

Parameter	Value	Notes
Addresses	D5 (HVPS ripple)	Harmonic rejection
Measurement	Klystron forward I/Q	Upstream of cavity
Effective bandwidth	~ 300 Hz (fast) / ~ 1.5 kHz (slow)	Limited by DSP sample rate

Parameter	Value	Notes
Algorithm	Adaptive harmonic estimator	6 fast + 8 slow harmonics
Sample rate	~ 23 kHz	Hardware ripple clock on RFP module
DSP	AT&T DSP1610 (16-bit fixed-point)	On RFP VXI module
SPEAR3 status	Active (primarily as slow phase tracker)	

Note: In SPEAR3 operations, the ripple loop is deployed primarily as a **slow phase tracker** compensating for klystron phase shifts across cathode voltage changes (D6). The LLRF9 inherently rejects HVPS ripple through its high-bandwidth direct loop, making the legacy DSP-based ripple loop unnecessary in the upgrade.

Sources: [R36] `ripple.s,v`; [R20t]; [R14] Schwarz §5.

6.6 Gap Feedforward Loop

Not used at SPEAR3. Addresses D2 (ion clearing gap transient). In PEP-II, the GVF module provided pre-computed I/Q correction waveforms via DSP firmware (`gvff.s`). Not needed at SPEAR3 due to smaller harmonic number ($h = 372$ vs. PEP-II $h = 3,492$).

6.7 HVPS Loop — Klystron Operating Point Regulation

Purpose: Adjusts the klystron cathode voltage V_k to maintain the klystron operating point at $\sim 10\%$ below saturation (D6), ensuring the direct loop has sufficient headroom for fast corrections.

Signal flow: Klystron forward power monitor (or station gap voltage) $\rightarrow$ EPICS SNL (`rf_hvps_loop.st,v`) $\rightarrow$ PLC HVPS voltage setpoint $\rightarrow$ Enerpro SCR firing angle $\rightarrow$ cathode voltage V_k .

Control law (from `rf_hvps_loop.st,v`): Operates in two modes:

1. **Processing mode** (STATION_PROC): Slowly ramps V_k upward while monitoring cavity vacuum, conditioning the cavities by gradually increasing RF power.
2. **Operating mode** (STATION_ON_CW): Proportional controller with deadband and rate limiting:

$$\Delta V_k[n] = \begin{cases} K_{\text{HVPS}} \cdot (P_{\text{target}} - P_{\text{measured}}) & \text{if } |P_{\text{target}} - P_{\text{measured}}| > P_{\text{deadband}} \\ 0 & \text{otherwise} \end{cases} \quad (\text{Eq. 6.6a})$$

where K_{HVPS} is the proportional gain (voltage step per unit power error), clamped to a maximum step size per cycle.

Parameter	Value	Notes
Addresses	D6	Operating point regulation
Measurement	Klystron forward power or station gap voltage	Mode-selectable
Actuator	HVPS cathode voltage V_k	Via PLC $\rightarrow$ Enerpro firing angle
Bandwidth	~ 1 Hz	Limited by PLC scan rate and Enerpro settling
Update rate	~ 2 Hz (~ 0.5 s cycle)	Configurable via <code>hvps_loop_delay</code>
Control law	Proportional with deadband	Rate-limited output

Parameter	Value	Notes
Implementa- tion	EPICS SNL: <code>rf_hvps_loop.st,v</code> (343 lines, 4 states)	States: init, off, proc, on
SPEAR3 status	Active	

Sources: [R14]; `spear-rf-code-legacy/rfApp/src/seq/rf_hvps_loop.st,v`.

6.8 Tuner Loop — Cavity Resonant Frequency Tracking

Purpose: Adjusts the mechanical cavity tuner to maintain the optimum detuning angle ψ_{opt} (Eq. 2.5a), compensating for beam loading (main factor), cavity thermal drift (D8) and microphonics (D7). Also re-converges to the new equilibrium following a ring-circumference-driven shift in the RF operating frequency (D9).

Signal flow: Cavity probe phase and klystron forward phase $\rightarrow$ phase subtraction $\rightarrow$ comparison to $\psi_{\text{target}} \rightarrow$ deadband logic $\rightarrow$ stepper motor command $\rightarrow$ mechanical tuner.

Control law (from `rf_tuner_loop.st,v` [R34]):

$$\varepsilon = [\angle(V_{\text{probe}}) - \angle(V_{\text{fwd}})] - \psi_{\text{target}} \quad (\text{Eq. 6.7a})$$

$$\text{Step command} = \begin{cases} +N_{\text{step}} & \text{if } \varepsilon > \varepsilon_{\text{deadband}} \\ -N_{\text{step}} & \text{if } \varepsilon < -\varepsilon_{\text{deadband}} \\ 0 & \text{otherwise} \end{cases} \quad (\text{Eq. 6.7b})$$

Frequency offset estimation (from `subSysFreqOff` in `subSys.c`):

$$\Delta f_{\text{est}}(x, V) = p_0 + p_1(x - x_{\text{home}}) + p_2(x - x_{\text{home}})^2 + p_3(x - x_{\text{home}})^3 + t_1 V^2 \quad (\text{Eq. 6.7c})$$

where x is the tuner position (steps), x_{home} is the home position, $p_0 \dots p_3$ are polynomial coefficients from calibration, and $t_1 V^2$ accounts for voltage-dependent detuning. Exponential smoothing is applied.

Parameter	Value	Notes
Addresses	D7, D8, D9	Frequency tracking (microphonics + cavity thermal + ring circ. drift)
Measurement	$\angle(\text{probe}) - \angle(\text{fwd})$	Detuning angle proxy
Actuator	Stepper motor $\rightarrow$ mechanical tuner plunger	Per cavity (4 independent loops)
Bandwidth	$\sim 0.01\text{--}1$ Hz	Limited by mechanical response
Control law	Bang-bang with deadband	N_{step} steps per correction cycle
Tuning reso- lution	~ 1 Hz/step	Worm gear mechanism, self-locking
Implementa- tion	EPICS SNL: <code>rf_tuner_loop.st,v</code> (555 lines)	States: init, unknown, reset, off, on

Parameter	Value	Notes
Motor controller	AB 1746-HSTP1 (in service). Galil DMC-4143 Rev 1.3h is in development, not installed — test moves were made Aug 2025; it goes online when the LLRF upgrade completes	—
SPEAR3 status	Active	

Sources: [R14]; [R34] `rf_tuner_loop.st,v`; [R35] Galil commissioning notes.

6.9 DAC Loop — Outermost Amplitude Regulation

Purpose: Maintains the cavity gap voltage (or klystron drive power) at the software setpoint by adjusting the I/Q modulator baseline DAC values. This is the outermost and slowest feedback loop, compensating for long-term drifts.

Signal flow: Gap voltage readback (cavity probe amplitude) or drive power readback → error calculation → proportional controller with deadband → DAC count adjustment → RFP Octal DAC → I/Q modulator baseline.

Control law (from `rf_dac_loop.st,v` and `subIQcounts` in `subIQ.c`):

$$\Delta C_{\text{DAC}}[n] = K_{\text{DAC}} \cdot (V_{\text{set}} - V_{\text{meas}}) \cdot D_{\text{conv}} \cdot (1 + G_{\text{loop}}) \quad (\text{Eq. 6.8a})$$

where ΔC_{DAC} is the DAC count change, K_{DAC} is proportional gain (0–1), D_{conv} is the calibration conversion factor (counts/kV), and G_{loop} is the direct loop gain correction. Output subject to deadband, rate limiting ($|\Delta C| \leq \Delta C_{\text{max}}$), and range limiting (± 2047 counts, 12-bit DAC).

Operating modes (station-state dependent):

Station State	DAC Loop Mode	Controlled Variable
STATION_OFF / STATION_PARK	Inactive	—
STATION_TUNE	Drive power regulation	Tune-mode DAC
STATION_ON_CW, direct loop OFF	Drive power regulation	RFP DAC
STATION_ON_CW, direct loop ON	Gap voltage regulation	RFP DAC

Parameter	Value	Notes
Bandwidth	~ 0.1 Hz	Limited by scan rate and smoothing
Update rate	Event-driven or ≤ 10 s timeout	<code>DAC_LOOP_MAX_INTERVAL = 10.0</code>
DAC range	± 2047 counts (12-bit)	Minimum delta: 0.5 counts
Implementation	EPICS SNL: <code>rf_dac_loop.st,v</code> (290 lines, 4 states)	init, off, tune, on
SPEAR3 status	Active	

Sources: `rf_dac_loop.st,v`; `subIQ.c` (`subIQcounts`).

6.10 Gain Tracking Function

Purpose: Compensates for klystron gain variation (D6) as cathode voltage changes. The klystron small-signal gain varies by up to ~ 7 dB across the operating range; without tracking, this shifts the direct loop's open-loop gain and stability margins.

Control law:

$$G_{\text{modulator}} \cdot G_{\text{klystron}}(V_k) = G_{\text{loop,target}} \text{ (constant)} \quad (\text{Eq. 6.9a})$$

$$\therefore G_{\text{modulator}} = G_{\text{loop,target}} / G_{\text{klystron}}(V_k) \quad (\text{Eq. 6.9b})$$

Implementation: A slow EPICS calculation (~ 2 Hz) reads klystron forward and drive power monitors, computes current gain $G_{\text{kly}} = P_{\text{fwd}}/P_{\text{drive}}$, and writes updated 2×2 matrix coefficients to the RFP Octal DAC. The ConfDirect calibration routine performs initial gain measurement and matrix setup.

The DC gain coefficient tracking in subSysDCcoeff adjusts the ripple loop's DC coefficient based on klystron gain deviations with deadband limiting:

$$\Delta G_{\text{DC}} = D_{\text{scale}} \cdot 10^{(G_{\text{desired}} + L_{\text{accum}})/20} - G_{\text{actual}} \quad (\text{Eq. 6.9c})$$

Sources: [R15]; [R14]; subSys.c (subSysDCcoeff).

7 HVPS Plant Model and Dynamics

7.1 Power Supply Architecture

The SPEAR3 klystron HVPS is a PEP-II design: 12-pulse primary SCR-controlled rectifier at 12.47 kV (SLAC). Designed by R. Cassel and M.N. Nguyen.

7.2 HVPS Electrical Parameters

Parameter	Value	Unit
Input voltage	12,470 V RMS L-L	3-phase 60 Hz
Output voltage range	0 to -90 kV	DC
Maximum current	27 A	DC
Nominal operating	-77 kV, 22 A	DC
Power rating	2.5 MVA	—
Voltage regulation	$< \pm 0.5\%$	at > 65 kV
Voltage ripple	$< 1\%$ P-P, $< 0.2\%$ RMS	at > 60 kV
Filter inductors (L_1, L_2)	0.3 H each	85 A DC
Filter capacitors (C)	$4 \times 8 \mu\text{F}$ at 30 kV	—
SCR crowbar arc energy	< 5 J (with), < 20 J (without)	—

Sources: [R21] Cassel & Nguyen, SLAC-PUB-7591; [R22] PS-341-360-01-R2.

7.3 SCR Phase Control Dynamics

$$V_{dc} = V_{dc,max} \cos \alpha \quad (\text{Eq. 7.1})$$

The Enerpro FCOG1200 firing boards:

$$H_{\text{Enerpro}}(s) = \frac{1}{1 + s/\omega_{\text{Enerpro}}} \quad (\text{Eq. 7.2})$$

where $\omega_{\text{Enerpro}} \approx 415 \text{ rad/s}$ (settling $\sim 50 \text{ ms} \approx 3 \text{ AC cycles}$).

Sources: [R25] Bourbeau, IEEE 1983; [R26] Enerpro manual.

7.4 PLC Voltage Regulation Loop

The SLC-500 PLC implements a first-order IIR filter with scan period $T = 10 \text{ ms}$:

$$y[n] = (1 - \alpha) y[n - 1] + \alpha x[n] \quad (\text{Eq. 7.3})$$

with $\alpha = 0.4$, giving time constant $\tau = -T / \ln(1 - \alpha) \approx 20 \text{ ms}$.

Sources: [R27] CasselPLCCode.pdf; [R23] hvps/simulation/hvps_sim/config.py.

7.5 Klystron Arc Protection

Four protection mechanisms: SCR crowbar ($< 1 \mu\text{s}$), star point bypass, 500Ω isolation resistors, $200 \mu\text{H}$ cable inductors. Result: $< 5 \text{ J}$ to klystron, $I^2 t < 40 \text{ A}^2\text{s}$.

7.6 HVPS Dynamic Response Summary

Subsystem	Time Constant	Bandwidth
PLC filter	$\tau = 20 \text{ ms}$	$\sim 8 \text{ Hz}$
Enerpro PLL	settling $\sim 50 \text{ ms}$	$\sim 66 \text{ Hz}$
SCR commutation	$\sim 100 \mu\text{s}$	$\sim 1.6 \text{ kHz}$
Filter LC network	$\tau_{LC} = 86 \mu\text{s}$	$\sim 1.8 \text{ kHz}$
Overall voltage step	$< 10 \text{ ms}$ (10% step)	$\sim 16 \text{ Hz}$

The Enerpro PLL ($\sim 50 \text{ ms}$ settling) dominates: HVPS loop bandwidth limited to $\sim 1 \text{ Hz}$.

8 Tuner Mechanics and Resonant Frequency Control

8.1 Cavity Tuner Physical Description

Parameter	Value
Motor	Superior Electric Slo-Syn M093-FC11 (NEMA 34D)
Drive mechanism	Worm gear (self-locking)
Tuning range	$\sim \pm 200$ kHz
Step resolution	~ 1 Hz/step
Distance per microstep	$3.175 \mu\text{m}$ (legacy), $0.05 \mu\text{m}$ (Galil)

Sources: [R29]–[R33] Tuner documentation in `11rf/tuners/`.

8.2 Tuning Physics

$$f_{\text{res}}(x) = \text{polynomial fit (3rd–4th order)} \quad (\text{Eq. 8.1})$$

Temperature dependence: ~ -1 kHz/°C.

8.3 Tuner Control Loop

$$\varepsilon = [\angle(\text{probe}) - \angle(\text{fwd})] - \psi_{\text{target}} \quad (\text{Eq. 8.2})$$

where ψ_{target} is the target detuning angle (Eq. 2.6). Implemented in `rf_tuner_loop.st,v` (EPICS SNL). Bandwidth ~ 0.01 – 1 Hz.

Sources: [R14]; [R34] `rf_tuner_loop.st,v`; [R35] Galil commissioning notes.

9 Performance Requirements and Verification

9.1 Disturbance Rejection Summary

Disturbance	Frequency	Open-Loop Impact	Rejection	Residual
Beam loading (D1–D2)	DC–100 kHz	Unstable	~ 40 dB	Stable
Robinson (D3)	~ 10 kHz (Eq. 2.4b)	Exponential growth	~ 40 dB	$\ll 1/\tau_s$
HVPS ripple (D5)	360–2000 Hz	$\sim 1\%$ phase	~ 40 dB	$< 0.01\%$
Thermal drift (D8)	< 0.01 Hz	~ 100 Hz/hr	Tuner tracks	< 1 Hz
Klystron gain (D6)	0.01 – 1 Hz	~ 7 dB var.	Gain tracking	< 0.5 dB

9.2 LLRF9 Commissioning Results

From [R4]: LLRF9 achieves improved noise floor vs. legacy at 500 mA. Overall amplitude stability $< 0.05\%$ RMS, phase stability $< 0.05^\circ$ RMS — both exceed requirements.

9.3 Performance Margins

Parameter	Capacity	Typical	Margin
Klystron power	1.2 MW	$\sim 782 \text{ kW}$ (4×196)	$\sim 35\%$
HVPS voltage	90 kV	$\sim 74 \text{ kV}$	$\sim 22\%$
Gap voltage/cavity	1 MV	$\sim 712 \text{ kV}$	$\sim 40\%$
Direct loop BW	$\sim 930 \text{ kHz}$	$\sim 800 \text{ kHz}$	$\sim 16\%$
Impedance reduction	$\sim 40 \text{ dB}$	Required $\sim 30 \text{ dB}$	$> 10 \text{ dB}$ margin

9.4 Calibration Data

Calibration establishes the numerical relationships between raw hardware signals (ADC counts, DAC counts, detector voltages) and physical quantities (kV, kW, degrees, Hz). It is essential for closing all feedback loops accurately. This section provides a high-level summary; detailed calibration procedures and data tables will be documented in **Doc D (Operational Data Catalog)**.

9.4.1 Calibration Sequence Overview

The master calibration is executed by `rf_calib.st,v` (3,345 lines, 27 states). It runs as an EPICS SNL program and requires the station to be OFF (no RF power). The sequence progresses through the following phases:

Phase	States	What It Does
Initialization	Startup, CombCheck, Setup	Registers with RFP module, verifies hardware, sets known baseline
Zero all multipliers	ZeroCavMults, ZeroDirMults, ZeroCombMults	Writes zero to all I/Q modulator DACs — establishes the "no signal" baseline for offset measurement
Combiner calibration	Combiner	Calibrates the 4 cavity combining modulators: measures each probe independently, adjusts I/Q matrix for accurate vector sum
Direct loop calibration	Direct, SummingNodeI/Q, GainStageI/Q	Characterizes direct loop gain stages and summing node offsets. I and Q channels measured independently to resolve cross-coupling
Klystron chain	ZeroKlysMults, DiffNodeOffsets, KlysStage, CompStage, CombStage, Klys-Demod	Calibrates klystron forward path: drive modulator offsets, klystron gain, compensator stages, demodulator phase alignment
Tuner & modulator	TuneStage, NullModulator	Calibrates tune-mode drive path; nulls RF modulator output (zero DAC $\rightarrow$ zero RF)
Completion	Finish/Done or Abort/Abend	Restores operational configuration, reports success/failure

Each state includes retry logic (NUM_TRIES iterations), severity checking on PV readbacks, and abort handling. The entire sequence takes $\sim 2\text{--}5$ minutes.

9.4.2 Drive Amplitude Calibration

Establishes the mapping from DAC counts to klystron input drive power. Data files: `driveAmpCalibration.xlsx`, `klystronCouplerDriveAmpCalibrations.xlsx`.

The key relationship is the **drive conversion constant** D_{conv} (counts/kV), computed by `subIQamp12conv`:

$$D_{\text{conv}} = \frac{A_{\text{ref}}}{V_{\text{gap}} \cdot (1 + G_{\text{loop}})} \quad (\text{Eq. 9.1})$$

where A_{ref} is the reference amplitude (counts), V_{gap} is the measured gap voltage (kV), and G_{loop} is the feedback loop gain. This constant is used by the DAC loop (Eq. 6.8a) and recomputed whenever the operating point changes.

9.4.3 Power Measurement Calibration

Maps RF detector voltages to physical power levels. Data files: `reflectedPowerCalibrations.xlsx`, `pulsarCouplerCalibration2049.xlsx`.

The **RF detector conversion loss** measured during calibration (`subIQamp12loss`):

$$L_{\text{det}} = 20 \cdot \log_{10} \left(\frac{E_{\text{conv}} \cdot \sqrt{P_{\text{cal}}}}{A_{\text{det}}} \right) \text{ dB} \quad (\text{Eq. 9.2})$$

where $E_{\text{conv}} = 0.31623$ (power conversion constant), P_{cal} is calibration power (mW), and A_{det} is measured detector amplitude (V). Accounts for cable attenuation, coupler directivity, and detector nonlinearity.

The **coupling factor** (VSWR-based, `subIQamp1Cp1g`):

$$\beta_{\text{meas}} = \frac{1 + r}{1 - r}, \quad r = \frac{A_{\text{refl}}}{A_{\text{fwd}}} \quad (\text{Eq. 9.3})$$

9.4.4 Frequency and Detuning Calibration

Maps tuner motor position to cavity resonant frequency offset. The polynomial model (Eq. 6.7c) is fitted from measured data: the tuner is stepped across its range and the resonant frequency measured at each position. Calibration coefficients $p_0, \dots, p_3$ and temperature coefficient t_1 are stored in EPICS PVs.

9.4.5 Tuner Mode DAC Calibration

Data file: `tuneModeDacCalibration.xlsx`. Establishes DAC counts-to-drive-power for the `STATION_TUNE` state (low-power cavity conditioning). Separate from operational drive calibration (§9.4.2) because the operating point differs.

9.4.6 Signal Routing and Patch Panel

Data file: `b132R11PatchPanel.xlsx`. Documents physical signal routing in Building 132 R11: cable lengths, attenuation values, connector types, and signal naming. Essential for verifying the delay budget (§2.3) and signal levels.

Upgrade note: Many calibrations will need adaptation for the LLRF9 system (different ADC/DAC ranges, signal levels, processing gains). The polynomial frequency model (Eq. 6.7c) and combiner matrix calibration are expected to transfer; drive and power detector calibrations require new measurements.

Sources: [R38]; [R39]; `rf_calib.st,v`; `subIQ.c` (§2.2 of [R20u]).

A SPEAR3 RF System Parameter Table

A.1 A.1 Storage Ring Parameters

Parameter	Symbol	Value	Unit	Source
Beam energy	E_0	3.0	GeV	[R1]
Beam current	I_b	500	mA	[R1]
Circumference	C	234.14	m	[R2]
Revolution frequency	f_{rev}	1.2804	MHz	Derived
Harmonic number	h	372	—	[R1]
RF frequency	f_{RF}	476.3	MHz	[R4]
Momentum compaction	α_c	1.18×10^{-3}	—	[R2]
Energy loss per turn	U_0	1.02	MeV	Operational (current IDs)
Total RF voltage (design)	V_{RF}	3.2	MV	[R1] [R3]
Total RF voltage (operational)	V_{RF}	~2.85	MV	[R4] [R5]
Synchronous phase	ϕ_s	69.0	deg	Eq. 2.4a (cos convention)
Synchrotron tune	ν_s	~0.008	—	Eq. 2.4b; [R1]
Synchrotron frequency	f_s	~10.1	kHz	Eq. 2.4b
Long. radiation damping time	τ_s	2.87	ms	[R1]
Trans. radiation damping time	$\tau_{x,y}$	4.24, 5.14	ms	[R1]

A.2 A.2 Cavity Parameters (Per Cavity)

Parameter	Symbol	Value	Unit	Source
Resonant frequency	f_0	≈ 476.3	MHz	[R6]
Shunt impedance (linac)	R_s	3.73	M Ω	[R6]
R/Q	R/Q	~116	Ω	[R7]
Unloaded Q	Q_0	32,000	—	[R6]
Loaded Q	Q_L	6,700	—	Derived from $\beta = 3.78$
Coupling coefficient (this doc)	β	3.78	—	Derived
Coupling coefficient (Schwarz actual)	β	3.72	—	[R6]
Coupling coefficient (Schwarz optimum)	β	3.84	—	[R6]
Cavity half-bandwidth	$\Delta f_{1/2}$	35.5	kHz	Derived
Operational gap voltage	V_{gap}	~712	kV	[R5]
Beam-induced voltage	$V_{b,\text{res}}$	1.865	MV/ca	Eq. 2.2: $I_b R_s$
Optimum detuning angle	ψ_{opt}	≈ -67.8	deg	Eq. 2.5a
Optimum frequency detuning	Δf_{opt}	≈ -87	kHz	Eq. 2.6
Cavity wall losses	P_{wall}	~68.1	kW/cav	Eq. 2.7a

Parameter	Symbol	Value	Unit	Source
Beam power per cavity	$P_{\text{beam}}/n_{\text{cav}}$	~ 127.5	kW/cav	Eq. 2.7b
Generator power per cavity	$P_{\text{gen/cav}}$	~ 196	kW	Eq. 2.7c
Total RF power (4 cav)	$P_{\text{gen,tot}}$	~ 782	kW	$4 \times P_{\text{gen/cav}}$

A.3 A.3 Klystron Parameters

Parameter	Value	Unit	Source
Type	Marconi/CPI K3512S	—	[R1]
Maximum power	1.2 MW CW	—	[R1]
Gain	43 dB min	—	[R1]
Bandwidth	5 MHz (-3 dB)	—	[R1]
Group delay	< 150 ns	—	[R1]
Drive power	~ 29 W	—	[R5]
Perveance	$\sim 2.0 \times 10^{-6}$	$\text{A/V}^{3/2}$	[R23]

A.4 A.4 Feedback Loop Parameters

Loop	Bandwidth	SPEAR3 Status	Addresses	Source
Direct	~ 800 kHz	Active	D1–D4	[R14]
Comb	2 MHz	Not used	D4	[R14]
Ripple	~ 300 Hz	Active	D5	[R14]
Gap FF	100 Hz	Not used	D2	[R14]
HVPS	~ 1 Hz	Active	D6	[R14]
Tuner	~ 0.01 – 1 Hz	Active	D7, D8	[R14]
DAC	~ 0.1 Hz	Active	Amplitude drift	[R14]
LFB Woofer	1 MHz	Not used	D2	[R14]

B Source Document Reference Index

B.1 B.1 Published Papers

Ref	Citation
[R1]	McIntosh, P. et al., "The SPEAR3 RF System," SLAC-PUB-10983, EPAC 2004
[R2]	Hettel, R. et al., "Design of the SPEAR 3 Light Source," PAC 1999

Ref	Citation
[R7]	Rimmer, R.A. et al., "RF Cavity Development for the PEP-II B Factory," LBL-33360, 1992
[R11]	Gamp, A., "Beam-Cavity Interaction," CAS 2011, arXiv:1112.3203
[R12]	Wilson, P.B., "Fundamental-Mode RF Design," SLAC-PUB-6062, 1993
[R13]	Boussard, D., "Control of Cavities with High Beam Loading," PAC 1985
[R15]	Corredoura, P., "Architecture and Performance of the PEP-II Low-Level RF System," SLAC-PUB-8124, PAC 1999
[R16]	Robinson, K.W., "Stability of Beam in RF Systems," CEA-CEAL-1010, 1964
[R17]	Rimmer, R.A. et al., "Comparison of Calculated, Measured, and Beam Sampled Impedances," PRSTAB 3, 102001, 2000
[R21]	Cassel, R. and Nguyen, M.N., "A Unique Power Supply for the PEP II Klystron," SLAC-PUB-7591, PAC 1997
[R25]	Bourbeau, E.J., "Application of PLL Techniques to SCR Drives," IEEE 1983

B.2 B.2 Textbooks

Ref	Citation
[R3]	SSRL SPEAR Storage Ring Parameters, https://www-ssrl.slac.stanford.edu/accphy/spear_parameters.html (last updated 26 Apr 2002, H.-D. Nuhn)
[R10]	Wiedemann, H., <i>Particle Accelerator Physics</i> , 4th ed., Springer, 2015
[R18]	Analog Devices AD834 datasheet

B.3 B.3 Repository Documents

Ref	Document	Path
[R4]	LLRF9 Commissioning Tests	11rf/tests/11rf9Tests.pdf
[R5]	System Design Report	Designs/tex/doc0-system-design/0_system_design_report.pdf
[R6]	RF System Description (Schwarz)	11rf/documentation/legacyArchitecture/ps3403305100.pdf
[R14]	Feedback Loop Description (Schwarz)	11rf/documentation/legacyArchitecture/feedbackLoopDescriptionps3403305200.pdf
[R19]	Comprehensive FBK Loops Description	11rf/documentation/legacyArchitecture/feedbackLoopDescriptionps3403305200.pdf
[R20t]	DSP Firmware Analysis	spear-rf-code-legacy/codeReviewTechnicalNotes/04-dsp-firmware.md
[R21t]	Cassel & Nguyen, PAC 1997 — SLAC-PUB-7591	hvps/architecture/originalDocuments/slac-pub-7591.pdf
[R22]	HVPS Technical Spec	hvps/architecture/originalDocuments/ps3413600102.pdf
[R23]	HVPS Simulation Config	hvps/simulation/hvps_sim/config.py
[R26]	Enerpro FCOG1200 Manual	hvps/controls/enerpro/enerproDocuments/
[R27]	Cassel PLC Code	hvps/documentation/plc/CasselPLCCode.pdf

Ref	Document	Path
[R28]	Cavity Tuner Inspection Report, 13 June 2023	11rf/tuners/cavityTunerInspections20230613.docx
[R29]	Tuner mechanical design paper, PAC 1997	11rf/tuners/tunerDesignPac97HDS8P030.PDF
[R30]	Superior Electric SLO-SYN stepper motor data	11rf/tuners/SLO-SYN.pdf
[R31]	SLO-SYN MD808 Stepper Drive Manual	11rf/tuners/SLO-SYN_MD808_Stepper_Drive_Manual.pdf
[R32]	SLO-SYN SS2000MD4M Step Drive / Translator Manual	11rf/tuners/SLO-SYN_SS2000MD4M_Step_Drive_Translator_Manual.pdf
[R33]	Superior Electric stepper catalogue (legacy)	11rf/tuners/Old Stepper Catalog_Superior Electric_0.pdf
[R34]	Tuner Loop Source Code	spear-rf-code-legacy/rfApp/src/seq/rf_tuner_loop.st,v
[R35]	Galil Commissioning Notes	11rf/tuners/galil/GalilCommissioning.docx
[R36]	DSP Ripple Firmware	spear-rf-code-legacy/rfApp/src/dsp/rfpDsp/ripple.s,v
[R38]	RF Calibration Data	11rf/calibrations/*.xlsx
[R39]	RF Document Index	11rf/documentation/RfSystemDocumentIndexR3.xlsx

B.4 B.4 External Web References

Ref	URL	Content
[W1]	https://inspirehep.net/files/945e7ff73cc428af4c018fd1bdb6afa7	McIntosh EPAC04
[W2]	https://www.osti.gov/biblio/839730	OSTI SLAC-PUB-10983
[W3]	https://export.arxiv.org/pdf/1112.3203v1.pdf	Gamp CAS 2011
[W4]	https://www.dimtel.com/products/11rf9	Dimtel LLRF9
[W5]	https://proceedings.jacow.org/p85/PDF/PAC1985_1852.PDF	Boussard PAC85
[W7]	https://inspirehep.net/files/dbbd3f9a808792f9901894060a879b5f	Chang et al. NSRRC
[W8]	https://www-ssrl.slac.stanford.edu/accphy/spear_parameters.html	SSRL SPEAR Storage Ring Parameters [R3]

C Symbol and Notation Conventions

C.1 C.1 Cavity and Beam Parameters

Symbol	Definition	Unit	First Ref
f_0	Cavity resonant frequency	MHz	Eq. 2.1
f_{RF}	RF operating frequency ($= h \cdot f_{\text{rev}}$)	MHz	§1
f_{rev}	Revolution frequency	MHz	§1
ω_0	Angular resonant frequency ($= 2\pi f_0$)	rad/s	Eq. 2.1
$\omega_{1/2}$	Cavity half-bandwidth ($= \omega_0/2Q_L = 2\pi \times 35.5 \text{ kHz}$)	rad/s	Eq. 2.1a
$\Delta f_{1/2}$	Cavity half-bandwidth (linear frequency)	kHz	Eq. 2.1b
Q_0	Unloaded quality factor	—	§2.1.1
Q_L	Loaded quality factor	—	§2.1.1
Q_{ext}	External quality factor (coupling port)	—	§2.1.1
β	Coupling coefficient ($= Q_0/Q_{\text{ext}}$)	—	§2.1.1
R_s	Shunt impedance (circuit convention: $V^2/2P$)	M Ω	§2.1.1
R_a	Shunt impedance (accelerator convention: $V^2/P = 2R_s$)	M Ω	§C.2
V_{gap}	Gap voltage per cavity	kV	§2.1.1
V_{RF}	Total RF voltage ($= n_{\text{cav}} \times V_{\text{gap}}$)	MV	§2.1.3
I_b	DC beam current	A	§2.1.3
$V_{b,\text{res}}$	Beam-induced voltage at resonance ($= I_b R_s$)	MV	Eq. 2.2
ϕ_s	Synchronous phase angle (from voltage crest)	de-grees	Eq. 2.4
ψ	Detuning angle	de-grees	Eq. 2.5
ψ_{opt}	Optimum detuning angle	de-grees	Eq. 2.5a
Δf	Frequency detuning ($= f_0 - f_{\text{RF}}$)	kHz	Eq. 2.6
$\Delta\omega$	Angular frequency offset from RF	rad/s	Eq. 2.1
U_0	Energy loss per turn (synchrotron radiation)	MeV	§1
h	Harmonic number ($= f_{\text{RF}}/f_{\text{rev}}$)	—	§1
α_c	Momentum compaction factor	—	Eq. 2.4b
ν_s	Synchrotron tune ($= f_s/f_{\text{rev}}$)	—	Eq. 2.4b
f_s	Synchrotron frequency	kHz	Eq. 2.4b
E_0	Beam energy	MeV	Eq. 2.4b
n_{cav}	Number of cavities	—	Eq. 2.7

C.2 C.2 Klystron and Drive Parameters

Symbol	Definition	Unit	First Ref
K_{kly}	Klystron small-signal voltage gain	— or dB	Eq. 2.8
τ_{kly}	Klystron group delay	ns	Eq. 2.8
$G_{\text{kly}}(s)$	Klystron transfer function ($K_{\text{kly}} e^{-s\tau_{\text{kly}}}$)	—	Eq. 5.1

Symbol	Definition	Unit	First Ref
P_{sat}	Klystron saturation power	MW	Eq. 2.9
$P_{\text{in,sat}}$	Klystron input power at saturation	W	Eq. 2.9
V_k	Klystron cathode voltage	kV	§6.6
P_{fwd}	Klystron forward power	kW	§6.9
P_{drive}	Klystron drive power	W	§6.9

C.3 C.3 Loop Transfer Functions and Compensator Parameters

Symbol	Definition	Unit	First Ref
$G_{\text{OL}}(s)$	Direct loop open-loop transfer function	—	Eq. 5.1
G_{prop}, K_p	Proportional gain	— or dB	Eq. 5.1
$G_{\text{lead}}(s)$	Lead compensator: $(1 + s/\omega_z)/(1 + s/\omega_p)$	—	Eq. 5.1
$G_{\text{int}}(s)$	PI integrator: $1 + \omega_i/s$	—	Eq. 5.1
ω_z	Lead compensator zero frequency	rad/s	§5.2
ω_p	Lead compensator pole frequency	rad/s	§5.2
ω_i	Integrator unity-gain frequency ($\approx 2\pi \times 30$ kHz)	rad/s	§5.2
$H_{\text{cav}}(s)$	Cavity transfer function	—	Eq. 2.1a
τ_d	Total loop delay	ns	Eq. 2.11
f_c	Crossover frequency (where $ G_{\text{OL}} = 1$)	kHz	Eq. 2.11
$T(s)$	Closed-loop transfer function	—	Eq. 5.2
Z_{eff}	Effective impedance with feedback	Ω	Eq. 5.3
Z_{cav}	Cavity impedance without feedback	Ω	Eq. 2.1
$L_1(s), L_2(s)$	Fast and slow loop transfer functions	—	Eq. 5.5
G_0	DC plant gain	—	Eq. 2.12

C.4 C.4 Comb Filter and Group Delay Equalization Parameters

Symbol	Definition	Unit	First Ref
z	Z-transform variable ($e^{j\omega T_s}$)	—	Eq. 5.4
n	Samples per revolution ($= f_s/f_{\text{rev}}$)	—	Eq. 5.4
G	Comb feed-forward gain	—	Eq. 5.4
K	Comb feedback coefficient ($ K < 1$)	—	Eq. 5.4
ν_s	Synchrotron tune ($= f_s/f_{\text{rev}}$)	—	Eq. 5.4
G_{peak}	Comb tooth peak gain ($= G/(1 - K)$)	—	§6.2
$H_{\text{eq}}(z)$	Group delay equalizer (32-tap FIR)	—	Eq. 6.2b
c_k	FIR equalizer coefficients ($k = 0 \dots 31$)	—	Eq. 6.2b

Symbol	Definition	Unit	First Ref
$G_{\text{OL,comb}}(z)$	Comb path open-loop transfer function	—	Eq. 6.2c
n_{delay}	Hardware transport delay (samples)	—	Eq. 6.2c
$Z_{\text{eff,D+C}}$	Effective impedance with Direct + Comb	Ω	Eq. 6.2a

C.5 C.4a LFB Woofer Parameters

Symbol	Definition	Unit	First Ref
K_{woofer}	Woofer injection gain	—	Eq. 6.3a
$H_{\text{FIR}}(s)$	Woofer group delay equalizer (shared with comb)	—	Eq. 6.3a
τ_{woofer}	Woofer one-turn injection delay	μs	Eq. 6.3a
$\Delta \vec{V}_{\text{LFB}}(s)$	LFB correction signal (from TAXI fiber)	V	Eq. 6.3a
$\vec{V}_{\text{ref,total}}$	Total I/Q reference (static + woofer)	V	Eq. 6.3a

C.6 C.5 Ripple Loop Parameters

Symbol	Definition	Unit	First Ref
$\hat{A}_k, \hat{B}_k$	Estimated harmonic coefficients (cosine, sine)	counts	Eq. 6.4a,b
μ_k	Adaptation gain for harmonic k	—	Eq. 6.4a
f_{line}	AC line frequency (60 Hz)	Hz	Eq. 6.4a
T_s	DSP sampling period (1/23 kHz)	s	Eq. 6.4a
$e[n]$	Phase error at sample n	rad	Eq. 6.4a

C.7 C.6 Slow Loop Parameters

Symbol	Definition	Unit	First Ref
K_{HVPS}	HVPS loop proportional gain	V/W	Eq. 6.6a
P_{deadband}	HVPS loop deadband	W	Eq. 6.6a
ε	Tuner detuning angle error	degrees	Eq. 6.7a
ψ_{target}	Target detuning angle	degrees	Eq. 6.7a
N_{step}	Tuner steps per correction cycle	steps	Eq. 6.7b
$p_0 \dots p_3$	Frequency offset polynomial coefficients	kHz, kHz/step, ...	Eq. 6.7c
t_1	Voltage-dependent detuning coefficient	kHz/kV ²	Eq. 6.7c
x, x_{home}	Tuner position, home position	steps	Eq. 6.7c
K_{DAC}	DAC loop proportional gain (0–1)	—	Eq. 6.8a
D_{conv}	DAC conversion factor	counts/kV	Eq. 6.8a
G_{loop}	Direct loop gain correction factor	—	Eq. 6.8a

Symbol	Definition	Unit	First Ref
$G_{\text{modulator}}$	Baseband modulator gain (adjustable)	—	Eq. 6.9a
$G_{\text{loop,target}}$	Target constant loop gain	—	Eq. 6.9a

C.8 C.7 Calibration Parameters

Symbol	Definition	Unit	First Ref
D_{conv}	Drive conversion constant (counts/kV)	counts/kV	Eq. 9.1
A_{ref}	Reference DAC amplitude	counts	Eq. 9.1
L_{det}	RF detector conversion loss	dB	Eq. 9.2
E_{conv}	Power conversion constant (0.31623)	—	Eq. 9.2
P_{cal}	Calibration power	mW	Eq. 9.2
β_{meas}	Measured coupling factor (VSWR-based)	—	Eq. 9.3
r	Reflection coefficient magnitude	—	Eq. 9.3

C.9 C.8 I/Q Signal Processing

Symbol	Definition	Unit	First Ref
$I(t), Q(t)$	In-phase, quadrature baseband components	V	Eq. 3.0
$A(t)$	Amplitude $[= \sqrt{I^2 + Q^2}]$	V	Eq. 3.0a
$\phi(t)$	Phase $[= \text{atan2}(Q, I)]$	rad	Eq. 3.0a
G (in Eq. 3.1)	Baseband modulator gain	—	Eq. 3.1
θ	Baseband modulator rotation angle	rad	Eq. 3.1
$\vec{E}$	Error vector $[= \vec{V}_{\text{ref}} - \vec{V}_{\text{probe}}]$	V	Eq. 3.2

C.10 C.9 Conventions

1. **Shunt impedance:** $R_s = V^2/(2P)$ throughout (circuit convention). Accelerator convention $R_a = 2R_s$.
2. **Synchronous phase:** ϕ_s measured from voltage crest (SLAC convention): $V_{\text{RF}} \cos \phi_s = U_0$.
3. **Detuning:** $\Delta f = f_0 - f_{\text{RF}}$. Negative = cavity below RF (normal above transition).
4. **Laplace variable:** $s = \sigma + j\omega$; for frequency response analysis, $s = j\omega$.
5. **Bold symbols:** Vectors (e.g., $\vec{V}_{\text{ref}}$, $\vec{E}$).
6. **Hat notation:** Estimated quantities (e.g., $\hat{A}_k$).
7. **Reference tags:** [Rn] = numbered reference, [Rnt] = transcription, [Wn] = web, [Dn] = disturbance (§4).
8. **Equation numbering:** (Eq. M.N) where M = section number, N = sequence within section. Lettered variants (a, b, c) denote closely related sub-equations.

End of Document

Document Control:

- Tier 1 RF physics reference for the SPEAR3 LLRF system.
- Definitive version: `Designs/tex/docP-rf-physics/P_rf_physics_and_plant.pdf` — this document.