


Welcome Guide

Bluetooth Headphone KBJ-299N



Welcome to this User Guide. Please read this guide carefully before initial operation and keep it for future reference or other users.

Products Overview

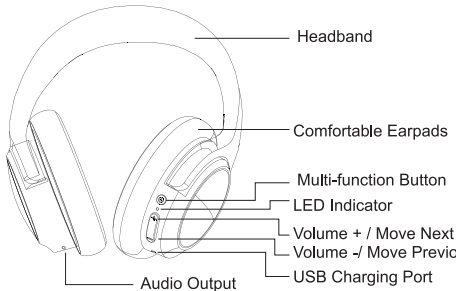


Product Description

BT Version	BT V5.0	Play Time	14 hours
BT Chip	QCC3003	Talk Time	16 hours
Audio Format Support	MP3/WMA/AAC/WAV/APE/AIF/DSD/M4A/OGG/ALAC/DAC/LDAC	Charging Time	4 hours
BT Protocols	AVRCP V1.4, HFP V1.6, A2DP, HSP1.2	Battery Capacity	420mA
Sound Channel	Stereo	Charging Port	Micro USB Port
Operating Range	10m/33ft	Package Contents	Audio Cable and Charging Cable
FCC ID	2AA7XKBJ-299N		

EN1


Pairing Procedure

1. Keep the distance between the earphone and phone within 1 metre.
2. Keep pressing MFB until the red and blue indicator flashes.
3. Turn the phone on and search for BT-enabled devices, find Tecknet BH922 and click on it to be connected.
4. If a PIN number or password are required, please enter "0000".
5. Press "YES" if there is "YES/NO" confirmation during the connection.
6. After successfully pairing, the indicator will turn blue and flash every 5 seconds.



Power On/Off

1. Power on: Keep pressing the MFB for 3 seconds until a prompt "Power on" is heard, it will be in standby.
2. Power off: Keep pressing the MFB for 3 seconds until a prompt "Power off" is heard, it will be turned off.




Pairing Mode

There are two pairing modes.

First: Keep pressing MFB for 5 seconds until the red and blue indicator flashes, a prompt "Pairing" will be heard.

Second: After turning on the headphone, please keep pressing MFB for 2 seconds until red and blue indicator flashes, a prompt "Pairing" will be heard.




Answer/Cancel Call/End Call/Last Number redial

1. Answer call: Press the MFB to answer a call.
2. End call: Press the MFB for 2 seconds to end the call.
3. Redial call: Press the "Volume + and Volume -" at the same time to redial the last call.

EN2


Tripartite Call

1. Answer 3rd party Call: If there is 3rd party calling during a call, hang up the current call by pressing the MFB to answer 3rd party.
2. Reject 3rd party Call: Press MFB for 2 seconds to reject the 3rd party during a call.
3. Switch 3rd party Call: Press MFB twice to answer 3rd party call during a call.




Pause/Play

1. Press the MFB to pause or play music when listening to music.



Act as Wired Headphones

The headset can also be used as wired headphone by simply connecting an audio cable to the headset and phone or other audio devices, which come with 3.5 mm audio jack. So, music plays without the need for batteries.




Clearing BT Pairing

Press Volume+ and Volume- at the same time for 3 seconds to clear the pairing, when the red and blue indicator flashes, the headphone will enter the pairing mode.

EN3

Voice Assistant (SIRI).

In standby mode or when music plays, double-click the MFB to activate the Voice Assistant (SIRI).




Charging

Indicator

The LED indicator will turn red while the headphone is charging. If there is no LED light displaying, it is fully charged. The red light will flash every 5 seconds when it has low power.

The TeckNet BH922 headset is partially charged at the factory. Please make sure that you fully charge it before using it for the first time. Plug in the Micro USB cable and plug another side to the USB port of the PC/Laptop or into USB power charger.





- Charging will start automatically and the LED indicator will turn red.
- The headset is fully charged when LED indicator turns off. It takes about 4 hours for the battery to fully charge.

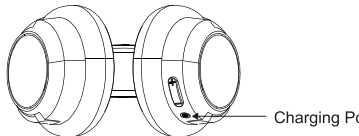

iPhone Settings

If there is no sound when answering call via iPhone, please adjust the settings with the following steps. Settings-General-Accessibility-Call Audio Routing-BT Headset

EN4



EN5

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.