




# BCM–D408EF1

## Specification

---



Revision 1.1 – 9/02/2013



**CONFIDENTIAL INFORMATION**



**BnCOM Co.,Ltd**

# List of Contents

<b>1. General</b>	<b>3</b>
1.1 Overview	3
1.2 Features	4
1.3 Application	4
1.4 Pin Configuration & Outline Size	5
1.5 Device Terminal Functions	6
1.6 Package Dimensions & Land Pattern	7
<b>2. Characteristics</b>	<b>8</b>
2.1 Electrical Characteristics	8
2.2 RF Characteristics	9
<b>3. Terminal Description</b>	<b>10</b>
3.1 UART Interface	10
3.1.1 UART Interface	10
3.1.2 UART Bypass Mode	11
3.2 USB Interface	11
3.3 I2C Interface	12
3.4 SPI Interface	12
<b>4 Application Schematic</b>	<b>13</b>
<b>5 Ordering Information</b>	<b>14</b>


---

# 1. General

## 1.1 Overview

This specification covers Bluetooth module (class-1) which complies with Bluetooth specification version 2.1 + EDR (Or version 3.0) and integrates RF & Baseband controller in small package. This Module has deployed CSR's BC04-External EDR chipset.

All detailed specification including pin outs and electrical specification may be changed without notice.

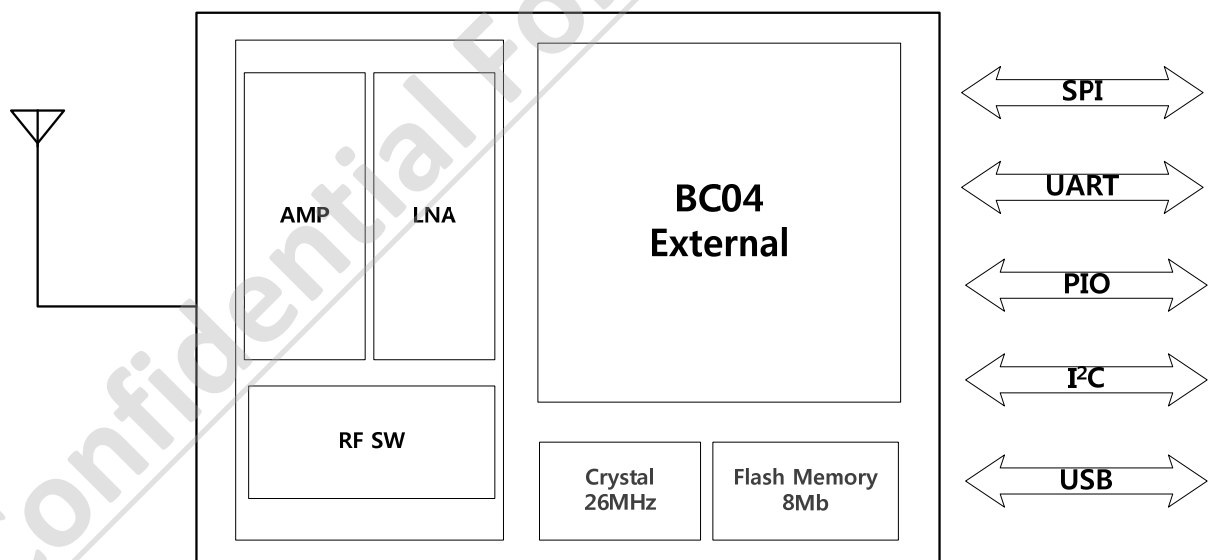

---


## 1.2 Features

- Fully Qualified Bluetooth v2.1 + EDR (Or V3.0) System
- Full-speed Bluetooth Operation with Full Piconet Support
- Scatternet Support
- Ultra Low Power Consumption
- Support for 802.11 Co-existence
- RoHS Compliant
- UART interface with programmable band rate up to 3Mbits/s with an optional bypass mode
- Full-speed USB v2.0 interface supports OHCI and UHCI host interface
- Standard HCI (UART and USB) support
- Integrated to 8Mbit external Flash memory
- Integrated 26MHz Reference Clock
- Competitive Size (13mm x 13mm x 1.65mm : QFN 36Pin)
- Operating temperature range (MAX -40℃ ~ 85℃)
- Supply voltage range (2.7 V ~ 3.6 V)


## 1.3 Application

- Digital camera & printer
- Cellular Handsets
- Personal Digital Assistants (PDA)
- Space critical application
- GPS, POS, Barcode Reader
- USB Dongle
- Access Points

## 1.4 Pin Configuration & Outline Size

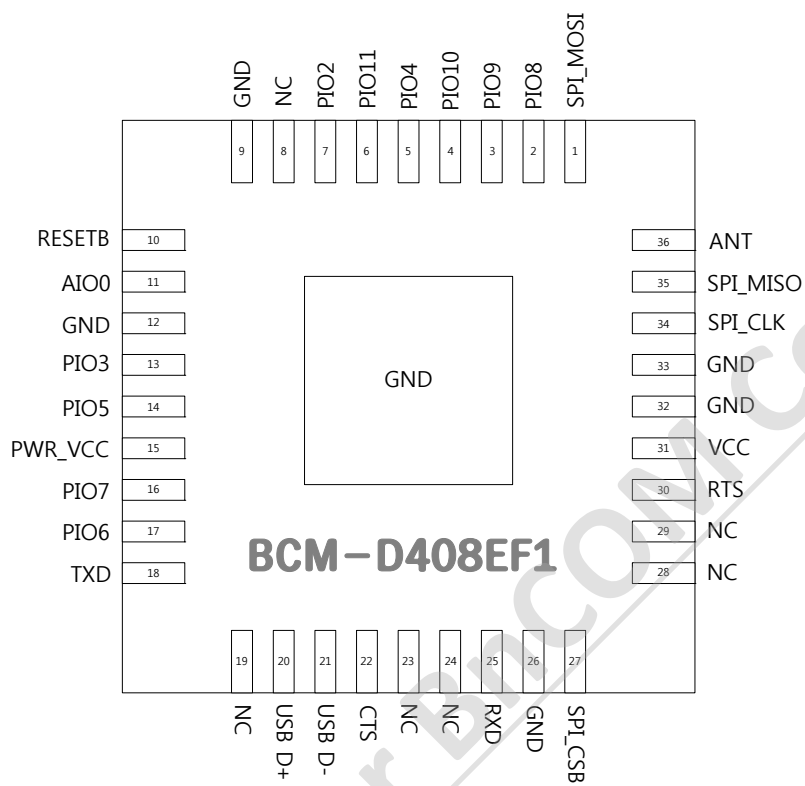


**Pin Configuration (TOP VIEW)**

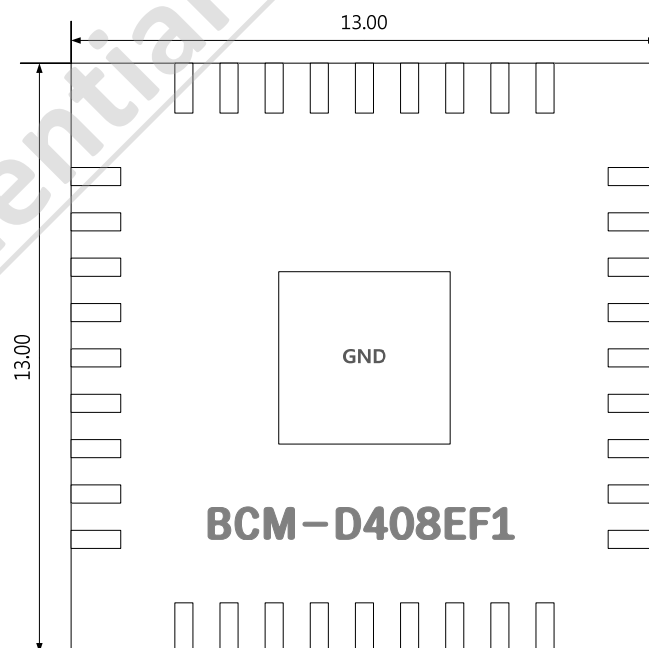


## 1.5 Device Terminal Functions

Function	Pin Name		Pin No.	Description
UART Interface	UART_TXD		18	UART data output
	UART_RXD		25	UART data input (idle status high)
	UART_RTS		30	UART request to send, active low
	UART_CTS		22	UART clear to send, active low
SPI Interface	CSB		27	Chip select for Synchronous Serial Interface Active low
	CLK		34	Serial Peripheral Interface clock
	MISO		35	Serial Peripheral Interface data output
	MOSI		1	Serial Peripheral Interface data input
USB Interface	USB_DN		21	USB data minus
	USB_DP		20	USB plus with selectable internal 1.5K pull-up resistor
PIO & AIO	PIO2		7	Programmable input/output line
	PIO3		13	Programmable input/output line
	PIO4		5	Programmable input/output line
	PIO5		14	Programmable input/output line
	PIO6	SCL	17	Programmable input/output line Or I2C SCL
	PIO7	SDA	16	Programmable input/output line Or I2C SDA
	PIO8	WP	2	Programmable input/output line Or I2C WP
	PIO9		3	Programmable input/output line
	PIO10		4	Programmable input/output line
	PIO11		6	Programmable input/output line
	AIO0		11	General purpose analogue interface
Other Pins	POWER_VCC		15	D.C input voltage for operation (2.7 ~ 3.6)
	VCC		31	D.C input voltage for operation (2.7 ~ 3.6)
	ANT		36	RF connection to antenna
	RESETB		10	Reset if low. Input debounced so must be low for >5ms to cause a reset
	GND		9,12,26,32,33	Ground
	NC		8,19,23,24,28,29	

## 1.6 Package Dimensions & Land Pattern

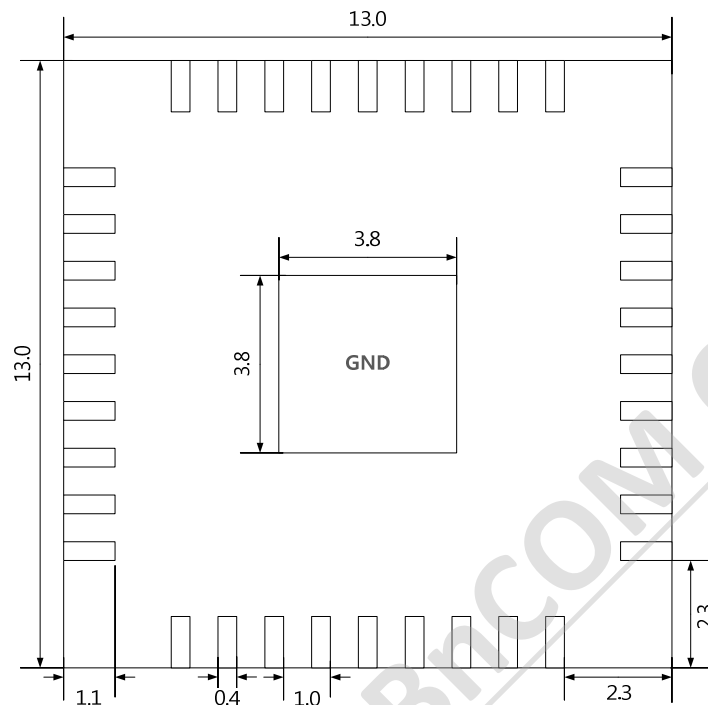

Top view

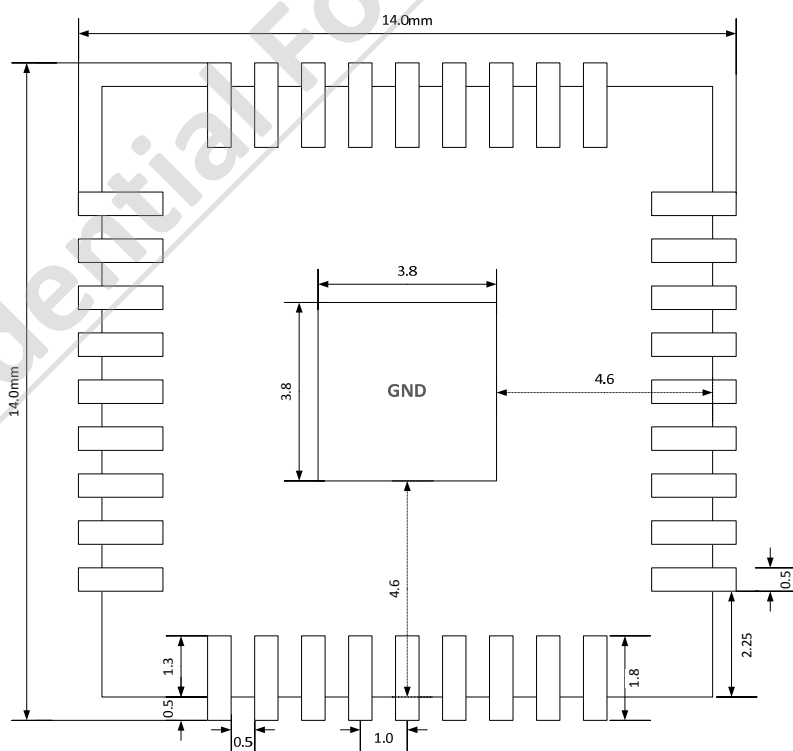

Land Pattern

---

## 2. Characteristics

### 2.1 Electrical Characteristics

#### Absolute Maximum Ratings

Rating		Min	Max.	Unit
Storage temperature range		-40	105	°C
Supply voltage	VCC	2.7	3.6	V
I/O Output voltage	VDD_PIO	VSS-0.4V	VCC+0.4V	V

#### Recommended Operating Conditions

Rating		Min	Typ.	Max.	Unit
Commercial Grade Operating Temperature range		-20	-	70	°C
Industrial Grade Operating Temperature range		-40	-	85	°C
Supply voltage	VCC	2.7	3.3	3.6	V
I/O Output voltage	VDD_PIO	2.7	3.3	3.6	V



## 2.2 RF Characteristics


RF	Specification	Condition	Min.	Typ.	Max	Unit
Transmitter	Output transmit power	Normal	-	16	18	dBm
	Transmit power density	Normal	14	15	18	dBm
	Transmit power control	Normal	2	4	8	dBm
	Frequency Range	Normal	2400		2483.5	MHz
	20dB bandwidth for modulated carrier	Normal		900	1000	MHz
	Adjacent channel transmit power	±2MHz		-35	-20	dBm
		±3MHz		-45	-40	dBm
		±4Mhz		-50	-40	dBm
	Modulation Characteristics	Δf1avg	140		175	KHz
		Δf2max	115			KHz
		Δf2avg/Δf1avg			80	%
	Initial carrier frequency tolerance	Normal	-20		20	KHz
	Carrier frequency Drift	One slot packet(DH1)	-25		25	KHz
		Three slot packet(DH3)	-40		40	KHz
		Five slot packet(DH5)	-40		40	KHz
Transceiver	Carrier frequency Drift	30MHz ~ 1GHz			-36	dBm
		1GHz~12.75GHz			-30	dBm
		1.8GHz~5.1GHz			-47	dBm
		5.1GHz~5.3Ghz			-47	dBm
Receiver	Sensitivity level(0.1% BER)	Single slot packet	-83	-85	-87	dBm
		Multi slot packets	-83	-85	-87	dBm
	C/I performance	Co-channel			11	dB
		1MHz(Adjacent channel)			0	dB
		2MHz(2nd Adjacent channel)			-30	dB
		3MHz(3rd Adjacent channel)			-40	dB
	Blocking performance	30MHz ~2GHz	-10			dBm
		2GHz~2.4GHz	-27			dBm
		2.5GHz~3GHz	-27			dBm
		3GHz~12.75GHz	-10			dBm
	Intermodulation performance	n-5	-39			dBm
	Maximum input level		-20	-10		dBm

---

## 3. Terminal Description

### 3.1 UART Interface

BCM-D408EF1 has a standard UART serial interface that provides a simple Mechanism for communicating with other serial devices using the RS232 Protocol.



The 4 signals that implement the UART function. When BCM-D408EF1 is connected to another digital device, UART\_RX and UART\_TX transfer data between the 2 devices. The remaining 2 signals, UART\_CTS and UART\_RTS, can implement RS232 hardware flow control where both are active low indicators.

#### 3.1.1 UART Setting

User can change data format the following selection using PSKEY.


However, host shall communicate with default setting UART connection initiated at first time.

$$\text{Baud Rate} = \frac{\text{PSKEY\_UART\_BAUDRATE}}{0.004096}$$

Parameter		Possible values
Baud rate	Minimum	1200 baud(≤2% Error)
	Maximum	9600 baud(≤1% Error)
		3M baud(≤1% Error)
Flow control		RTS/CTS or None
Parity		None, Odd or Even
Number of stop bits		1 or 2
Bits per byte		8

### 3.1.2 UART Bypass Mode

In order to apply the UART bypass mode, a BCCMD command will be issued to BCM-408EF1 upon this, it will switch the bypass to PIO 4,5,6,7 as shown in figure. When the bypass mode has been invoked, module enters the deep sleep state indefinitely

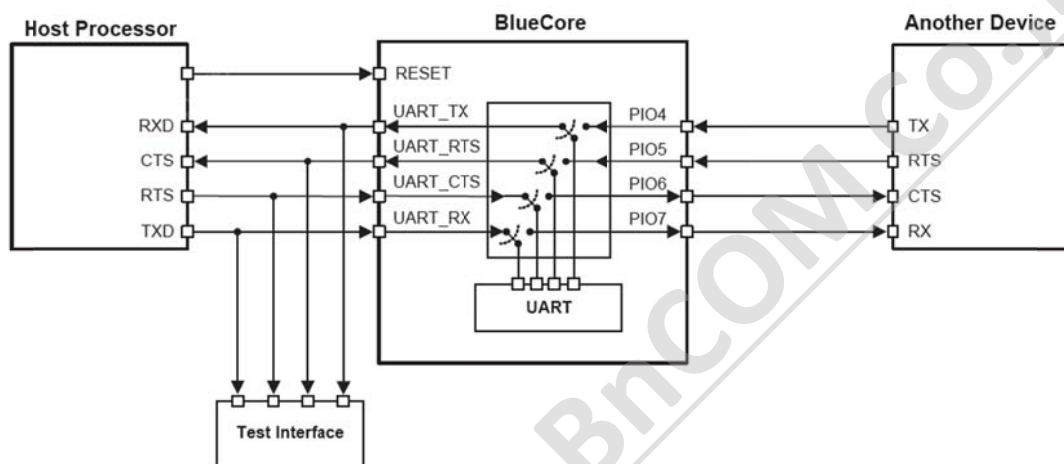

### 3.2 USB Interface

This is a full speed (12Mbits/s) USB interface for communicating with other compatible digital devices. BCM-D408EF1 acts as a USB peripheral, responding to requests from a master host controller such as a PC.

The USB interface is capable of driving a USB cable directly. No external USB transceiver is required. The device

operates as a USB peripheral, responding to requests from a master host controller such as a PC. Both the OHCI and the UHCI standards are supported. The set of USB endpoints implemented can behave as specified in the USB


section of the Bluetooth v2.1 + EDR specification or alternatively can appear as a set of endpoints appropriate to USB audio devices such as speakers.

As USB is a master/slave oriented system (in common with other USB peripherals), BCM-D408EF1 only supports USB Slave operation.

### 3.3 I<sup>2</sup>C Interface

PIO[8:6] can be used to form a master I<sup>2</sup>C interface. The interface is formed using software to drive these lines. Therefore it is suited only to relatively slow functions such as driving a dot matrix LCD, keyboard scanner or EEPROM

Note. PIO[7:6] dual functions, UART bypass and EEPROM support, therefore devices using an EEPROM connect support UART bypass mode. PIO Lines need to be pulled-up through 2.2K $\Omega$  resistors.

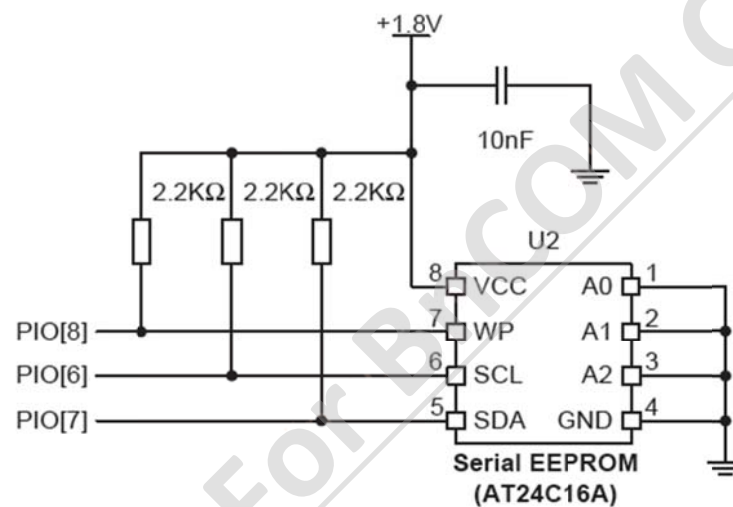


### 3.4 SPI Interface

The synchronous serial port interface (SPI) is used to program configure and debug Module. It can also be used for programming the Flash memory. SPI interface is connected by using the MOSI, MISO, CSB and CLK pins.

It is required in production and product certification. Ensure the 4 SPI signals are brought out to either test points or a header.

SPI interface can't be used for any application purposes.

## 4. Application Schematic

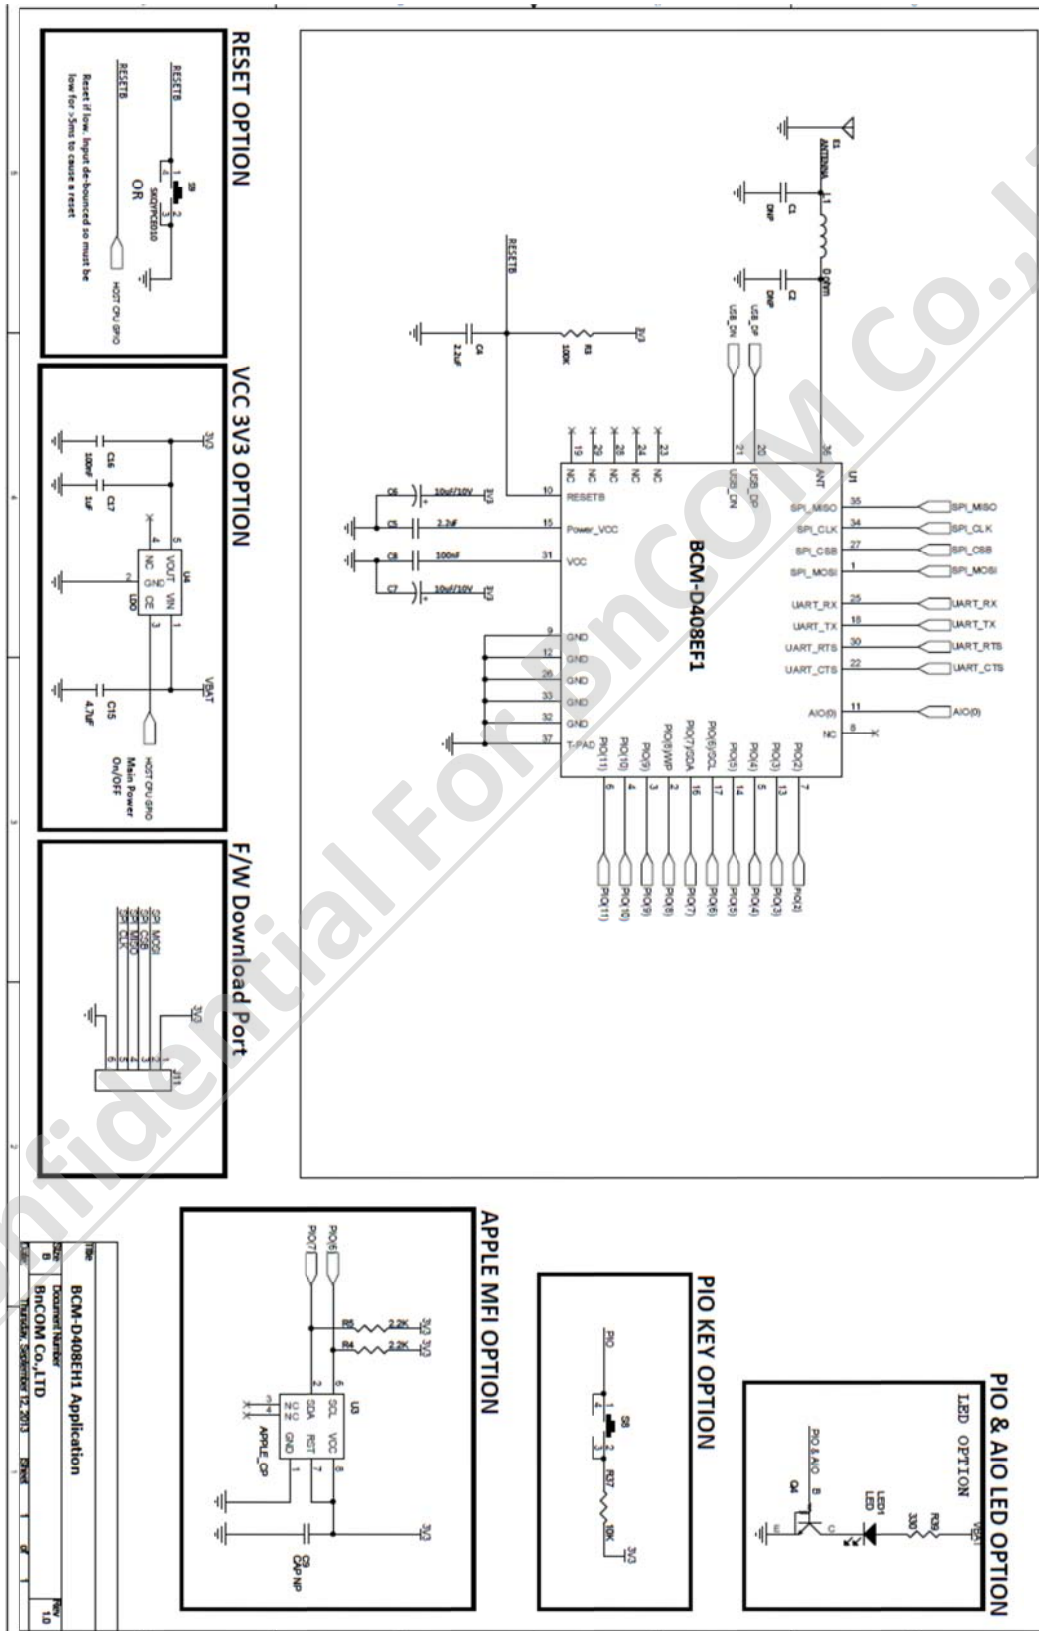

## 5. Ordering Information

BCM   -   D   4   08   EF   1   -   N   C  
 ①        ②   ③   ④   ⑤   ⑥        ⑦   ⑧

1. BnCOM Code
  - ① BnCOM Bluetooth Module
2. Module type.
  - ② Series/Terminal
  - ③ Bluetooth Main Chip Series

Code	Module Series	Code	BT Chip Series
<b>S</b>	Stereo Audio Series	<b>4</b>	BC04 Series
<b>M</b>	Mono Audio Series	<b>5</b>	BC05 Series
<b>D</b>	Data Series	<b>8</b>	CSR8000 Series

3. Memory Size & Type.
  - ④ Memory Size
  - ⑤ Memory Type

Code	Memory Size	Code	Memory Type
<b>08</b>	8Mbit	<b>EF</b>	External Flash Memory
<b>16</b>	16Mbit	<b>IF</b>	Internal Flash Memory
		<b>EE</b>	External EEPROM

4. Bluetooth Class
  - ⑥ Bluetooth Module Class

Code	Module Class
<b>2</b>	Class2 (Max 4dBm)
<b>1</b>	Class1 (Max 20dBm)

5. HW Version
  - ⑦ Antenna Type
  - ⑧ Temperature Characteristics

Code	Antenna Type	Code	Temperature Characteristics
<b>A</b>	Chip Antenna	<b>C</b>	Commercial Grade Temperature (-20 ~ 70 °C)
<b>N</b>	RF Pin Pad Type	<b>I</b>	Industrial Grade Temperature (-40 ~ 85 °C)